



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

Gujrat LSA

February 2026

Contents

- 1. Introduction 3
- 2. Executive Summary (LSA) 3
 - 2.1 Drive test details 3
 - 2.2 Drive test routes 4
 - 2.3 Summary of areas covered 4
 - 2.4 Telecom service providers detected frequency bands 5
 - 2.5 Performance against key QoS parameters 6
- 3. QoS performance analysis-LSA level 7
 - 3.1 Overview 8
 - 3.2 Voice performance 8
 - 3.3 Data performance 11
- 4. Detailed QoS performance analysis 13
 - 4.1 Overview 13
 - 4.2 City 13
 - 4.2.1 Drive test route 13
 - 4.2.2 Areas covered 13
 - 4.2.3 Voice performance 14
 - 4.2.4 Data performance 22
 - 4.3 Hotspots 26
 - 4.3.1 Locations 26
 - 4.3.2 Hotspot covered 26
 - 4.3.3 Voice performance 26
 - 4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G) 29
 - 4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed) 34
 - 4.4 Walk Test 38
 - 4.4.1 Walk test locations 38
 - 4.4.2 Walk Test Covered 38
 - 4.4.3 Voice Performance 38
 - 4.4.4 Data Performance 39
 - 4.5 Highway 40
 - 4.5.1 Drive test route 40
 - 4.5.2 Routes Covered 40
 - 4.5.3 Voice performance 40
 - 4.5.4 Data performance 49

5. Voice & Data Key findings	53
5.1 Overall Voice.....	53
5.2 Overall Data	53
5.3 Operator wise Key Findings	54
6. Annexure	58
6.1 Route wise coverage map	58
6.1.1 City	58
6.1.2 Highway	63
7. Appendix	69
7.1 Appendix-I	69
7.1.1 Drive test setup	69
7.1.2 Drive test Methodology	71
7.2 Appendix-II	73
7.2.1 Network Performance Parameters for Voice calls	73
7.2.2 Network Performance Parameters Data tests	74

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in Gujrat License Service Area (LSA) during the month of February-2026 under the supervision of TRAI Regional Office (RO) Jaipur. Details of route/area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Ahmedabad & Gandhinagar City	City	462.4	02-Feb-2026	05-Feb-2026
2	Ahmedabad & Gandhinagar City	Inter Operator Calling	1 Location	06-Feb-2026	06-Feb-2026
3	Ahmedabad & Gandhinagar City	Hotspot	14 Locations	05-Feb-2026	06-Feb-2026
4	Ahmedabad	Walk test	2.5	06-Feb-2026	06-Feb-2026
5	Vadodara to Ahmedabad	Highway	95.3	02-Feb-2026	02-Feb-2026

Table-1: Drive test summary

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator call test, hotspots, walk tests and highway as per the legends shown on the map.

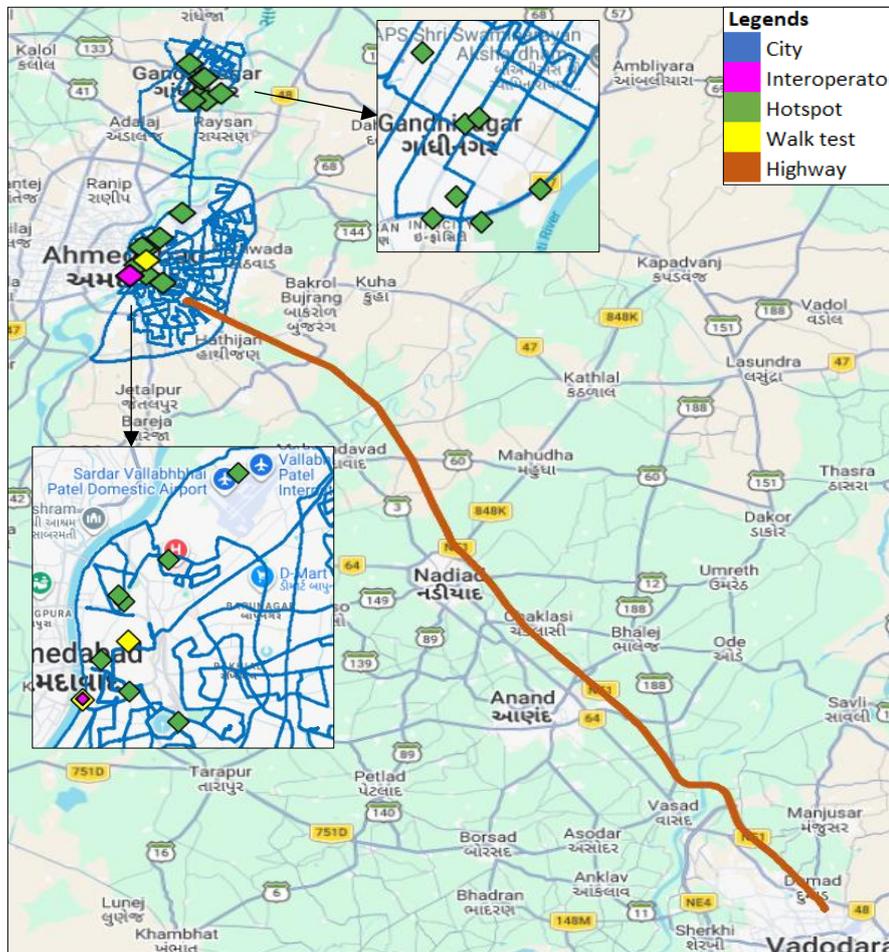


Figure-1: Drive test routes

2.3 Summary of areas covered

a) City-Gandhinagar, Kolavada, Sector-26, Sector-30, Kudasana, Adalaj, Hansol, Girdhar Nagar, Piplaj, Govindwadi, Vinzol, Navapura, Kathwada, Nanachiloda, Naroda, Bapunagar and Maninagar etc.

b) Hotspot

1. Ahmedabad Airport
2. Akshardham Temple Gandhi Nagar
3. Civil Hospital Ahmedabad
4. Civil Hospital Gandhi Nagar
5. District Court Gandhi Nagar
6. Gandhi Nagar Railway Station
7. Geeta Mandir Bus Stand
8. Hutheesing Jain Temple
9. Indora Nature Park Gandhi Nagar
10. Infocity Supermall I/II Gandhi Nagar
11. Kalupur Railway Station
12. Kankariya Lake
13. Sarita Udyan Gandhi Nagar
14. Teen Darwaja

c) Walk Test

1. River Front
2. Swaminarayan Temple To Jama Masjid

d) Highway- Vadodara to Ahmedabad via NE-1, passing through Poicha, Chikodra, Nadiad, Modaj and Geratnagar etc.

2.4 Telecom service providers detected frequency bands



Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	1800
2	Bharti Airtel Ltd.	4G	900,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,2100,2500
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900
10	Vodafone Idea Ltd.	4G	900,1800,2100,2500
11	Vodafone Idea Ltd.	5G	3500

Table-2: Telecom service provider (TSP) covered in IDT

2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), CST: Call Setup Time (in seconds), DCR: Drop Call Rate (in %) & MOS: Mean Opinion Score.

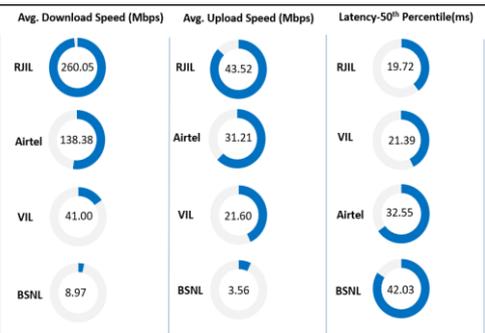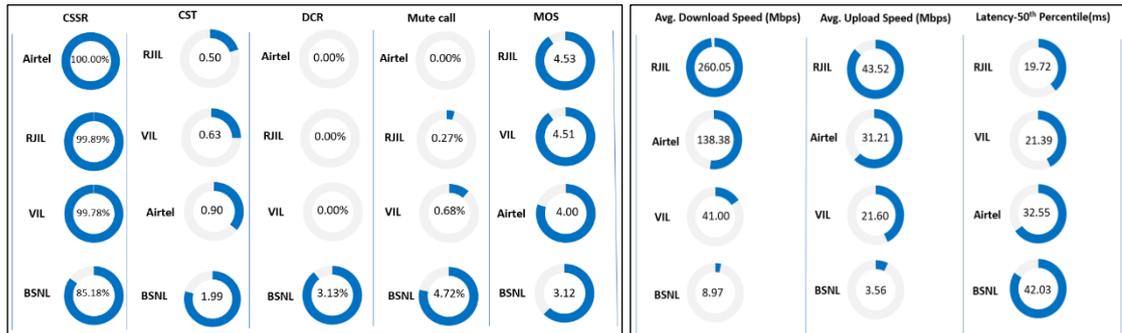

Summary-Voice services

Call Setup Success Rate: Airtel, BSNL, RJIL and VIL have 100.00%, 85.18%, 99.89% and 99.78% call setup success rate respectively in Auto-selection mode (5G/4G/3G/2G).

Call Setup Time: Airtel, BSNL, RJIL and VIL have call setup time of 0.90, 1.99, 0.50 and 0.63 seconds respectively in Auto-selection mode (5G/4G/3G/2G).

Drop Call Rate: Airtel, BSNL, RJIL and VIL have drop call rate of 0.00%, 3.13%, 0.00% and 0.00% respectively in Auto-selection mode (5G/4G/3G/2G).

Call Silence/Mute Rate: Airtel, BSNL, RJIL and VIL have silence call rate of 0.00%, 4.72%, 0.27% and 0.68% respectively in packet switched network (4G/5G).

Mean Opinion Score (MOS): Airtel, BSNL, RJIL and VIL have average MOS of 4.00, 3.12, 4.53 and 4.51 respectively.

Summary-Data services

Data Download performance (Overall):

Average download speed of Airtel (5G/4G) is 138.38 Mbps, BSNL (4G/3G/2G) is 8.97 Mbps, RJIL (5G/4G) is 260.05 Mbps and VIL (5G/4G/2G) is 41.00 Mbps.

Data Upload performance (Overall): Average upload speed of Airtel (5G/4G) is 31.21 Mbps, BSNL (4G/3G/2G) is 3.56 Mbps, RJIL (5G/4G) is 43.52 Mbps and VIL (5G/4G/2G) is 21.60 Mbps.

Latency (Overall): Airtel, BSNL, RJIL and VIL 50th percentile latency is 32.55 ms, 42.03 ms, 19.72 ms & 21.39 ms respectively.

Data performance - Hotspots (in Mbps):

Airtel- 4G D/L: 47.24	4G U/L: 7.15
5G D/L: 121.09	5G U/L: 34.66
BSNL- 4G D/L: 18.05	4G U/L: 6.50
RJIL- 4G D/L: 41.81	4G U/L: 8.50
5G D/L: 258.16	5G U/L: 39.19
VIL- 4G D/L: 31.97	4G U/L: 12.76
5G D/L: 55.09	5G U/L: 23.15

Note- "D/L" Download speed, "U/L" Upload speed

- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 0.74%, 10.34%, 0.16% & 0.09% of the **City IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 55 to 58** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 2.11%, 14.83%, 1.17% & 1.56% of the **City IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 59 to 62** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 3.63%, 44.49%, 0.62% & 2.12% of the **Highway IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 66 to 69** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 19.72%, 45.35%, 9.49% & 7.14% of the **Highway IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 70 to 73** as per the **Section 6.1** under Para-6 (Annexure)}

QoS Performance Analysis- Gujrat LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the Gujrat LSA during the month of February-2026 covering city drive, hotspots, walk test and highway. (Refer Table 1)

3.2 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	725	753	733
Call Setup Success Rate %	99.03	98.80	99.18
Drop Call Rate %	0.42	1.75	1.38
Call Setup Time-Average (Second)	4.82	2.86	4.59
Handover Success Rate %	99.36	99.56	97.69

Table-3: Summary of voice call performance in 3G/2G network mode only.

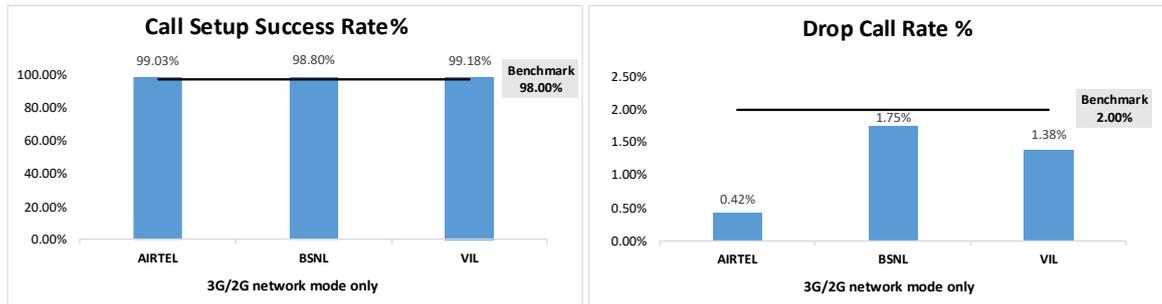


Figure-2: Call setup success rate and drop call rate performance.

Number of unique cell Id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	309	NA
2G	1203	285	1178

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	925	1012	929	928
Call Setup Success Rate %	100.00	85.18	99.89	99.78
Drop Call Rate %	0.00	3.13	0.00	0.00
Call Setup Time-Average (Second)	0.90	1.99	0.50	0.63
Handover Success Rate %	100.00	99.37	99.98	99.97

Table-5: Summary of voice call performance in network auto-selection mode.

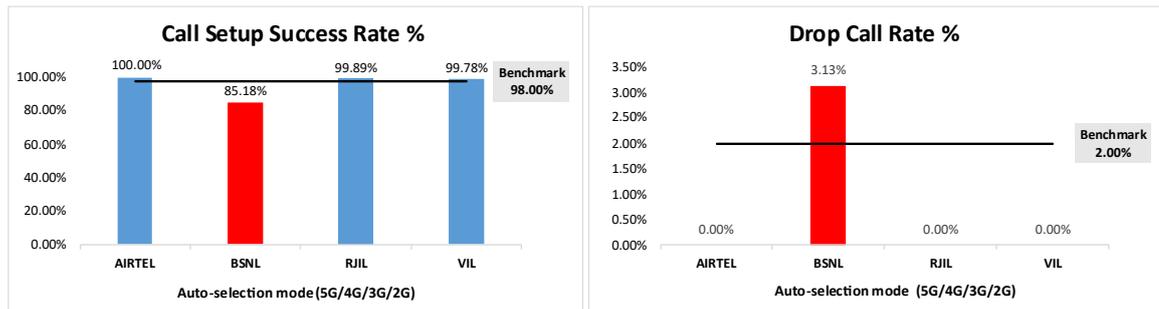


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	733	593	734	740
Number of silences call for >4 Sec	0	28	2	5
Silence Call Rate %	0.00	4.72	0.27	0.68
Number of silence instances for >4 Sec	0	34	2	6
Number of silence instances for >3 Sec	5	50	2	14
Number of silence instances for >2 sec	11	80	9	50
RTP Jitter (4G & 5G) in ms	5.97	7.78	17.83	12.06
Packet loss Rate Downlink %	0.38	5.79	0.48	0.42
Packet loss Rate Uplink %	0.21	5.39	0.59	0.45

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	1493	0
4G	2238	438	710	2130
3G	NA	88	NA	NA
2G	2	126	NA	0

Table-7: Technology wise number of network cell Id's latched during drive test.

Note-
<ul style="list-style-type: none"> • NA- Service provider doesn't provide services in respective technology. • 0- No cell Id's were found in respective technology.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	4618	3323	4634	4650
Speech Quality (Average MOS)	4.00	3.12	4.53	4.51
Number of samples with MOS >=4 to <5 (Excellent)	3799	990	4179	4148
Number of samples with MOS >=3 to <4 (Good)	688	862	285	403
Number of samples with MOS >=2 to <3 (Fair)	74	1000	105	65
Number of samples with MOS >=1 to <2 (Poor)	57	471	65	34
%age of samples with MOS >=4 to <5 (Excellent)	82.27%	29.79%	90.18%	89.20%
%age of samples with MOS >=3 to <4 (Good)	14.90%	25.94%	6.15%	8.67%
%age of samples with MOS >=2 to <3 (Fair)	1.60%	30.09%	2.27%	1.40%
%age of samples with MOS >=1 to <2 (Poor)	1.23%	14.17%	1.40%	0.73%

Table-8: Summary of speech quality (MOS) samples.

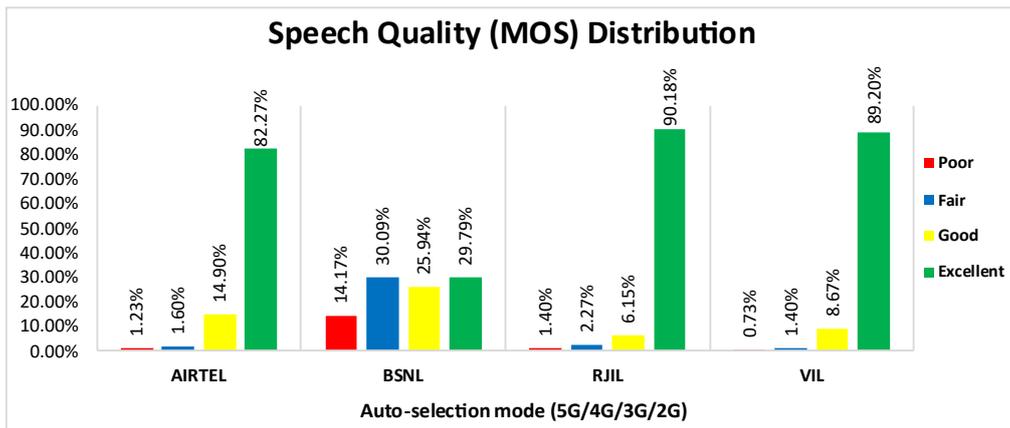


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service providers call setup success rate, total 10 to 13 inter operator calls were attempted at one location which is River Front. The call setup success rate and call setup time observation is as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	100.00
BSNL	100.00	NA	100.00	100.00
RJIL	100.00	100.00	NA	100.00
VIL	100.00	100.00	100.00	NA

Table-9: Call setup success rate across service providers

Note-
<ul style="list-style-type: none"> • NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	1.89	1.00	2.35
BSNL	2.46	NA	1.63	1.76
RJIL	1.83	1.60	NA	1.64
VIL	1.92	1.39	1.34	NA

Table-10: Call setup time across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	138.38	8.97	260.05	41.00
	80th Percentile	210.42	14.81	384.24	54.29
	20th Percentile	56.16	1.65	120.10	27.30
Upload Throughput (Mbits/s)	Average	31.21	3.56	43.52	21.60
	80th Percentile	56.35	4.79	69.48	30.74
	20th Percentile	5.95	1.24	15.98	11.29
Latency (ms)	50th Percentile	32.55	42.03	19.72	21.39

Table-11: Summary of data performance in network auto-selection mode.

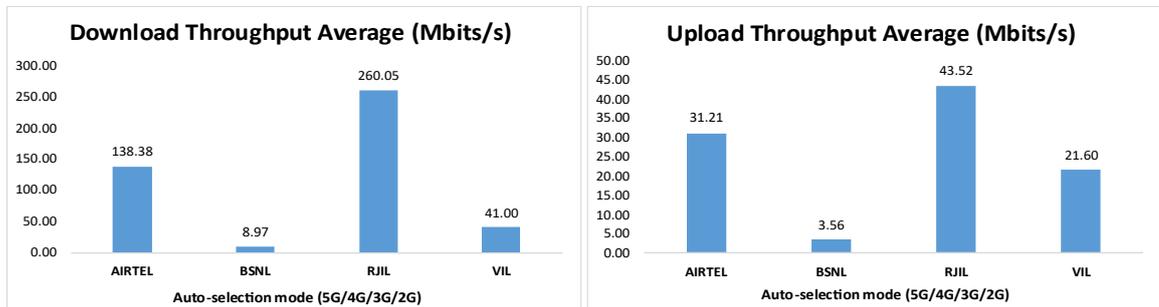


Figure- 5: Download and Upload throughput

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	1485	0
4G	2236	422	60	2198
3G	NA	149	NA	NA
2G	0	27	NA	5

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots, walk test and highway for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

4.2 City

Drive test was conducted from 2nd February 2026 to 5th February 2026 in Ahmedabad & Gandhinagar City. (Refer Table-1)

4.2.1 Drive test route

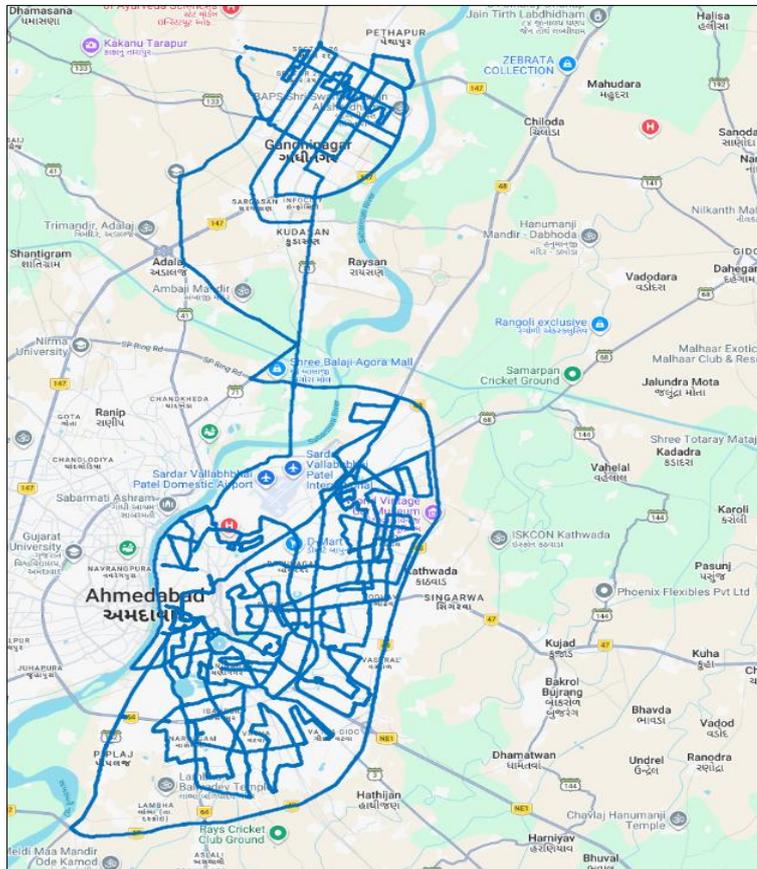


Figure- 6: Drive test routes

4.2.2 Areas covered

Gandhinagar, Kolavada, Sector-26, Sector-30, Kudasan, Adalaj, Hansol, Girdhar Nagar, Piplaj, Govindwadi, Vinzol, Navapura, Kathwada, Nanachiloda, Naroda, Bapunagar and Maninagar etc.

4.2.3 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	687	709	695
Call Setup Success Rate %	98.98	99.15	99.14
Drop Call Rate %	0.44	1.28	1.31
Call Setup Time-Average (Second)	4.84	2.85	4.60
Handover Success Rate %	99.31	99.57	97.63

Table-13: Summary of voice call performance in 3G/2G network mode only.

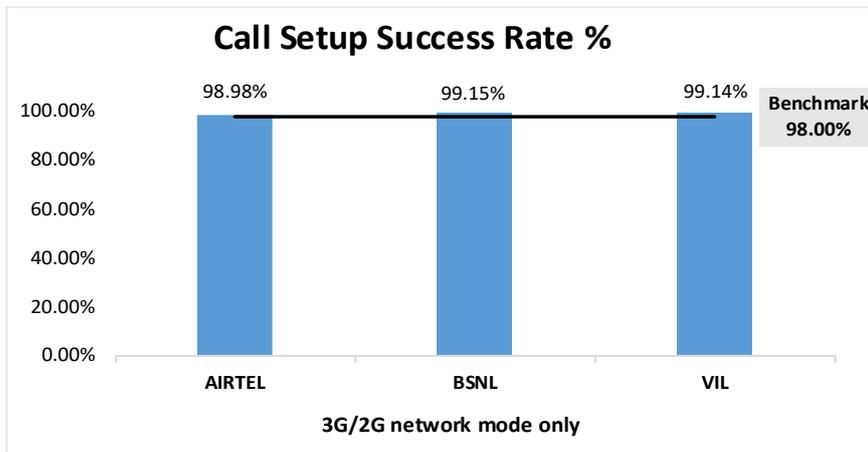


Figure-7: Performance for call setup success rate.

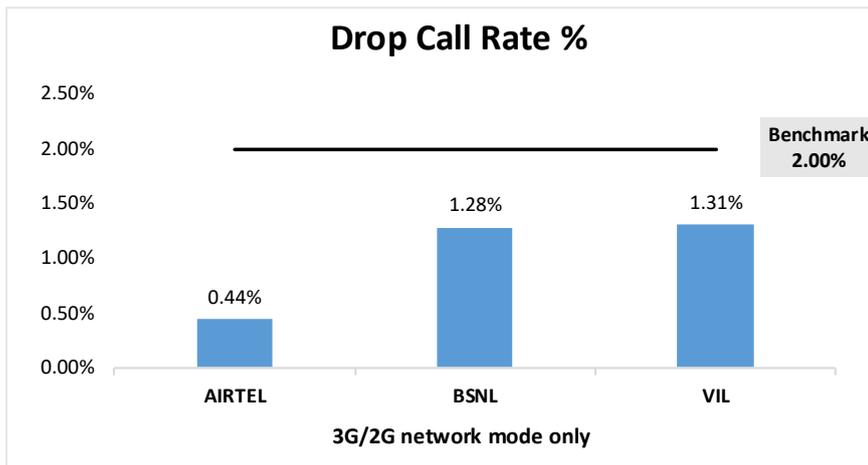


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	68.98%	NA
2G	99.98%	30.92%	99.99%
Limited Service	0.02%	0.09%	0.01%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.

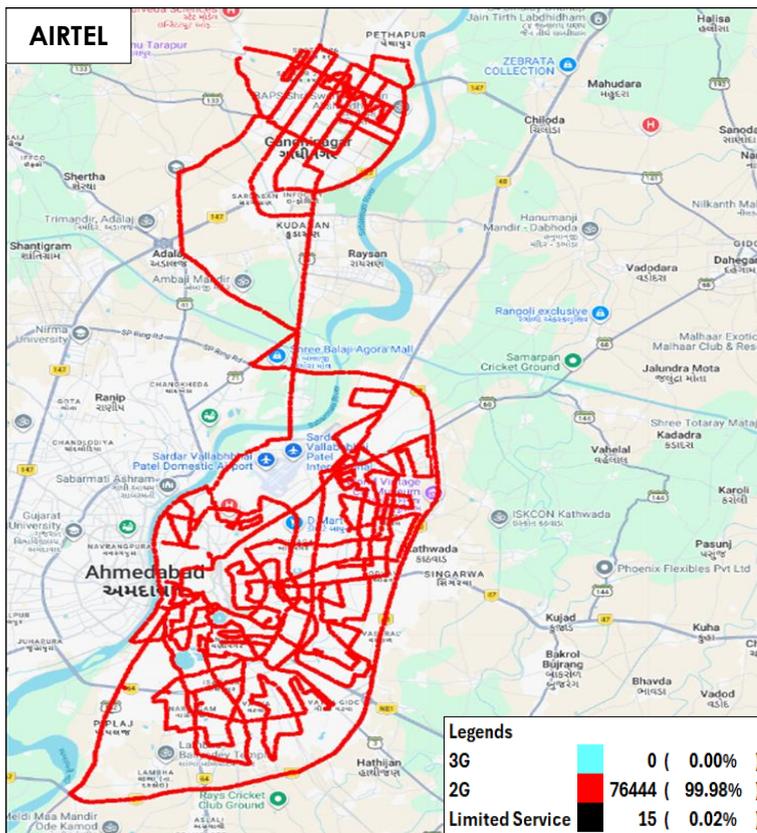


Figure-9: Serving technology plots 3G/2G network mode - AIRTEL.

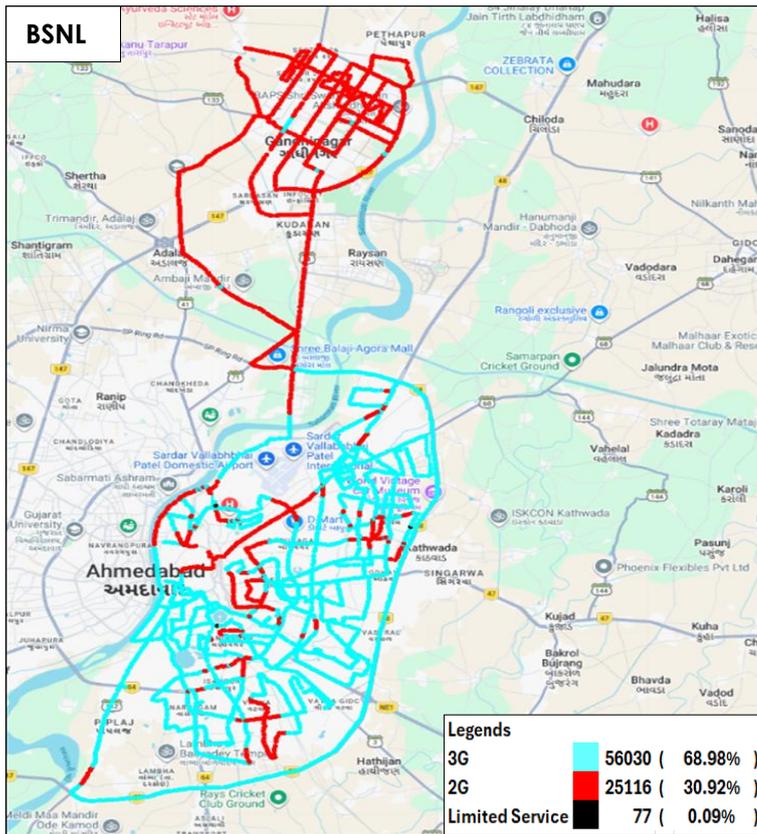


Figure-10: Serving technology plots 3G/2G network mode - BSNL.

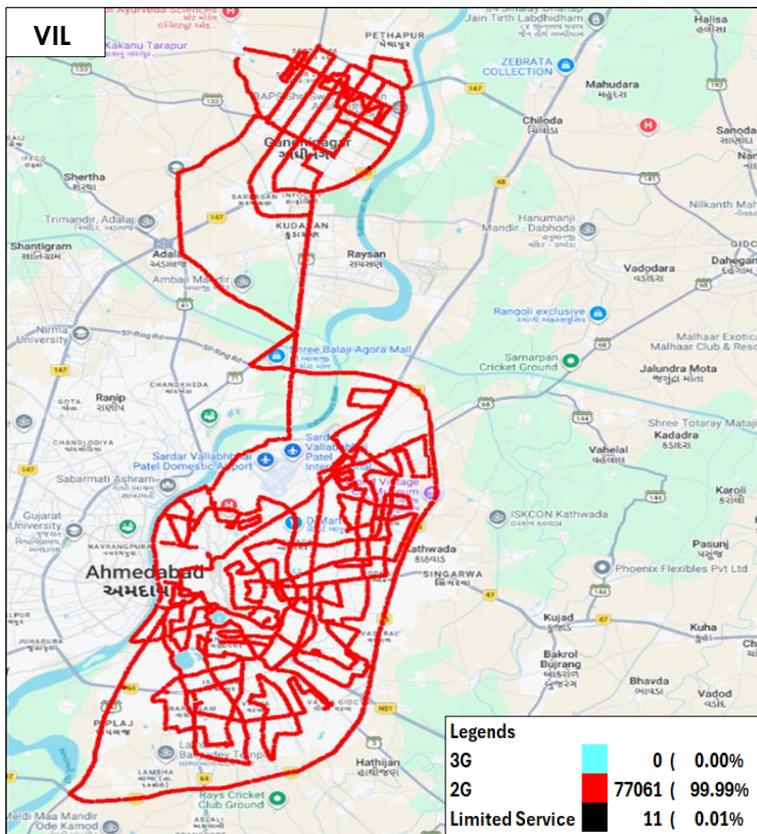


Figure-11: Serving technology plots 3G/2G network mode - VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 52, 53 & 54 for map view)

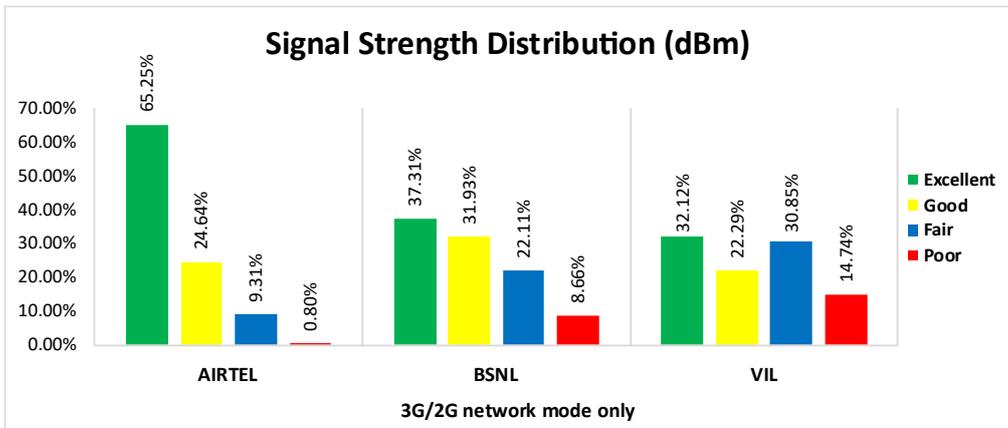


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 65% of samples falling in the excellent signal strength category.
- BSNL has 37% of samples falling in the excellent signal strength category.
- VIL has 32% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	721	796	724	723
Call Setup Success Rate %	100.00	81.91	99.86	99.72
Drop Call Rate %	0.00	2.61	0.00	0.00
Call Setup Time Average (Second)	0.89	2.21	0.50	0.63
Handover Success Rate %	100.00	99.58	99.98	99.97

Table-15: Summary of voice call performance in network auto-selection mode.

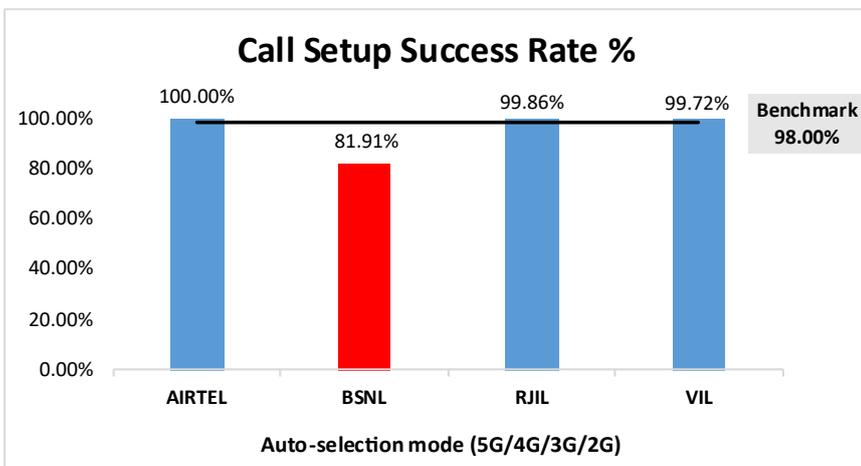


Figure-13: Performance for call setup success rate.

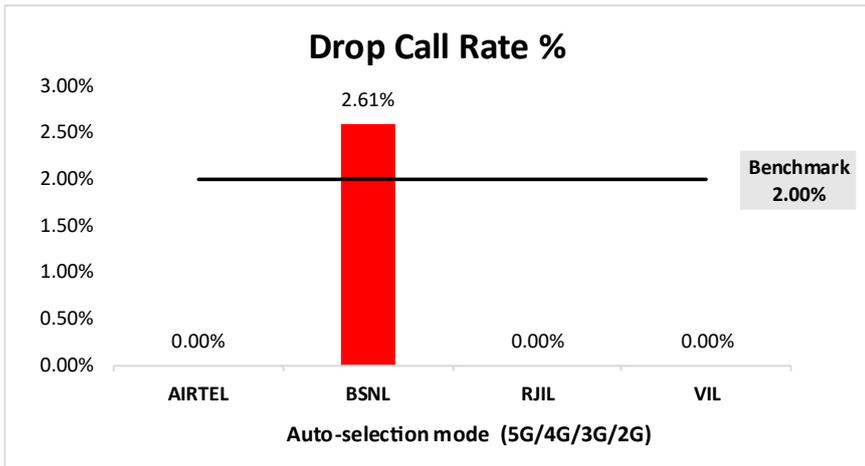


Figure-14: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	694	557	696	701
Number of silences call for >4 Sec	0	28	2	5
Silence Call Rate %	0.00	5.03	0.29	0.71
Number of silence instances for >4 Sec	0	34	2	6
Number of silence instances for >3 Sec	4	48	2	13
Number of silence instances for >2 sec	8	77	7	42
RTP Jitter (4G & 5G) in ms	5.87	7.78	18.20	12.17
Packet loss Rate Downlink %	0.31	5.78	0.46	0.41
Packet loss Rate Uplink %	0.19	5.30	0.58	0.43

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	4128	2980	4142	4143
Speech Quality (Average MOS)	4.02	3.17	4.53	4.52
Number of samples with MOS >=4 to <5 (Excellent)	3446	929	3737	3715
Number of samples with MOS >=3 to <4 (Good)	601	829	257	352
Number of samples with MOS >=2 to <3 (Fair)	55	843	95	48
Number of samples with MOS >=1 to <2 (Poor)	26	379	53	28
%age of samples with MOS >=4 to <5 (Excellent)	83.48%	31.17%	90.22%	89.67%
%age of samples with MOS >=3 to <4 (Good)	14.56%	27.82%	6.20%	8.50%
%age of samples with MOS >=2 to <3 (Fair)	1.33%	28.29%	2.29%	1.16%
%age of samples with MOS >=1 to <2 (Poor)	0.63%	12.72%	1.28%	0.68%

Table-17: Summary of speech quality (MOS) samples.

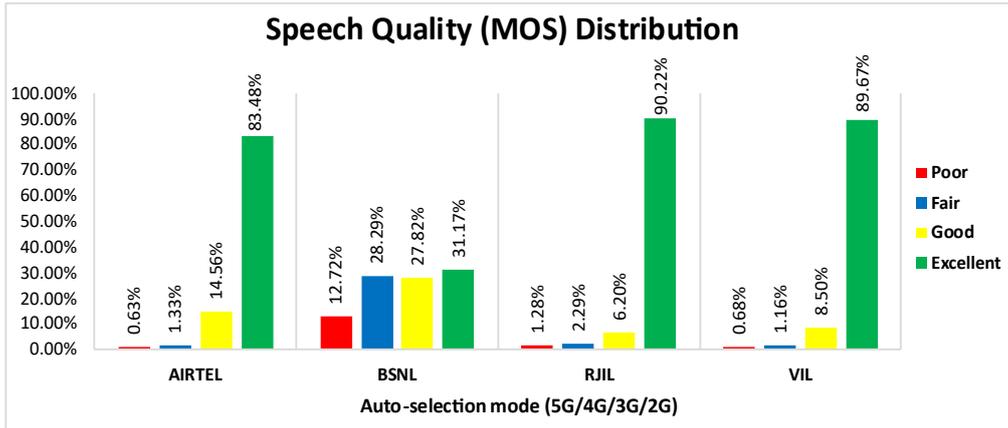


Figure-15: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	8.14%	NA	85.75%	1.62%
4G	91.86%	75.30%	14.25%	98.38%
3G	NA	18.60%	NA	NA
2G	0.00%	5.39%	NA	0.00%
Limited Service	0.00%	0.71%	0.00%	0.00%

Table-18: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

Note-

- NA- Service provider doesn't provide services in respective technology.

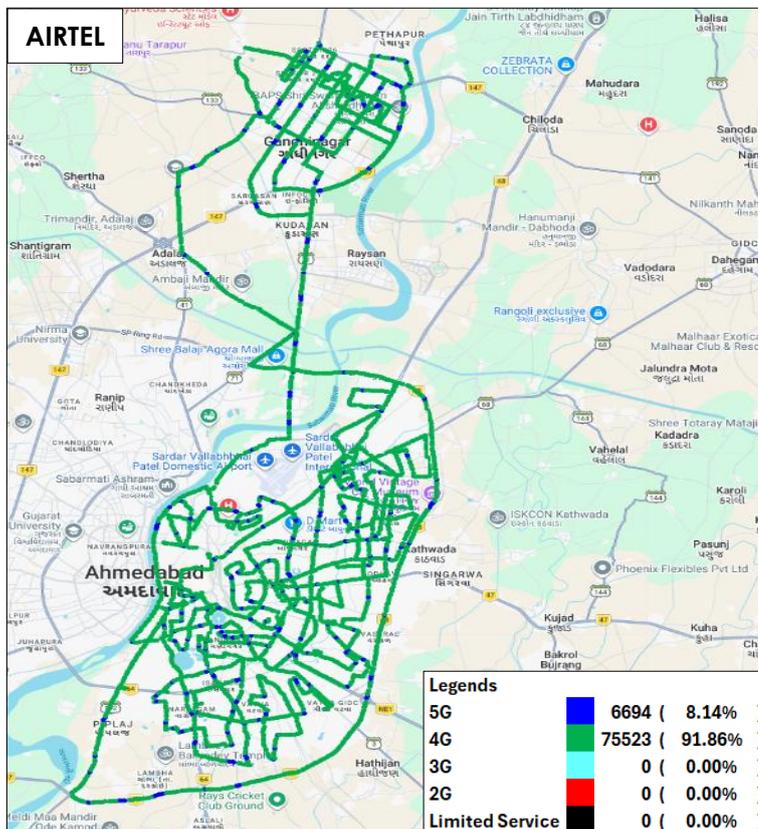


Figure-16: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

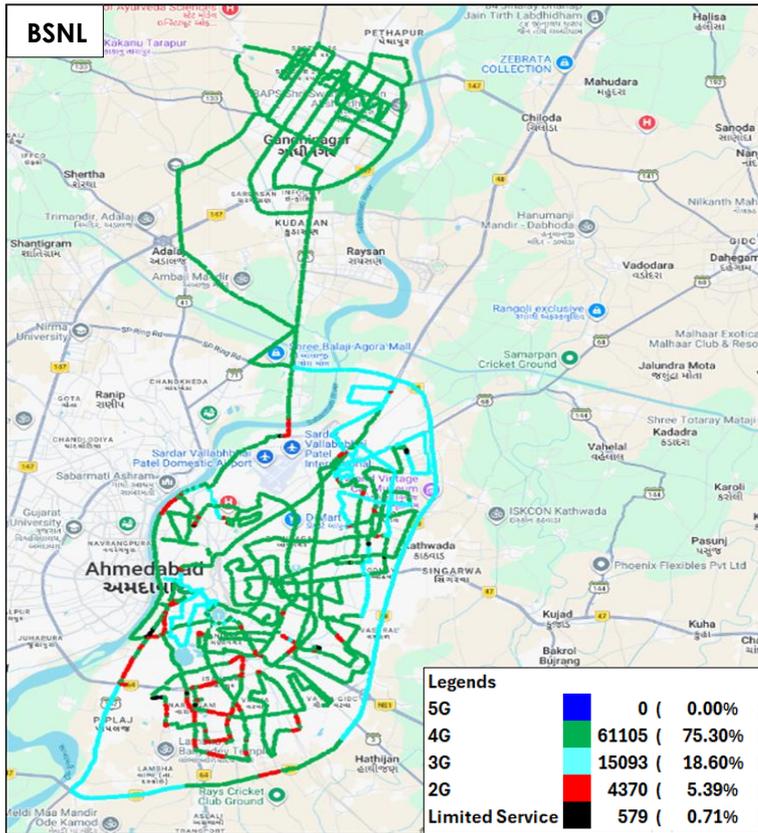


Figure-17: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

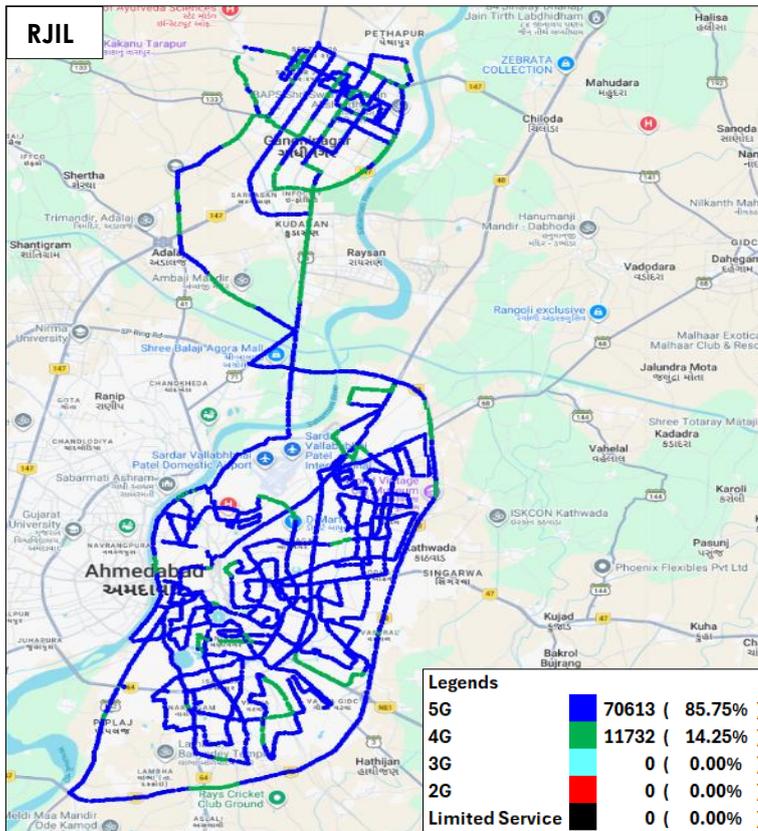


Figure-18: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

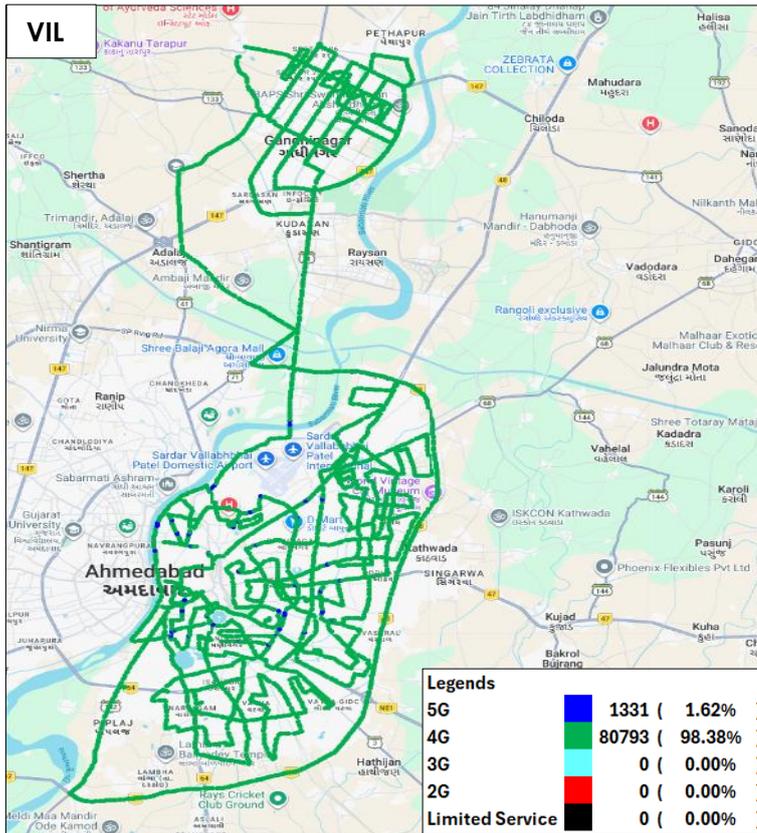


Figure-19: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-55, 56, 57 & 58 for map view)

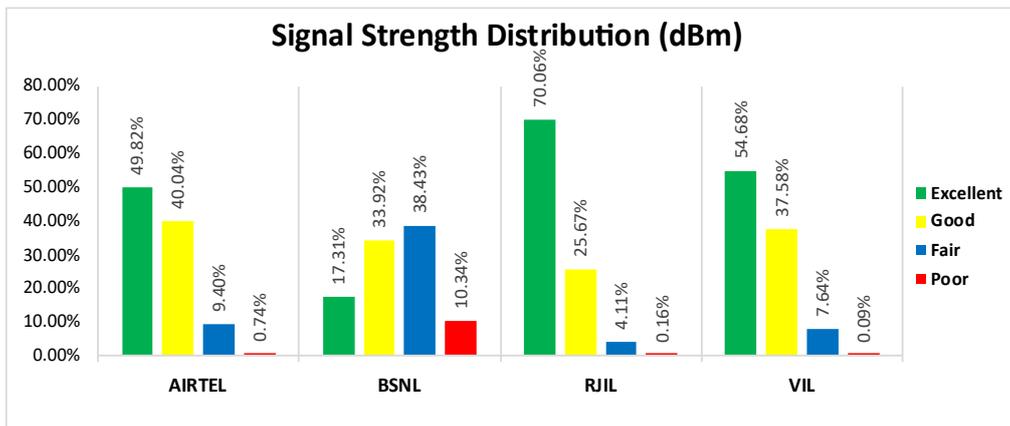


Figure-20: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 50% of samples falling in the excellent signal strength category.
- BSNL has 17% of samples falling in the excellent signal strength category.
- RJIL has 70% of samples falling in the excellent signal strength category.
- VIL has 55% of samples falling in the excellent signal strength category.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	144.88	8.63	269.60	41.18
	80th Percentile	216.97	14.34	393.93	54.28
	20th Percentile	61.90	1.45	137.10	27.49
Upload Throughput (Mbits/s)	Average	33.11	3.42	45.46	22.25
	80th Percentile	58.63	4.41	71.08	30.93
	20th Percentile	6.96	1.24	18.21	11.72
Latency (ms)	50th Percentile	31.67	42.47	19.45	20.59

Table-19: Summary of Data performance in network auto-selection mode.

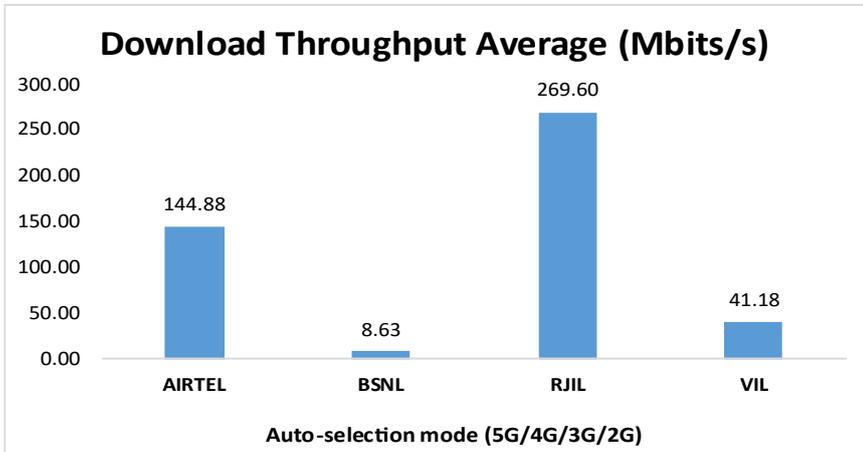


Figure- 21: Download throughput

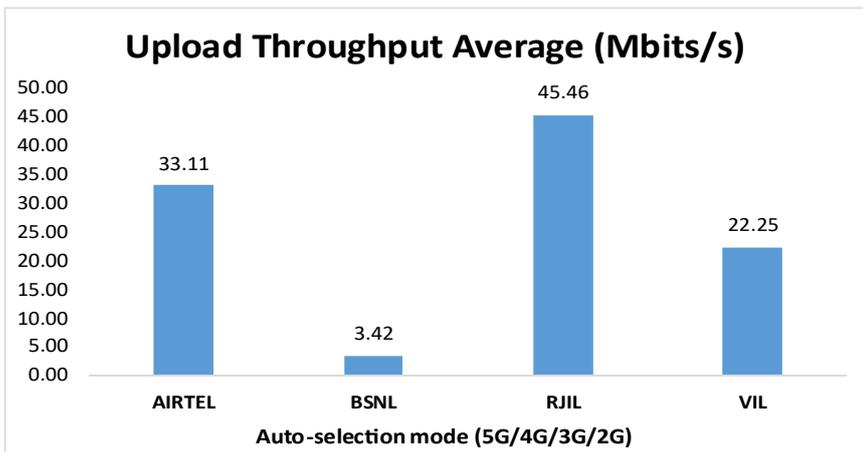


Figure- 22: Upload throughput

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	75.87%	NA	99.59%	33.52%
4G	24.12%	62.77%	0.41%	66.40%
3G	NA	35.94%	NA	NA
2G	0.00%	0.64%	NA	0.08%
Limited Service	0.00%	0.65%	0.00%	0.00%

Table-20: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

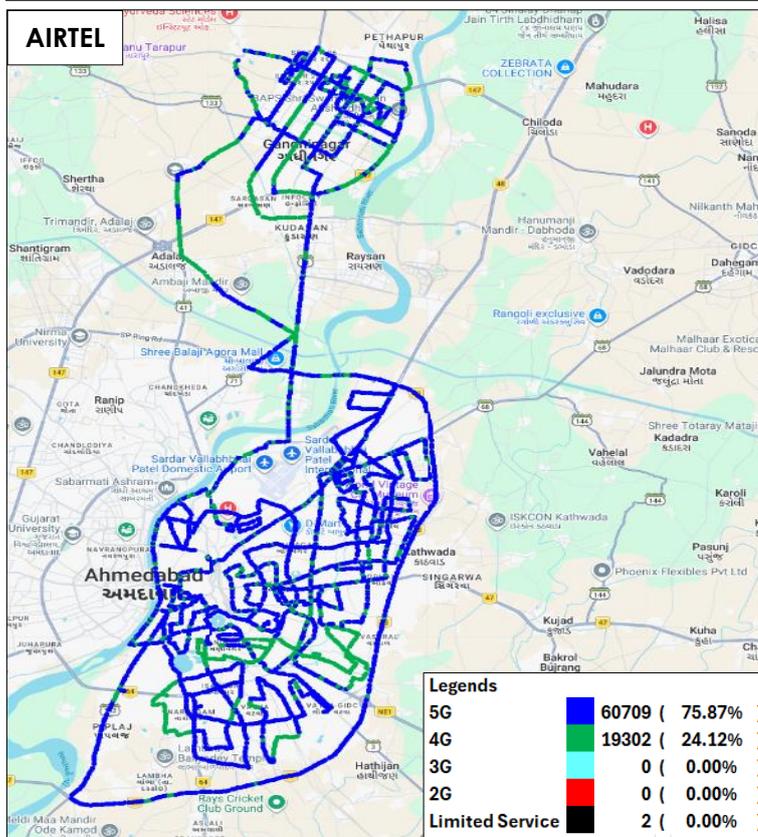


Figure-23: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

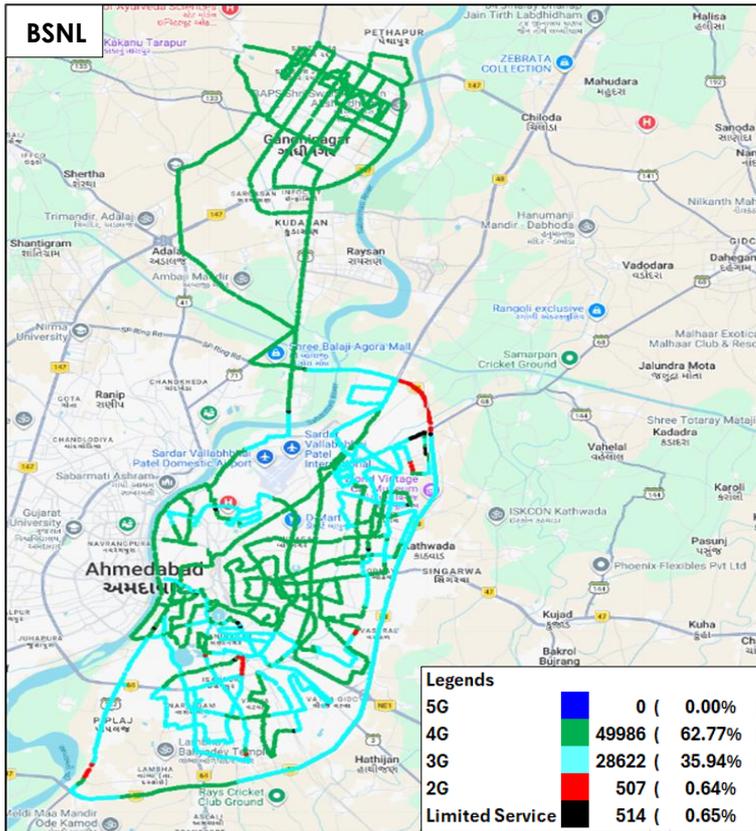


Figure-24: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - BSNL.

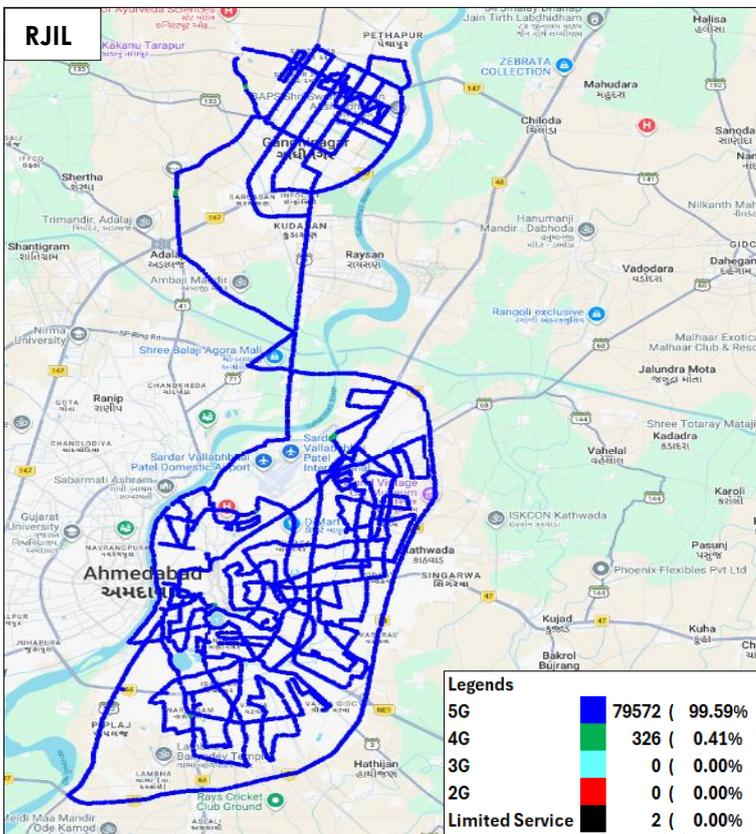


Figure-25: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

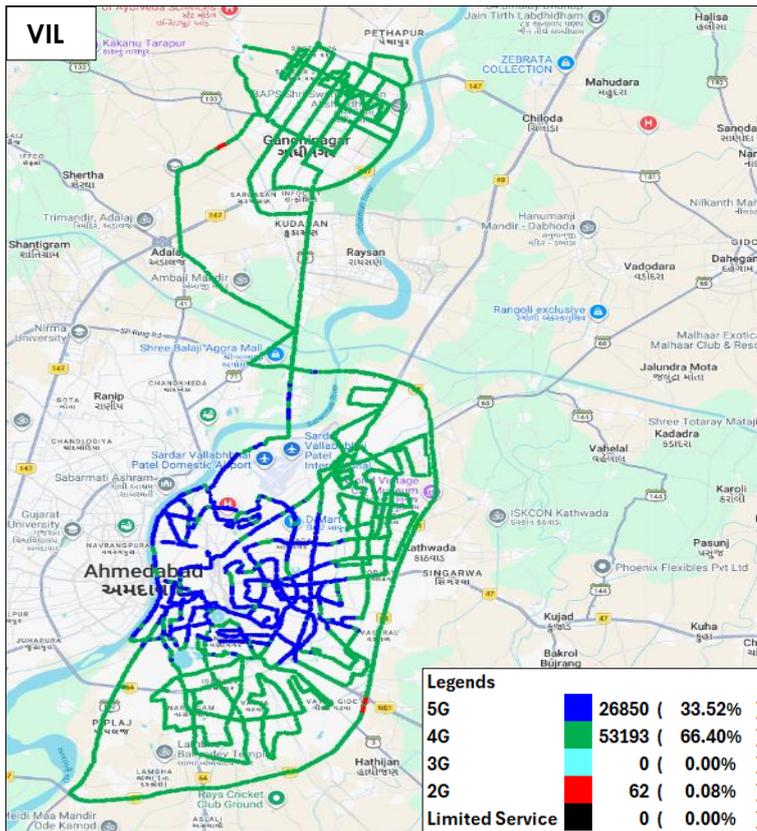


Figure-26: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - VIL

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-59, 60, 61 & 62 for map view)

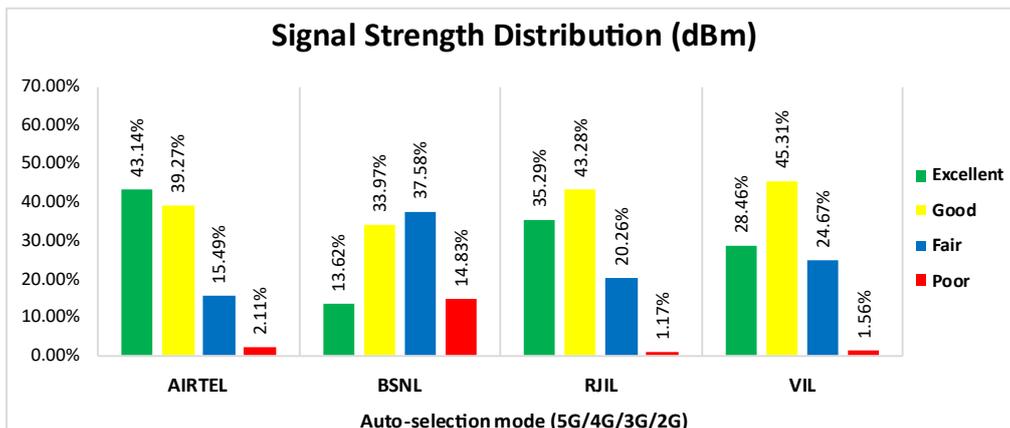


Figure-27: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 43% of samples falling in the excellent signal strength category.
- BSNL has 14% of samples falling in the excellent signal strength category.
- RJIL has 35% of samples falling in the excellent signal strength category.
- VIL has 28% of samples falling in the excellent signal strength category.

4.3 Hotspots

Hotspot testing has been done on 5th February 2026 and 6th February 2026. Fourteen locations have been tested in the city. (Refer Table-1)

4.3.1 Locations

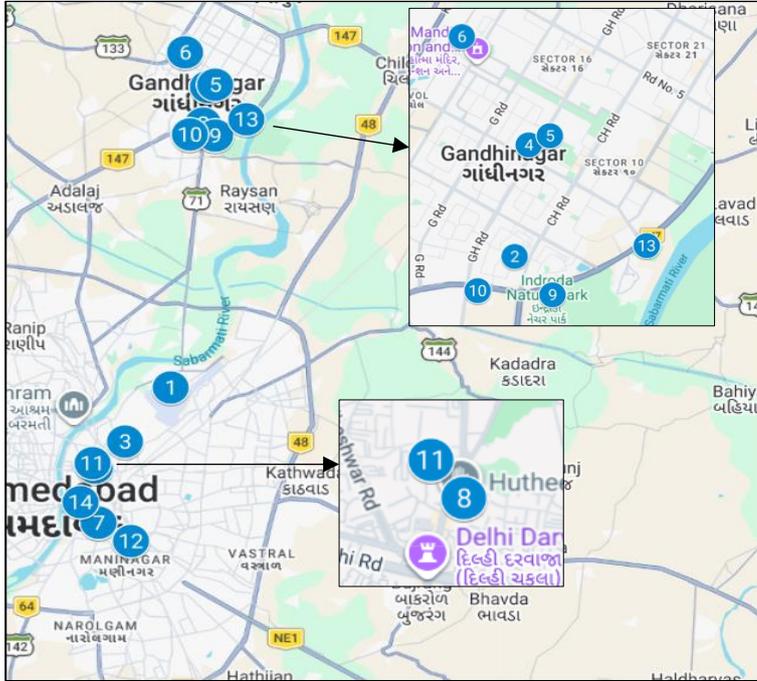


Figure- 28: Hotspot locations

4.3.2 Hotspot covered

1. Ahmedabad Airport
2. Akshardham Temple Gandhi Nagar
3. Civil Hospital Ahmedabad
4. Civil Hospital Gandhi Nagar
5. District Court Gandhi Nagar
6. Gandhi Nagar Railway Station
7. Geeta Mandir Bus Stand
8. Hutheesing Jain Temple
9. Indora Nature Park Gandhi Nagar
10. Infocity Supermall I/II Gandhi Nagar
11. Kalupur Railway Station
12. Kankariya Lake
13. Sarita Udyan Gandhi Nagar
14. Teen Darwaja

4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	140	140	140	140
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.98	0.60	0.51	0.65

Table-21: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Ahmedabad Airport				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.83	1.25	0.48	0.87

Table-22: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Akshardham Temple Gandhi Nagar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.96	0.53	0.56	0.58

Table-23: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Civil Hospital Ahmedabad				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.99	0.56	0.47	0.60

Table-24: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Civil Hospital Gandhi Nagar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.87	0.54	0.56	0.80

Table-25: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

District Court Gandhi Nagar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.94	0.53	0.46	0.66

Table-26: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Gandhi Nagar Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.01	0.55	0.43	0.58

Table-27: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Geeta Mandir Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.94	0.57	0.56	0.65

Table-28: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Hutheesing Jain Temple				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.82	0.53	0.56	0.68

Table-29: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Indora Nature Park Gandhi Nagar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.32	0.52	0.66	0.60

Table-30: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Infocity Supermall I/II Gandhi Nagar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.87	0.62	0.46	0.58

Table-31: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Kalupur Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.03	0.53	0.51	0.64

Table-32: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Kankariya Lake				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.95	0.60	0.50	0.61

Table-33: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Sarita Udyan Gandhi Nagar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.89	0.53	0.54	0.60

Table-34: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Teen Darwaja				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.22	0.60	0.46	0.60

Table-35: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	119.92	13.64	266.34	40.82
Download Throughput 80th Percentile (Mbit/s)	177.36	19.54	396.80	58.15
Download Throughput 20th Percentile (Mbit/s)	40.27	5.37	49.02	26.49
Download Session Setup Success Rate %	98.57	100.00	97.14	100.00
Upload Throughput Average (Mbits/s)	29.94	3.90	40.29	19.50
Upload Throughput 80th Percentile (Mbit/s)	53.05	5.36	61.52	27.48
Upload Throughput 20th Percentile (Mbit/s)	4.97	1.26	10.76	10.61
Upload Session Setup Success Rate %	98.57	100.00	100.00	100.00
Web Browsing Delay (Second)	4.57	6.78	3.92	4.88
Youtube Initial Buffer Delay (Second)	1.19	2.08	0.63	0.68
Latency (ms) - 50th Percentile	35.12	41.39	20.13	22.35
Jitter (ms)	19.35	56.43	8.73	6.38
Packet Loss Rate%	7.63	11.94	4.05	0.37
Packet Loss Rate- 90th percentile	28.18	25.34	2.94	0.40

Table-36: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Ahmedabad Airport				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	26.55	4.08	156.25	27.17
Download Session Setup Success Rate %	100.00	100.00	80.00	100.00
Upload Throughput Average (Mbits/s)	9.48	1.29	45.51	13.80
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	6.11	7.11	3.80	5.79
Youtube Initial Buffer Delay (Second)	3.34	8.46	0.50	0.69
Latency (ms) - 50th Percentile	41.82	48.07	19.25	24.71
Jitter (ms)	7.90	106.66	5.90	11.79
Packet Loss Rate%	2.00	15.80	0.10	0.10

Table-37: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Akshardham Temple Gandhi Nagar				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	73.52	15.66	720.28	46.51
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	16.81	1.28	53.04	27.07
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.86	6.93	3.30	4.49
Youtube Initial Buffer Delay (Second)	0.71	1.75	0.50	0.63
Latency (ms) - 50th Percentile	35.94	50.90	18.50	22.18
Jitter (ms)	2.07	180.08	2.85	2.81
Packet Loss Rate%	3.70	68.20	0.00	0.20

Table-38: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Civil Hospital Ahmedabad				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	136.78	5.34	856.47	59.38
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	43.99	2.52	101.88	24.34
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.75	5.89	3.44	4.38
Youtube Initial Buffer Delay (Second)	0.56	1.01	0.55	0.54
Latency (ms) - 50th Percentile	38.07	38.77	20.57	15.52
Jitter (ms)	9.56	33.23	3.28	2.19
Packet Loss Rate%	0.20	3.70	0.10	0.00

Table-39: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Civil Hospital Gandhi Nagar				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	125.54	24.67	14.89	17.24
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	36.49	4.63	11.46	14.83
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.08	7.12	5.49	3.18
Youtube Initial Buffer Delay (Second)	0.62	1.61	0.80	0.77
Latency (ms) - 50th Percentile	31.86	49.72	20.12	29.37
Jitter (ms)	4.70	44.90	9.02	6.81
Packet Loss Rate%	0.20	8.00	0.40	0.40

Table-40: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

District Court Gandhi Nagar				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	84.35	18.68	218.28	24.28
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	3.25	2.02	28.61	8.57
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.87	7.43	3.53	4.92
Youtube Initial Buffer Delay (Second)	0.93	3.30	0.50	0.75
Latency (ms)- 50th Percentile	29.40	40.19	500.06	22.79
Jitter (ms)	7.70	37.06	21.59	8.67
Packet Loss Rate%	14.80	4.10	36.60	0.10

Table-41: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Gandhi Nagar Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	223.10	35.65	125.46	36.99
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	16.22	4.72	29.15	20.34
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.19	6.76	3.26	5.05
Youtube Initial Buffer Delay (Second)	0.60	1.19	0.52	0.64
Latency (ms) - 50th Percentile	25.95	42.14	20.20	23.45
Jitter (ms)	3.28	49.53	6.55	4.45
Packet Loss Rate%	0.20	3.50	0.20	0.00

Table-42: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Geeta Mandir Bus Stand				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	235.57	14.90	218.81	62.17
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	73.87	2.75	49.93	23.55
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.00	5.84	2.85	4.10
Youtube Initial Buffer Delay (Second)	0.57	2.43	0.54	0.64
Latency (ms)- 50th Percentile	32.71	42.84	19.02	22.20
Jitter (ms)	84.04	48.00	3.33	2.85
Packet Loss Rate%	0.30	4.50	0.20	0.10

Table-43: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Hutheesing Jain Temple				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	120.49	13.29	241.25	51.42
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	79.91	7.58	30.90	31.28
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.70	6.71	3.36	4.22
Youtube Initial Buffer Delay (Second)	0.67	1.33	0.51	0.58
Latency (ms) - 50th Percentile	30.74	45.03	19.51	17.95
Jitter (ms)	1.82	41.40	3.52	2.39
Packet Loss Rate%	0.30	3.50	0.00	0.00

Table-44: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Indora Nature Park Gandhi Nagar				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	8.29	7.51	29.33	6.86
Download Session Setup Success Rate %	80.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	1.50	1.30	1.65	1.25
Upload Session Setup Success Rate %	80.00	100.00	100.00	100.00
Web Browsing Delay (Second)	9.89	10.12	11.93	10.48
Youtube Initial Buffer Delay (Second)	7.45	-	-	1.75
Latency (ms) - 50th Percentile	58.47	42.31	25.86	28.44
Jitter (ms)	110.69	45.32	29.17	23.05
Packet Loss Rate%	13.40	6.60	18.20	4.30

Table-45: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

Infocity Supermall I/II Gandhi Nagar				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	223.07	12.47	403.21	35.13
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	19.68	2.79	98.41	11.82
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.74	7.36	2.56	5.17
Youtube Initial Buffer Delay (Second)	1.66	2.84	0.56	0.68
Latency (ms) - 50th Percentile	36.68	40.14	21.23	24.61
Jitter (ms)	7.80	45.57	4.25	4.44
Packet Loss Rate%	0.40	6.00	0.00	0.00

Table-46: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Kalupur Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	88.74	4.97	87.30	53.64
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	31.83	3.54	9.98	16.16
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	6.53	5.09	3.38	4.53
Youtube Initial Buffer Delay (Second)	0.91	1.63	0.65	0.79
Latency (ms) - 50th Percentile	36.96	39.62	19.56	18.47
Jitter (ms)	3.17	48.05	4.38	3.17
Packet Loss Rate%	42.20	3.40	0.30	0.00

Table-47: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Kankariya Lake				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	144.68	14.58	248.76	45.29
Download Session Setup Success Rate %	100.00	100.00	80.00	100.00
Upload Throughput Average (Mbits/s)	53.30	4.44	66.87	17.81
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.56	6.60	3.40	5.64
Youtube Initial Buffer Delay (Second)	0.92	1.20	0.56	0.71
Latency (ms) - 50th Percentile	32.59	33.82	19.74	21.50
Jitter (ms)	2.06	21.63	3.96	5.75
Packet Loss Rate%	0.10	3.00	0.00	0.00

Table-48: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Sarita Udyan Gandhi Nagar				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	40.45	6.39	341.59	45.63
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	11.55	1.25	32.61	26.20
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.59	10.32	2.97	4.78
Youtube Initial Buffer Delay (Second)	0.70	8.81	0.51	0.62
Latency (ms) - 50th Percentile	70.17	43.69	21.19	24.04
Jitter (ms)	23.00	51.48	4.08	6.57
Packet Loss Rate%	28.90	32.80	0.00	0.00

Table-49: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Teen Darwaja				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	125.45	12.81	41.29	59.75
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	18.19	14.45	4.07	36.01
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.50	6.05	4.24	3.98
Youtube Initial Buffer Delay (Second)	0.74	0.85	1.47	0.57
Latency (ms) - 50th Percentile	28.84	38.46	36.41	24.56
Jitter (ms)	3.13	64.79	20.46	4.38
Packet Loss Rate%	0.10	4.10	0.60	0.00

Table-50: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	121.09	-	258.16	55.09
	Upload Throughput Average (Mbits/s)	34.66	-	39.19	23.15
4G	Download Throughput Average (Mbits/s)	47.24	18.05	41.81	31.97
	Upload Throughput Average (Mbits/s)	7.15	6.50	8.50	12.76

Table-51: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Ahmedabad Airport					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	20.64	-	129.34	-
	Upload Throughput Average (Mbits/s)	7.71	-	28.13	-
4G	Download Throughput Average (Mbits/s)	23.11	6.72	15.77	23.53
	Upload Throughput Average (Mbits/s)	7.72	1.58	5.90	9.37

Table-52: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Akshardham Temple Gandhi Nagar					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	56.38	-	652.38	-
	Upload Throughput Average (Mbits/s)	29.02	-	65.55	-
4G	Download Throughput Average (Mbits/s)	66.16	21.33	104.71	50.76
	Upload Throughput Average (Mbits/s)	4.61	2.18	13.97	17.41

Table-53: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
-------------------------------------------------------------------------	--	--	--	--	--

Civil Hospital Ahmedabad					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	117.51	-	717.66	62.52
	Upload Throughput Average (Mbits/s)	40.47	-	101.99	23.85
4G	Download Throughput Average (Mbits/s)	29.36	9.21	43.10	15.22
	Upload Throughput Average (Mbits/s)	10.93	8.52	16.32	13.03

Table-54: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Civil Hospital Gandhi Nagar					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	121.37	-	17.96	-
	Upload Throughput Average (Mbits/s)	20.48	-	10.55	-
4G	Download Throughput Average (Mbits/s)	22.85	27.65	19.27	25.49
	Upload Throughput Average (Mbits/s)	7.68	18.35	5.67	12.33

Table-55: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

District Court Gandhi Nagar					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	120.71	-	233.92	-
	Upload Throughput Average (Mbits/s)	8.25	-	19.50	-
4G	Download Throughput Average (Mbits/s)	28.30	25.88	57.19	15.96
	Upload Throughput Average (Mbits/s)	2.78	5.55	5.64	10.18

Table-56: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Gandhi Nagar Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	151.71	-	186.54	-
	Upload Throughput Average (Mbits/s)	20.95	-	33.53	-
4G	Download Throughput Average (Mbits/s)	82.25	22.15	19.44	18.93
	Upload Throughput Average (Mbits/s)	3.89	13.96	5.06	15.20

Table-57: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Geeta Mandir Bus Stand					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	212.24	-	210.88	61.16
	Upload Throughput Average (Mbits/s)	66.60	-	53.51	28.94
4G	Download Throughput Average (Mbits/s)	101.17	11.52	42.74	32.29
	Upload Throughput Average (Mbits/s)	10.96	1.43	15.96	12.85

Table-58: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Hutheesing Jain Temple					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	129.26	-	219.13	50.60
	Upload Throughput Average (Mbits/s)	74.91	-	26.19	20.06
4G	Download Throughput Average (Mbits/s)	64.75	12.42	38.80	51.50
	Upload Throughput Average (Mbits/s)	14.73	6.57	5.22	23.05

Table-59: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Indora Nature Park Gandhi Nagar					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	41.12	-
	Upload Throughput Average (Mbits/s)	-	-	2.08	-
4G	Download Throughput Average (Mbits/s)	11.63	29.80	13.10	10.87
	Upload Throughput Average (Mbits/s)	1.71	7.53	0.97	4.23

Table-60: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Infocity Supermall I/II Gandhi Nagar					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	441.00	-
	Upload Throughput Average (Mbits/s)	-	-	96.10	-
4G	Download Throughput Average (Mbits/s)	43.06	16.02	73.07	20.85
	Upload Throughput Average (Mbits/s)	1.59	6.80	10.95	10.37

Table-61: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Kalupur Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	158.98	-	72.04	55.04
	Upload Throughput Average (Mbits/s)	46.30	-	7.35	22.52
4G	Download Throughput Average (Mbits/s)	46.82	10.61	29.35	46.97
	Upload Throughput Average (Mbits/s)	12.22	2.46	7.06	12.34

Table-62: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Kankariya Lake					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	208.72	-	226.08	41.58
	Upload Throughput Average (Mbits/s)	66.12	-	74.96	17.00
4G	Download Throughput Average (Mbits/s)	102.61	13.50	46.56	36.31
	Upload Throughput Average (Mbits/s)	10.12	5.20	10.88	4.98

Table-63: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Sarita Udyan Gandhi Nagar					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	74.15	-	410.20	-
	Upload Throughput Average (Mbits/s)	7.34	-	24.73	-
4G	Download Throughput Average (Mbits/s)	20.16	20.75	49.02	38.76
	Upload Throughput Average (Mbits/s)	3.81	3.73	6.87	20.11

Table-64: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Teen Darwaja					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	114.57	-	56.07	59.63
	Upload Throughput Average (Mbits/s)	12.06	-	4.48	25.06
4G	Download Throughput Average (Mbits/s)	19.06	21.59	33.25	60.09
	Upload Throughput Average (Mbits/s)	5.54	6.08	8.54	13.23

Table-65: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

4.4 Walk Test

Walk Test has been conducted on 6th February 2026. Two locations have been tested in the city. (Refer Table-1)

4.4.1 Walk test locations

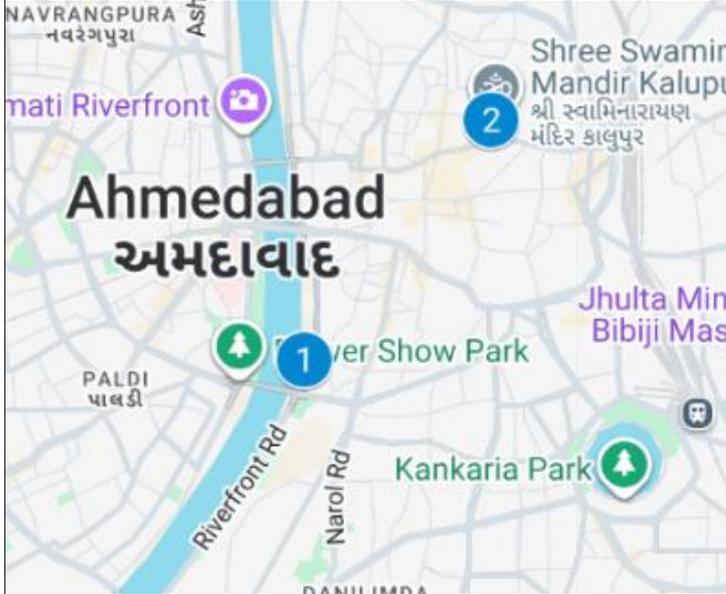


Figure-29: Walk Test locations.

4.4.2 Walk Test Covered

1. River Front
2. Swaminarayan Temple To Jama Masjid

4.4.3 Voice Performance

River Front				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	12	12	12	12
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.90	1.34	0.48	0.61

Table-66: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Swaminarayan Temple to Jama Masjid				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	14	15	14	14
Call Setup Success Rate %	100.00	93.33	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.00	0.74	0.48	0.60

Table-67: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.4.4 Data Performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

River Front				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	48.99	9.04	171.00	57.81
Download Session Setup Success Rate %	92.31	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	41.50	9.55	54.54	30.77
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	34.10	40.90	18.37	16.97

Table-68: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Swaminarayan Temple to Jama Masjid				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	123.06	5.38	130.44	62.46
Download Session Setup Success Rate %	100.00	92.31	100.00	100.00
Upload Throughput Average (Mbits/s)	36.28	6.53	40.48	29.30
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	31.23	41.85	20.92	18.35

Table-69: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.5 Highway

Drive test was conducted on 2nd February 2026 covering one Highway route. (Refer Table-1)

4.5.1 Drive test route

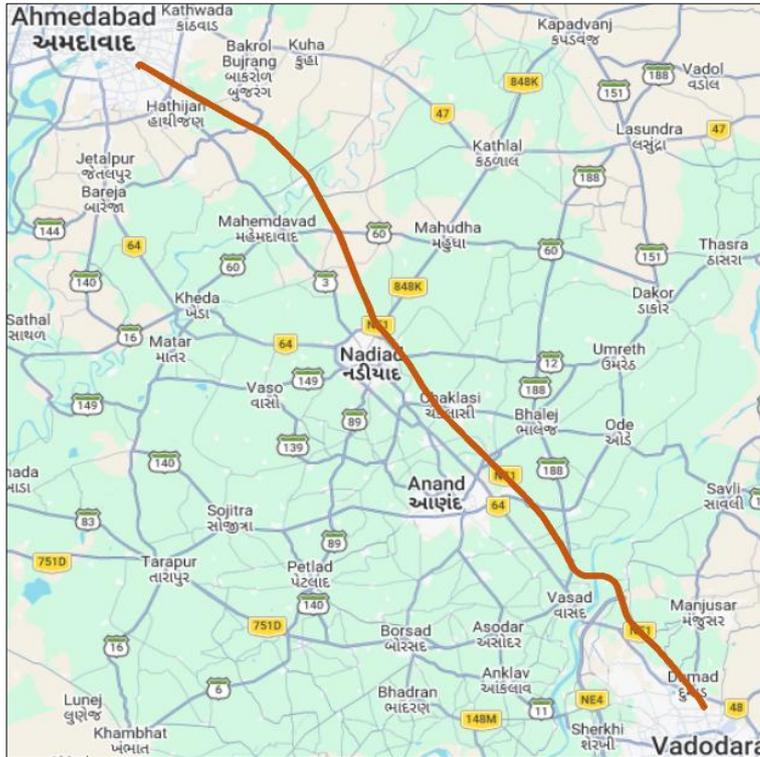


Figure-30: Drive test route Highway.

4.5.2 Routes Covered

Vadodara to Ahmedabad via NE-1, passing through Poicha, Chikodra, Nadiad, Modaj and Geratnagar etc.

4.5.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect the experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	38	44	38
Call Setup Success Rate %	100.00	93.18	100.00
Drop Call Rate %	0.00	9.76	2.63
Call Setup Time-Average (Second)	4.40	3.05	4.42
Handover Success Rate %	100.00	99.34	98.50

Table-70: Summary of voice call performance in 3G/2G network mode only.

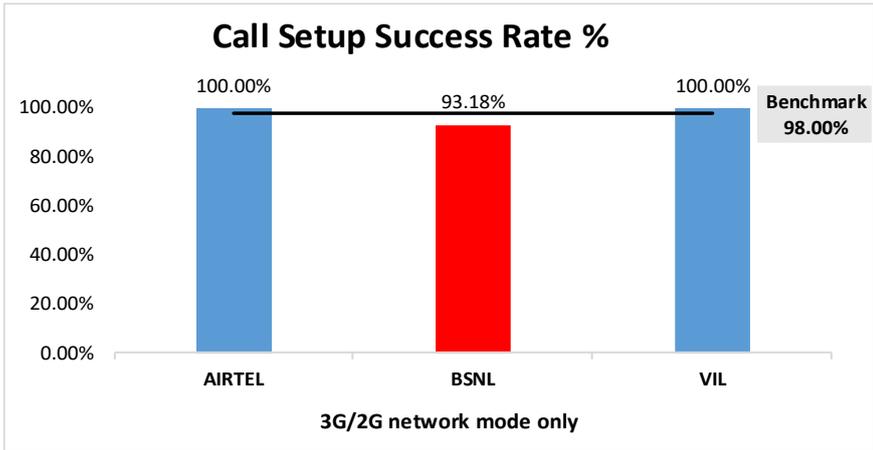


Figure-31: Performance for call setup success rate.

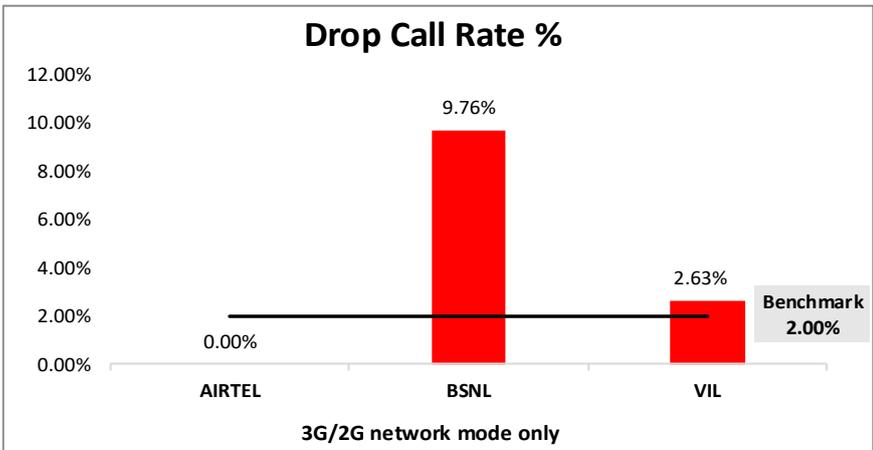


Figure-32: Performance for drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	23.33%	NA
2G	100.00%	76.46%	99.95%
Limited Service	0.00%	0.21%	0.05%

Table-71: Time spent on technology during drive test 3G/2G network mode only.

Note-

- NA- Service provider doesn't provide services in respective technology.

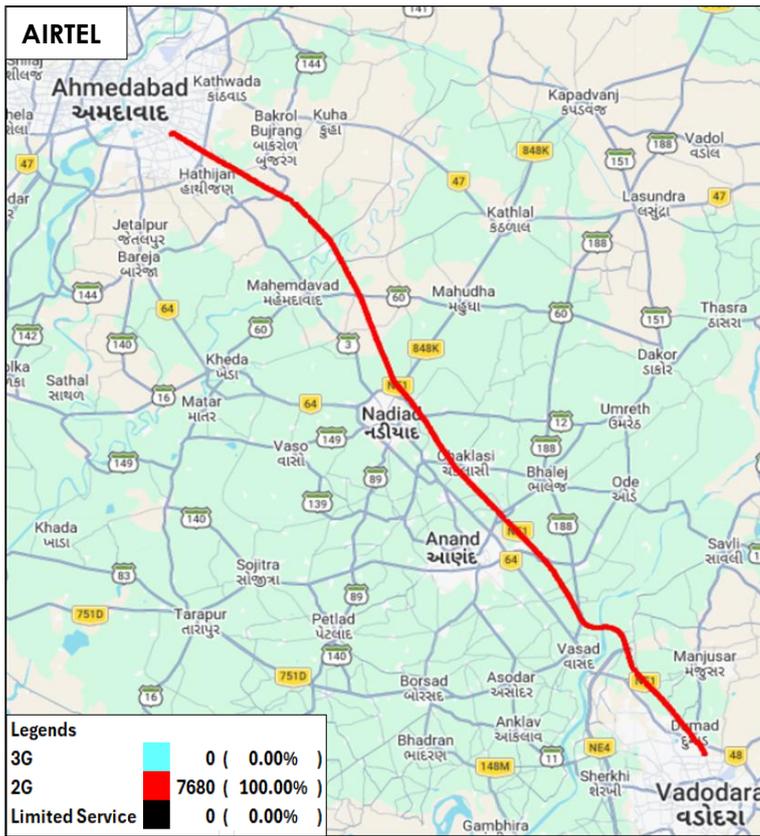


Figure-33: Serving technology plots 3G/2G network mode - AIRTEL.

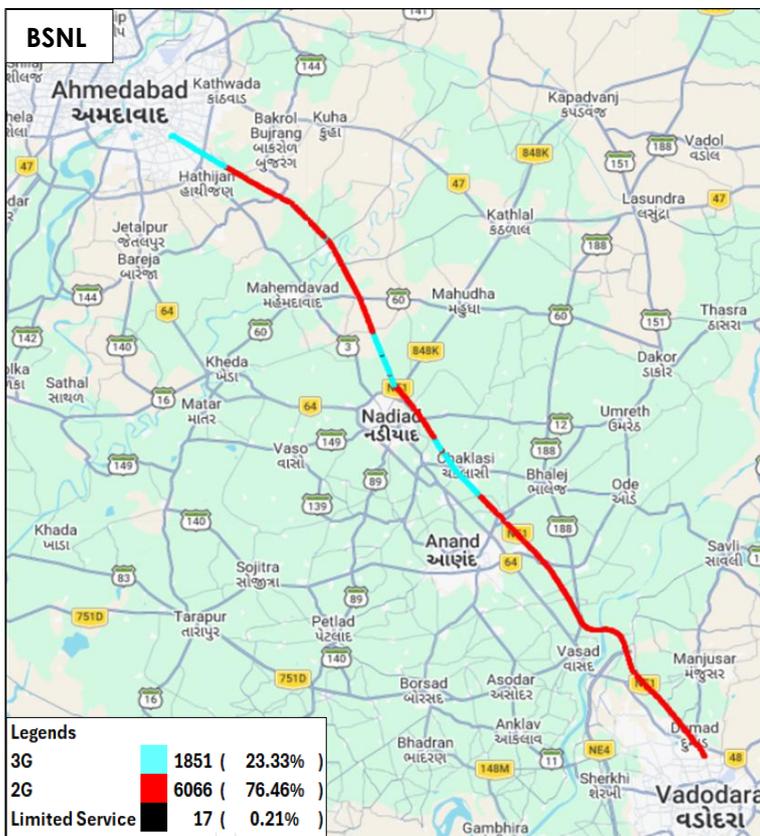


Figure-34: Serving technology plots 3G/2G network mode - BSNL.

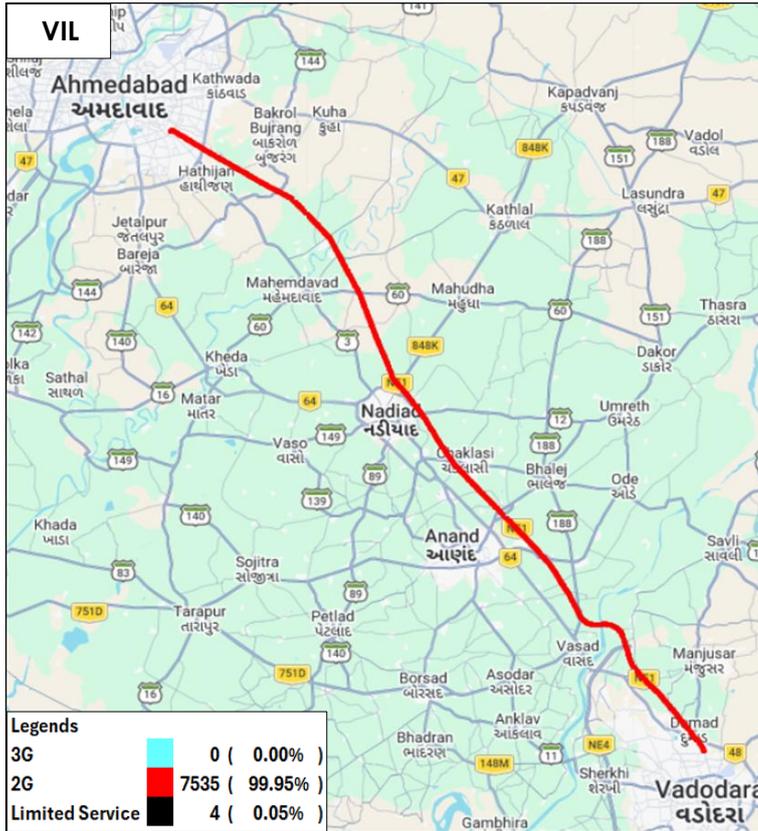


Figure 35: Serving technology plots 3G/2G network mode - VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure-63, 64 & 65 for map view)

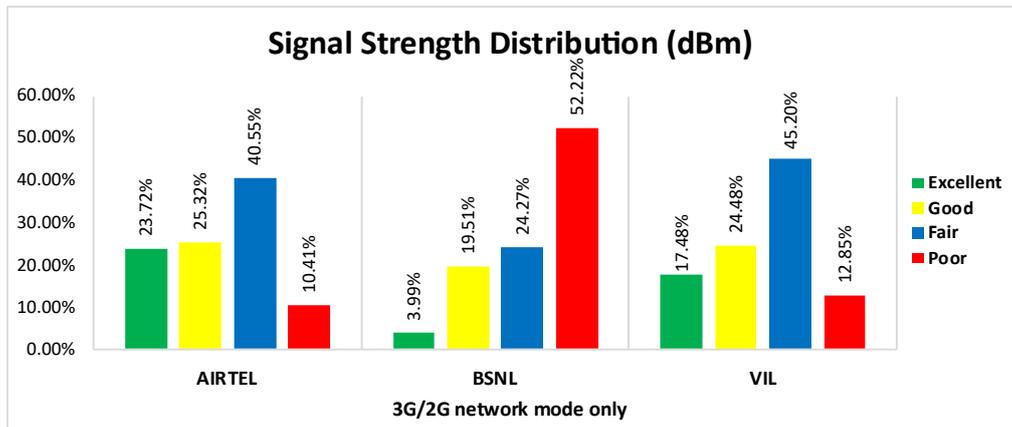


Figure-36: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 24% of samples falling in the excellent signal strength category.
- BSNL has 4% of samples falling in the excellent signal strength category.
- VIL has 17% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	38	49	39	39
Call Setup Success Rate %	100.00	89.80	100.00	100.00
Drop Call Rate %	0.00	22.73	0.00	0.00
Call Setup Time Average (Second)	0.93	3.67	0.55	0.69
Handover Success Rate %	100.00	96.75	100.00	100.00

Table-72: Summary of voice call performance in network auto-selection mode.

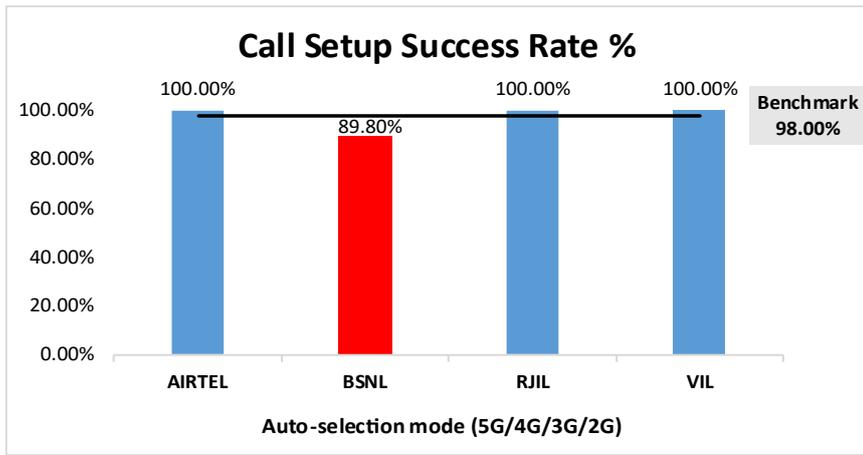


Figure-37: Performance for call setup success rate.

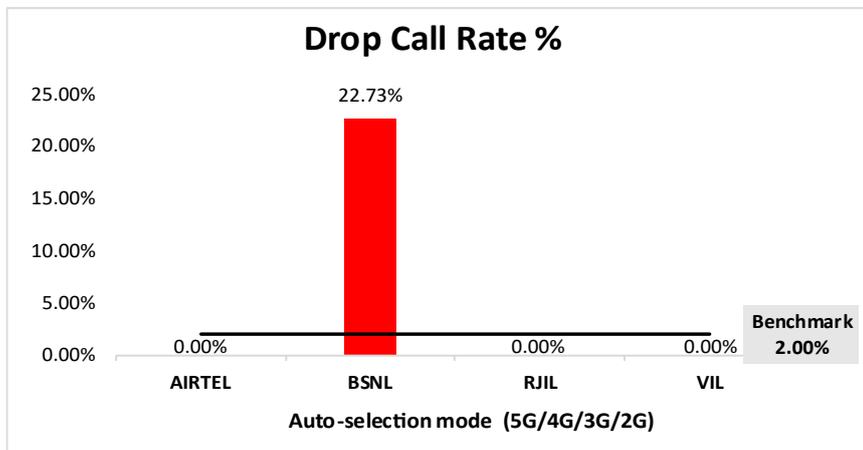


Figure-38: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	39	36	38	39
Number of silence call for >4 Sec	0	0	0	0
Silence Call Rate %	0.00	0.00	0.00	0.00
Number of silence instances for >4 Sec	0	0	0	0
Number of silence instances for >3 Sec	1	2	0	1
Number of silence instances for >2 sec	3	3	2	8
RTP Jitter (4G & 5G) in ms	6.87	7.84	14.44	11.07
Packet loss Rate Downlink %	1.58	6.04	0.82	0.62
Packet loss Rate Uplink %	0.51	7.18	0.78	0.87

Table-73: Summary of silence instances & packet loss rate for mobile to mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-73	490	343	492	507
Speech Quality (Average MOS)	3.80	2.66	4.50	4.45
Number of samples with MOS >=4 to <5 (Excellent)	353	61	442	433
Number of samples with MOS >=3 to <4 (Good)	87	33	28	51
Number of samples with MOS >=2 to <3 (Fair)	19	157	10	17
Number of samples with MOS >=1 to <2 (Poor)	31	92	12	6
%age of samples with MOS >=4 to <5 (Excellent)	72.04%	17.78%	89.84%	85.40%
%age of samples with MOS >=3 to <4 (Good)	17.76%	9.62%	5.69%	10.06%
%age of samples with MOS >=2 to <3 (Fair)	3.88%	45.77%	2.03%	3.35%
%age of samples with MOS >=1 to <2 (Poor)	6.33%	26.82%	2.44%	1.18%

Table-74: Summary of speech quality (MOS) samples.

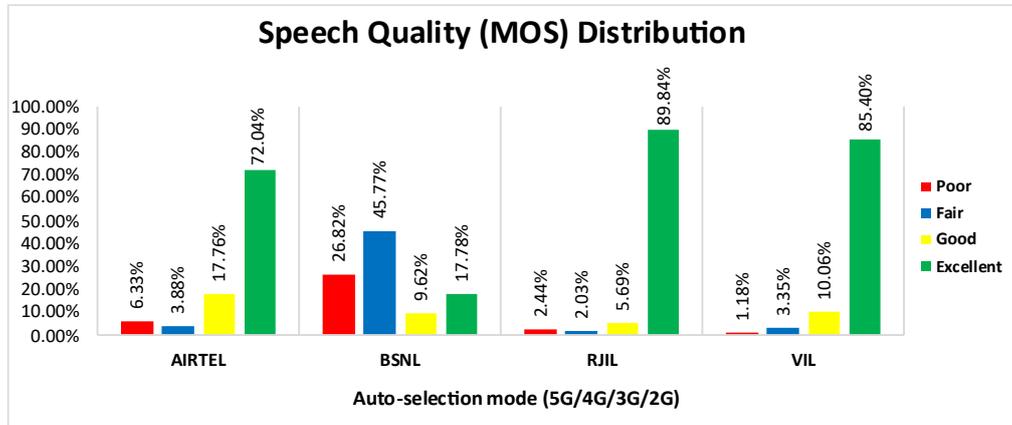


Figure-39: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	5.04%	NA	39.75%	0.00%
4G	92.54%	56.65%	60.25%	100.00%
3G	NA	3.89%	NA	NA
2G	2.42%	37.76%	NA	0.00%
Limited Service	0.00%	1.70%	0.00%	0.00%

Table-75: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

Note-

- NA- Service provider doesn't provide services in respective technology.

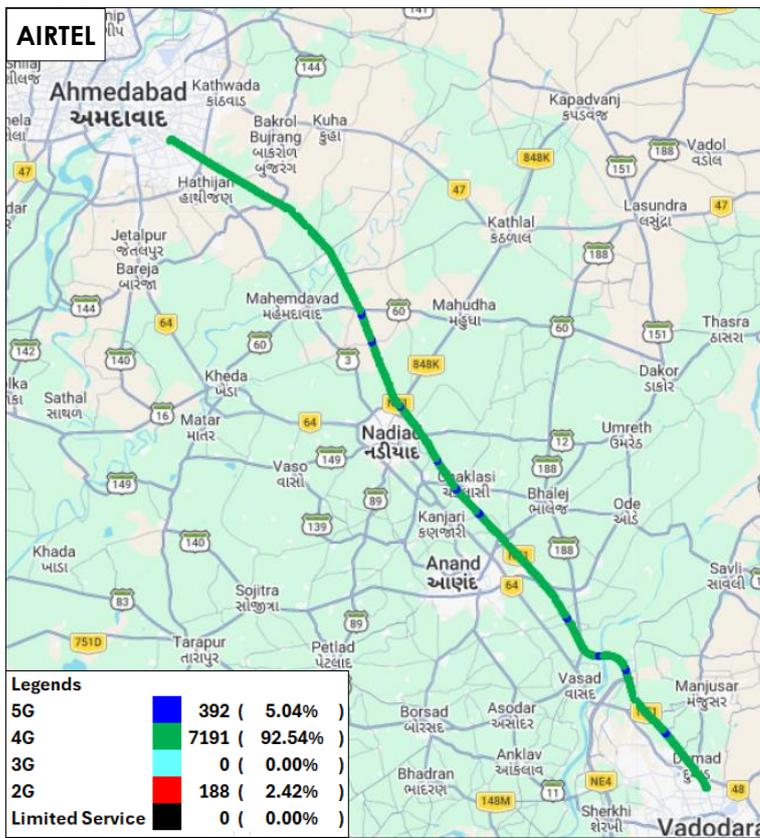


Figure-40: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL

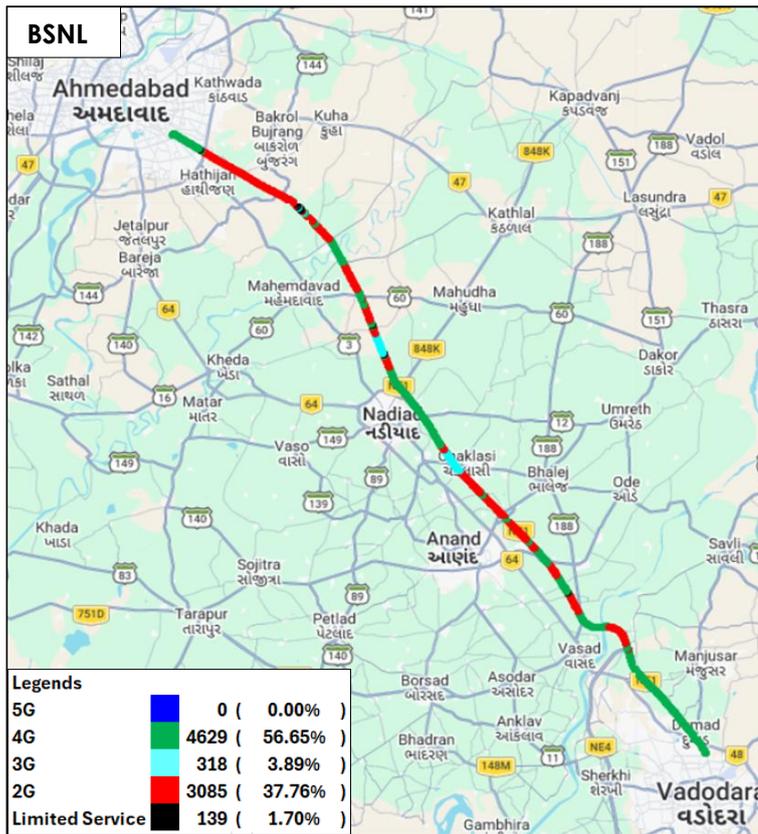


Figure-41: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

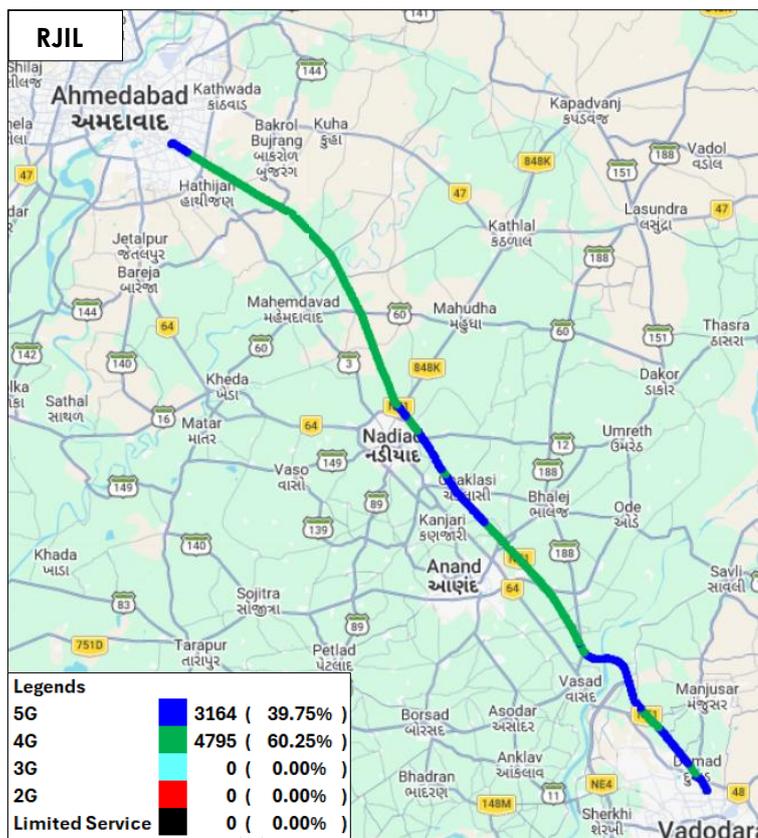


Figure-42: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

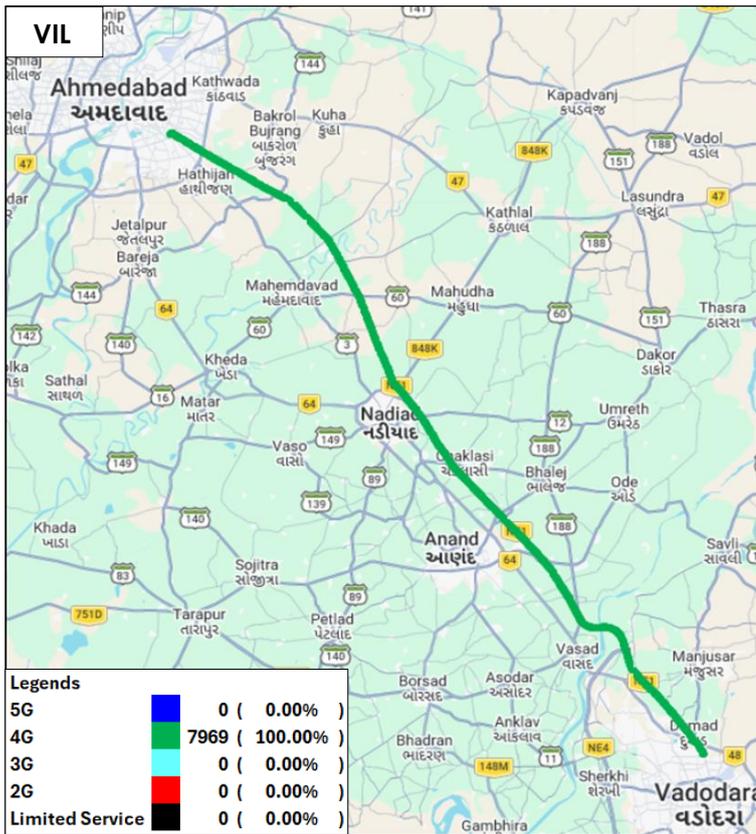


Figure-43: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-66, 67, 68 & 69 for map view)

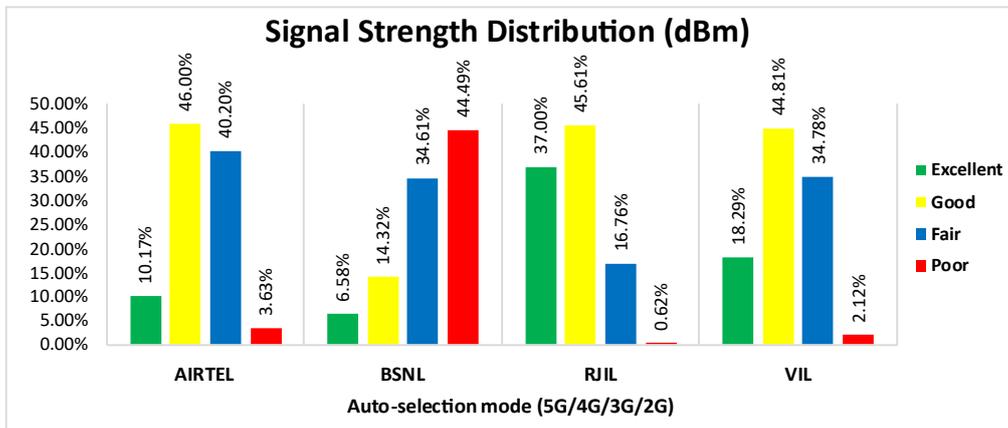


Figure-44: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 10% of samples falling in the excellent signal strength category.
- BSNL has 7% of samples falling in the excellent signal strength category.
- RJIL has 37% of samples falling in the excellent signal strength category.
- VIL has 18% of samples falling in the excellent signal strength category.

4.5.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	97.38	5.68	191.73	31.42
	80th Percentile	174.02	9.00	309.51	40.90
	20th Percentile	13.74	1.64	30.51	19.30
Upload Throughput (Mbits/s)	Average	16.07	2.38	23.86	13.57
	80th Percentile	32.63	3.80	42.21	19.82
	20th Percentile	2.55	1.22	6.14	6.14
Latency (ms)	50th Percentile	39.86	47.44	20.97	25.53

Table-76: Summary of Data performance in network auto-selection mode.

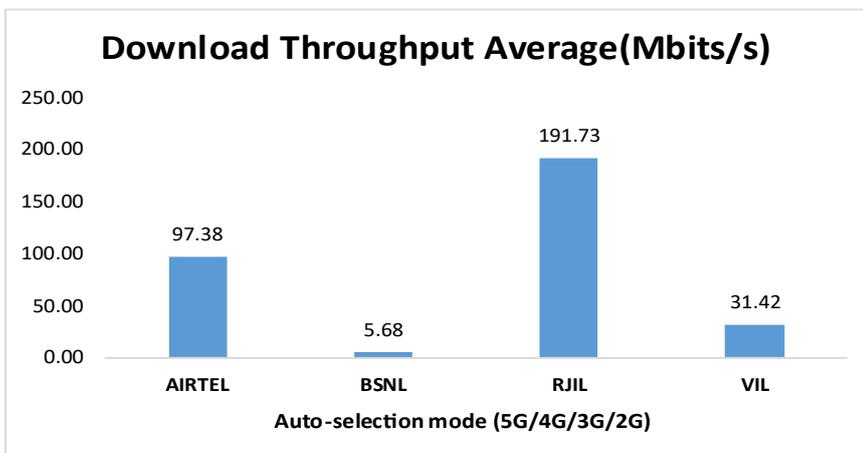


Figure 45: Download throughput.

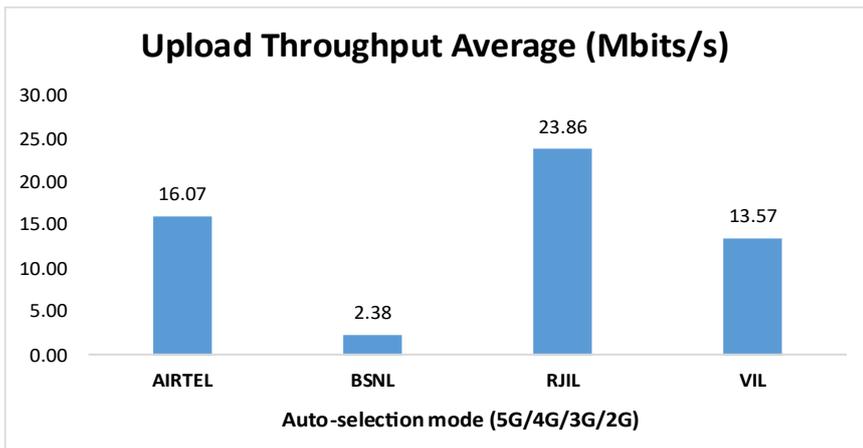


Figure-46: Upload throughput.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	48.44%	NA	94.33%	0.00%
4G	51.56%	60.72%	5.67%	99.73%
3G	NA	22.32%	NA	NA
2G	0.00%	6.21%	NA	0.27%
Limited Service	0.00%	10.75%	0.00%	0.00%

Table-77: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

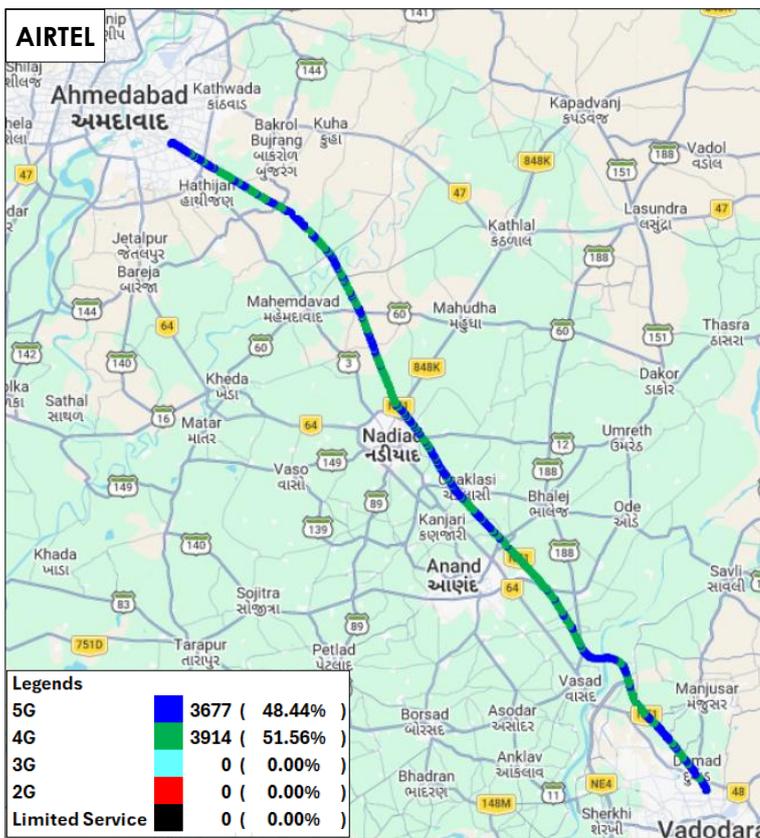


Figure-47: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - AIRTEL

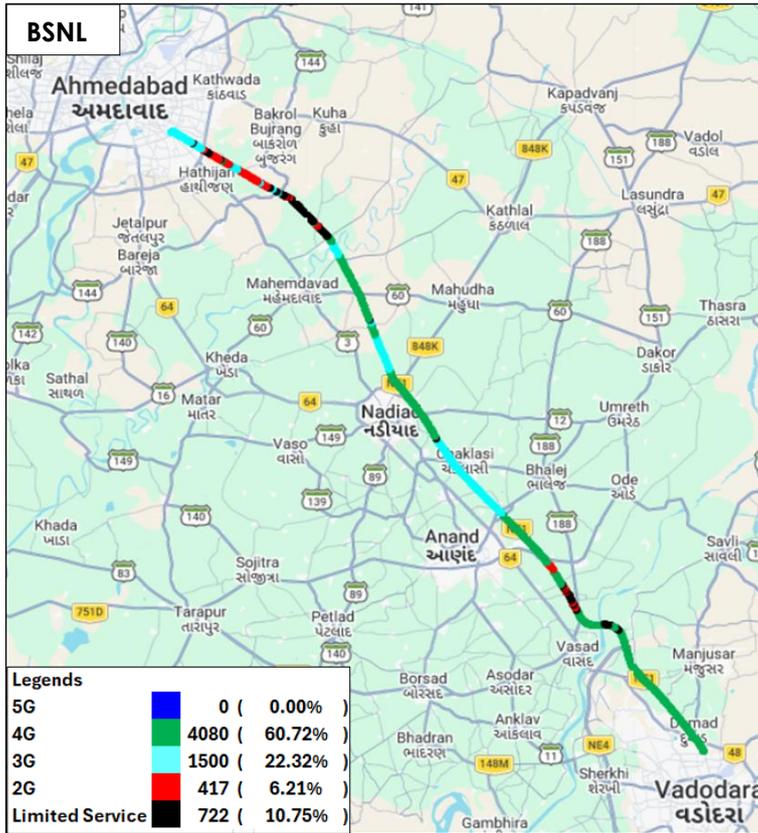


Figure-48: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - BSNL.

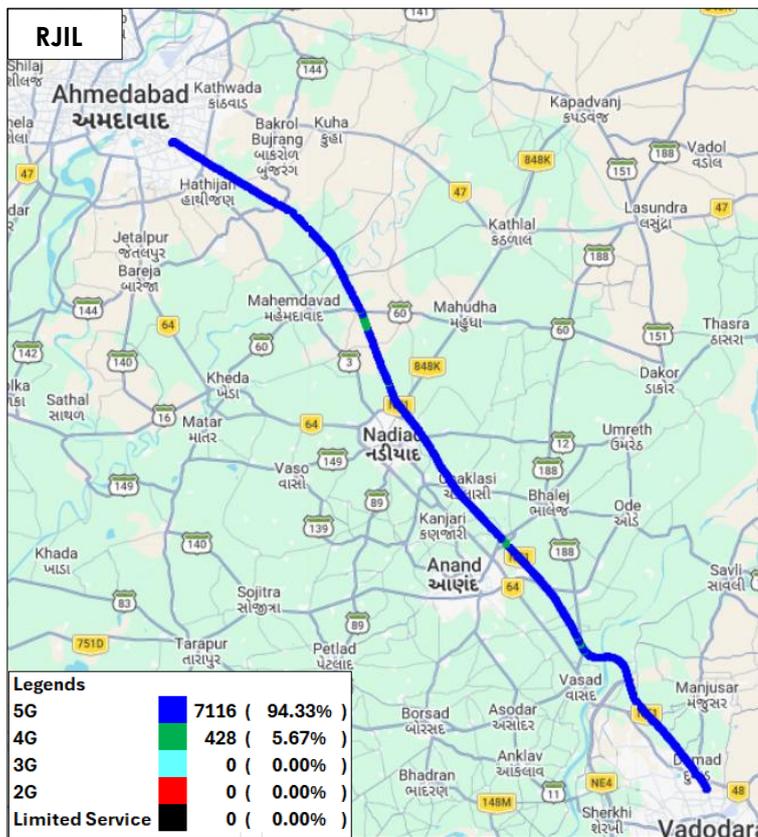


Figure-49: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

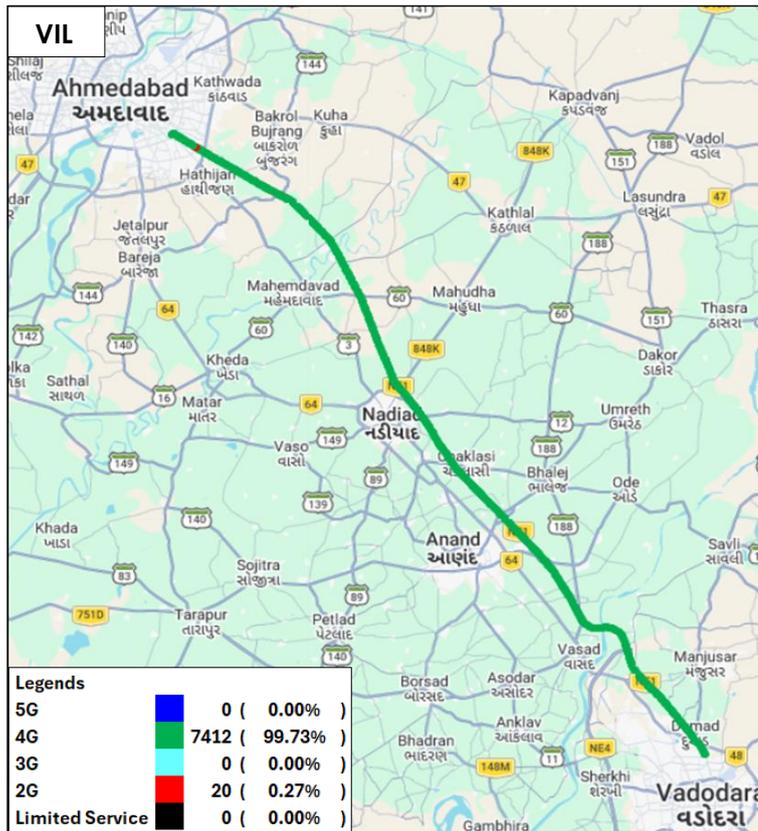


Figure-50: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - VIL.

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-70, 71, 72 & 73 for map view)

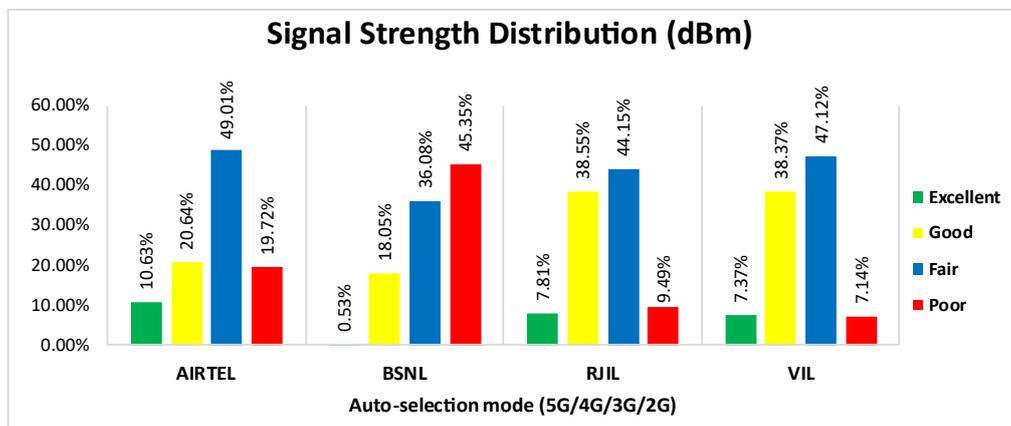


Figure-51: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 11% of samples falling in the excellent signal strength category.
- BSNL has 1% of samples falling in the excellent signal strength category.
- RJIL has 8% of samples falling in the excellent signal strength category.
- VIL has 7% of samples falling in the excellent signal strength category.

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 99.03%, 98.80% and 99.18% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 100.00%, 85.18%, 99.89% and 99.78% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) All operators have 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)

2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 4.82, 2.86 & 4.59 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 0.90, 1.99, 0.50 & 0.63 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate:

In packet switched network (4G/5G) BSNL, VIL, RJIL & Airtel have 4.72%, 0.68%, 0.27% & 0.00% silence call rate respectively. Further BSNL has higher RTP packet loss rate in downlink (5.79%) compared to RJIL (0.48%), VIL (0.42%) & Airtel (0.38%). In uplink the RTP packet loss rate is higher for BSNL (5.39%) compared to RJIL (0.59%), VIL (0.45%) & Airtel (0.21%). (refer table-6)

4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 0.42%, 1.75% and 1.38% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 0.00%, 3.13%, 0.00% and 0.00% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 138.38 Mbps, 8.97 Mbps, 260.05 Mbps and 41.00 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 31.21 Mbps, 3.56 Mbps, 43.52 Mbps and 21.60 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 119.92 Mbps, 13.64 Mbps, 266.34 Mbps and 40.82 Mbps respectively. (refer table-36)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 29.94 Mbps, 3.90 Mbps, 40.29 Mbps and 19.50 Mbps respectively. (refer table-36)

3. Data session setup success rate (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL have 98.57%, 100.00%, 97.14% and 100.00% download session setup success rate respectively. (refer table-36)
- b) Airtel, BSNL, RJIL and VIL have 98.57%, 100.00%, 100.00% and 100.00% upload session setup success rate respectively. (refer table-36)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 99.03% call setup success rate and 0.42% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 98.98% call setup success rate and 0.44% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-66 & 67)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-70)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-72)

Data

- Airtel has 138.38 Mbps average download speed & 31.21 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 144.88 Mbps average download speed & 33.11 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Ahmedabad Airport, Akshardham Temple Gandhi Nagar, District Court Gandhi Nagar, Indora Nature Park Gandhi Nagar, Kalupur Railway Station and Sarita Udyan Gandhi Nagar have less download speed (less than 100 Mbps) out of total 14 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-37, 38, 41, 45, 47 & 49)
- Ahmedabad Airport, Akshardham Temple Gandhi Nagar, District Court Gandhi Nagar, Gandhi Nagar Railway Station, Indora Nature Park Gandhi Nagar, Infocity Supermall I/II Gandhi Nagar, Sarita Udyan Gandhi Nagar and Teen Darwaja have less upload speed (less than 20 Mbps) out of total 14 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 37, 38, 41, 42, 45, 46, 49 & 50)
- River Front Walk test location has less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 68)

- Airtel has 97.38 Mbps average download speed & 16.07 Mbps average upload speed across the measured routes for highway drive. (refer table-76)

2. BSNL:

Voice

- 98.80% call setup success rate and 1.75% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 85.18% call setup success rate and 3.13% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.15% call setup success rate and 1.28% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 81.91% call setup success rate and 2.61% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at River Front walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 66)
- 93.33% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Swaminarayan Temple to Jama Masjid walk test location. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table- 67)
- 93.18% call setup success rate and 9.76% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-70)
- 89.80% call setup success rate and 22.73% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-72)

Data

- BSNL has 8.97 Mbps average download speed & 3.56 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 8.63 Mbps average download speed & 3.42 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Ahmedabad Airport, Civil Hospital Ahmedabad, Indora Nature Park Gandhi Nagar, Kalupur Railway Station and Sarita Udyan Gandhi Nagar have less download speed (less than 10 Mbps) out of total 14 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-37, 39, 45, 47 & 49)
- Ahmedabad Airport, Akshardham Temple Gandhi Nagar, Indora Nature Park Gandhi Nagar and Sarita Udyan Gandhi Nagar hotspot locations have less upload speed (less than 2 Mbps) out of total 14 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 37, 38, 45 & 49)

- Both Walk test locations have less download speed (less than 10 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 68 & 69)
- BSNL has 5.68 Mbps average download speed & 2.38 Mbps average upload speed across the measured routes for highway drive. (refer table- 76)

3. RJIL:

Voice

- 99.89% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.86% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-66 & 67)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-72)

Data

- RJIL has 260.05 Mbps average download speed & 43.52 Mbps average upload speed for LSA. (refer table-11)
- RJIL has 269.60 Mbps average download speed & 45.46 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Civil Hospital Gandhi Nagar, Indora Nature Park Gandhi Nagar, Kalupur Railway Station and Teen Darwaja have less download speed (less than 100 Mbps) out of total 14 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 40, 45, 47 & 50)
- Civil Hospital Gandhi Nagar, Indora Nature Park Gandhi Nagar, Kalupur Railway Station and Teen Darwaja have less upload speed (less than 20 Mbps) out of total 14 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-40, 45, 47 & 50)
- RJIL has 191.73 Mbps average download speed & 23.86 Mbps average upload speed across the measured routes for highway drive. (refer table- 76)

4. VIL:

Voice

- 99.18% call setup success rate and 1.38% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 99.78% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)

- 99.14% call setup success rate and 1.31% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 99.72% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 66 & 67)
- 100.00% call setup success rate and 2.63% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 2.00% for drop call rate. (refer table-70)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-72)

Data

- VIL has 41.00 Mbps average download speed & 21.60 Mbps average upload speed for LSA. (refer table-11)
- VIL has 41.18 Mbps average download speed & 22.25 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 37 to 50)
- Ahmedabad Airport, Civil Hospital Gandhi Nagar, District Court Gandhi Nagar, Indora Nature Park Gandhi Nagar, Infocity Supermall I/II Gandhi Nagar, Kalupur Railway Station and Kankariya Lake have less upload speed (less than 20 Mbps) out of total 14 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 37, 40, 41, 45, 46, 47 & 48)
- Both Walk test locations have less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 68 & 69)
- VIL has 31.42 Mbps average download speed & 13.57 Mbps average upload speed across the measured routes for highway drive. (refer table- 76)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

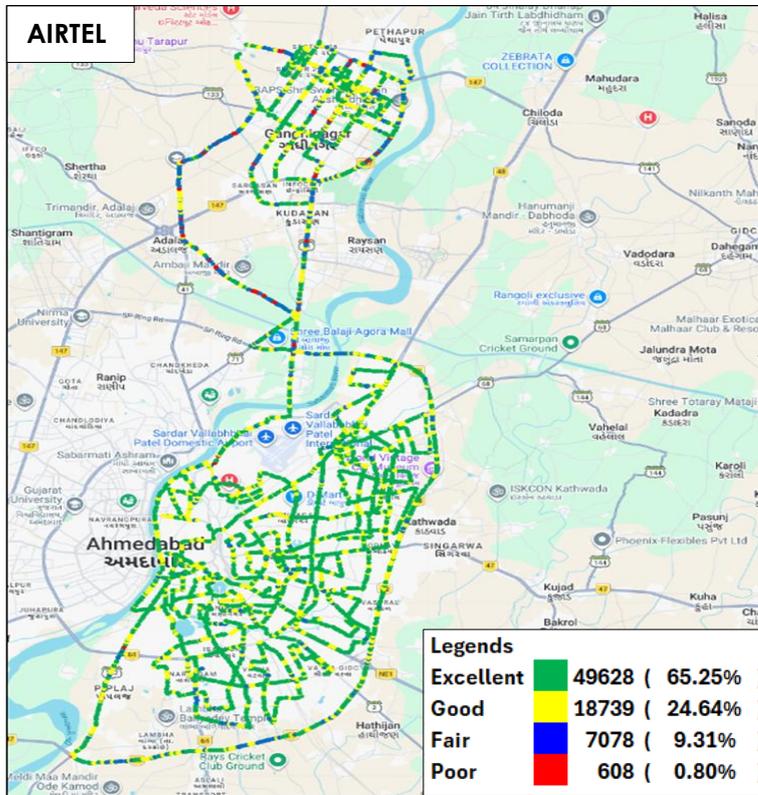


Figure-52: Signal strength 3G/2G network mode voice - AIRTEL.

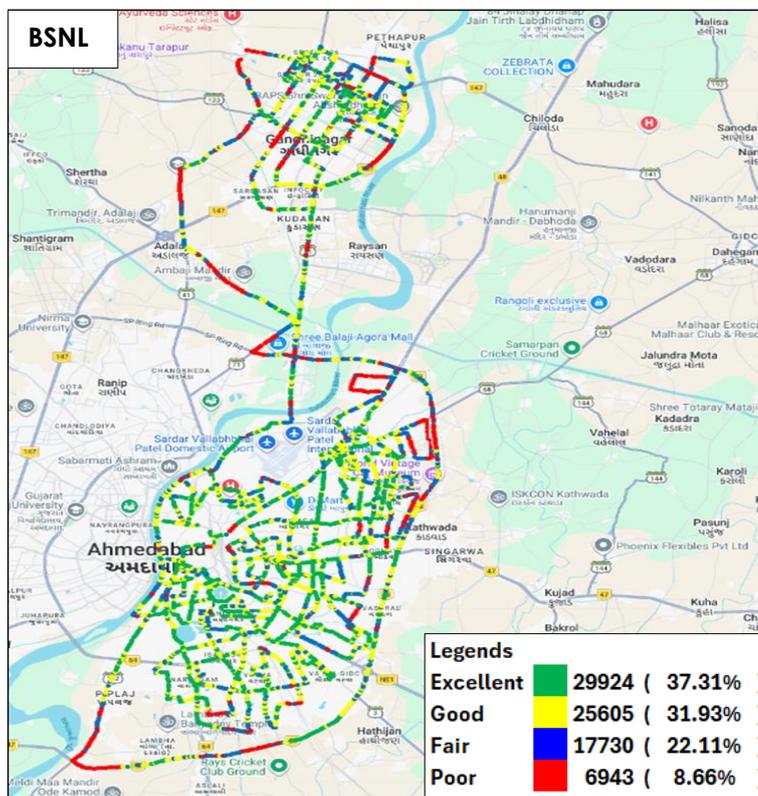


Figure-53: Signal strength 3G/2G network mode voice - BSNL.

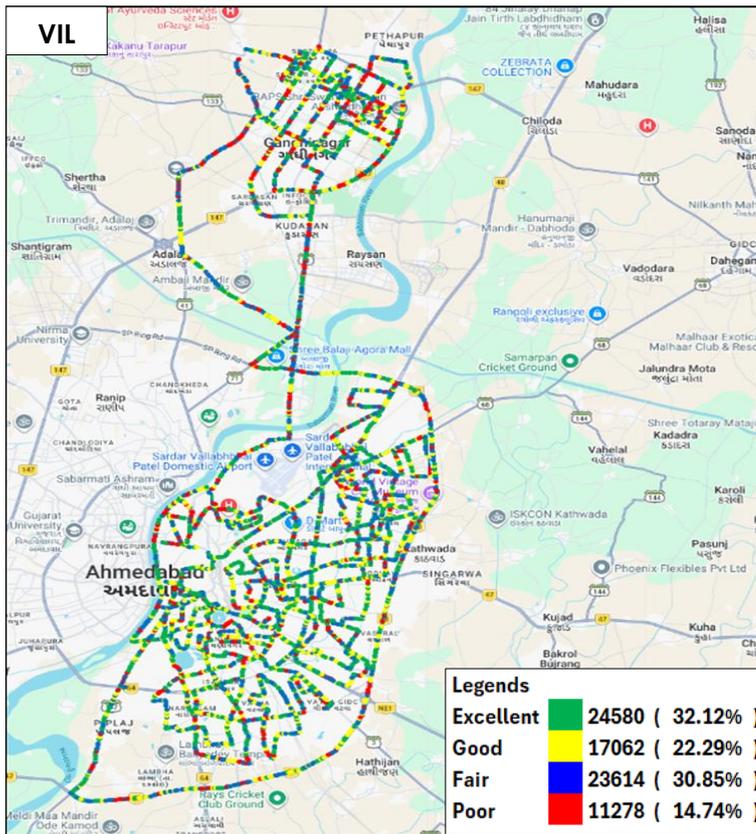


Figure-54: Signal strength 3G/2G network mode voice - VIL.

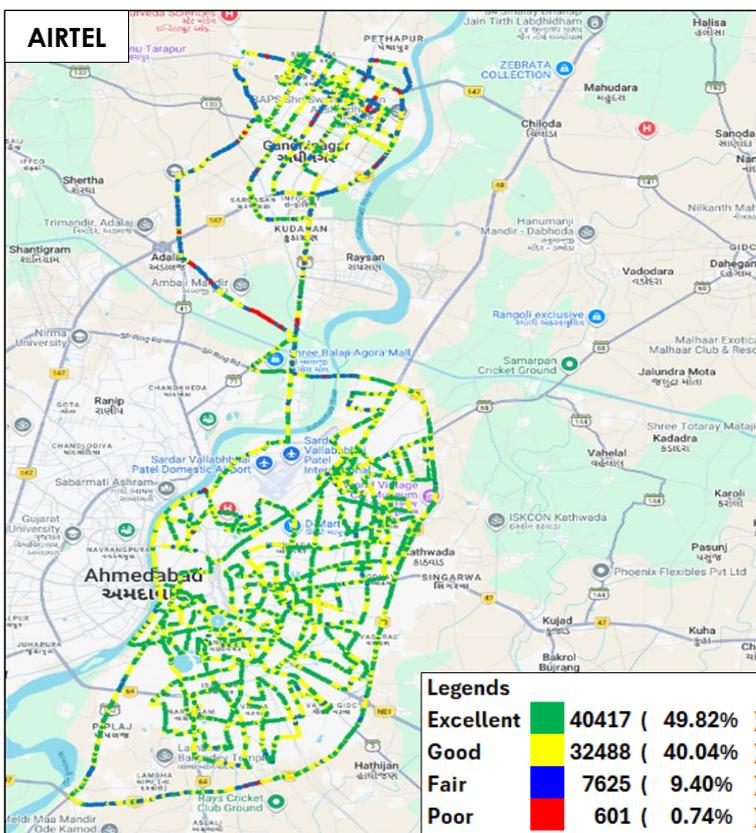


Figure-55: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

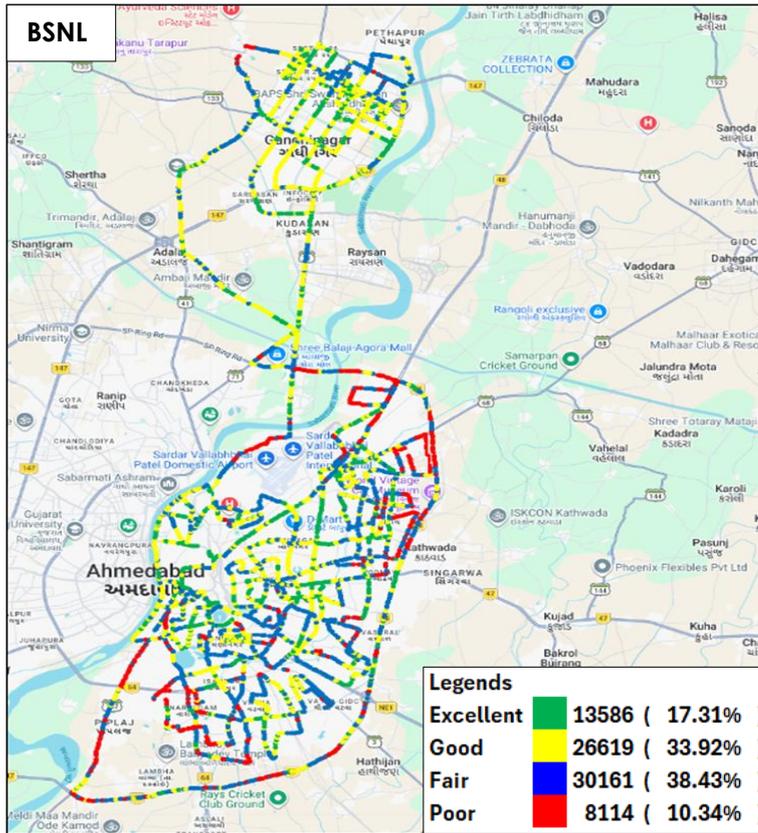


Figure-56: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

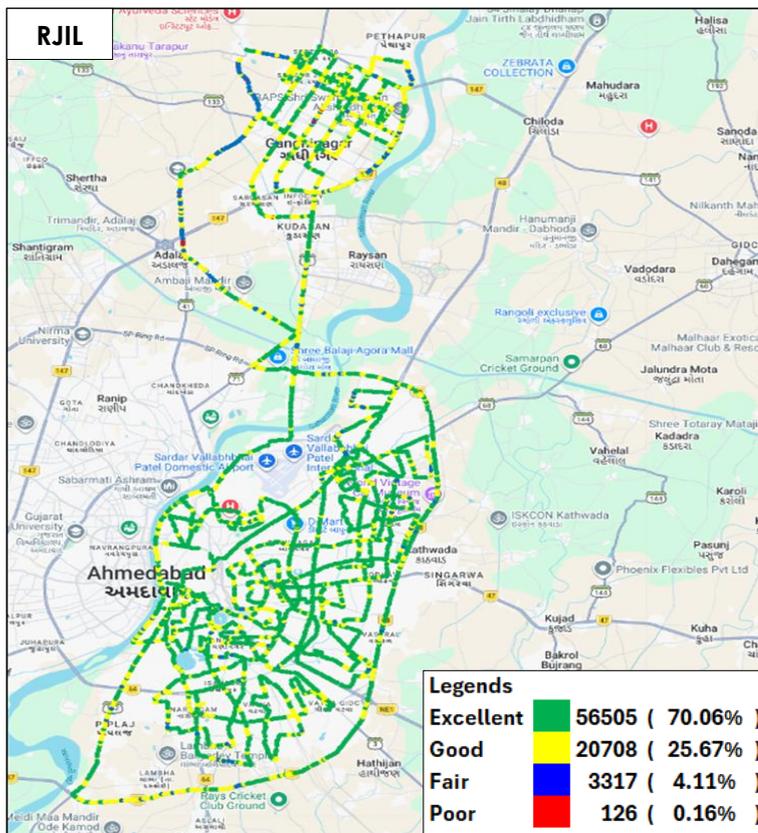


Figure-57: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

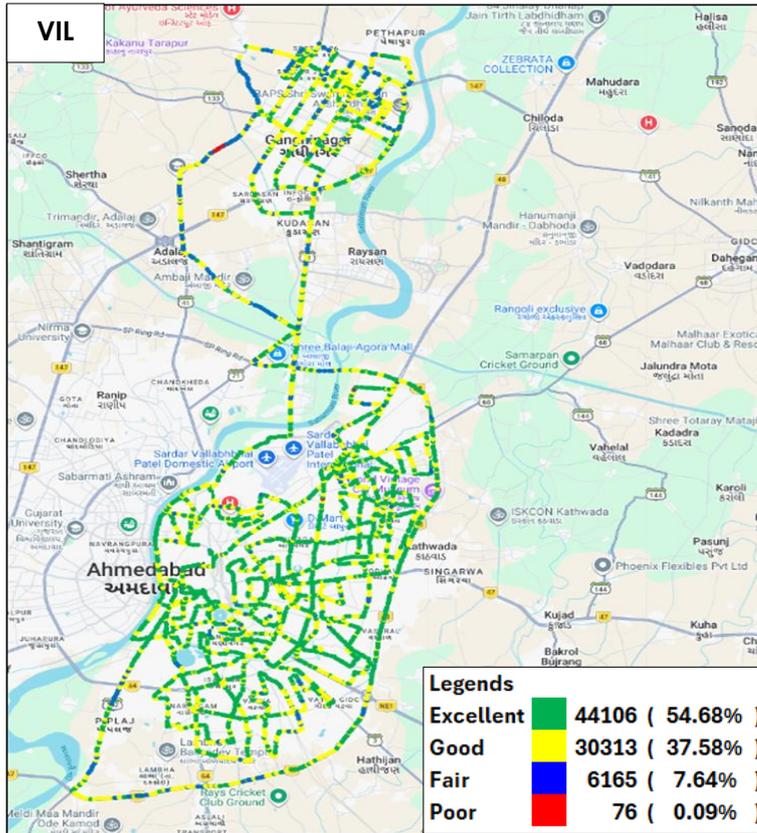


Figure-58: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

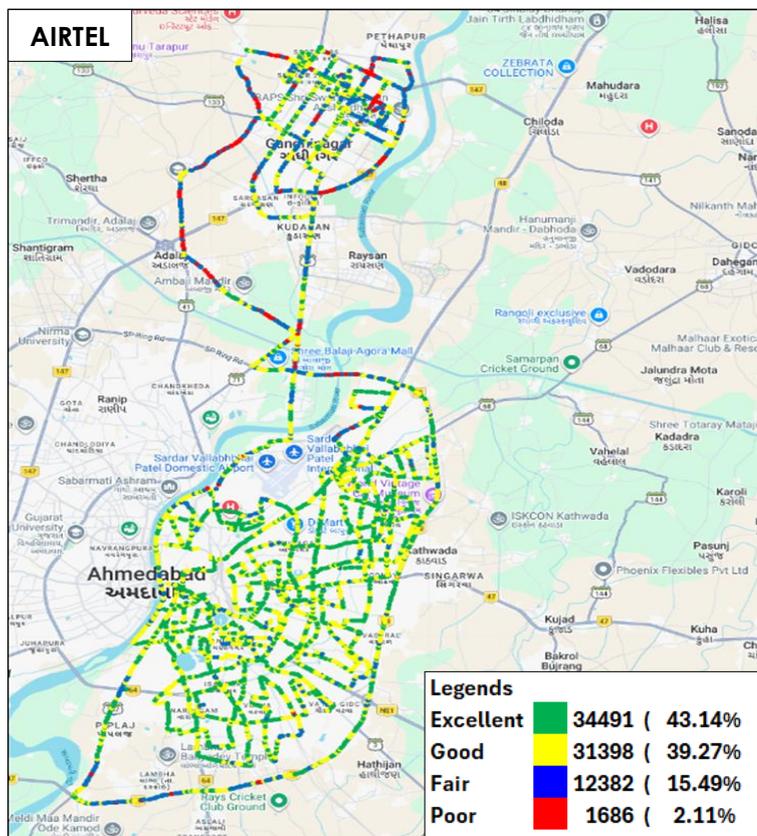


Figure-59: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

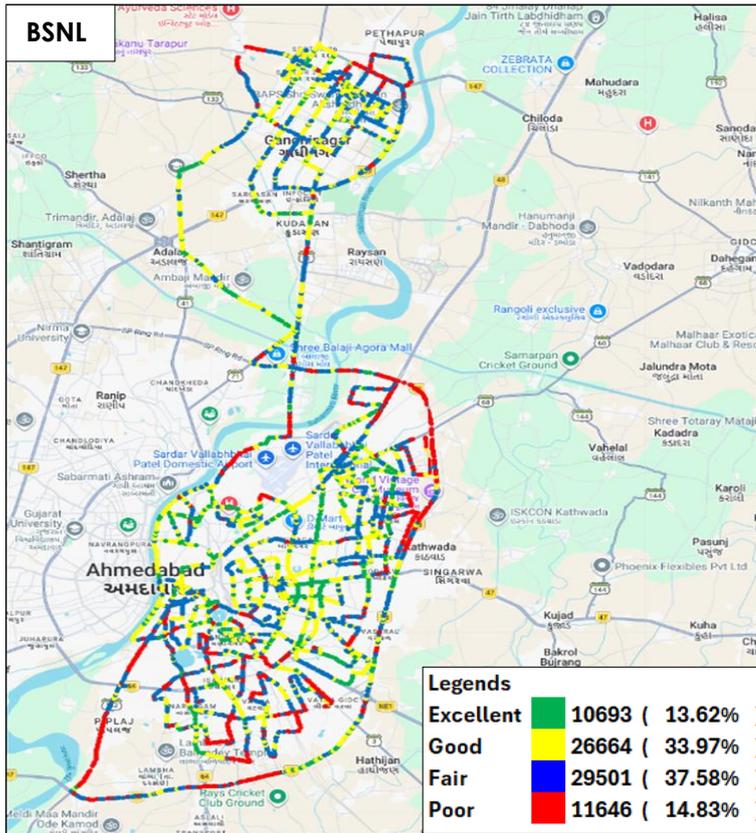


Figure-60: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

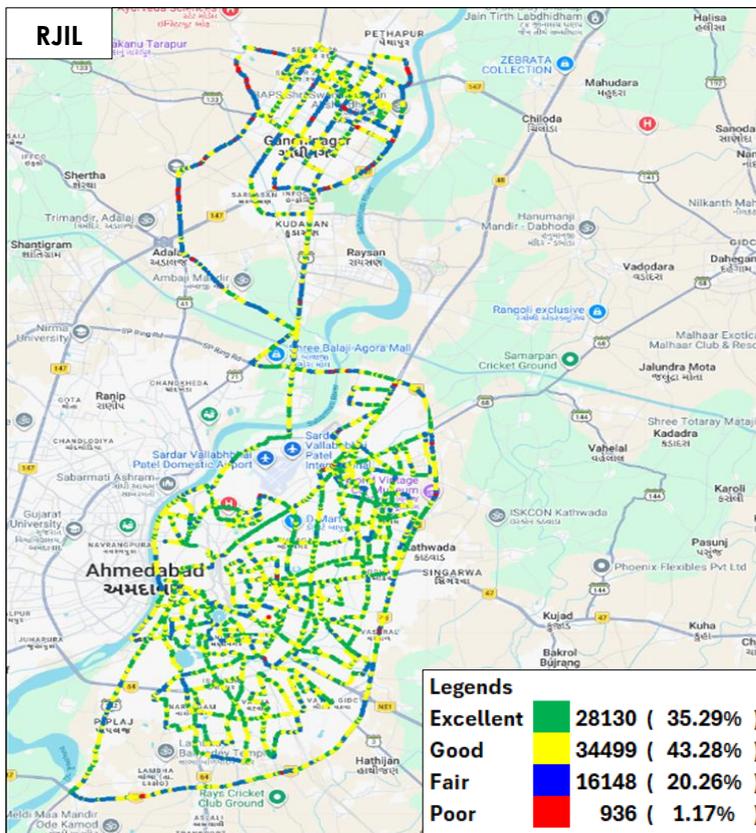


Figure-61: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

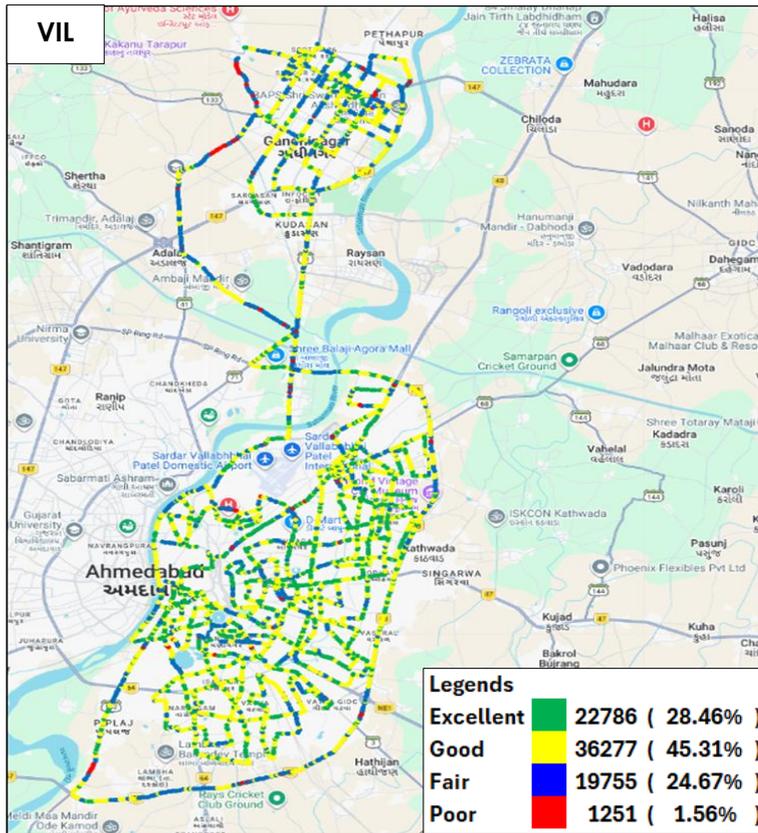


Figure-62: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

6.1.2 Highway

i) Vadodara to Ahmedabad

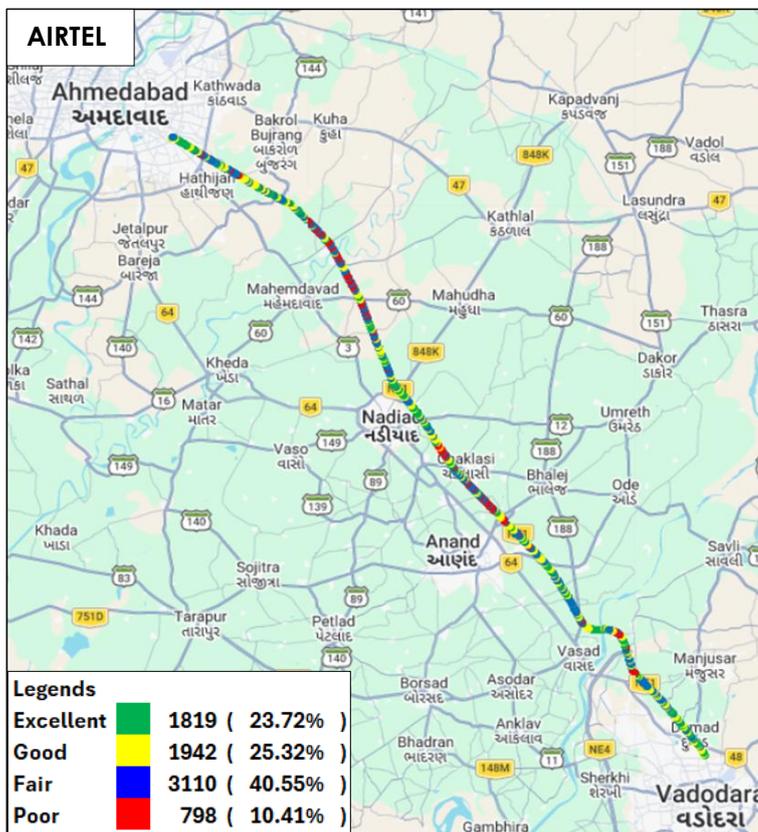


Figure-63: Signal strength 3G/2G network mode voice - AIRTEL.

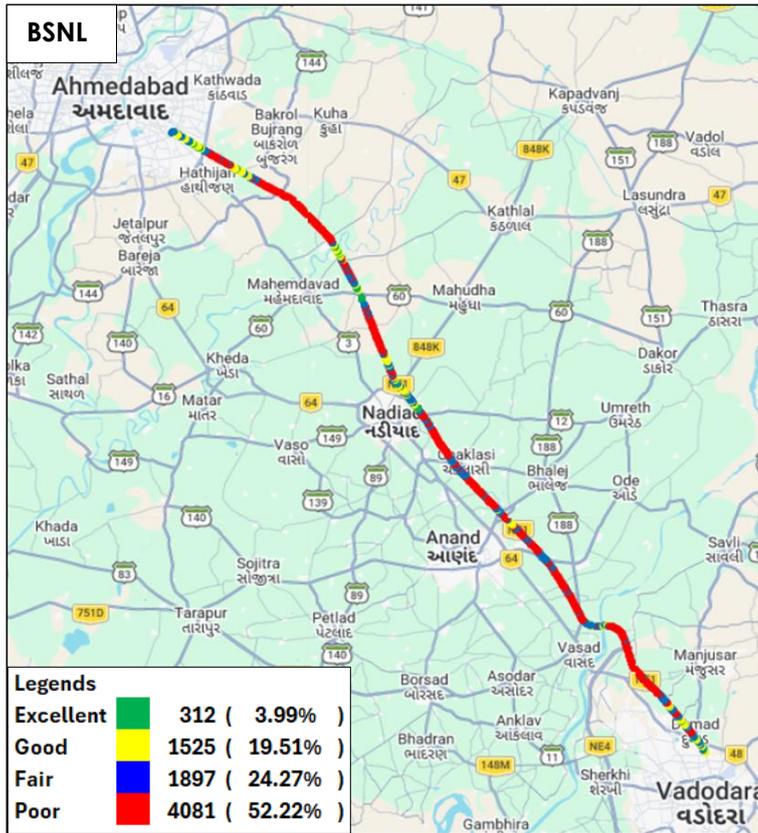


Figure-64: Signal strength 3G/2G network mode voice - BSNL.

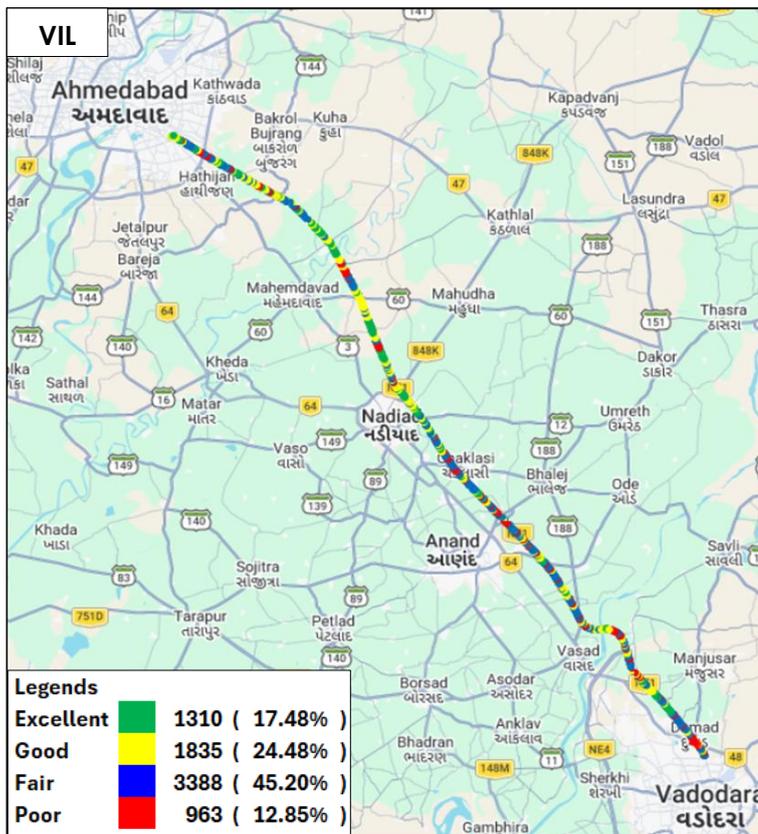


Figure-65: Signal strength 3G/2G network mode voice - VIL.

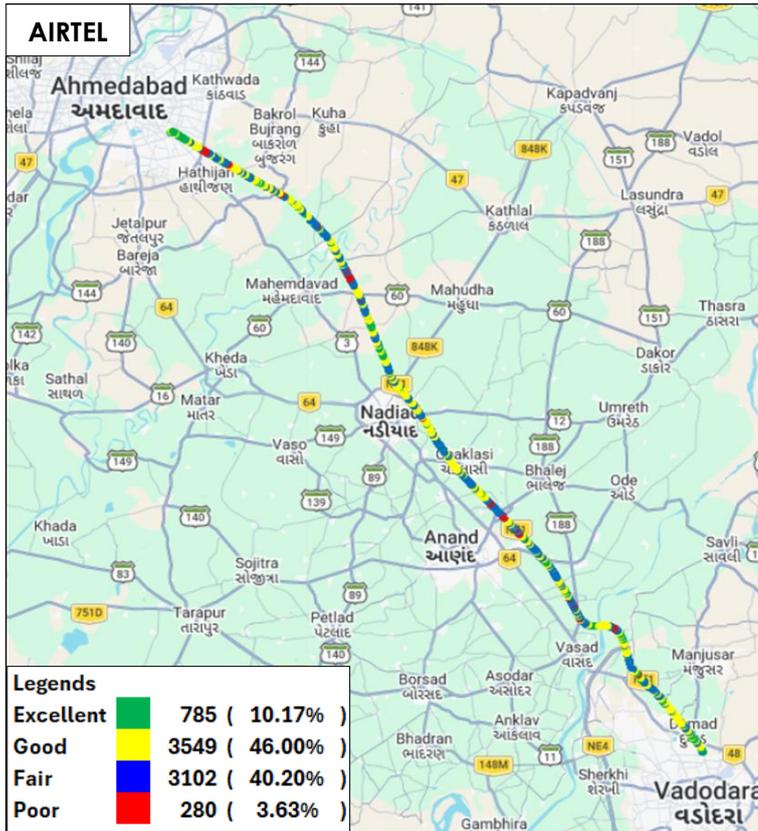


Figure-66: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

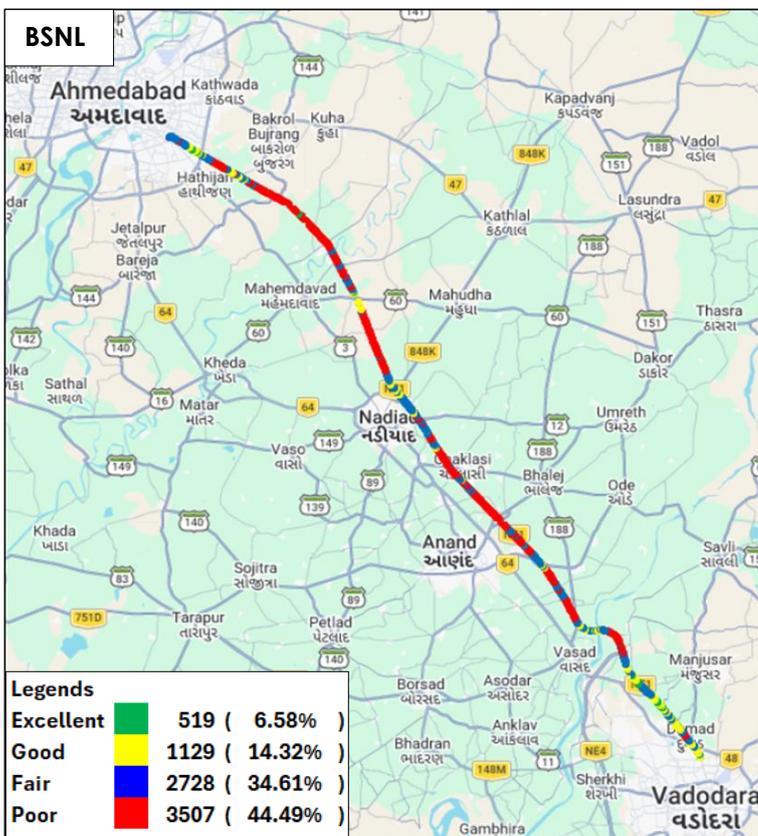


Figure-67: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

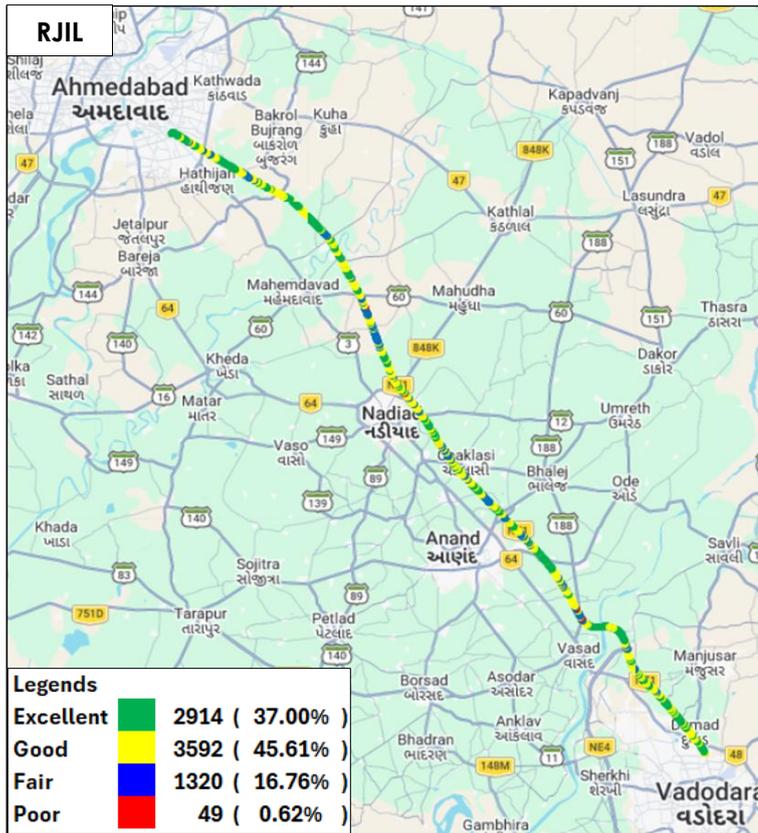


Figure-68: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

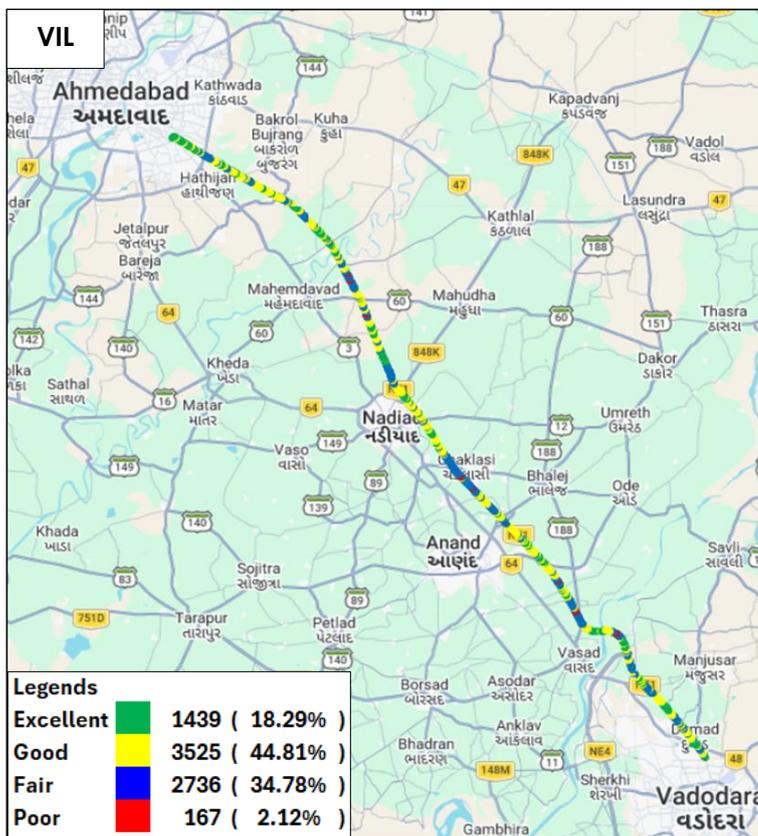


Figure-69: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

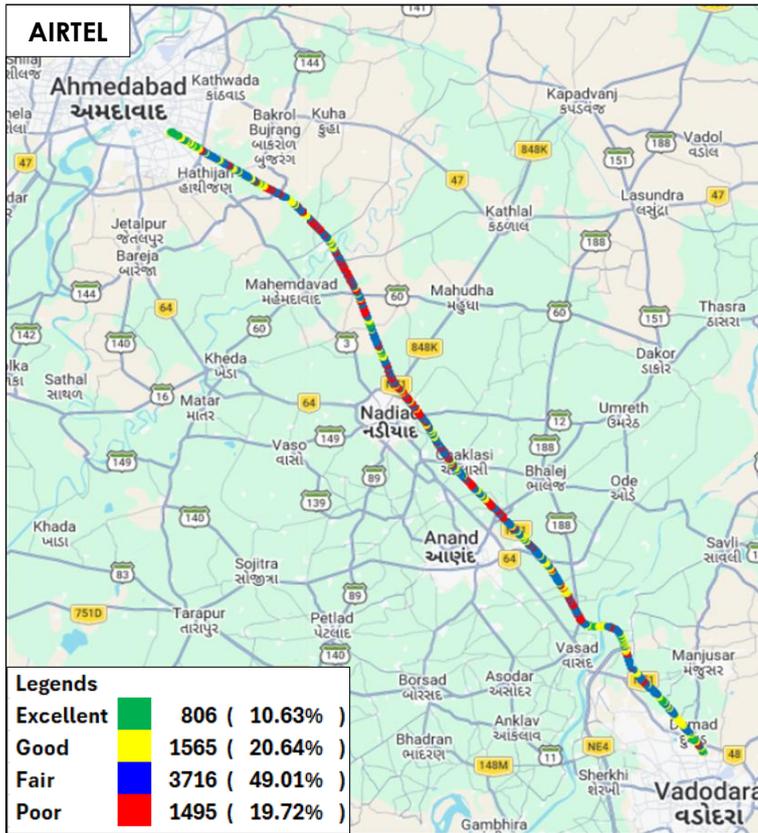


Figure-70: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

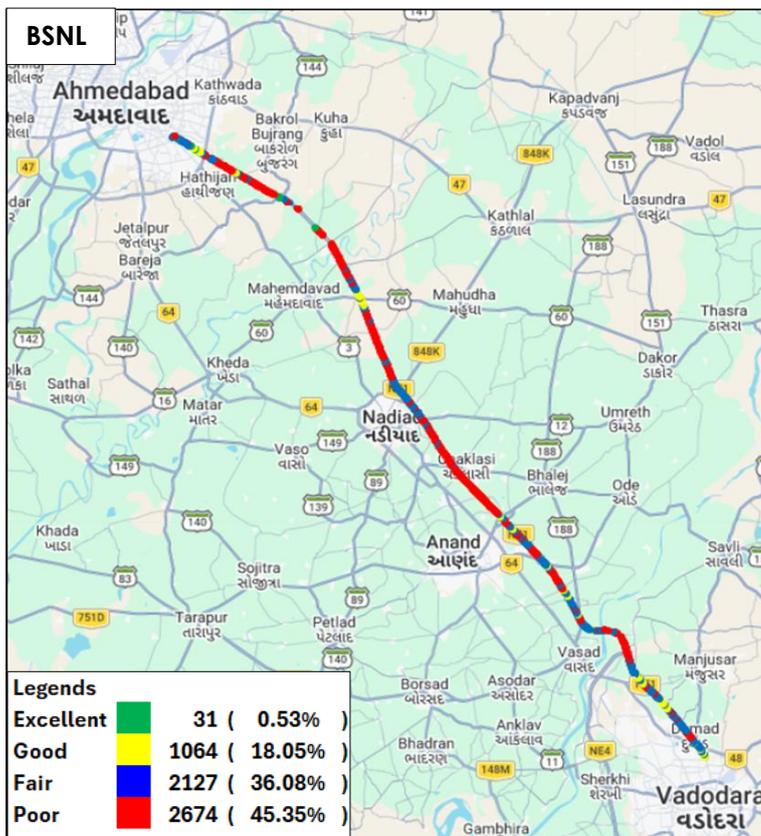


Figure-71: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

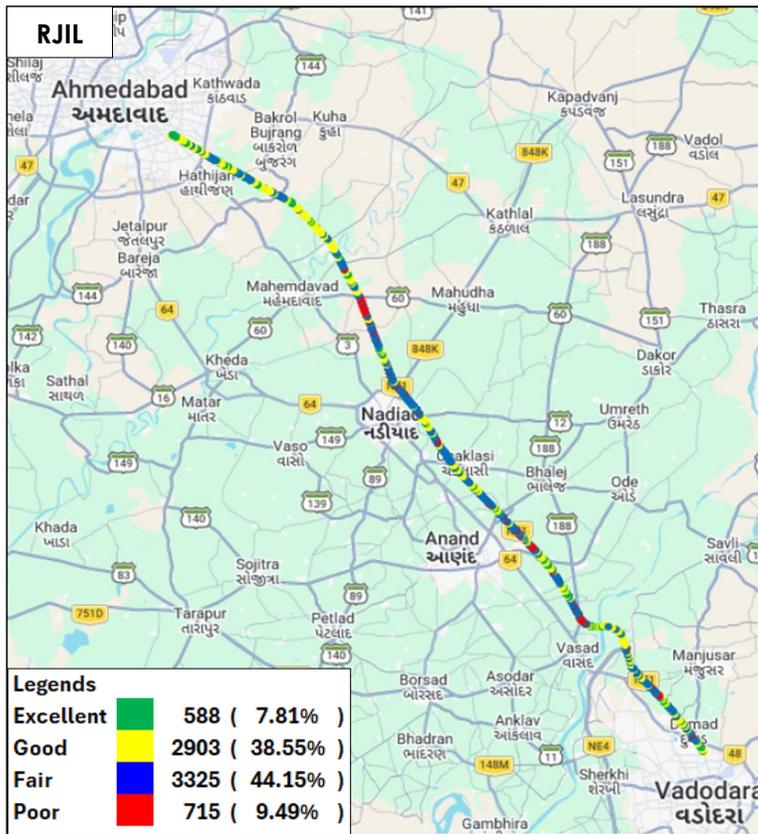


Figure-72: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

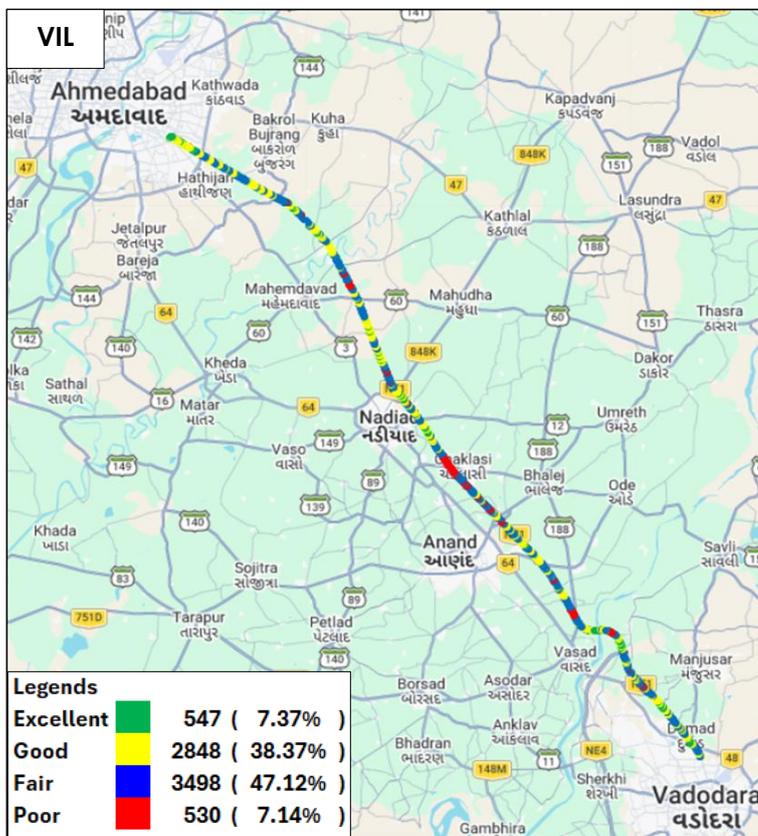


Figure-73: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	<ul style="list-style-type: none"> • 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call 	30 Sec
Call Duration		90/180 seconds
Wait/ Guard Time		15 Sec

Table-78: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.
- 180 Sec calls were made in highway route drive.

Data Test		
Test Type	Technology	Detail
FTP/HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
FTP/HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.irctc.co.in , www.sbi.bank.in) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)		25 count- Dynamic 500 count- Hotspot Payload- 42 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)		500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 42 bytes in all drive

Table-79: Data test detail

Note-

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- TWAMP-UDP & TCP test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Delhi-based TRAI server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing for BSNL.
- Airtel and RJIL server were used for FTP Download, FTP Upload, TCP and TWAMP testing, for Airtel and RJIL respectively.
- VIL server was used for HTTP Download, HTTP Upload TCP and TWAMP testing, for VIL.

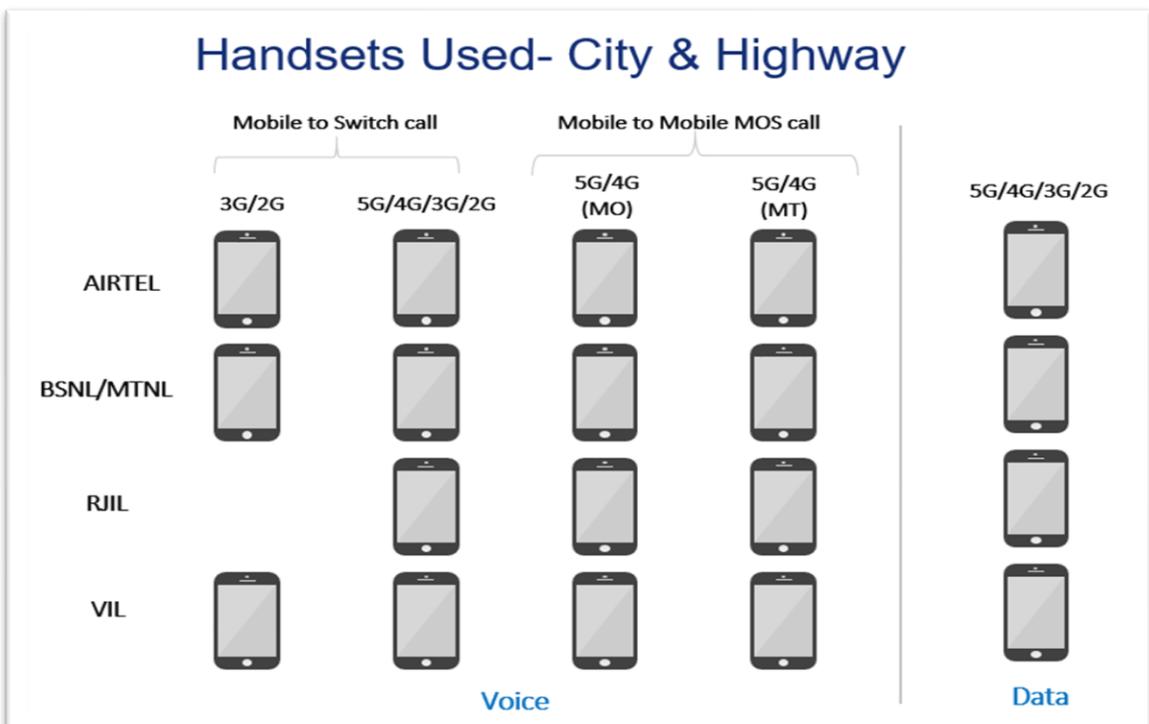


Figure-74: Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

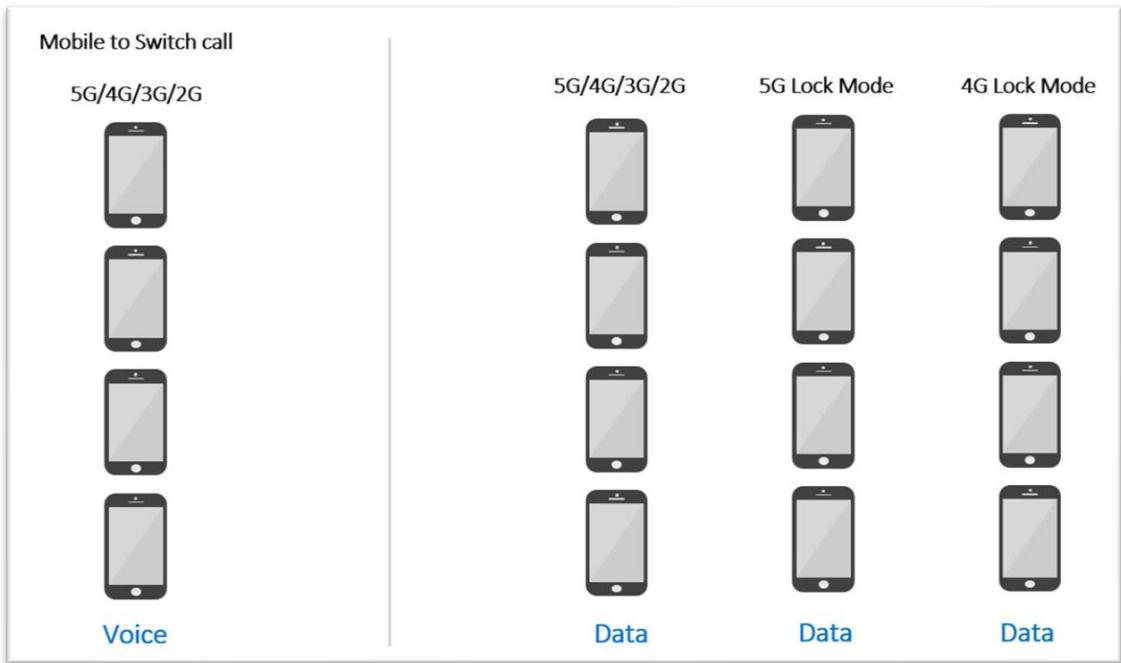


Figure-75: Number of handsets used in railway/metro/walktest/hotspot/ coastal area

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

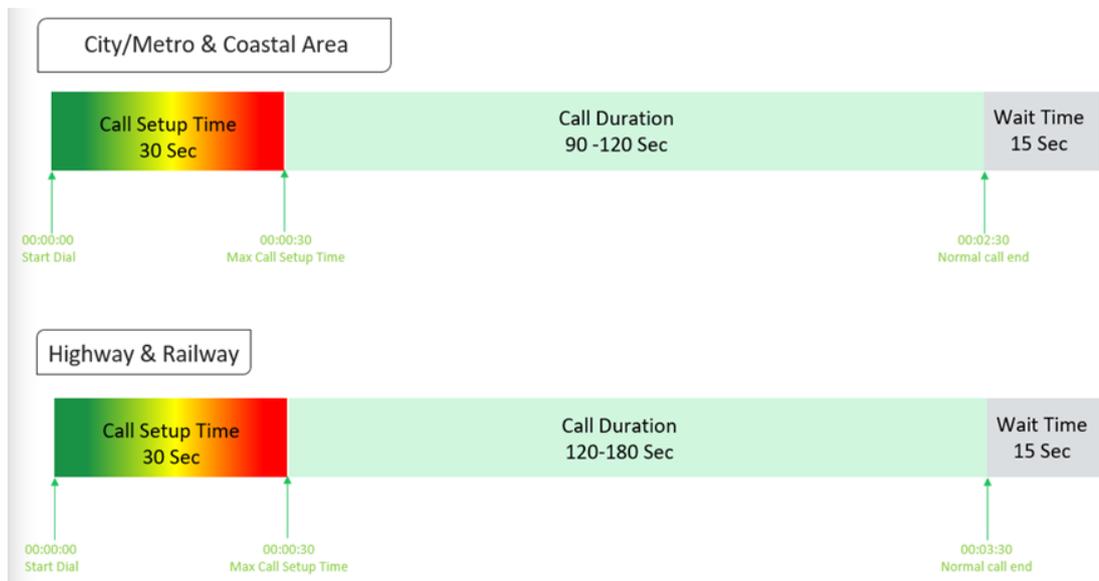


Figure-76: Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.

(b) Hotspot voice testing

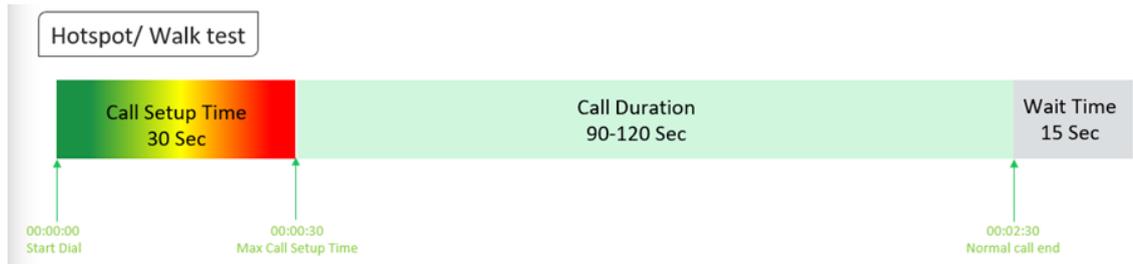


Figure-77: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

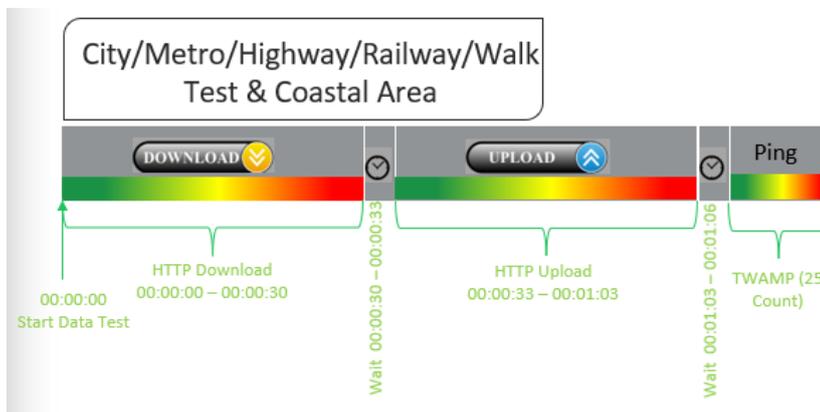


Figure-78: Data test script used in city/metro/railway/highway/walk test & coastal area

(d) Static Data(internet) testing

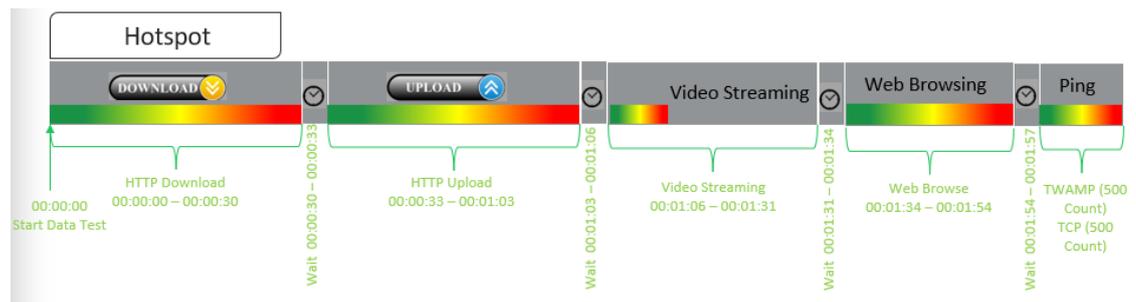


Figure-79: Data test script used at hotspot

- 5 Data iteration done at each hotspot location
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	<p>(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup:</p> <ul style="list-style-type: none"> (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. <p>CSSR = (Total Call Established/ Total Call Attempt) *100</p> <p>As per QoS Regulation 2024 benchmark value is >=98%</p>
Drop Call Rate	<p>Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network</p> <p>Drop Call Rate = (Total Call Drop/Total Call Established) *100</p> <p>As per QoS Regulation 2024 benchmark value is <=2%</p>
Call Setup Time	<p>Time taken from call initiate to call alerting/ringing.</p> <p>Call Setup Time = T2- T1</p> <p>T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)</p>
Voice Quality (MOS)	<p>Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as:</p> <p>Excellent: MOS ≥ 4 and < 5 Good : MOS ≥ 3 and < 4 Fair : MOS ≥ 2 and < 3 Poor : MOS ≥ 1 and < 2</p>
Handover Success Rate	<p>Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100</p> <p>Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.</p>
Silence Call	<p>A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call.</p> <p>Silence call rate = (count of silence call / Total calls established) *100</p> <p>If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.</p>

Jitter	<p>The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as: $D(i,j) = (R_j - R_i) - (S_j - S_i)$</p> <p>The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16$ or 8</p>																																		
Downlink Packet Drop Rate	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
Uplink Packet Drop Rate	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
Signal Strength	<p>Signal strength is the signal power level received by the wireless user.</p> <table border="1"> <thead> <tr> <th rowspan="2">Parameter Name</th> <th rowspan="2">Technology</th> <th colspan="4">Signal Strength (dBm)</th> </tr> <tr> <th>Excellent</th> <th>Good</th> <th>Fair</th> <th>Poor</th> </tr> </thead> <tbody> <tr> <td>Rx Level</td> <td>GSM</td> <td>0 to \geq -65</td> <td><-65 to \geq -75</td> <td><-75 to \geq -85</td> <td><-85 to min</td> </tr> <tr> <td>RSCP</td> <td>WCDMA</td> <td>0 to \geq -70</td> <td><-70 to \geq -80</td> <td><-80 to \geq -90</td> <td><-90 to min</td> </tr> <tr> <td>RSRP</td> <td>LTE</td> <td>0 to \geq -80</td> <td><-80 to \geq -95</td> <td><-95 to \geq -110</td> <td><-110 to min</td> </tr> <tr> <td>SS_RSRP</td> <td>NR</td> <td>0 to \geq -80</td> <td><-80 to $>$ -95</td> <td><-95 to \geq -110</td> <td><-110 to min</td> </tr> </tbody> </table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to \geq -65	<-65 to \geq -75	<-75 to \geq -85	<-85 to min	RSCP	WCDMA	0 to \geq -70	<-70 to \geq -80	<-80 to \geq -90	<-90 to min	RSRP	LTE	0 to \geq -80	<-80 to \geq -95	<-95 to \geq -110	<-110 to min	SS_RSRP	NR	0 to \geq -80	<-80 to $>$ -95	<-95 to \geq -110	<-110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to \geq -65	<-65 to \geq -75	<-75 to \geq -85	<-85 to min																														
RSCP	WCDMA	0 to \geq -70	<-70 to \geq -80	<-80 to \geq -90	<-90 to min																														
RSRP	LTE	0 to \geq -80	<-80 to \geq -95	<-95 to \geq -110	<-110 to min																														
SS_RSRP	NR	0 to \geq -80	<-80 to $>$ -95	<-95 to \geq -110	<-110 to min																														

Table-80: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
Download Speed (Mbps)	<p>The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.</p> <p>Download Speed = Total bytes transferred during download / Total time for transfer</p> <ul style="list-style-type: none"> 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
Upload Speed (Mbps)	<p>The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server.</p> <p>Upload Speed = Total bytes transferred during upload / Total time for transfer.</p> <ul style="list-style-type: none"> 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
Download Session Setup Success Rate	<p>(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.</p>

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency (TWAMP-UDP)	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency, we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
Jitter (TWAMP-UDP)	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate (TWAMP-UDP & TCP)	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on TWAMP-UDP & TCP. *90 th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-81: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.