

West Zone

TRAI AUDIT BROADBAND REPORT – Maharashtra & Goa - Audit of JAS Quarter, 2016

Prepared By -

Prepared For-



Telecom Regulatory Authority of India (15/150 9001-2008 Certified Organisation)

KANTAR IMRB

TABLE OF CONTENTS

1. Intro	duction
1.1	About TRAI5
1.2	Objectives5
1.3	Coverage
1.4	Audit Process and operator selection6
1.5	Framework Used
1.5.1	PMR Reports - Significance and Methodology8
1.5.2	Live Calling - Significance and Methodology10
1.6	Colour Code to read the report12
1.7	Audit Methodology12
1.8	Sampling Methodology13
1.9	Executive Summary14
1.9.1	PMR Quarterly Data – JAS'1614
1.9.1	Service Provisioning/ Activation Time15
1.9.2	Fault Repair/ Restoration15
1.9.3	Billing Performance15
1.9.4	Response time to customer for assistance15
1.9.5	Bandwidth Utilization and Throughput16
1.9.6	Network Latency16
1.10	Live Measurement
1.10.1	Bandwidth Utilization and Throughput17
1.10.2	Network Latency
1.11	Live Calling
1.11.1	Service Provisioning/ Activation Times19
1.11.2	Fault Repair/ Restoration20
1.11.3	Billing Performance20
1.11.4	Response time to customer for assistance20
2. Criti	cal Findings21



3.	Deta	iled Findings - Comparison between PMR Data and Live Measurement/ Calling Data	24
	3.1	Service Provisioning/ Activation Time	24
	3.1.1	Parameter Explanation	24
	3.1.2	Detailed Findings - Service Provisoning	25
	3.2	Fault Repair/ Restoration Time	26
	3.2.1	Parameter Explanation	26
	3.2.2	Detailed Findings - Fault Repair within Next Working Day	27
	3.2.3	Detailed Findings - Fault Repair within 3 Working Days	28
	3.3	Metering and Billing Credibility	29
	3.3.1	Parameter Explanation – billing complaints	29
	3.4	Time Taken to Refund after Closure	
	3.4.1	Parameter Explanation	
	3.4.2	Detailed Findings - Refund of Deposits	35
	3.5	Response Time to Customer for Assistance	36
	3.5.1	Parameter Explanation	36
	3.5.2	Detailed Findings - Call Answered within 60 Seconds	
	3.5.3	Detailed Findings - Call Answered within 90 Seconds	38
	3.6	Bandwidth Utilization & Download Speed	
	3.6.1	Parameter Explanation – Bandwidth Utilization	
	3.6.2	Detailed findings – Bandwidth Utilization	40
	3.6.3	Parameter Explanation - Broadband Download Speed	41
	3.6.4	Detailed findings – Broadband Download Speed	42
	3.7	Service Availability/Uptime	43
	3.7.2	Detailed Findings - Service Availability	44
	3.8	Network Latency & Packet Loss	45
	3.8.1	Parameter Explanation - Network Latency	45
	3.8.2	Parameter Explanation – Packet Loss	46
	3.8.3	Detailed Findings - Network Latency / Packet Loss	47
4.	Anne	exure – JAS'16	48
	4.1	Service Provisioning	48



4.2	Fault Repair/ Restoration
4.3	Billing Performance – Metering and billing credibility51
4.4	Response Time to the Customer for Assistance
4.5	Bandwidth Utilization
4.6	Broadband Download Speed56
4.7	Service Availability/ Uptime
4.8	Network Latency / Packet Loss

1. INTRODUCTION

1.1 About TRAI

TRAI's mission is to create and nurture conditions for growth of telecommunications in the country in a manner and at a pace that will enable India to play a leading role in the emerging global information society. One of the main objectives of TRAI is to provide a fair and transparent policy environment which promotes a level playing field and facilitates fair competition.

In pursuance of above objective, TRAI has been issuing regulations, order and directives to deal with the issues or complaints raised by the operators as well as the consumers. These regulations, order and directives have helped to nurture the growth of multi operator multi service - an open competitive market from a government owned monopoly. Also, the directions, orders and regulations issued cover a wide range of subjects including tariff, interconnection and quality of service as well as governance of the Authority.

TRAI initiated a regulation - The Standards of Quality of Service of Basic Telephone Service (Wire line) and Cellular Mobile Telephone Service Regulations, 2009 (7 of 2009) dated 20th March, 2009, the "Standards of Quality of Service for Wireless Data Services Regulations, 2012 dated 4th December 2012, and the "Quality of Service of Broadband Service Regulations", 2006 (11 of 2006) dated 6th October, 2006 that provide the benchmarks for the parameters on customer perception of service to be achieved by service provider.

In order to assess the above regulations, TRAI has commissioned a third party agency to conduct the audit of the service providers and check the performance of the operators on the various benchmarks set by Telecom Regulatory Authority of India (TRAI).

1.2 OBJECTIVES

The primary objective of the Audit module is to:

Audit and Assess the Quality of Services being rendered by Basic (Wireline), Cellular Mobile (Wireless), and Broadband service against the parameters notified by TRAI. (The parameters of Quality of Services (QoS) have been specified by in the respective regulations published by TRAI).



1.3 COVERAGE

The broadband audit was conducted in MAHARASHTRA & GOA circle. For BSNL, a geographical spread among the SDCAs and POPs was maintained. For other operators, the audit was conducted for all SDCAs at overall level.




1.4 AUDIT PROCESS AND OPERATOR SELECTION

As per TRAI guidelines, the Broadband Audit for a circle is conducted once every year.

- The operators have been assimilated as per TRAI guidelines given in QoS tender document 2015 and latest list of licensees (with more than 10,000 subscriber in their LSAs) provided by TRAI.
- To conduct the audit, IMRB auditors contacted the broadband operators given in the list below to conduct the audit in MAHARASHTRA & GOA circle for the JAS 2016 quarter.
- The PMR was generated from the raw data pertaining to July, August and September 2016 (JAS'16), which was extracted by auditor from the operator's systems during the audit conducted in the month of September 2016.
- Live calling activity was carried out during the period of September 2016. The data considered for live calling was for the month prior to the live calling month. In this round of audit, August 2016 data was considered for live calling for all operators.
- 3 day live measurement activity was carried out on working days during the month of September 2016. The data for the last three working days from the date of live measurement was extracted from operator's systems and audited by the auditors.



1.5 FRAMEWORK USED

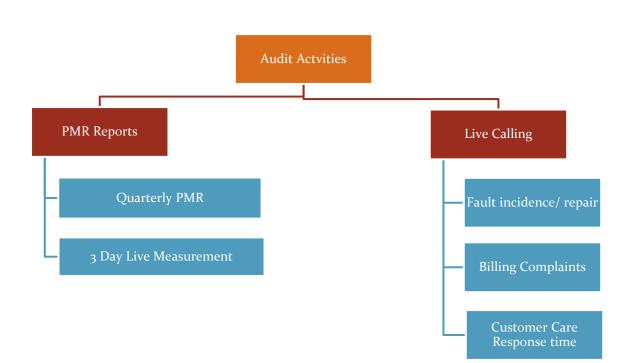




1.5.1 PMR REPORTS - SIGNIFICANCE AND METHODOLOGY

The significance of PMR or Performance Monitoring Reports is to assess the various Quality of Service (QoS) parameters involved in the Broadband services, which indicate the overall health of service for an operator.

To verify the QoS performance of the operators, TRAI has appointed IMRB as their auditor in West Zone to conduct QoS audit of operators. The steps involved in the audit have been given below.

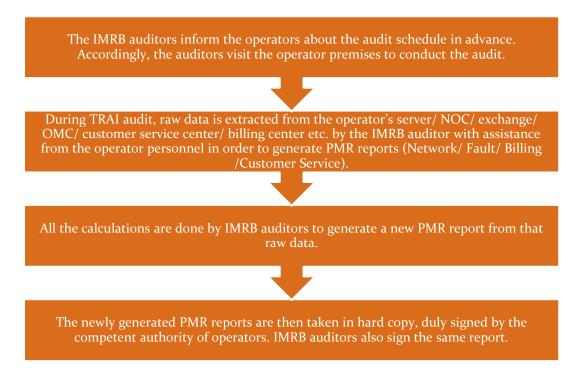

The raw data extracted is then used to generate PMR reports in the following formats.

- ♦ Quarterly PMR
- 🏷 3 Day Live Measurement Data

Let us understand these formats in detail.

This report has been prepared from the raw data extracted for the period of JAS'16 during September 2016.

1.5.1.1 QUARTERLY PMR REPORT – PARAMETERS REVIEWED

The main purpose of quarterly PMR report is to verify the following key QoS parameters on quarterly basis as per the methodology stated above in section 1.4.

- Service Provisioning
- Fault incidence/clearance related statistic
- Billing Performance (Metering and billing credibility)
- Resolution of billing complaints
- Response time to customer for assistance
- Bandwidth Utilization
- Broadband download speed
- Service Availability/ Uptime



Network Latency/ Packet Loss

1.5.1.2 3 DAY LIVE MEASUREMENT - SIGNIFICANCE AND METHODOLOGY

The main purpose of 3 day live measurement is to evaluate the following parameters on intraday basis. The auditors visit the sample exchanges (in case of BSNL) and main exchanges (in case of other operators) to collect the 3 day live data for the following parameters.


- Bandwidth Utilization
- Broadband download speed
- Service Availability/ Uptime
- Network Latency/ Packet Loss

While the quarterly PMR report provides an overall view of the performance of QoS parameters, the 3 day live data helps looking at intraday performance on the above given parameters. All the calculations are then done on the basis of that raw data of 3 days.

1.5.1.3 TCBH – SIGNIFICANCE AND SELECTION METHODOLOGY

As per Quality of Service of Broadband Service Regulations", 2006 (11 of 2006), Time Consistent Busy Hour" or "TCBH" means the one hour period starting at the same time each day for which the average traffic of the resource group concerned is greatest over the days under consideration and such Time Consistent Busy Hour shall be established on the basis of analysis of traffic data for a period of ninety days.

Step by step procedure to identify TCBH for an operator:

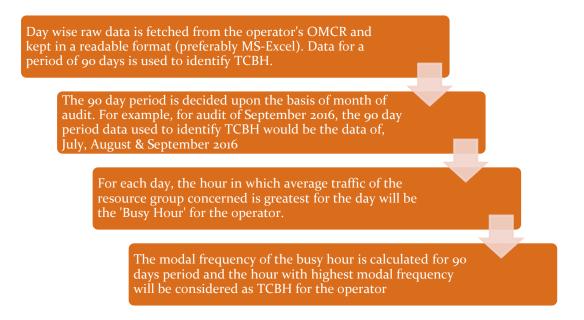

During audit, the auditors identified following TCBHs from the raw data collected from the operators for the quarter of JAS'16.



Airtel	BSNL	D-VOIS	Digital Network	FIVE NETWORK	HATHWAY	INDUS
11:00 - 12:00	18:00 - 19:00	15:00 - 16:00	18:00 - 19:00	19:00-20:00	18:00 - 19:00	19:00-20:00
PACENET	RCL	SYSCON	TCL	TIKONA	ΠL	YOU
19:00-20:00	18:00 - 19:00	18:00 - 19:00	18:00 - 19:00	20:00 - 21:00	18:00 - 19:00	18:00 - 19:00


The data for network parameters has been taken as per the TCBH identified by the auditor for the operators.

1.5.2 LIVE CALLING - SIGNIFICANCE AND METHODOLOGY

The main purpose of live calling is to verify the performance of following parameters by doing test calls to the subscribers/ specific numbers.

- Service Provisioning
- Fault incidence/clearance related statistic
- Resolution of billing complaints
- Response time to customer for assistance

The process of conducting live calling has been stated below.

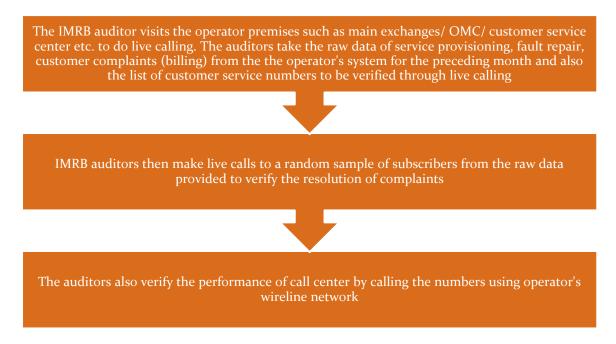

Let us now discuss the methodology of live calling for each parameter in detail.

1.5.2.1 SERVICE PROVISIONING

Live calling for service provisioning is done to verify the following.

♥ Number of connections provided in 15 days from customer request

Live Calling Process:



- Auditors request the operator to provide the database of all the subscribers who requested for a new connection in one month prior to IMRB auditor visit
- 100 Calls per service provider are made to customers or in case of BSNL, 10% or 30 per SDCA by randomly selecting from the database provided by operator
- Auditors check and record whether the connection was provided to customers within the timeframes as mentioned in the benchmark

Benchmark:

New connections provided within 15 days: 100%

1.5.2.2 FAULT CLEARANCE

Live calling for fault clearance is done to verify the following.

- ✤ Fault repair by next working day
- ✤ Fault repair within 3 working days

Live Calling Process:

- Auditors request the operator to provide the database of all the subscribers who reported Faults in one month prior to IMRB auditor visit
- Calls are made to up to 10% or 100 complainants, whichever is less, per service provider or in case of BSNL, if there are more than 1 SDCAs selected for the sample, 10% or 30 complainants per sample SDCA by randomly selecting from the list provided by operator.
- Auditors check and record whether the fault was corrected within the timeframes as mentioned in the benchmark

Benchmarks:

- ✤ Fault repair by next working day: =>90%
- ✤ Fault repair within 3 working days: =>99%

1.5.2.3 RESOLUTION OF BILLING COMPLAINTS

Live calling is done to verify Resolution of billing complaints within stipulated time. The process for this parameter is stated below.

- Auditors request the operator provided the database of all the subscribers who reported billing complaints in one month prior to IMRB auditor visit. In case of BSNL, data for the complaints from the subscribers belonging to the sample exchanges is requested specifically
- A sample of 10% or 100 complainants, whichever is less, is selected randomly from the list provided by operator
- Solution Calls are made by auditors to the sample of subscribers to check and record whether the complaint was resolved within the timeframes as mentioned in the benchmark.

Benchmarks:

98% complaints resolved within 4 weeks



1.5.2.4 RESPONSE TIME TO CUSTOMER FOR ASSISTANCE

Live calling is done to verify response time for customer assistance is done to verify the performance of call center in terms of

- % age of calls answered by operator (voice to voice) within 60 seconds: In 60% of the cases or more
- % age of calls answered by operator (voice to voice) within 90 seconds: In 80% of the cases or more

The process for this parameter is stated below.

- Overall sample size was 100 calls per service provider per circle at different points of time, evenly distributed across the selected exchanges – 50 calls between 1000 HRS to 1300 HRS and 50 calls between 1500 HRS to 1700 HRS.
- Solution Time to answer the call by the operator was assessed from the time interviewer pressed the requisite button for being assisted by the operator.
- All the supplementary services that have any kind of human intervention are to be covered here. It also includes the IVR assisted services.

1.6 COLOUR CODE TO READ THE REPORT

Not Meeting the benchmark

1.7 AUDIT METHODOLOGY

As per audit tender, following table explains the audit methodology for Broadband services. Here, a YES signifies that the mentioned parameter gets audited by the given audit method (PMR/ Live Measurement/ Live Calling).

	Parameters	Quarterly PMR Data	3 day live measurement	Live calling
1	Service Provisioning/ Activation time	YES		YES
2	Fault Repair/ Restoration Time	YES		YES
3	Billing Performance			
(i)	Billing Complaints per 100 Bills issued	YES		
(ii)	%age of billing complaints resolved in four weeks	YES		Yes
(iii)	Refund of deposits after closure within 60 days	YES		
4	Response time to the customer for assistan	ce(Voice to Voice)		
(i)	Within 60 seconds > 60%	YES		YES
(ii)	Within 90 seconds > 80%	YES		YES
5	Bandwidth Utilization/ Throughput:			
	A) Bandwidth Utilization			
-	POP to ISP gateway Node [Intra – network] Links	YES	YES	
-	ISP Gateway Node to IGSP / NIXI Node upstream Link(s) for international connectivity	YES	YES	
	B) Broadband Connection Speed (Download)	YES	YES	
6	Service Availability/Uptime	YES	YES	



7	Packet Loss	YES	YES									
8	Network Latency for wired broadband access)											
(i)	User reference point at POP / ISP Gateway Note to International Gateway (IGSP/NIXI)	YES	YES									
(ii)	User reference point at ISP Gateway Node to International nearest NAP port abroad (Satellite)	YES	YES									
(iii)	User reference point at ISP Gateway Node to International nearest NAP port abroad (Satellite)	YES	YES									

1.8 SAMPLING METHODOLOGY

 As per the sampling methodology prescribed by TRAI, all exchanges over 10% of SDCA or 10 SDCAs whichever is more in a licensed service area should be selected for the purpose of audit, live calling and live measurement. However apart from BSNL, all exchanges covered for other operators.

Below list of SDCAs covered during the audit for BSNL in Maharashtra & Goa Circle:-

Total SSA - 30

Total SDCA - 315

Selected SDCA (10%) - 32

SSA	SDCA	SSA	SDCA
AHMEDNAGAR	ANR	NASHIK	Nashik
AKOLA	Akola	OSMANABAD	Osmanabad
AMRAVATI	Amravati	PARBHANI	Parbhani Group
AURANGABAD	AGD	PUNE	Chinchwad
BHANDARA	Bhandara	RAIGAD	Alibag
BEED	Beed	RATNAGIRI	Ratnagiri
CHANDRAPUR	Chandrapur	SATARA	Satara
DHULE	Dhule	SINDHUDURG	Kankavali
GADCHIROLI	Gadchiroli	SOLAPUR	SPR
GOA	Panaji	WARDHA	Wardha
JALGAON	Jalgaon	YAVATMAL	Yavatmal
KALYAN	Thane	BULDANA	Buldana
KOLHAPUR	Kolhapur	JALNA	Jalna
LATUR	Latur	SANGLI	Miraj
NAGPUR	Nagpur	PUNE	hadakwasala
NANDED	Nanded	PUNE	Pune



1.9 EXECUTIVE SUMMARY

1.9.1 PMR QUARTERLY DATA – JAS'16

Parameters	Benchmar ks	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
				I	Service	provsioning upt	ime			l				
Percentage connections provided within 15 days	100%	100.00%	99.30%	100.00%	100.00%	99.98%	96.72%	100.00%	100.00%	100.00%	99.82%	100.00%	100.00%	99.76%
Fault repair restoration time														
Percentage faults repaired by next working days	≥ 90%	94.91%	99.06%	100.00%	NA	100.00%	100.00%	100.00%	56.25%	100.00%	97.22%	92.10%	100.00%	91.51%
Percentage faults repaired within three working days	≥ 99%	99.27%	100.00%	100.00%	NA	100.00%	100.00%	100.00%	91.95%	100.00%	100.00%	99.34%	100.00%	99.97%
uyu					Billi	ng performance								
Billing complaints per 100 bills issued	< 2%	0.01%	0.10%	0.00%	0.00%	0.26%	0.00%	0.00%	NA	NA	0.05%	0.14%	0.05%	0.00%
%age of billing complaints resolved in 4 weeks	100%	100.00%	100.00%	NA	NA	100.00%	NA	NA	NA	NA	NA	100.00%	100.00%	NA
%age cases in which refund of deposits after closure was made in 60 days	100%	100.00%	100.00%	NA	NA	100.00%	NA	NA	NA	NA	NA	100.00%	100.00%	NA
				Custo	omer care/help	line assessment	(Voice to Voic	e)		1				
Percentage calls answered within 60 seconds	≥ 60%	61.21%	77.71%	96.18%	NP	93.95%	NP	92.69%	97.97%	100.00%	95.10%	59.93%	93.76%	91.00%
Percentage calls answered within 90 seconds	≥ 80%	66.76%	90.36%	99.84%	NP	97.19%	NP	100.00%	99.24%	100.00%	100.00%	81.88%	100.00%	94.00%
					Bandwidth	utilisation/Thro	ughput							
Percentage bandwidth utilised on upstream links	< 80%	NP	28.57%	14.85%	52.00%	NP	79.27%	73.23%	NP	95.00%	8.64%	78.61%	76.64%	77.27%
Broadband download speed	≥ 80%	NP	85.59%	83.67%	95.00%	92.75%	NP	86.72%	87.00%	NP	91.00%	93.99%	NP	87.91%
Service availability/uptime	≥ 98%	NP	99.38%	100.00%	100.00%	99.10%	100.00%	100.00%	99.68%	100.00%	98.97%	99.98%	99.11%	99.46%
Packet loss	< 1%	NP	0.51%	0.27%	0.00%	0.12%	NP	0.07%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
					Ne	twork Latency								
POP/ISP Node to NIXI	< 120 msec	37	75	17	NA	43	NP	79	NA	33	3	NA	69	8.51
ISP node to NAP port (Terrestrial)	< 350 msec	64	214	NA	NA	163	NP	59	NA	133	254	NA	200	277.22

NA: Parameters not applicable for the operators.



The objective assessment of Quality of Service (QoS) carried out by IMRB gives an insight into the overall broadband performance of various operators with a parameter wise performance evaluation as compared to TRAI benchmark.

Following are the parameter wise observations for the operators in MAHARASHTRA & GOA circle.

1.9.1 SERVICE PROVISIONING/ ACTIVATION TIME

• As per audit, all operators met the benchmark for providing new connections within 15 days, except BSNL, Hathway, Indus, TCL and You Broadband.

1.9.2 FAULT REPAIR/ RESTORATION

- The benchmark of repairing 90% faults within the next day was not met by RCL,
- The benchmark of repairing 99% faults within next three days of receiving complaints was not met by RCL

1.9.3 BILLING PERFORMANCE

• As per audit, all the operators met the benchmark for metering and billing credibility.

NA: However D-Vois, Five, Indus, Pacenet RCL, Syscon, TCL and You does not have any disputes

• All operators met the benchmark for resolution of billing complaints within 4 weeks.

NA: Subscribers of D-Vois, Five, Indus, Pacenet RCL, Syscon, TCL and You does not have any disputes because they are under pre-paid service.

1.9.4 RESPONSE TIME TO CUSTOMER FOR ASSISTANCE

• All operators met the benchmark for answering 60% calls within 60 seconds except Tikona, whereas all operators met the benchmark for answering 80% calls within 90 seconds except Airtel.

NP: Five and Indus did not submit the data.



1.9.5 BANDWIDTH UTILIZATION AND THROUGHPUT

• All operators met the benchmark for bandwidth utilized on upstream links during audit except Syscon,

NP: Airtel, Hathway and RCL did not submit the data.

• All operators met the benchmark for download speed.

NP: Airtel, Indus, Syscon and TTL did not submit the data.

• All operators met the benchmark for service availability time as per audit.

NP: Airtel did not submit the data.

• All operators met the benchmark for packet loss.

NP: Airtel and Indus did not submit the data.

1.9.6 NETWORK LATENCY

NP: Indus did not submit the data.

• All operators met the benchmark for Network Latency parameters.

NA:-Not applicable, operators do not have satellite connection.



1.10 LIVE MEASUREMENT

Parameters	Benchmar ks	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
	Bandwidth utilisation/Throughput													
Percentage bandwidth utilised on upstream links	< 80%	NP	28.57%	NP	53.20%	NP	78.10%	72.30%	NP	94.30%	9.00%	77.00%	75.65%	77.55%
Broadband download speed	≥ 80%	NP	83.23%	82.45%	95.00%	92.00%	NP	87.23%	88.00%	NP	92.30%	94.49%	NP	87.91%
Service availability/uptime	≥ 98%	NP	99.38%	100.00%	100.00%	99.10%	100.00%	100.00%	99.68%	100.00%	98.97%	99.99%	99.11%	99.46%
Packet loss	<1%	0.00%	0.56%	0.25%	0.00%	0.11%	NP	0.07%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
	Network Latency													
POP/ISP Node to NIXI	<120 msec	35	76	19	NA	43	NP	79	NA	33	3	NA	69	6
ISP node to NAP port (Terrestrial)	< 350 msec	60	213	NA	NA	163	NP	59	NA	133	254	NA	200	97

1.10.1 BANDWIDTH UTILIZATION AND THROUGHPUT

• Syscon failed to meet the benchmark for bandwidth utilized on upstream links during live measurement.

NP: Airtel, D-Vois, Hathway and RCL did not submit the data.

• All operators met the benchmark of providing committed broadband download speed as per live measurement except You Broadband.

NP: Airtel, Indus, Syscon and TTL did not submit the data.

• All operators met the benchmark for service availability time as per live measurement.

NP: Airtel did not submit the data.

• All operators met the benchmark for packet loss.

1.10.2 NETWORK LATENCY

• All operators met the benchmark for Network Latency parameters.

NA:-Not applicable, operators do not have satellite connection.



1.11 LIVE CALLING

Parameters	Benchmar ks	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
	Service provsioning uptime													
Percentage connections provided within 15 days	100%	99.00%	92.00%	100.00%	100.00%	95.00%	92.00%	100.00%	100.00%	100.00%	98.00%	100.00%	100.00%	97.00%
					Fault rep	air restoration	time							
Percentage faults repaired by next working days	≥ 90%	95.00%	95.00%	100.00%	NA	100.00%	100.00%	100.00%	56.00%	100.00%	94.00%	91.00%	100.00%	90.00%
Percentage faults repaired within three working days	≥ 99%	99.00%	100.00%	100.00%	NA	100.00%	100.00%	100.00%	76.00%	100.00%	99.00%	100.00%	100.00%	100.00%
					Billin	ng performance								
%age of billing complaints resolved in 4 weeks	100%	100.00%	100.00%	NA	NA	100.00%	NA	NA	NA	NA	NA	100.00%	NA	NA
				Custo	omer care/help	line assessment	(Voice to Voic	e)						
Percentage calls answered within 60 seconds	≥ 60%	100.00%	100.00%	98.00%	98.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	91.16%	97.38%
Percentage calls answered within 90 seconds	≥ 80%	100.00%	100.00%	98.00%	98.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	91.16%	97.38%

NA: Parameters not applicable for the operators.

1.11.1 SERVICE PROVISIONING/ ACTIVATION TIMES

• As per live calling, all operators met the benchmark of providing 100% new connections within the TRAI stipulated timeline of 15 days, except Airtel, BSNL, Hathway, Indus, TCL and You Broadband.

1.11.2 FAULT REPAIR/ RESTORATION

• All operators the benchmark of repairing 90% faults within next working day except RCL and You benchmark for repairing 99% faults within 3 days, except RCL

1.11.3 BILLING PERFORMANCE

• As per live calling, all the operators met the benchmark for resolution of billing complaints within 4 weeks

NA: operator's live calling for 'resolution of billing complaints' has not been conducted due to very low/ zero base of billing complaints for the operators.

NA: Subscribers of D-Vois, Five, Indus, Pacenet RCL, Syscon, TCL and You does not have any disputes because they are under pre-paid service.

1.11.4 RESPONSE TIME TO CUSTOMER FOR ASSISTANCE

- As per live calling, all the operators met the benchmarks for call answered within 60 seconds.
- As per live calling, TTL and You Broadband failed to meet the benchmarks for call answered within 90 Seconds.



2. CRITICAL FINDINGS

Service Provisioning/ Activation Time

• As per audit, all operators met the benchmark for providing new connections within 15 days, except BSNL, Hathway, Indus, TCL and You Broadband.

Fault Repair/ Restoration

- The benchmark of repairing 90% faults within the next day was not met by RCL,
- The benchmark of repairing 99% faults within next three days of receiving complaints was not met by RCL

Billing Performance

- As per audit, all the operators met the benchmark for metering and billing credibility.
- NA: However D-Vois, Five, Indus, Pacenet RCL, Syscon, TCL and You does not have any disputes
- All operators met the benchmark for resolution of billing complaints within 4 weeks.

NA: Subscribers of D-Vois, Five, Indus, Pacenet RCL, Syscon, TCL and You does not have any disputes because they are under pre-paid service.

Response time to customer for assistance

• All operators met the benchmark for answering 60% calls within 60 seconds except Tikona, whereas all operators met the benchmark for answering 80% calls within 90 seconds except Airtel.

Bandwidth Utilization and Throughput

• All operators met the benchmark for bandwidth utilized on upstream links during audit except Syscon,

NP: Airtel, Hathway and RCL did not submit the data.

• All operators met the benchmark for download speed.



NP: Airtel, Indus, Syscon and TTL did not submit the data.

• All operators met the benchmark for service availability time as per audit.

NP: Airtel did not submit the data.

• All operators met the benchmark for packet loss.

NP: Airtel and Indus did not submit the data.

Network Latency

• All operators met the benchmark for Network Latency parameters.

NA:-Not applicable, operators do not have satellite connection.

Live calling

Service Provisioning/ Activation Times

• As per live calling, all operators met the benchmark of providing 100% new connections within the TRAI stipulated timeline of 15 days, except Airtel, BSNL, Hathway, Indus, TCL and You Broadband.

Fault Repair/ Restoration

• All operators the benchmark of repairing 90% faults within next working day except RCL and You benchmark for repairing 99% faults within 3 days, except RCL

Billing Performance

• As per live calling, all the operators met the benchmark for resolution of billing complaints within 4 weeks



NA: operator's live calling for 'resolution of billing complaints' has not been conducted due to very low/ zero base of billing complaints for the operators.

NA: Subscribers of D-Vois, Five, Indus, Pacenet RCL, Syscon, TCL and You does not have any disputes because they are under pre-paid service.

Response time to customer for assistance

- As per live calling, all the operators met the benchmarks for call answered within 60 seconds.
- As per live calling, TTL and You Broadband failed to meet the benchmarks for call answered within 90 Seconds.



3. DETAILED FINDINGS - COMPARISON BETWEEN PMR DATA AND LIVE MEASUREMENT/ CALLING DATA

3.1 SERVICE PROVISIONING/ ACTIVATION TIME

3.1.1 PARAMETER EXPLANATION

3.1.1.1 AUDIT PROCEDURE

IMRB Auditors verified and collected data pertaining to number of applications received at the service provider's level in the following time frames:-

- ♥ Number of applications received at the service provider's level
- ♦ Number of connections provided within 15 days
- ♦ Number of connections provided after 15 days

Live Calling: -

At least 10% of the subscribers who had requested for new connections in month prior to Audit were called to check whether connection was provided in 15 days

Data for the parameter was extracted from OMC (Operations and Maintenance Center) of the operators.

3.1.1.2 COMPUTATIONAL METHODOLOGY


- Solution Technically Non Feasible (TNF) cases such as unavailability of Broadband infrastructure/ equipment in the Area or Spare Capacity i.e. Broadband Ports including equipment to be installed at the customer premises for activating Broadband connection were excluded from the calculation of this parameter.
- Also, problems relating to customer owned equipment such as PC, LAN Card/ USB Port and internal wiring or non-availability of such equipment were excluded from the calculation of this parameter.



Percentage connections provided within X working days = No of connections provided within X working days/ Total number of connections registered during the period *100

3.1.1.3 BENCHMARK

100 % cases in =<15 working days.

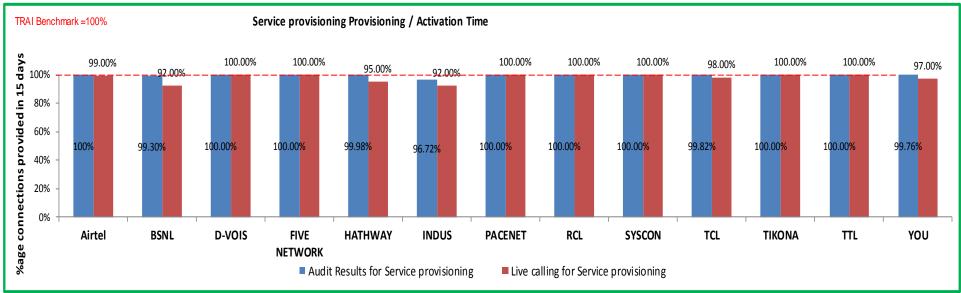

3.1.2 DETAILED FINDINGS - SERVICE PROVISONING

Data Source: OMC (Operations and Maintenance Center) of the operators

As per audit, all operators met the benchmark for providing new connections within 15 days. However, during live calling it was observed that Airtel, BSNL, Hathway, Indus TCL and You Broadband failed to meet the benchmark of providing 100% new connections within the TRAI stipulated timeline of 15 days.



3.2 FAULT REPAIR/ RESTORATION TIME

3.2.1 PARAMETER EXPLANATION

3.2.1.1 AUDIT PROCEDURE

IMRB Auditors to verify and collect data pertaining to number of fault received and also number of faults cleared at the service provider's level in the following time frames:-

- ♦ Number of faults cleared within 24 hours
- Solution Number of cleared in more than 1 day but less than 3 days
- ✤ Number of cleared in more than 3 days

Live calling: -

- by Live calling is done to verify 'Fault repair by next working day', 'Fault repair within 3 working days' and 'Fault repair in more than 3 working days'
- 🦻 Interviewers ensure that operator provided a list of all the subscribers who reported Faults in one month prior to IMRB staff visit
- Solution Calls are made to up to 10% or 100 complainants, whichever is less, per service provider or in case of BSNL, if there are more than 1 SDCAs selected for the sample, 10% or 30 complainants per sample SDCA by randomly selecting from the list provided by operator.
- Solutions check and record whether the fault was corrected within the timeframes as mentioned in the benchmark

Data for the parameter was extracted from OMC (Operations and Maintenance Center) of the operators.

3.2.1.2 COMPUTATIONAL METHODOLOGY

- Solution The time period for fault repair starts from the time when the fault is reported to the service provider either through customer care help line or in person by the subscriber
- Solution Considered to be considered as being registered in the next day business hours of the day are to be taken into account. All the complaints registered after the business hours are to be considered as being registered in the next day business hours




Fault incidence = (Total no of faults repaired in X working days /Total number of faults reported during the period)*100

3.2.1.3 BENCHMARK

 \clubsuit By next working day: => 90% and within 3 working days: => 99%.


3.2.2 DETAILED FINDINGS - FAULT REPAIR WITHIN NEXT WORKING DAY

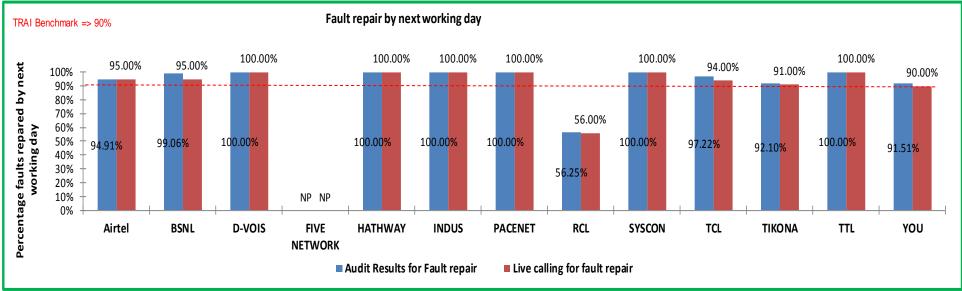

Data Source: OMC (Operations and Maintenance Center) of the operators

RCL failed to meet the benchmark for the parameter as per audit as well as during live calling.



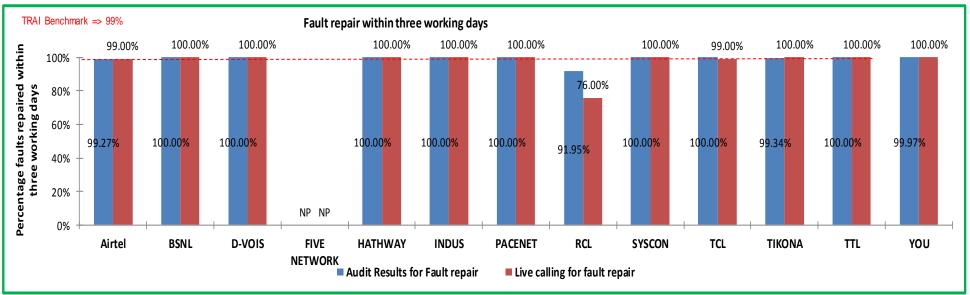

3.2.3 DETAILED FINDINGS - FAULT REPAIR WITHIN 3 WORKING DAYS

Data Source: OMC (Operations and Maintenance Center) of the operators

All operators met the benchmark for the parameter as per audit and live calling except RCL.

NA: Five does not have any faults registered.



3.3 METERING AND BILLING CREDIBILITY

3.3.1 PARAMETER EXPLANATION – BILLING COMPLAINTS

All the complaints related to billing as per clause 3.7.2 of QoS regulation of 20th March, 2009 were covered. The types of billing complaints covered are listed below.

- ♥ Payments made and not credited to the subscriber account
- Solution Payment made on time but late payment charge levied wrongly
- ✤ Double charges
- \clubsuit Credit agreed to be given in resolution of complaint, but not accounted in the bill
- $\,\,{\,\,{\ensuremath{\diamondsuit}}}\,\,$ Charging for services provided without consent
- ✤ Charging not as per tariff plans
- ✤ Overcharging or undercharging

In addition to the above, any billing complaint which leads to billing error, waiver, refund, credit, or any adjustment is also considered as a billing complaint for calculating the number of disputed bills.

3.3.1.1 AUDIT PROCEDURE

IMRB Auditors to verify and collect data pertaining to -

- ♥ Number of Billing complaints received at the service provider's level
- 🗞 Last billing cycle stated should be such that due date for payment of bills must be beyond the date when this form is filled.
- 🦻 Include all types of bills generated for customers. This could include online as well as other forms of bills presentation including printed bills

- Billing complaint is any of written complaint/ personal visit/ telephonic complaint related to: Excess metering/ wrong tariff scheme charged, Payment made in time but charged penalty/ not reflected in next bill, Last payment not reflected in bill, Adjustment/ waiver not done, Anything else related to bills, Toll free numbers charged etc.
- Billing complaints resolution database, with opening and closing date of complaint to identify the time taken to resolve a complaint

Live calling:

- Auditors request the operator provided the database of all the subscribers who reported billing complaints in one month prior to IMRB auditor visit. In case of BSNL, data for the complaints from the subscribers belonging to the sample exchanges is requested specifically. In case the sample data is too low to fulfill the target calls, auditors August call subscribers whose complaints got resolved in other months of the same audit period.
- 🗞 A sample of 10% or 100 complainants, whichever is less, is selected randomly from the list provided by operator
- Solution Calls are made by auditors to the sample of subscribers to check and record whether the complaint was resolved within the timeframes as mentioned in the benchmark.

Raw data for the parameter was extracted from central billing center of the operators.

3.3.1.2 COMPUTATIONAL METHODOLOGY – METERING AND BILLING CREDIBILITY

The calculation methodology (given below) as per QoS Regulations 2006 (11 of 2006), was followed to calculate incidence of billing complaints.


Billing complaints (%) = total number of disputed bills X 100 total number of bills issued during one billing cycle.

*Operator to include all types of bills generated for customers. This would include printed bills, online bills and any other forms of bills generated

**Billing complaints here shall include only dispute related issues (including those that August arise because of a lack of awareness at the subscribers' end). It does not include any provisional issues (such as delayed dispatch of billing statements, etc.) in which the operator has opened a ticket internally.

TRAI Benchmark: < 2%



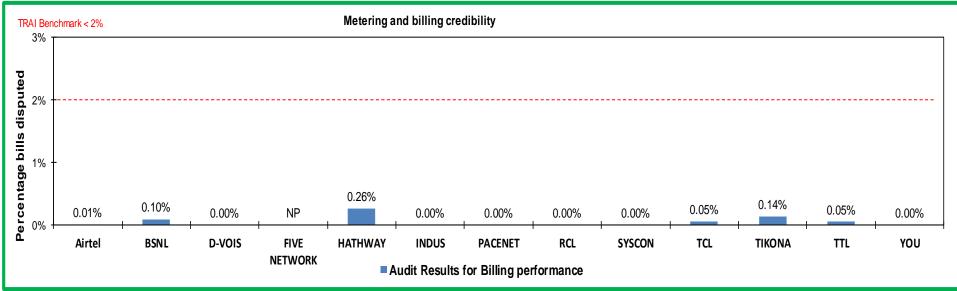

Data Source: Billing Center of the operators

All operators met the benchmark for the parameter.

NA: operator's live calling for 'resolution of billing complaints' has not been conducted due to very low/ zero base of billing complaints for the operators.

NA: Subscribers of D-Vois, Five, Indus, Pacenet RCL, Syscon, TCL and You does not have any disputes because they are under pre-paid service.



3.3.1.4 COMPUTATIONAL METHODOLOGY – RESOLUTION OF BILLING COMPLAINTS

Solution of Percentage resolution of billing complaints

The calculation methodology (given below) as per QoS Regulations 2006 (11 of 2006), and TRAI guidelines (Received on Sep 08, 2014) was followed to calculate resolution of billing complaints.


Resolution of billing complaints within 4 weeks:

%age of billing complaints (for post-paid customers)/ charging, credit & validity (for pre-paid customers) resolved within 4 weeks =

number of billing complaints for post-paid customers/charging, credit/ validity complaints for pre-paid customers resolved within 4 weeks during the quarter X 100

number of billing/charging, credit / validity complaints received during the quarter



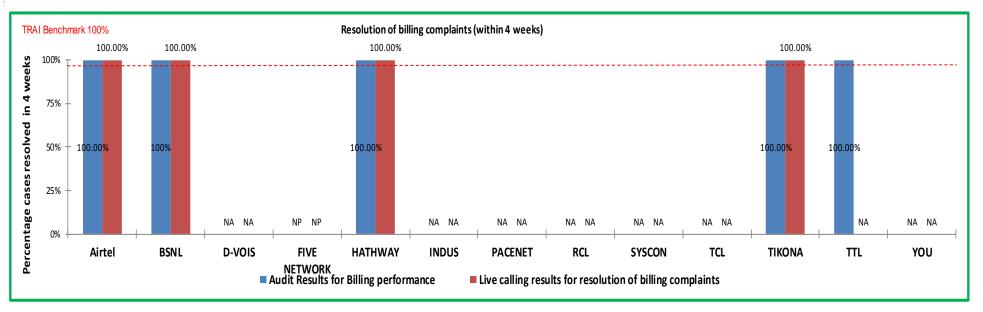

3.3.1.5 RESOLUTION OF BILLING COMPLAINTS – AUDIT FINDINGS

As per audit all operators met the benchmark for resolution of billing complaints within 4 weeks

NA: operator's live calling for 'resolution of billing complaints' has not been conducted due to very low/ zero base of billing complaints for the operators.

NA: Subscribers of D-Vois, Five, Indus, Pacenet RCL, Syscon, TCL and You does not have any disputes because they are under pre-paid service.



3.4 TIME TAKEN TO REFUND AFTER CLOSURE

3.4.1 PARAMETER EXPLANATION

3.4.1.1 AUDIT PROCEDURE

IMRB Auditors collected and verified data pertaining to -

- ✤ Number of cases requiring refund of deposits
- ✤ Number of cases where refund was made within 60 days
- \$ %age cases where refund was made within 60 days.

Data for the parameter was extracted from central billing center of the operators.

3.4.1.2 COMPUTATIONAL METHODOLOGY


🗞 Date of closure is considered to be the date on which the connection is discontinued in the service provider database of active customers

Time taken to refund = Date of refund - Date of closure

3.4.1.3 BENCHMARK

3 100% cases in less than 60 days



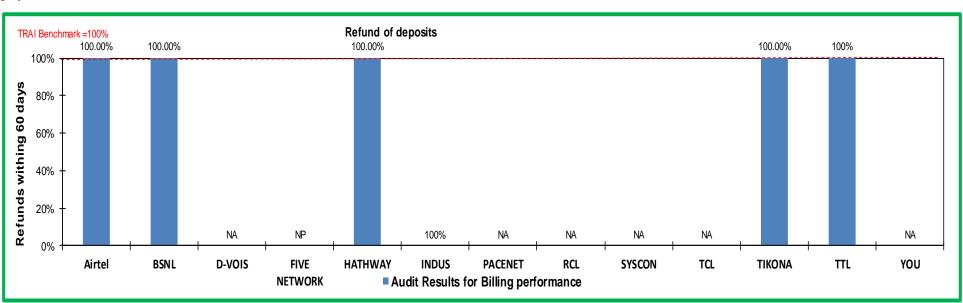

3.4.2 DETAILED FINDINGS - REFUND OF DEPOSITS

All operators met the benchmark for the parameter.

NA: -Operators had no cases where a refund was applicable.



3.5 **RESPONSE TIME TO CUSTOMER FOR ASSISTANCE**

3.5.1 PARAMETER EXPLANATION

3.5.1.1 AUDIT PROCEDURE

IMRB Auditors collected and verified data pertaining to

- ✤ Number of calls received by the operator
- \clubsuit Number and percentage calls answered within 60 seconds
- ♥ Number and percentage calls answered within 80 seconds

Live calling:

Solution of the calls at different points of time were made in a licensed service area/circle for each service provider to assess the efficiency of the call center

Data for the parameter was extracted from central customer service center of the operators.

3.5.1.2 COMPUTATIONAL METHODOLOGY


% age of calls answered by operator (voice to voice) within n seconds = (Number of calls where time taken for operator to respond* >= n sec / Total number of calls where an attempt to route to the operator was made) x 100)*.

Time taken for operator to respond = Time when an operator responds to a call - Time when the relevant code to reach the operator is dialled

3.5.1.3 BENCHMARK

- Calls answered within 60 seconds => 60 %
- \clubsuit Calls answered within 90 seconds => 80%




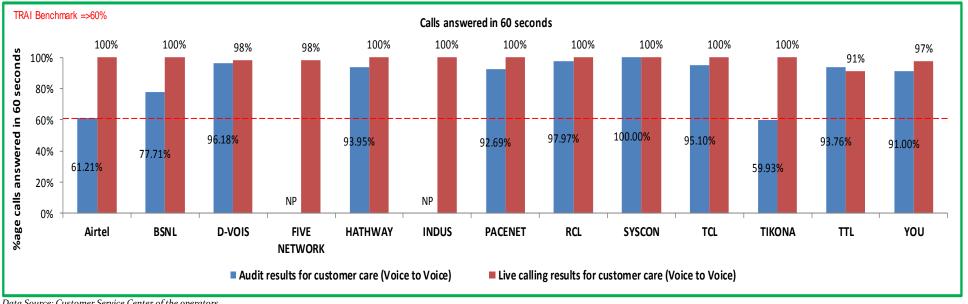

3.5.2 DETAILED FINDINGS - CALL ANSWERED WITHIN 60 SECONDS

Data Source: Customer Service Center of the operators



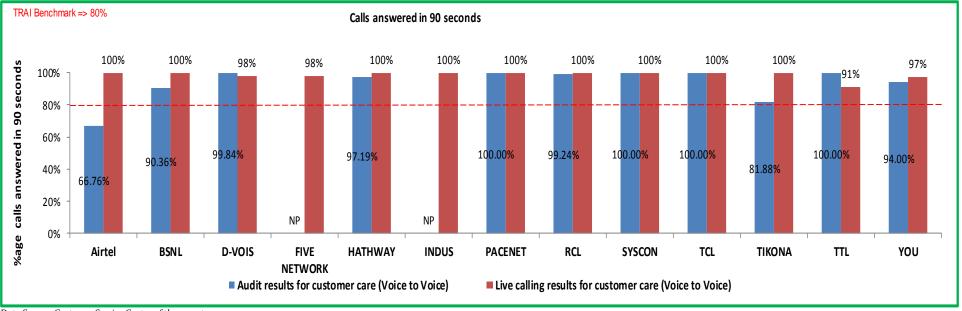

3.5.3 DETAILED FINDINGS - CALL ANSWERED WITHIN 90 SECONDS

Data Source: Customer Service Center of the operators

All operators met the benchmark for answering 60% calls within 60 seconds and 80% calls within 90 seconds as per audit.



3.6 BANDWIDTH UTILIZATION & DOWNLOAD SPEED

3.6.1 PARAMETER EXPLANATION – BANDWIDTH UTILIZATION

3.6.1.1 AUDIT PROCEDURE

IMRB Auditors verified and collected data pertaining to -

POP to ISP gateway Node [Intra - network] Links

- Auditors to verify and collect data pertaining to Total Bandwidth available and Total Bandwidth utilized during TCBH at some of the sample intra network links (POP to ISP Node) on each of the three days of live measurement separately
- 🗞 Total Bandwidth available and Total bandwidth utilized during at the sample links TCBH for the complete month of audit
- ♥ Total number of intra network links having >90% bandwidth utilization during the month of Audit

ISP Gateway Node to IGSP / NIXI Node upstream Link's) for international connectivity

- ♥ Total number of upstream links for International connectivity
- Total number of links having Bandwidth > 90%Total Bandwidth available and Total Bandwidth utilized on all the upstream links during TCBH (POP to ISP Node) on each of the three days of live measurement separately
- Separately for the days)

Data for the parameter was extracted from NOC (Network Operations Center) of the operators.

3.6.1.2 COMPUTATIONAL METHODOLOGY

Percentage Bandwidth available on the link = Total Bandwidth* utilised in TCBH for the period/ Total Bandwidth Available during the period*100

3.6.1.3 BENCHMARK



- ♦ < 80% link(s)/route bandwidth utilization during peak hours (TCBH).</p>
- If on any link(s)/route bandwidth utilization exceeds 90%, then network is considered to have congestion. For this additional provisioning of bandwidth on immediate basis, but not later than one month is mandated.

3.6.2 DETAILED FINDINGS – BANDWIDTH UTILIZATION

			,	Audit result:	s for Bandwi	dth Utilizatio	on							
Bandwidth utilization	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Percentage Bandwidth utilisation during peak hours (In Mbps)	<80%	NP	28.57%	14.85%	52.00%	NP	79.27%	73.23%	NP	95.00%	8.64%	78.61%	76.64%	77.27%
			Live m	easurment	results for B	andwidth Ut	ilization							
Bandwidth utilization	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Percentage Bandwidth utilisation during peak hours (In Mbps)	<80%	NP	28.57%	NP	53.20%	NP	78. 1 0%	72.30%	NP	94.30%	9.00%	77.00%	75.65%	77.55%

Data Source: Network Operations Center (NOC) of the operators

• All operators met the benchmark for bandwidth utilized on upstream links during audit except Syscon, NP: Hathway and RCL did not submit the data.

Syscon did not meet benchmark during both PMR and Live.



3.6.3 PARAMETER EXPLANATION - BROADBAND DOWNLOAD SPEED

3.6.3.1 AUDIT PROCEDURE

Auditors collected and verified the following information from the operator's system.

- 🌣 Total committed download speed to the all subscribers (In Mbps) (A)
- ✤ Total average download speed observed during TCBH (In Mbps)

Live Calling/ Measurement:

- \clubsuit Details of live customers were obtained from the service providers
- Solution of the service of the servi
- 🗞 Details of total committed download speed and speed available to the users were recorded for each of the subscriber

3.6.3.2 COMPUTATIONAL METHODOLOGY

So The download speed for one customer is calculated by the download speed measurement software using the formula provided below:

Data Download Speed = Size of test file (data) in ISP server/ Transmission time required for error free transfer of the entire data

Percentage download speed available was calculated as = Sum of total speed available for 50 customers/Total committed download speed for 50 customers*100



3.6.3.3 BENCHMARK

Subscribed broadband connection speed to be met >= 80% from ISP Node to user

Data for the parameter was taken from "Download measurement software" installed in the server at ISP Node of the operators.

3.6.4 DETAILED FINDING	S – BRO	ADBAN	ND DO	WNLO.	AD SPI	EED								
			Aud	lit results fo	r broadband	d download :	speed							
Broadband download speed Benchmark Airtel BSNL D-VOIS FIVE NETWORK HATHWAY INDUS PACENET RCL SYSCON TCL TIKONA TTL YOU														YOU
%age subscribed speed available to the subscriber during TCBH (B/A)*100	≥ 80%	NP	85.59%	83.67%	95.00%	92.75%	NP	86.72%	87.00%	NP	91.00%	93.99%	NP	87.91%
			Live meas	urement res	ults for broa	adband dow	nload speed							
Broadband download speed	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
%age subscribed speed available to the subscriber during TCBH (B/A)*100	≥ 80%	NP	83.23%	82.45%	95.00%	92.00%	NP	87.23%	88.00%	NP	92.30%	94.49%	NP	87.91%

Data Source: Download measurement software installed in the server at ISP Node of the operators

• All operators met the benchmark for download speed. But, NP: Airtel, Indus, Syscon and TTL did not submit the data.

All operators met the benchmark of providing committed broadband download speed as per PMR audit and Live Audit.

3.7 SERVICE AVAILABILITY/UPTIME

3.7.1.1 AUDIT PROCEDURE

IMRB Auditors verified and collected data pertaining to -

- ♥ Total operational hrs.
- \clubsuit Total downtime hrs.
- by The above mentioned data was obtained and verified separately for three days in which the live measurement was carried out, Month in which audit was carried out/

Data for the parameter was extracted from OMC (Operations and Maintenance Center) of the operators.

3.7.1.2 COMPUTATIONAL METHODOLOGY


- 🖏 Total downtime for all users, including the LAN switches, Routers, Servers, etc. at ISP Node and connectivity to upstream service provider are to be included
- Blanned outages for routine maintenance of the system are excluded from the calculation of service availability/uptime

Service availability/Uptime = (Total operational hours - Total Downtime hrs)*100 / Total operational hours

3.7.1.3 BENCHMARK

=>98% with effect from quarter ending September 2007 and onwards



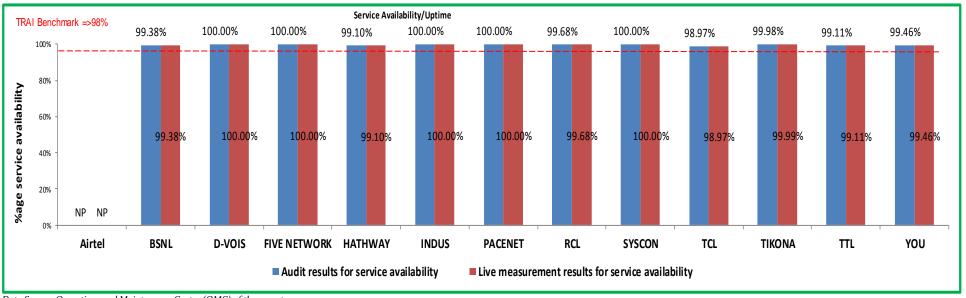

3.7.2 DETAILED FINDINGS - SERVICE AVAILABILITY

Data Source: Operations and Maintenance Center (OMC) of the operators

All operators met the benchmark for service availability time as per Quarterly audit and Live Audit.

• All operators met the benchmark for service availability time as per audit. NP: Airtel did not submit the data.



3.8 NETWORK LATENCY & PACKET LOSS

3.8.1 PARAMETER EXPLANATION - NETWORK LATENCY

Network Latency: Network Latency is the measure of duration of a round trip for a data packet between specific source and destination Router Port/ Customer Premises Equipment (CPE).

3.8.1.1 AUDIT PROCEDURE

IMRB Auditors verified and collected data pertaining to:

- ♥ Records maintained for ping tests conducted during the period
- \clubsuit Smoked ping test (wherever available) results for the period
- 🗞 Results of live ping tests conducted during three day live measurement and month of Audit (During peak hours)
- 🗞 Live ping tests were conducting by selecting a minimum of three user reference test points at POP/ISP Node in each circle

Data for the parameter was extracted from NOC (Network Operations Center) of the operators.

3.8.1.2 COMPUTATIONAL METHODOLOGY

- Latency is the measure of duration of a round trip for a data packet between specific source and destination Router Port/Customer Premises Equipment (CPE). The round trip delay for the ping packets from ISP premises to the IGSP premises to the IGSP/NIXI gateway and to the nearest NAP port abroad are measured by computing delay for 1000 pings of 64 bytes each (Pings are to be sent subsequent to acknowledgement received for the same for previous ping)
- Service provider needs to carry out such tests daily during Time Consistent Busy Hour(TCBH) and report the average results for the month in the performance monitoring report to TRAI
- Solution Minimum sample reference points for each service area shall be three in number or multiple reference points if required

Hence the formula for network latency would be Network latency for X days= Total round trip time for all the ping packets transmitted in X days /No of days during the period



3.8.1.3 BENCHMARK

- ♥ < 120 msec from user reference point at POP/ISP Node to International Gateway</p>
- 🗞 < 350 msec from User reference point at ISP Gateway Node to International nearest NAP port (Terrestrial)
- 🈓 < 800 msec from User reference point at ISP Gateway Node to International nearest Nap port (Satellite)

3.8.2 PARAMETER EXPLANATION – PACKET LOSS

Packet Loss: Packet loss is the percentage of packets lost to the total packets transmitted between two designated CPE/ Router Ports.

3.8.2.1 AUDIT PROCEDURE

IMRB Auditors verified and collected data pertaining to -

- ${\ensuremath{\,{\mathbb E}}}$ $\ensuremath{\,{\rm Records}}$ maintained for ping tests conducted during the period
- \clubsuit Smoked ping test (wherever available) results for the period
- 🗞 Results of live ping tests conducted during three day live measurement and month of Audit (During TCBH)
- 🗞 Live ping tests were conducting by selecting a minimum of three user reference test points at POP/ISP Node in each circle

Data for the parameter was extracted from NOC (Network Operations Center) of the operators.

3.8.2.2 COMPUTATIONAL METHODOLOGY

- Packet loss is the percentage of packets lost to total packets transmitted between two designated Customer Premises Equipment's/Router ports. It is the measurement of packet lost from the broadband customer (User) configuration/User reference point at POP/ISP Node to IGSP/NIXI Gateway and to the nearest NAP port abroad
- So The packet loss is measured by computing the percent packet loss of 1000 pings of 64 byte packet each.
- Service provider needs to carry out such tests daily during Time Consistent Busy Hour(TCBH) and report the average results for the month in the performance monitoring report to TRAI
- 🗞 Minimum sample reference points for each service area were three in number or multiple reference points if required



Hence Packet loss is computed by the formula: (Total number of ping packets lost during the period/Total number of ping packets transmitted)*100

3.8.2.3 BENCHMARK

✤ Packets Loss <1 %</p>

3.8.3 DETAILED FINDINGS - NETWORK LATENCY / PACKET LOSS

			A	udit results	for Latency	and packet l	oss								
Network Latency and Packet Loss	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	натнwау	INDUS	PACENET	RCL	SYSCON	TCL	τικονα	TTL	YOU	
Packet Loss (Percentage)	< 1%	NP	0.51%	0.27%	0.00%	0.12%	NP	0.07%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	
				N	etwork Late	ncy				*				•	
From user reference point at POP/ISP Node to IGSP/ NIXI (msec)	<120msec	37	75	17	NA	43	NP	79	NA	33	3	NA	69	8.51	
From user reference point at ISP Gateway Node to nearest NAP Port (Terrestrial) (In msec)	errestrial) (in msec) <350msec 64 214 NA NA NA 163 NP 59 NA 133 254 NA 200 277.22														
From user reference point at ISP Gateway Node to nearest NAP Port (Terrestrial) (In msec)	<800msec	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
			Live me	asurement r	results for La	ntency and p	acket loss								
Network Latency and Packet Loss	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	ΤΙΚΟΝΑ	TTL	YOU	
Packet Loss (Percentage)	< 1%	0.00%	0.56%	0.25%	0.00%	0.11%	NP	0.07%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	
				N	etwork Late	ncy									
From user reference point at POP/ISP Node to IGSP/ NIXI (msec)	<120msec	35	76	19	NA	43	NP	79	NA	33	3	NA	69	6	
From user reference point at ISP Gateway Node to nearest NAP Port (Terrestrial) (In msec)	<350msec	60	213	NA	NA	163	NP	59	NA	133	254	NA	200	97	
From user reference point at ISP Gateway Node to nearest NAP Port (Terrestrial) (In msec)	<800msec	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	

Data Source: Network Operations Center (NOC) of the operators

All operators met the benchmark for network latency related parameters.

• All operators met the benchmark for packet loss. NP: Airtel and Indus did not submit the data.

4. ANNEXURE – JAS'16

4.1 SERVICE PROVISIONING

				Sei	vice Provisio	oning								
				Audit Resul	ts for Service	e provisionir	g							
	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Total connections registered during the period		2662	2731	1925	11197	4225	822	453	175	11812	1125	6730	4245	6355
Number of connections provided within 15 days		2662	2712	1925	11197	4224	795	453	175	11812	1123	6730	4245	6340
Percentage of connections provided within 15 days	100%	100%	99.30%	100.00%	100.00%	99.98%	96.72%	100.00%	100.00%	100.00%	99.82%	100.00%	100.00%	99.76%
Number of connections provided after 15 days of registration of demand		0	2731	1925	11197	4225	822	453	175	11812	1125	6730	4245	6355
percentage of connections provided after 15 days of registration of demand	100%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	NA	100.00%
Number of customers to whom credit is given for delayed connections		0	0	0	0	0	0	0	0	0	0	0	0	0
Percentage of customers to whom credit is given for delayed connections	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
				Live calling	for Service	provisioning	:							
	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Total connections registered during the period		100	100	100	100	100	100	100	100	100	100	100	100	100
Number of connections provided within 15 days		99	92	100	100	95	92	100	100	100	98	100	100	97
Percentage of connections provided within 15 days	100%	99.00%	92.00%	100.00%	100.00%	95.00%	92.00%	100.00%	100.00%	100.00%	98.00%	100.00%	100.00%	97.00%

Data Source: Operations and Maintenance Center (OMC) of the operators



4.2 FAULT REPAIR/ RESTORATION

				Audit R	esults for Fa	ult repair								
Fault repair	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Total No. of faults registered during the period		6065	13675	23546	NA	40567	2198	421	1255	2220	1189	14676	21345	20791
No. of faults repaired by next working day during the period		5756	13546	23546	NA	40567	2198	421	706	2220	1156	13517	21345	19026
Percentage of faults repaired by next working day during the period	≥ 90%	94.91%	99.06%	100.00%	NA	100.00%	100.00%	100.00%	56.25%	100.00%	97.22%	92.10%	100.00%	91.51%
No. of faults repaired within 3 days during the period		6021	13675	23546	NA	40567	2198	421	1154	2220	1189	14579	21345	20785
Percentage of faults repaired within 3 days during the period	≥ 99%	99.27%	100.00%	100.00%	NA	100.00%	100.00%	100.00%	91.95%	100.00%	100.00%	99.34%	100.00%	99.97%
Rent rebate	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Percentage of cases where rent rebate for >3 days was given	100%	99.98%	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Percentage of cases where rent rebate for 15 days was given	100%	100.00%	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Percentage of cases where rent rebate for 30 days was given	100%	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Data Source: Operations and Maintenance Center (OMC) of the operators and live calls conducted by the auditors from operator's network



				Live c	alling for fau	lt repair								
Fault repair	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Total Number of calls made to subscribers		100	100	100	NA	100	100	100	100	100	100	100	100	100
Number of cases where faults were repaired by next working day		95	95	100	NA	100	100	100	56	100	94	91	100	90
Percentage cases where faults were repaired by next working day	≥ 90%	95.00%	95.00%	100.00%	NA	100.00%	100.00%	100.00%	56.00%	100.00%	94.00%	91.00%	100.00%	90.00%
Number of cases where faults were repaired within 3 days		99	100	100	NA	100	100	100	76	100	99	100	100	100
Percentage cases where faults were repaired within 3 days	≥ 99%	99.00%	100.00%	100.00%	NA	100.00%	100.00%	100.00%	76.00%	100.00%	99.00%	100.00%	100.00%	100.00%



4.3 BILLING PERFORMANCE – METERING AND BILLING CREDIBILITY

				Audit Resu	lts for Billing	, performanc	e							
Billing Performance	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
					Billing diput	tes								
Total bills generated during the period		84422	476234	18989	1010	42356	4785	5456	NA	NA	46578	95088	126578	178
Total number of bills disputed		8	456	0	0	112	0	0	NA	NA	25	129	65	0
Percentage bills disputed (Avg of 3 billing cycles)	≤ 2%	0.01%	0.10%	0.00%	0.00%	0.26%	0.00%	0.00%	NA	NA	0.05%	0.14%	0.05%	0.00%
				Resolutio	on of billing	complaints					1			
Total number of complaints		8	456	NA	NA	112	NA	NA	NA	NA	25	129	65	NA
Total complaints resolved in 4 weeks from date of receipt		8	456	NA	NA	112	NA	NA	NA	NA	25	129	65	NA
Percentage complaints resolved within 4 weeks of date of receipt	100%	100.00%	100.00%	NA	NA	100.00%	NA	NA	NA	NA	NA	100.00%	100.00%	NA
				Re	fund of dep	osits				1		1		
Total number of cases requiring refund		16	456	NA	NA	112	NA	NA	NA	NA	25	129	65	NA
Total number of cases where refund was made within 60 days		16	456	NA	NA	112	NA	NA	NA	NA	25	129	65	NA
Percentage cases in which refund was received within 60 days	100%	100.00%	100.00%	NA	NA	100.00%	NA	NA	NA	NA	NA	100.00%	100.00%	NA

Data Source: Billing Center of the operators

			Live call	ing results f	or resolution	n of billing o	omplaints							
Resolution of billing complaints	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Total Number of calls made		8	100	NA	NA	50	NA	NA	NA	NA	NA	50	NA	NA
Number of cases resolved in 4 weeks		8	100	NA	NA	50	NA	NA	NA	NA	NA	50	NA	NA
Percentage cases resolved in 4 weeks	≥ 98%	100.00%	100.00%	NA	NA	100.00%	NA	NA	NA	NA	NA	100.00%	NA	NA
Number of cases resolved in 6 weeks		8	100	NA	NA	50	NA	NA	NA	NA	NA	50	NA	NA
Percentage cases resolved in 6 weeks	100%	100.00%	100.00%	NA	NA	100.00%	NA	NA	NA	NA	NA	100.00%	NA	NA

Data Source: Live calls conducted by the auditors from operator's network



4.4 **RESPONSE TIME TO THE CUSTOMER FOR ASSISTANCE**

				Calls Ansv	wered withir	1 60 seconds								
Customer Care Assessment	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Total Number of calls received		50045	45634	204567	NP	115643	NP	876	394	3220	103412	153096	11034	149579
Total Number of calls answered within 60 seconds		30631	35462	196743	NP	108652	NP	812	386	3220	98345	91748	10345	136117
Percentage calls answered within 60 seconds	≥ 60%	61.21%	77.71%	96.18%	NP	93.95%	NP	92.69%	97.97%	100.00%	95.10%	59.93%	93.76%	91.00%
				Calls Ansv	wered withir	90 seconds								
Total Number of calls received		50045	45634	204567	NP	115643	NP	876	394	3220	103412	153096	11034	149579
Total Number of calls answered within 90 seconds		33410	41235	204232	NP	112391	NP	876	391	3220	103412	125348	11034	140604
Percentage calls answered within 90 seconds	≥ 80%	66.76%	90.36%	99.84%	NP	97.19%	NP	100.00%	99.24%	100.00%	100.00%	81.88%	100.00%	94.00%

Data Source: Customer Service Center of the operators



			Live cal	ling results f	for custome	r care (Voice	to Voice)							
Customer Care Assessment	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Total Number of calls received		100	100	100	100	100	100	100	100	100	100	100	100	100
Total Number of calls answered within 60 seconds		100	100	98	98	100	100	100	100	100	100	100	91	97
Percentage calls answered within 60 seconds	≥ 60%	100%	100%	98%	98%	100%	100%	100%	100%	100%	100%	100%	91%	97%
Total Number of calls answered within 90 seconds		100	100	98	98	100	100	100	100	100	100	100	91	97
Percentage calls answered within 90 seconds	≥ 80%	100%	100%	98%	98%	100%	100%	100%	100%	100%	100%	100%	91%	97%

Data Source: Live calls conducted by the auditors from operator's network



4.5 BANDWIDTH UTILIZATION

			1	Audit result	s for Bandwi	idth Utilizati	on							
Bandwidth utilization	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Percentage Bandwidth utilisation during peak hours (In Mbps)	<80%	NP	28.57%	14.85%	52.00%	NP	79.27%	73.23%	NP	95.00%	8.64%	78.61%	76.64%	77.27%
			Live m	easurment	results for B	andwidth Ut	ilization							
Bandwidth utilization	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Percentage Bandwidth utilisation during peak hours (In Mbps)	<80%	NP	28.57%	NP	53.20%	NP	78.10%	72.30%	NP	94.30%	9.00%	77.00%	75.65%	77.55%

Data Source: Network Operations Center (NOC) of the operators



4.6 BROADBAND DOWNLOAD SPEED

			Aud	lit results fo	r broadband	l download :	peed							
Broadband download speed	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
%age subscribed speed available to the subscriber during TCBH (B/A)*100	≥ 80%	NP	85.59%	83.67%	95.00%	92.75%	NP	86.72%	87.00%	NP	91.00%	93.99%	NP	87.91%
Broadband download speed	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
%age subscribed speed available to the subscriber during TCBH (B/A)*100	≥ 80%	NP	83.23%	82.45%	95.00%	92.00%	NP	87.23%	88.00%	NP	92.30%	94.49%	NP	87.91%

Data Source: Download measurement software installed in the server at ISP Node of the operators



4.7 SERVICE AVAILABILITY/ UPTIME

Audit results for service availability														
Service Availability	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Service Availability Uptime in Percentage	≥ 98%	NP	99.38%	100.00%	100.00%	99.10%	100.00%	100.00%	99 . 68%	100.00%	98.97%	99.98%	99.11%	99.46%
Live measurement results for service availability														
Service Availability	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Service Availability Uptime in Percentage	≥ 98%	NP	99.38%	100.00%	100.00%	99.10%	100.00%	100.00%	99.68%	100.00%	98.97%	99.99%	99.11%	99.46%

Data Source: Operations and Maintenance Center (OMC) of the operators



4.8 NETWORK LATENCY / PACKET LOSS

					e									
	1		Д		for Latency	and packet l	DSS	1		1				
Network Latency and Packet Loss	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	ΤΙΚΟΝΑ	TTL	YOU
Packet Loss (Percentage)	< 1%	NP	0.51%	0.27%	0.00%	0.12%	NP	0.07%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
				N	letwork Late	ncy								
From user reference point at POP/ISP Node to IGSP/ NIXI (msec)	<120msec	37	75	17	NA	43	NP	79	NA	33	3	NA	69	8.51
From user reference point at ISP Gateway Node to nearest NAP Port (Terrestrial) (In msec)	<350msec	64	214	NA	NA	163	NP	59	NA	133	254	NA	200	277.22
From user reference point at ISP Gateway Node to nearest NAP Port (Terrestrial) (In msec)	<800msec	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
			Live me	asurement	results for La	tency and pa	acket loss							
Network Latency and Packet Loss	Benchmark	Airtel	BSNL	D-VOIS	FIVE NETWORK	HATHWAY	INDUS	PACENET	RCL	SYSCON	TCL	TIKONA	TTL	YOU
Packet Loss (Percentage)	< 1%	0.00%	0.56%	0.25%	0.00%	0.11%	NP	0.07%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
				N	letwork Late	ncy				1		1		1
From user reference point at POP/ISP Node to IGSP/ NIXI (msec)	<120msec	35	76	19	NA	43	NP	79	NA	33	3	NA	69	6
From user reference point at ISP Gateway Node to nearest NAP Port (Terrestrial) (In msec)	<350msec	60	213	NA	NA	163	NP	59	NA	133	254	NA	200	97
From user reference point at ISP Gateway Node to nearest NAP Port (Terrestrial) (In msec)	<800msec	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Data Source: Network Operations Center (NOC) of the operators



KANTAR IMRB

SCO 47, 5th Floor, Old Judicial Complex, Sector 15 Part 1, Gurgaon, Haryana – 122001

)+91 (124) 4217300

TRAI Audit Wireless Report for Maharashtra & Goa Circle

WEST ZONE

QE September 2016

Prepared by:



Submitted to:





1 TABLE OF CONTENTS

2	Intro	duction
	2.1	About TRAI
	2.2	Objectives
	2.3	Coverage9
	2.4	Framework used9
	2.4.1	PMR Reports10
	2.4.2	Live Calling24
	2.4.3	Voice Drive Test – 2G & 3G27
	2.4.4	Wireless Data Drive Test - 2G & 3G
	2.5	Operators Covered 2G and 3G
	2.6	Colour Codes to read the report
3	Criti	cal Findings
4	Exec	utive Summary-2G
	4.1	PMR Data - 3 Months- Consolidated for 2G
	4.1.1	PMR Data – July for 2G40
	4.1.2	PMR Data –August for 2G40
	4.1.3	PMR Data - September for 2G41
	4.2	3 Day Data – Consolidated for 2G
	4.2.1	3 Day Data – July for 2G
	4.2.2	3 Day Data -August for 2G43
	4.2.3	3 Day Data - September for 2G44
	4.3	PMR Data - 3 Months- Consolidated for 3G
	4.3.1	PMR Data – July for 3G46
	4.3.2	PMR Data -August for 3G46
	4.3.3	PMR Data - September for 3G46
	4.4	3 Day Data - Consolidated for 3G47
	4.4.1	3 Day Data – July for 3G
	4.4.2	3 Day Data -August for 3G48
	4.4.3	3 Day Data - September for 3G48



	4.5	Wireless data PMR & 3 Day Live - Consolidated for 2G	49
	4.6	Wireless data PMR & 3 Day Live - Consolidated for 3G	.50
	4.7	Live Calling Data - Consolidated	. 51
	4.8	Billing and customer care - Consolidated	52
	4.9	Inter Operator Call Assessment - Consolidated	54
	4.10	Comparison Between IMRB and Operator's data for PMR 2G	55
	4.11	Comparison Between IMRB and Operator's data for PMR 3G	55
5	Criti	cal Findings	.56
6 Li		meter Description& Detailed Findings - Comparison Between PMR Data, 3 Day Live Data and ng Data for 2G	
	6.1	BTS Accumulated Downtime	.58
	6.1.1	Parameter Description	58
	6.1.2	Key Findings - Consolidated	59
	6.2	Worst Affected BTS due to downtime	62
	6.2.1	Parameter Description	62
	6.2.2	Key Findings- Consolidated	.63
	6.3	Call Set Up Success Rate	.66
	6.3.1	Parameter Description	.66
	6.3.2	Key Findings - Consolidated	67
	6.4	Network Channel Congestion- Paging Channel /TCH Congestion/POI	.69
	6.4.1	Parameter Description	.69
	6.4.2	Key Findings - SDCCH/Paging Channel Congestion (Consolidated)	.70
	6.4.3	Key Findings - TCH Congestion (Consolidated)	73
	6.4.4	Key Findings – POI Congestion (Consolidated) – Average of 3 months	75
	6.5	Call Drop Rate	79
	6.5.1	Parameter Description	79
	6.5.2	Key Findings - Consolidated	.80
	6.6	Cells having greater than 3% TCH drop	82
	6.6.1	Parameter Description	82
	6.6.2	Key Findings - Consolidated	.83
	6.7	Voice Quality	.85



	6.7.1	Parameter Description	85
	6.7.2	Key Findings	86
7 Li		meter Description & Detailed Findings - Comparison Between PMR Data, 3 Day Live Data an ng Data for 3G	
	7.1	Node Bs downtime	88
	7.1.1	Parameter Description	88
	7.1.2	Key Findings - Consolidated	89
	7.2	Worst affected Node Bs due to downtime	92
	7.2.1	Parameter Description	92
	7.2.2	Key Findings – Consolidated	93
	7.3	Call Set Up Success Rate	95
	7.3.1	Parameter Description	95
	7.3.2	Key Findings - Consolidated	96
	7.4	Network Channel Congestion- RRC Congestion/ Circuit Switched RAB Congestion	99
	7.4.1	Parameter Description	99
	7.4.2	Key Findings - RRC Congestion (Consolidated)	. 101
	7.4.3	Key Findings – Circuit Switched RAB Congestion (Consolidated)	.103
	7.4.4	Key Findings – POI Congestion (Consolidated) – Average of 3 months	106
	7.5	Circuit Switched Voice Drop Rate	. 110
	7.5.1	Parameter Description	. 110
	7.5.2	Key Findings - Consolidated	111
	7.6	Worst affected cells having more than 3% Circuit Switched Voice Drop Rate	113
	7.6.1	Parameter Description	113
	7.6.2	Key Findings - Consolidated	. 114
	7.7	Circuit Switch Voice Quality	. 116
	7.7.1	Parameter Description	. 116
	7.7.2	Key Findings	117
8	Parai	meter Description & Detailed Findings - Wireless Data Services (2G)	. 119
	8.1	Activation Done within 4 hours	. 119
	8.2	PDP context activation success rate	.120
	8.3	Drop Rate	121



9	Para	meter Description & Detailed Findings - Wireless Data Services (3G)	122
	9.1	Activation Done within 4 hours	122
	9.2	PDP context activation success rate	123
	9.3	Drop Rate	124
10	Para	meter Description and Detailed Findings – Non-Network Parameters	125
	10.1	Metering and billing credibility	125
	10.1.1	Parameter Description	125
	10.1.2	2 Key Findings – Metering and billing credibility (Postpaid)	127
	10.1.3	Key Findings - Metering and billing credibility (Prepaid)	127
	10.2	Resolution of Billing/ Charging Complaints	128
	10.2.1	1 Parameter Description	128
	10.2.2	2 Key Findings- within 4 weeks	129
	10.2.	3 Key Findings within 6 weeks	130
	10.3	Period of Applying Credit/Wavier	131
	10.3.1	1 Parameter Description	131
	10.3.2	2 Key Findings	132
	10.4	Call Centre Performance-IVR	133
	10.4.	1 Parameter Description	133
	10.4.	2 Key Findings	133
	10.5	Call Centre Performance-Voice to Voice	134
	10.5.1	1 Parameter Description	134
	10.5.2	2 Key Findings	135
	10.6	Termination/Closure of Service	136
	10.6.	1 Parameter Description	136
	10.6.	2 Key Findings	136
	10.7	Refund of Deposits After closure	137
	10.7.1	1 Parameter Description	137
	10.7.2	2 Key Findings	138
11	Deta	iled Findings - Drive Test Data	139
	11.1	Operator Assisted Drive Test - voice	139



	11.1.1	AMRAVATI SSA	140
	11.1.2	RAIGARD (PEN) SSA	147
	11.1.3	PUNE SSA	154
	11.1.4	KUDAL (SINDHUDURGA) SSA	164
	11.1.5	OSMANABAD SSA	171
	11.1.6	SANGALI SSA	179
	11.1.7	YAVATAMAL SSA	186
	11.1.8	WARDHA SSA	193
	11.1.9	RATNAGIRI SSA	199
	11.1.10	o PARBHANI SSA	207
	11.1.11	NANDED SSA	214
	11.1.12	2 NAGPUR SSA	221
	11.1.13	3 LATUR SSA	228
	11.1.14	4 GADCHIROLI SSA	235
	11.1.15	5 DHULE SSA	242
	11.1.16	6 CHANDRAPUR SSA	249
	11.1.17	7 BHANDARA SSA	256
12	Anne	exure- Consolidated-2G	263
12	2.1	Network Availability	263
12	2.2	Connection Establishment (Accessibility)	264
13	2.3	Connection Maintenance (Retainability)	265
13	2.4	Voice quality	266
1	2.5	POI Congestion	267
13	Anne	exure – Consolidated-3G	268
13	3.1	Network Availability	268
1	3.2	Connection Establishment (Accessibility)	269
1	3.3	Connection Maintenance (Retainability)	270
1	3∙4	Voice quality	271
1	3.5	POI Congestion	272
14	Anne	exure -Customer Services	273



1	4.1	Met	tering and billing credibility	273
1	4.2	Cus	stomer Care	275
1	4.3	Ter	mination / closure of service	278
1	4.4	Tim	ne taken for refund of deposits after closure	278
1	4.5	Live	e Calling Results for Resolution of Service Requests	279
1	4.6	Live	e Calling Results for Level 1 Services	279
1	4.7	Lev	el 1 Service calls made	280
15	Cou	nter l	Details	295
	15.1.1		Ericsson	297
	15.1.2	2	NSN (Nokia Siemens Networks)	299
1	5.2	Bloo	ck Schematic Diagrams	301
	15.2.1	1	Ericsson	301
	15.2.2	2	NSN (Nokia Siemens Networks)	302
16	Ann	exure	e –July-2G	303
17	Ann	exure	e –August-2G	307
18	Ann	exure	e –September-2G	313
19	Ann	exure	e – July -3G	318
20	Ann	exure	e – August-3G	323
21	Ann	exure	e – September-3G	327
22	Abbi	revia	tions	333

2 INTRODUCTION

2.1 ABOUT TRAI

TRAI's mission is to create and nurture conditions for growth of telecommunications in the country in a manner and at a pace that will enable India to play a leading role in the emerging global information society. One of the main objectives of TRAI is to provide a fair and transparent policy environment which promotes a level playing field and facilitates fair competition.

In pursuance of above objective, TRAI has been issuing regulations, order and directives to deal with the issues or complaints raised by the operators as well as the consumers. These regulations, order and directives have helped to nurture the growth of multi operator multi service - an open competitive market from a government owned monopoly. Also, the directions, orders and regulations issued cover a wide range of subjects including tariff, interconnection and quality of service as well as governance of the Authority.

TRAI initiated a regulation - The Standard of Quality of Service of Basic Telephone Service (Wireline) and Cellular Mobile Telephone Service regulations, 2009 (7 of 2009) dated December 20, 2009 and Quality of Service of Broadband Service Regulations, 2006 (11 of 2006) dated October 6, 2006 that provide the benchmarks for the parameters on customer perception of service to be achieved by service provider.

In order to assess the above regulations, TRAI has commissioned a third party agency to conduct the audit of the service providers and check the performance of the operators on the various benchmarks set by Telecom Regulatory Authority of India (TRAI).

2.2 OBJECTIVES

The primary objective of the Audit module is to-

- Audit and Assess the Quality of Services being rendered by Basic (Wireline), Cellular Mobile (Wireless), and Broadband service against the parameters notified by TRAI. (The parameters of Quality of Services (QoS) have been specified by in the respective regulations published by TRAI).
- This report covers the audit results of the audit conducted for Cellular Mobile (Wireless) services in Maharashtra & Goa circle.




2.3 COVERAGE

The audit was conducted in Maharashtra & Goa circle covering all the SSAs (Secondary Switching Areas).



2.4 FRAMEWORK USED

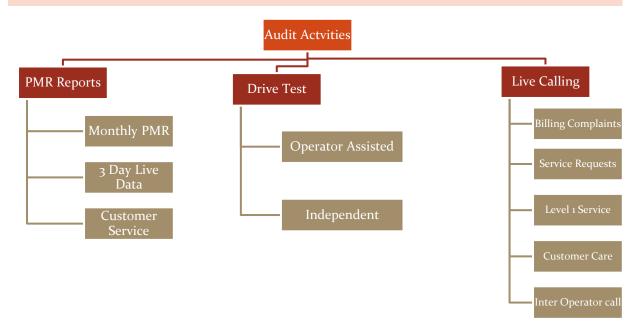


Let's discuss each of the activity in detail and the methodology adopted for each of the module.



2.4.1 PMR REPORTS

2.4.1.1 SIGNIFICANCE AND METHODOLOGY

PMR or Performance Monitoring Reports are generated to assess the various Quality of Service parameters involved in the mobile telephony service, which indicate the overall health of service for an operator.

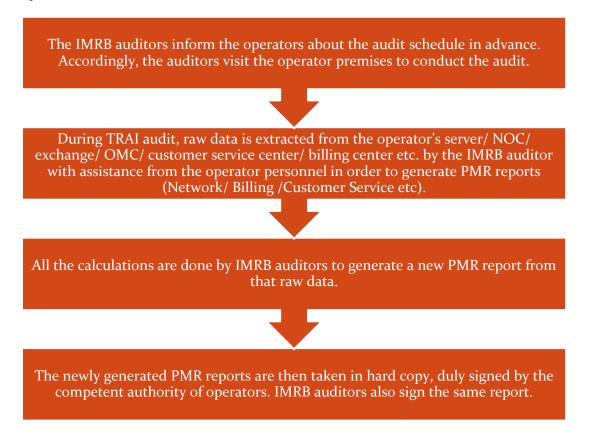

The PMR report for network parameters is taken for each month of the audit quarter and is extracted and verified in the first week of the subsequent month of the audit month. For example, July 2016 audit data was collected in the month of August 2016.

The PMR report for customer service parameters is extracted from Customer Service Center and verified once every quarter in the subsequent month of the last month of the quarter. For example, data for quarter ending September 2016 (JAS'16) was collected in the month of October 2016.

The raw data extracted from operator's systems is used to create PMR in the following three formats.

- Monthly PMR (Network Parameters& Wireless Data Services) 2G & 3G
- 🎭 3 Day Live Measurement Data (Network Parameters& Wireless Data Services)– 2G & 3G
- 🗞 Customer Service Data

Let us understand these formats in detail.



2.4.1.2 MONTHLY PMR 2G

This involved calculation of the various 2G Quality of Service network parameters through monthly Performance Monitoring Reports (PMR). The PMR reports were generated from the data extracted from operator's systems by the IMRB representative with the assistance of the operator at the operator's premises for the month of July, August and September 2016. The performance of operators on various parameters was assessed against the benchmarks. Parameters include-

Network Availability

• BTS accumulated downtime

• Worst affected BTS due to downtime

Connection Establishment (Accessibility)

• Call Set Up success Rate (CSSR)

Network Congestion Parameters

- SDCCH/Paging Channel Congestion
- TCH Congestion
- Point of Interconnection

Connection Maintenance

- Call Drop rate
- Worst affected cells having more than 3% TCH drop

Voice Quality

•% Connections with good voice quality

All the parameters have been described in detail along with key findings of the parameters in section 5 of the report. The benchmark values for each parameter have been given in the table below.



2.4.1.3 AUDIT PARAMETERS - NETWORK 2G

Let us now look at the various parameters involved in the audit reports.

Network Related

Network Parameters - 2G							
Parameter Category	Parameter	Benchmark					
	BTSs Accumulated downtime (not available for service)	≤ 2%					
Network Availability	Worst affected BTSs due to downtime	≤ 2%					
Connection	Call Set-up Success Rate (within licensee's own network)	≥ 95%					
Establishment	SDCCH/ Paging Chl. Congestion (%age)	≤ 1%					
(Accessibility)	TCH Congestion (%age)	≤ 2%					
	Call Drop Rate (%age)	≤ 2%					
Connection	Worst affected cells having more than 3% TCH drop	≤ 3%					
Maintenance (Retainability)	%age of connection with good voice quality	≥ 95%					
(Point of Interconnection (POI)	≤ 0.5%					



2.4.1.4 MONTHLY PMR 3G

This involved calculation of the various 3G Quality of Service network parameters through monthly Performance Monitoring Reports (PMR). The PMR reports were generated from the data extracted from operator's systems by the IMRB representative with the assistance of the operator at the operator's premises for the month of July, August and September 2016. The performance of operators on various parameters was assessed against the benchmarks. Parameters include-

Network Availability

• Node Bs accumulated downtime

• Worst affected Node Bs due to downtime

Connection Establishment (Accessibility)

• Call Set Up success Rate (CSSR)

Network Congestion Parameters

- RRC Congestion
- Circuit Switched RAB Congestion
- Point of Interconnection

Connection Maintenance

• Circuit Switched Voice Drop rate

Worst affected cells having more than 3% Circuit switched Voice drop rate

Voice Quality

•% Connections with good Circuit Switched Voice Quality

All the parameters have been described in detail along with key findings of the parameters in section 5 of the report. The benchmark values for each parameter have been given in the table below.



2.4.1.5 AUDIT PARAMETERS - NETWORK 3G

Let us now look at the various parameters involved in the audit reports.

Network Related

Network Parameters - 3G						
	Node Bs downtime (not available for service)					
Network Availability	Worst affected Node Bs due to downtime	≤ 2%				
Connection	Call Set-up Success Rate (within licensee's own network)	≥ 95%				
Establishment (Accessibility)	RRC Congestion					
	Circuit Switched RAB Congestion	≤ 2%				
Connection Maintenance (Retainability)	Circuit Switched voice drop rate	≤ 2%				
	Worst affected cells having more than 3% Circuit switched voice drop rate	≤ 3 %				
	%age of connection with good circuit switched voice quality	≥ 95%				
	Point of Interconnection (POI)	0.5%				

2.4.1.6 MONTHLY PMR - WIRELESS DATA SERVICES (2G & 3G)

The PMR report for wireless data service (2G and 3G) is extracted at the operator premises and verified every month of the quarter. This includes three parameters-

- Services Activation / provisioning:- Activation done within 4 hours≥ 95%
- > PDP Context activation success rate:- PDP Context activation success rate $\ge 95\%$
- ▶ Drop Rate:- Drop Rate $\leq 5\%$


2.4.1.7 AUDIT PARAMETERS -WIRELESS DATA SERVICES (2G & 3G)

Wireless Data Service					
Service Activation	Activation done within 4 hours	≥ 95%			
PDP Context activation success rate	PDP Context activation success rate	≥ 95%			
Drop Rate	Drop Rate	≤ 5%			



2.4.1.8 POINT OF DATA EXTRACTION


The data is extracted from a terminal/computer connected to OMCR & OSS on the operator network.

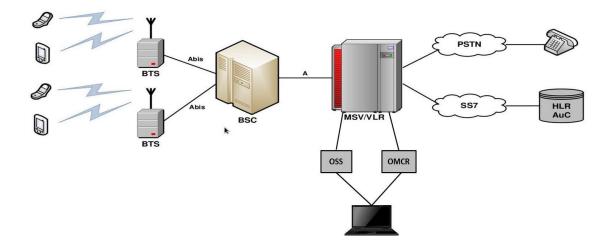



2.4.1.9 STEP BY STEP AUDIT PROCEDURE

The key steps followed for extraction of reports at the operator premises are given below.

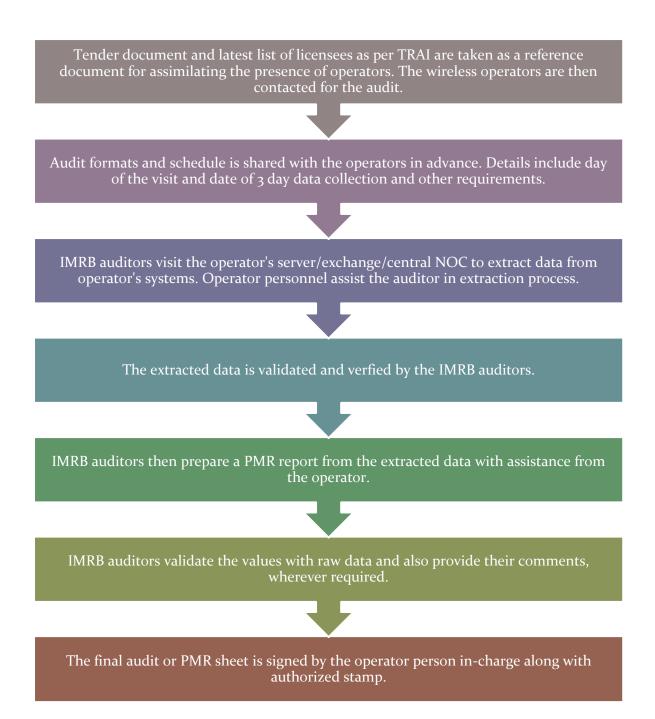

Data has been extracted and calculated as per the counter details provided by the operators. The details of counters have been provided in section 8.15 of the report. The calculation methodology for each parameter has been stated in the table given below.



2.4.1.10 CALCULATION METHODOLOGY - NETWORK PARAMETERS 2G

Parameter	Calculation Methodology
BTS Accumulated Downtime	Sum of downtime of BTSs in a month in hours i.e. total outage time of all BTSs in hours during a month / (24 x Number of days in a month x Number of BTSs in the network in licensed service area) x 100
Worst Affected BTS Due to Downtime	(Number of BTSs having accumulated downtime greater than 24 hours in a month / Number of BTS in Licensed Service Area) * 100
Call Setup Success Rate	(Calls Established / Total Call Attempts) * 100
SDCCH/ Paging Channel Congestion	SDCCH / TCH Congestion% = [(A1 x C1) + (A2 x C2) ++ (An x Cn)] / (A1 + A2 ++ An) Where: A1 = Number of attempts to establish SDCCH / TCH
	made on day 1 C1 = Average SDCCH / TCH Congestion % on day 1 A2 = Number of attempts to establish SDCCH / TCH made on day 2
TCH Congestion	C ₂ = Average SDCCH / TCH Congestion % on day 2 An = Number of attempts to establish SDCCH / TCH made on day n Cn = Average SDCCH / TCH Congestion % on day n
POI Congestion	POI Congestion% = $[(A_1 \times C_1) + (A_2 \times C_2) + \dots + (A_n \times C_n)] / (A_1 + A_2 + \dots + A_n)$ Where: A1 = POI traffic offered on all POIs (no. of calls) on day 1 C1 = Average POI Congestion % on day 1 A2 = POI traffic offered on all POIs (no. of calls) on day 2 C2 = Average POI Congestion % on day 2 An = POI traffic offered on all POIs (no. of calls) on day n Cn = Average POI Congestion % on day n
Call Drop Rate	Total Calls Dropped / Total Calls Established x 100
Worst Affected Cells having more than 3% TCH drop	Total number of cells having more than 3% TCH drop during CBBH/ Total number of cells in the LSA x 100
Connections with good voice quality	No. of voice samples with good voice quality / Total number of samples x 100



2.4.1.11 CALCULATION METHODOLOGY - NETWORK PARAMETERS 3G

Parameter	Calculation Methodology
Node Bs Accumulated Downtime	Sum of downtime of Node Bs in a month in hours i.e. total outage time of all Node Bs in hours during a month / (24 x Number of days in a month x Number of Node Bs in the network in licensed service area) x 100
Worst Affected Node Bs Due to Downtime	(Number of Node Bs having accumulated downtime greater than 24 hours in a month / Number of Node B in Licensed Service Area) * 100
Call Setup Success Rate	(RRC Established / Total RRC Attempts) * 100
	$RRC / RAB Congestion\% = [(A_1 x C_1) + (A_2 x C_2) ++ (An x Cn)] / (A_1 + A_2 ++ An)$
RRC Congestion	Where: A1 = Number of attempts to establish RRC/ RAB made on day 1
Circuit Switched RAB Congestion	C1 = Average RRC/ RAB Congestion % on day 1 A2 = Number of attempts to establish RRC/ RAB made on day 2 C2 = Average RRC/ RAB Congestion % on day 2 An = Number of attempts to establish RRC/ RAB made on day n Cn = Average RRC/ RAB Congestion % on day n
POI Congestion	POI Congestion% = $[(A_1 \times C_1) + (A_2 \times C_2) + \dots + (An \times Cn)] / (A_1 + A_2 + \dots + An)$ Where: A1 = POI traffic offered on all POIs (no. of calls) on day 1 C1 = Average POI Congestion % on day 1 A2 = POI traffic offered on all POIs (no. of calls) on day 2 C2 = Average POI Congestion % on day 2 An = POI traffic offered on all POIs (no. of calls) on day n Cn = Average POI Congestion % on day n
Circuit Switched Voice Drop Rate	No. of voice RAB normally released / (No. of voice RAB normally released + RAB abnormally released) x 100
Worst Affected Cells having more than 3% Circuit Switched Voice Drop Rate	Number of cells having CSV drop rate > 3% during CBBH in a month / Total number of cells in the licensed area) x 100
Connections with good Circuit switched voice quality	1- (Number of Faulty Transport Blocks In Uplink downlink After Selection Combining Speech / Total number of Transport Blocks In Uplink downlink After Selection Combining Speech)) x 100



2.4.1.12 3 DAY LIVE DATA

The main purpose of 3 day live measurement is to evaluate the network parameters on intraday basis. While the monthly PMR report provides an overall view of the performance of QoS parameters, the 3 day live data helps looking at intraday performance on the network parameters discussed earlier. All the calculations are done on the basis of that raw data of 3 days.

The 3 day live data provides a sample of 9 days in a quarter (3 days each month of a quarter) with hourly performance, which enables the auditor to identify and validate intraday issues for an operator on the QoS network parameters. For example, network congestion being faced by an operator during busy/peak hours.

Network related parameters were evaluated for a period of 3 days in each month. 3 day live audit was conducted for 3 consecutive weekdays for each month. The data was extracted from each operator's server/ NOC etc. at the end of the 3rd day. The extracted data is then used to create a report (similar to PMR report) to assess the various QoS parameters.

The 3 day live measurement was conducted for network parameters (2G & 3G) and wireless data services (2G & 3G).


S. No.	Name of Service Provider	Date of Live Measurement Audit					
	GSM	Jul-16	Aug-16	Sep-16			
1	Aircel	04, 05, 06 July	03, 04, 05 Aug	03, 04, 05 Sept			
2	Airtel	04, 05, 06 July	04, 05, 06 Aug	06, 07,08 Sept			
3	Idea	07, 08, 09 July	07, 08, 09 Aug	07, 08, 09 Sept			
4	BSNL	07, 08, 09 July	07, 08, 09 Aug	07, 08, 09 Sept			
5	Rcom	01, 02, 03 July	01, 02, 03 Aug	01, 02, 03 Sept			
6	TATA	01, 02, 03 July	04, 05, 06 Aug	05, 06, 07 Sept			
7	Telenor	06, 07, 08 July	03, 04, 05 Aug	03, 04, 05 Sept			
8	Vodafone	04, 05, 06 July	04, 05, 06 Aug	04, 05, 06 Sept			
		CDMA Operator	rs				
9	TATA	01, 02, 03 July	04, 05, 06 Aug	05, 06, 07 Sept			
		3G Operators					
10	Airtel	04, 05, 06 July	04, 05, 06 Aug	06, 07, 08 Sept			
11	BSNL	07, 08, 09 July	07, 08, 09 Aug	07, 08, 09 Sept			
12	Reliance	01, 02, 03 July	01, 02, 03 Aug	01, 02, 03 Sept			
13	Vodafone	04, 05, 06 July	04, 05, 06 Aug	04, 05, 06 Sept			
14	Idea	07, 08, 09 July	07, 08, 09 Aug	07, 08, 09 Sept			



2.4.1.13 TCBH - SIGNIFICANCE AND SELECTION METHODOLOGY

As per QoS regulations 2009 (7 of 2009), Time Consistent Busy Hour" or "TCBH" means the one hour period starting at the same time each day for which the average traffic of the resource group concerned is greatest over the days under consideration and such Time Consistent Busy Hour shall be established on the basis of analysis of traffic data for a period of ninety days.

Step by step procedure to identify TCBH for an operator:

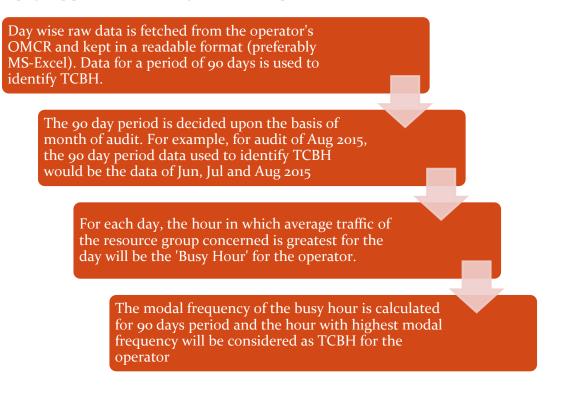




2.4.1.14 CBBH - SIGNIFICANCE AND SELECTION METHODOLOGY

As per QoS regulations 2009 (7 of 2009), Cell Bouncing Busy Hour (CBBH) means the one hour period in a day during which a cell in cellular mobile telephone network experiences the maximum traffic.

Step by step procedure to identify CBBH for an operator:

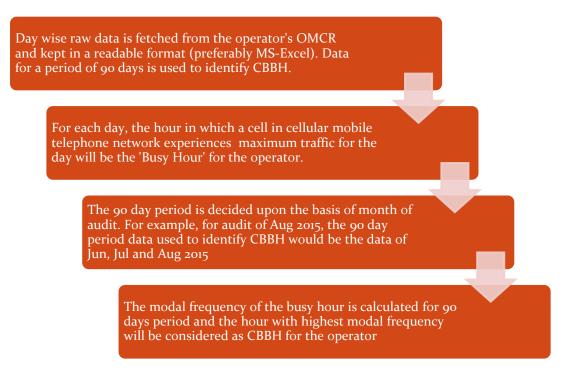

2.4.1.15 CUSTOMER SERVICE PARAMETERS

The data to generate PMR report for customer service parameters is extracted at the operator premises and verified once every quarter in the subsequent month of the last month of the quarter. For example, data for quarter ending September 2016 (JAS'16) was collected in the month of October 2016. To extract the data for customer service parameters for the purpose of audit, IMRB auditors primarily visit the following locations/ departments/ offices at the operator's end.

- Central Billing Center
- Central Customer Service Center

The operators are duly informed in advance about the audit schedule.

The Customer Service Quality Parameters include the following:

- Metering and billing credibility (postpaid and prepaid)
- Resolution of billing/charging complaints
- Period of applying credit/waiver/adjustment to customer's account
- Response time to the customer for assistance
- Termination/closure of service
- Time taken for refund of security deposit after closures.

Most of the customer service parameters were calculated by averaging over the quarter; however billing parameters were calculated by averaging over one billing cycle for a quarter.



All the parameters have been described in detail along with key findings of the parameter in section 6 of the report. The benchmark values for each parameter have been given in the table below.

2.4.1.16 AUDIT PARAMETERS - CUSTOMER SERVICE

Metering and Billing Credibility	Benchmark
No of billing complaints received - Post paid	≤ 0.1%
No. of billing complaints received- Prepaid	≤ 0.1%
Resolution of billing/ charging complaints within 4 weeks	98%
Resolution of billing/ charging complaints within 6 weeks	100%
Period of applying credit/waiver within 1 week of resolution of complaint	100%
Response Time to the Customer form Assistance	
Accessibility of call centre/customer care	≥ 95%
Percentage of calls answered by the operators (voice to voice) within 90 seconds	≥ 95%
Termination/ closure of service	≤ 7 days
Time taken for refund of deposits after closures within 60 days	100%



2.4.1.17 CALCULATION METHODOLOGY - CUSTOMER SERVICE PARAMETERS


Parameter	Calculation Methodology
Metering and billing credibility - Post-paid	Total billing complaints received during the relevant billing cycle / Total bills generated during the relevant billing cycle *100
Metering and billing credibility – Prepaid	Total charging complaints received during the quarter/ Total number of subscribers reported by the operator at the end of the quarter * 100
Resolution of billing/ charging complaints (Post-paid + Prepaid)	There are two benchmarks involved here: Billing or Charging Complaints resolved in 4 weeks from date of receipt / Total billing or charging complaints received during the quarter) x 100 Billing or Charging Complaints resolved in 6 weeks from date of receipt / Total billing or charging complaints received during the
Period of applying credit waiver	quarter) x 100 Number of cases where credit waiver is applied within 7 days/ total number of cases eligible for credit waiver * 100
Call centre performance IVR (Calling getting	Number of calls connected and answered by
connected and answered by IVR) Call centre performance (Voice to Voice)	IVR/ All calls attempted to IVR * 100Call centre performance Voice to Voice =(Number of calls answered by operator within90 seconds/ All calls attempted to connect tothe operator) * 100The calculation excludes the calls droppedbefore 90 seconds
Time taken for termination/ closure of service	Number of closures done within 7 days/ total number of closure requests * 100
Time taken for refund for deposit after closures	Number of cases of refund after closure done within 60 days/ total number of cases of refund after closure * 100



2.4.2 LIVE CALLING

2.4.2.1 SIGNIFICANCE AND METHODOLOGY

The main purpose of live calling is to verify the performance of various customer service parameters by doing test calls to the subscribers/ specific numbers. Below is a step wise procedure of live calling.

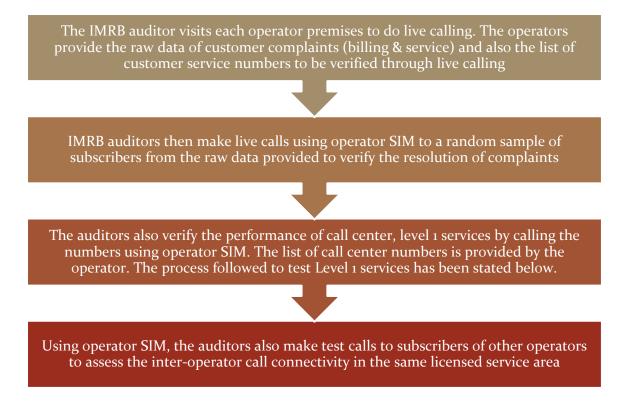

Live calling activity was carried out during the period of September 2016. The data considered for live calling was for the month prior to the month in which the live calling activity was being conducted. In this case, data of August 2016 was considered for live calling activity conducted in September 2016.

A detailed explanation of each parameter is explained below.

2.4.2.2 BILLING COMPLAINTS

Live calling is done to verify Resolution of billing complaints within stipulated time. The process for this parameter is stated below.

- Auditors request the operator provided the database of all the subscribers who reported billing complaints in one month prior to IMRB auditor visit. In case of BSNL, data for the complaints from the subscribers belonging to the sample exchanges is requested specifically
- A sample of 10% or 100 complainants, whichever is less, is selected randomly from the list provided by operator

Calls are made by auditors to the sample of subscribers to check and record whether the complaint was resolved within the timeframes as mentioned in the benchmark.



All the complaints related to billing as per clause 3.7.2 of QoS regulation of 20thDecember, 2009 were considered as population for selection of samples. A complete list of the same has been provided in Section 6.1.1.

TRAI benchmark-

Resolution of billing/ charging complaints - 98% within 4 weeks, 100% within 6 weeks

2.4.2.3 SERVICE COMPLAINTS REQUESTS

"Service request" means a request made to a service provider by its consumer pertaining to his account, and includes.

- ✤ A request for change of tariff plan
- A request for activation or deactivation of a value added service or a supplementary service or a special pack
- Solution A request for activation of any service available on the service provider's network
- Solution A request for shift or closure or termination of service or for billing details

All the complaints other than billing were covered. A total of 100 calls per service provider for each service in licensed service area were done by the IMRB auditors.

2.4.2.4 LEVEL 1 SERVICE

Level 1 is used for accessing special services like emergency services, supplementary services, inquiry and operator-assisted services.

Level 1 Services include services such as police, fire, ambulance (Emergency services). Test calls were made from operator SIMs. A total of 300 test calls were made per service provider in the quarter.

In JAS'16, IMRB has tried contacting the list of Level 1 services provided by TRAI as per the NNP (National Numbering Plan).

2.4.2.4.1 PROCESS TO TEST LEVEL 1 SERVICES

- On visiting the operator's premises (Exchange/Central Server etc.), auditors ask the operator authorized personnel to provide a list of Level 1 services being active in their service. The list should contain a description of the numbers along with dialing code.
- Operators might provide a long list of L1 services. To identify emergency L1 service numbers, auditors check if there is any number that starts with code '10' in that list. If auditors find any emergency number in addition to the below list, that number is also tested during live calling.
- On receiving the list, auditors verify it if the below given list of numbers are active in the service provider's network.
- If there are any other additional numbers provided by the operator, auditors also do live calling on those numbers along with below list.
- If any of these numbers is not active, then we would write the same in our report, auditors write in the report.
- Post verifying the list, auditors do live calling by equally distributing the calls among the various numbers and update the results in the live calling sheet.



L1 Code	Description
100	Police
101	Fire
102	Ambulance
104	Health Information Helpline
108	Emergency and Disaster Management Helpline
138	All India Helpine for Passangers
149	Public Road Transport Utility Service
181	Chief Minister Helpline
182	Indian Railway Security Helpline
1033	Road Accident Management Service
	Public Grievance Cell DoT Hq as 'Telecom Consumer
1037	Grievance Redressal Helpline'
1056	Emergency Medical Services
106X	State of the Art Hospitals
1063	Public Grievance Cell DoT Hg
1064	Anti Corruption Helpline
1070	Relief Commission for Natural Calamities
1071	Air Accident Helpline
1072	Rail Accident Helpline
1073	Road Accident Helpline
1077	Control Room for District Collector
1090	Call Alart (Crime Branch)
1091	Women Helpline
1097	National AIDS Helpline to NACO
1099	Central Accident and Trauma Services (CATS)
10580	Educationa & Vocational Guidance and Counselling
10589	Mother and Child Tracking (MCTH)
10740	Central Pollution Control Board
10741	Pollution Control Board
1511	Police Related Service for all Metro Railway Project
1512	Prevention of Crime in Railway
1514	National Career Service(NCS)
15100	Free Legal Service Helpline
155304	Municipal Corporations
155214	Labour Helpline
1903	Sashastra Seema Bal (SSB)
1909	National Do Not Call Registry
1912	Complaint of Electricity
	Drinking Water Supply
1916	



2.4.2.5 CUSTOMER CARE

Live calling is done to verify response time for customer assistance is done to verify the performance of call center in terms of

- ♥ Calls getting connected and answered by operator's IVR.
- % age of calls answered by operator / voice to voice) within 90 seconds: In 95% of the cases or more

The process for this parameter is stated below.

- Overall sample size is 100 calls per service provider per circle at different points of time, evenly distributed across the selected exchanges 50 calls between 1100 HRS to 1400 HRS and 50 calls between 1600 HRS to 1900 HRS.
- Solution Time to answer the call by the operator was assessed from the time interviewer pressed the requisite button for being assisted by the operator.
- Solution All the supplementary services that have any kind of human intervention are to be covered here. It also includes the IVR assisted services.

2.4.2.6 INTER OPERATOR CALL ASSESEMENT

A total of 100 calls per service provider to all the other service providers in a licensed service area were done for the purpose of audit.

2.4.3 VOICE DRIVE TEST - 2G & 3G

2.4.3.1 SIGNIFICANCE AND METHODOLOGY

Drive test, as the name suggests, is conducted to measure the performance of an operator in a moving vehicle in a specified network coverage area.

The main purpose of the drive test is to check the health of the mobile network of various operators in the area in terms of coverage (signal strength), voice quality, call drop rate, call set up success rate etc.

To assess the indoor coverage, the test is also conducted at two static indoor locations in each SSA, such as Malls, office buildings, shopping complexes, government buildings etc.

IMRB conducted two types of drive tests as mentioned below.

- 🗞 Operator Assisted Drive Test
- 🏷 Independent Drive Test

The main difference between the two is that in the operator assisted, operators participate in the drive test along with their hardware, software, phones etc. while in the independent drive test IMRB conducts the drive test on solitary basis and uses its own hardware. Operators generally do not have any knowledge of the drive test being conducted.

A detailed explanation of the two methodologies has been provided below.



2.4.3.2 OPERATOR ASSISTED DRIVE TEST - VOICE 2G & 3G

SSAs are selected according to the total no. of SSAs on that region and audited as per TRAI instructions; it depends on the total no. of drive on that circle. The drive tests were conducted for all operators in the circle, for both 2G and 3G voice services. As per TRAI instructions, the 2G drive was done in 2G only mode, while 3G drive test was conducted in dual mode (3G on priority).

As per the new directive given by TRAI Office New Delhi, drive test in the quarter were conducted at a SSA level. SSAs have been defined in two categories by TRAI as per the criticality of the SSA.

- 1. Normal SSA
- 2. Difficult SSA

During the drive test in normal SSA, the methodology adopted for the drive test is:

- ✤ 3 consecutive days were selected for drive test in selected SSA and SSA list was finalized by TRAI office New Delhi.
- Solution of the second second
- Route map was designed in such a way that all the major roads, highways and all the important towns and villages were covered as part of audit.
- Special emphasis was given to those areas where the number of complaints received were on the higher side, if provided by TRAI Office New Delhi.
- So The route is defined in a way that we cover maximum area in the SSA and try to cover maximum villages and cities within the SSA. The route is designed such that there is no overlap of roads (if possible).
- ✤ The route was classified as
 - o With In city
 - o Major Roads
 - o Highways
 - Shopping complex/ Mall
 - Office Complex/ Government Building
- There were no fixed calls which we need to do for within city, major roads and highways, but a minimum of 30 calls in each route, i.e., within city, major roads and highways on each day. For indoors, 20 calls each for shopping and office complex each day preferably in relatively bigger city.
- Solution The drive test covered selected cities and adjoining towns/rural areas where the service provider has commenced service, including congested areas and indoor sites.
- So The drive test of each mobile network was conducted between 10 am and 8 pm on weekdays.
- So The Vehicle used in the drive tests was equipped with the test tool that automatically generates calls on the mobile telephone networks.
- \clubsuit The speed of the vehicle was kept at around 30-50 km/hr.
- b The holding period of each test call was 120 seconds.
- A test call was generated 10 seconds after the previous test call is completed. For 3G, the gap between two calls was 30 seconds.
- ♥ Height of the antenna was kept uniform in case of all service providers.



In drive test for difficult SSAs, the methodology adopted for the drive test is:-

- Drive test was conducted for 6 consecutive days in selected SSAs and SSA list was finalized by TRAI office New Delhi.
- ♥ On an average, a minimum of 80 kilometers was covered each day, covering a minimum distance of 500kms in 6 days.

Rest of the activities for drive test in difficult SSAs are same as drive test for normal SSAs.

2.4.3.3 INDEPENDENT DRIVE TEST - 2G & 3G

The number of independent drive tests to be conducted and their locations are decided basis TRAI recommendation.

- A minimum of 80 kilometers was traversed during the independent drive test in a SSA on each day. SSA list was finalized by TRAI office New Delhi.
- Route map was designed in such a way that all the major roads, highways and all the important towns and villages were covered as part of audit.
- Special emphasis was given to those areas where the number of complaints received were on the higher side, if provided by TRAI.
- ✤ The route is defined in a way that we cover maximum area in the SSA and try to cover maximum villages and cities within the SSA. The route is designed such that there is no overlap of roads (if possible).
- ✤ The route was classified as-
 - $\circ \quad \text{With In city} \quad$
 - o Major Roads
 - o Highways
 - Shopping complex/ Mall
 - Office Complex/ Government Building
- There were no fixed calls which we need to do for within city, major roads and highways, but a minimum of 30 calls in each route, i.e., within city, major roads and highways on each day. For indoors, 20 calls each for shopping and office complex each day preferably in relatively bigger city.
- Solution The drive test covered selected cities and adjoining towns/rural areas where the service provider has commenced service, including congested areas and indoor sites.
- So The drive test of each mobile network was conducted between 10 am and 8 pm on weekdays.
- So The Vehicle used in the drive tests was equipped with the test tool that automatically generates calls on the mobile telephone networks.
- ♥ The speed of the vehicle was kept at around 30-50 km/hr.
- b The holding period of each test call was 120 seconds.
- A test call was generated 10 seconds after the previous test call is completed. For 3G, the gap between two calls was 30 seconds.
- ♥ Height of the antenna was kept uniform in case of all service providers.



2.4.3.4 PARAMETERS EVALUATED DURING VOICE DRIVE TEST - 2G & 3G

The parameters which were captured during the drive test include. Below are the parameters which are captured for the GSM and CDMA operators.

- ✤ Coverage-Signal strength (GSM)
 - ✓ Total calls made (A)
 - ✓ Number of calls with signal strength between o to -75 dBm
 - ✓ Number of calls with signal strength between o to -85 dBm
 - ✓ Number of calls with signal strength between o to -95 dBm
- ✤ Coverage-Signal strength (CDMA)
 - ✓ Total Ec/Io BINS (A)
 - ✓ Total Ec/Io BINS with less than -15 (B)
 - ✓ Low Interference = $[1 (B/A)] \times 100$
- ✤ Voice quality (GSM)
 - ✓ Total Rx Qual Samples– A
 - ✓ Rx Qual samples with o-5 value B
 - \checkmark %age samples with good voice quality = B/A x 100
- ✤ Voice quality (CDMA)
 - ✓ Total FER BINs (forward FER) A
 - ✓ FER BINs with o-2 value (forward FER) B
 - ✓ FER BINs with o-4 value (forward FER) C
 - ✓ % age samples with FER bins having o-2 value (forward FER) = B/A x 100
 - ✓ % age samples with FER bins having 0-4 value (forward FER) = $C/A \times 100$
 - ✓ No. of FER samples with value > 4 = [A-C]
- ✤ Call setup success rate
 - ✓ Total number of call attempts A
 - ✓ Total Calls successfully established B
 - ✓ Call success rate (%age) = $(B/A) \times 100$
- ✤ Blocked calls
 - ✓ 100% Call Set up Rate
- 🗞 Call drop rate
 - ✓ Total Calls successfully established A
 - ✓ Total calls dropped after being established B
 - ✓ Call Drop Rate (%age) = (B/A) x 100



2.4.4 WIRELESS DATA DRIVE TEST - 2G & 3G


The data drive test is conducted at stationary places called hotspots in a SSA for all the days the voice drive test is conducted in the same SSA.


2.4.4.1 METHODOLOGY

The measurement setup is used to conduct test calls for measuring successful data transmission download and upload attempts, minimum download speed, average throughput and latency is given in figure given below.

The basic measurement set-up consists of a Test-Device and a Test-Server with specified software and hardware. Test calls are established between the Test-Device and Test-Server and measurements are made for the respective QoS parameters. These parameters are measured in a stationary mode. Service Activation/Provisioning, PDP Context Activation Success Rate and Drop rate are reported from the actual network counters/database.

To assess the quality of the connection between an end user and an Internet Service Provider (ISP), ideally the Test-Server is placed as near as possible to the gateway providing the interconnection between access network and ISP network. The location of the test-server is as near as possible to the gateway providing the interconnection between access network and ISP network implies that the measurements will not reflect the influence in the QoS of the ISP network, between that gateway and the gateway interconnecting with the Internet.

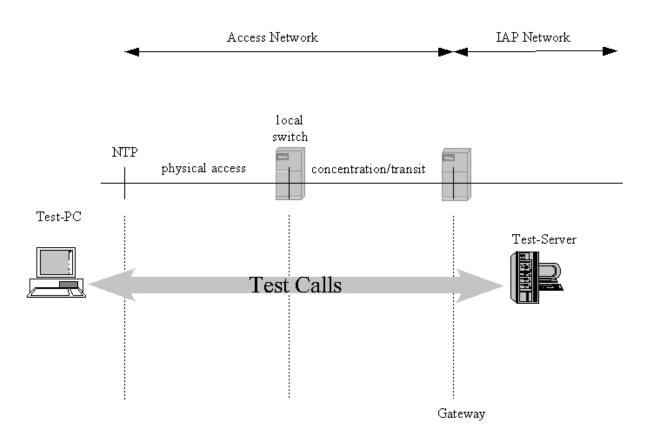





2.4.4.2 REQUIREMENTS FOR THE TEST-SERVER

For all tests, a dedicated test server is used as a well-defined reference. The test server may be located centrally for all the licensed service areas (LSA) or for a number of LSAs or in each LSA (not more than one in each LSA). Under no circumstances a commercial server (e.g. www.yahoo.com) is used, since the test conditions for such a server may change over time making later reproduction of the results impossible. The test server is identified by an IP address and not by its fully qualified Domain Name (FQDN) in order to avoid issues with Domain Name Server (DNS) lookup and including the DNS caching strategies of the used operating system into the measurement.

The Transmission Control Protocol (TCP) settings of the server tested against, is also recorded. Since the number of host operating systems for internet servers is larger than on the client side, no detailed recommendation concerning the TCP settings of the server is given.

However, the TCP stack of the reference server should at least be capable of the following:

- Maximum Segment Size between 1380 Bytes and 1460 Bytes.
- TCP RX Window Size > 4096 Bytes
- SACK (Selective Acknowledgement) enabled.
- TCP Fast Retransmit.
- TCP Fast Recovery enabled.
- Delayed ACK enabled (200ms).

2.4.4.3 TEST FILES

The test file consist of incompressible data i.e. a data file that is already compressed, e.g. like a zip or jpg file. The test file has at least twice the size (in Kbit) of the theoretically maximum data transmission rate per second (in Kbit/s) of the Internet access under consideration.

2.4.4.4 REPRESENTATIVENESS OR NUMBER OF TEST CALLS

- The choice of adequate test calls, i.e. geographical locations of origin and destination of calls as well as traffic variations, is a crucial point with respect to the comparability and validation of the statistics are calculated for the measured parameters. For each parameter, it is ensured that the samples are aggregated over all classes of customers for fairness in reflecting the QoS actually perceived by the user and the statistics are preserved to substantiate the same.
- The necessary number of samples (test calls) are 1067 for each of the category "A" and "Metro" licensed service area (LSA), 600 for each of the category "B" LSA and 384 for each of the category "C" LSA for all the parameters.



2.4.4.5 PARAMETERS EVALUATED DURING DATA DRIVE TEST AT HOTSPOTS

2.4.4.5.1 SUCCESSFUL DATA TRANSMISSIONS DOWNLOAD ATTEMPTS

The successful data download attempts is defined as the ratio of successful data downloads to the total number of data download attempts in a specified time period. A data transmission is successful if a test file is downloaded completely and with no errors.

Measurement:

The percentage that is the sum total of successful data downloads, divided by the sum total of all attempts to download a test file is provided. The statistics are calculated from test calls made according to the measurement set-up and taking into account the representativeness requirements. The successful data download is measured by downloading a test file. An attempt to transmit the test file is considered unsuccessful if it takes longer than 60 seconds.

Successful data transmission download attempts = <u>Total Successful download attempts</u> ×100 Total download attempts

2.4.4.5.2 SUCCESSFUL DATA TRANSMISSION UPLOAD ATTEMPTS

The successful data upload attempts is defined as the ratio of successful data uploads to the total number of data upload attempts in a specified time period. A data upload is successful if a test file is uploaded completely and with no errors.

Measurement:

The percentage that is the sum total of successful data uploads, divided by the sum total of all attempts to upload a test file should be provided. The statistics are calculated from test calls made according to the measurement set-up and taking into account the representativeness requirements. The successful data upload is measured by uploading a test file. An attempt to transmit the test file is considered unsuccessful if it takes longer than 60 seconds.

Successful data transmission upload attempts = <u>Total Successful upload attempts</u> ×100 Total upload attempts

2.4.4.5.3 MINIMUM DOWNLOAD SPEED

The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.

Measurement:

The minimum download speed is calculated from test calls made according to the measurement set-up. Test calls are to be made to weigh the results according to the patterns of real traffic. Minimum download speed is the average of the lower 10% of all such test calls.

Minimum download speed (average of lower 10% of all test calls) = $\underline{Download \text{ speed A } 1+A_2+A_3+A_4+A_5+A_6} \times 100$



Note- A1, A2, A3, A4 A5 & A6 are download speeds at 6 hotspots

2.4.4.5.4 AVERAGE THROUGHPUT FOR PACKET DATA

It is defined as the rate at which packets are transmitted in a network. In a mobile network the download speed varies depending on the number of users in a particular location. Even though a service provider may be advertising certain speed, the actual speed may vary as per the number of users in the network and there could be customer dissatisfaction on account of relatively slow speed. Hence, there is a need to prescribe an average throughput to protect the interest of consumers. The service providers need to constantly upgrade their network to meet average throughput benchmark.

- Solution The throughput is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.
- So The service provider will advertise the throughput being offered to its customers as per their category or plan and it should be meted out as per their commitment.

Measurement:

The average throughput for packet data should be calculated from all the test calls made according to the measurement setup.

Test calls are made to weigh the results according to the patterns of real traffic. Average throughput is calculated as the average of all such test calls.

Average Throughput for Packet data = Average of download attempts in Kbit/ average download time in sec

2.4.4.5.5 LATENCY

Latency is the amount of time taken by a packet to reach the receiving endpoint after being transmitted from the sending point. This time period is termed the "end-to-end delay" occurring along the transmission path. Latency generally refers to network conditions, such as congestion, that may affect the overall time required for transit.

Measurement:

Latency is measured with the test server for ping connected directly to the server on the same Intranet domain.

Latency (Percentage of successful pinged) = Total number of successful ping ×100 Total number of ping sent to the Test Server



2.5 OPERATORS COVERED 2G AND 3G

Name of Operator	Number of Subscriber as per VLR-2G
Aircel(DWL)	1562352
Airtel	12052696
BSNL	4505775
Idea	21297967
Reliance GSM	NDR
TATA CDMA	799341
TATA GSM	3038623
Telenor	6070926
Vodafone	18077067
Name of Operator	Number of Subscriber as per VLR-3G
Airtel 3G	1142327
BSNL 3G	620894
Idea 3G	3765244
TATA 3G	1043804
Vodafone 3G	2099365

September'16 VLR data was considered for the number of subscribers.

2.6 COLOUR CODES TO READ THE REPORT

Not Meeting the benchmark

Best Performing Operator



3 CRITICAL FINDINGS

PMR Consolidated (Network Parameters) for 2G

Telenor and Vodafone failed to meet the benchmark for Worst Affected Cells having more than 3% TCH drop.

3 Day Live Measurement (Network Parameters) for 2G

Aircel, Telenor and Vodafone failed to meet the benchmark of Worst Affected Cells having more than 3% TCH Drop.

Wireless Data Services for 2G & 3G

TATA GSM failed to meet the benchmark for PDP Context activation success rate during live audit

Note: Most of the operators were not submitted activation done within 4hrs data for monthly as well as 3days live.

Live Calling

- As per the consumers (live calling exercise) Reliance GSM and Telenor failed to meet the benchmark of resolving 98% complaints within 4 weeks and Aircel failed to meet the benchmark of 100% complaints within 6 weeks.
- BSNL failed to meet the benchmark for the parameter Customer Care / Helpline Assessment (voice to voice)
- As per the live calling results, none of the operators met the TRAI benchmark for level 1 service with calls being answered except Telenor and Vodafone.

Metering and billing credibility

- For the billing disputes of post-paid subscribers, it was observed that Idea failed to meet the TRAI benchmark for the parameter.
- > For the prepaid customers all operators met the benchmark of charging disputes except Idea.
- > Reliance GSM and Tata GSM failed to meet the TRAI specified benchmark of 95%.

Note: Tata CDAM had zero complaint during the audit period and they don't have separate IVR data for CDMA, all IVR calls included in Tata GSM.

Drive test 2G

Voice quality

- In Amravati, Raigad, Yavatmal, Ghadchiroli, Dhule, Nagpur SSA, BSNL failed to meet the benchmark for indoor as well as outdoor location.
- In Pune, Osmanabad, Wardha, Ratnagiri, Patbhani, Sangali, SSA BSNL failed to meet the benchmark for voice quality in outdoor location.
- In Sangali SSA, Reliance GSM failed to meet the benchmark for voice quality in indoor as well as outdoor locations.



- In Pune, Osmanabad, Chandrapur, Bhandara, Dhule, Ghadchiroli and Nagpur SSA, Reliance GSM failed to meet the benchmark for voice quality in outdoor location.
- In Nanded SSA, BSNL and Reliance GSM failed to meet the benchmark for voice quality in indoor location.
- In Kudal SSA, Tata CDMA failed to meet the benchmark for voice quality in indoor as well as outdoor location.
- > In Pune SSA, Idea failed to meet benchmark for voice quality in outdoor location.
- > In Dhule SSA, Telenor failed to meet the benchmark for outdoor location.

CSSR

- In Amravati, Yavatamal SSA BSNL failed to meet the benchmark for CSSR in indoor as well outdoor location.
- In Pune, Raigad (Pen), Osmanabad and Dhule SSA BSNL failed to meet the benchmark for CSSR in outdoor location.

Drop Rate

- In Amravati, Yavatamal SSA BSNL failed to meet the benchmark for drop rate in indoor as well outdoor location
- BSNL in Pune, Raigad, Wardha, Nanded, Nagpur, Ghadchiroli and Dhule and Osmanabad SSA failed to meet the benchmark for drop rate in outdoor location.
- > In Bhandara SSA, BSNL failed to meet the benchmark for drop rate in indoor location.
- Reliance GSM in Osmanabad and Pune SSA failed to meet the benchmark for drop rate in outdoor location.

Drive test 3G

Voice quality

- In Amravati, Wardha, Dhule and Bhandara SSA, Airtel 3G failed to meet the benchmark for voice quality in outdoor location.
- In Nagpur and Bhandara SSA BSNL 3G failed to meet the benchmark for drop rate in outdoor location.
- Airtel 3G in Nagpur and BSNL 3G in Wardha failed to meet the benchmark for voice quality in indoor & outdoor location.

CSSR

- > In Raigad (Pen) BSNL 3G failed to meet the benchmark for CSSR in outdoor location.
- In Osmanabad, Yavatamal, Bhandara and Wardha BSNL 3G failed to meet the benchmark for CSSR in indoor & outdoor location.

Drop Rate

- BSNL 3G failed to meet the benchmark in Amravati, Pune, Osmanabad, Raigad (Pen), Parbhani, Dhule for call drop rate in outdoor locations.
- > In Bhandara BSNL 3G failed to meet the benchmark for drop rate in indoor location.
- BSNL 3G failed to meet the benchmark in Yavatamal and Wardha for call drop rate in indoor as well outdoor locations.



4 EXECUTIVE SUMMARY-2G

The objective assessment of Quality of Service (QoS) carried out by IMRB gives an insight into the overall performance of various operators in the Maharashtra & Goa circle, with a parameter wise performance evaluation as compared to TRAI benchmark.

Network Availability			Connection	Establishmen	t (Accessibility)	Connection Maintenance (Retainability)		
Name of Service Provider	BTSs Accumulate d downtime (not available for service)	Worst affected BTSs due to downtime	Call Set-up Success Rate (within licensee's own network)	SDCCH/ Paging Chl. Congestion	TCH Congestion	Call Drop Rate (%age)	Worst affected cells having more than 3% TCH drop	%age of connection with good voice quality
Benchmark	≤2%	≤2%	≥ 95%	≤1%	≤2%	≤ 2%	≤3%	≥ 95%
Aircel(DWL)	0.08%	0.10%	99.07%	0.07%	0.17%	0.68%	2.93%	95.96%
Airtel	1.25%	0.00%	98.23%	0.09%	0.53%	0.53%	1.65%	96.52%
BSNL	1.89%	1.75%	96.42%	0.50%	1.43%	1.05%	2.87%	97.40%
Idea	0.08%	0.19%	98.73%	0.61%	0.76%	0.58%	2.24%	98.56%
Reliance GSM	0.16%	1.39%	99.24%	0.15%	0.22%	0.15%	0.49%	98.98%
TATA CDMA	0.05%	0.02%	98.16%	NA	0.90%	0.61%	2.67%	99.91%
TATA GSM	1.02%	0.00%	99.59%	0.05%	0.09%	0.42%	1.69%	97.46%
Telenor	0.21%	1.03%	98.60%	0.19%	0.32%	0.99%	3.67%	97.33%
Vodafone	0.15%	0.58%	99.46%	0.34%	0.54%	0.84%	4.03%	96.88%

4.1 PMR DATA - 3 MONTHS- CONSOLIDATED FOR 2G

NA: SDCCH/ Paging channel congestion not applicable for CDMA operators.

Following are the parameter wise observations for wireless operators for Maharashtra & Goa circle:

BTSs Accumulated Downtime:

All operators met the benchmark. Minimum BTS Accumulated downtime was recorded for TATA CDMA.

Worst Affected BTSs Due to Downtime:

All operators met the benchmark. Minimum worst affected BTSs due to downtime was recorded for Airtel and TATA GSM.

Call Set-up Success Rate (CSSR):

All operators met the benchmark for CSSR. The maximum CSSR was observed for TATA GSM.

SDCCH/ Paging Chl. Congestion:

All operators met the benchmark on SDCCH / Paging Channel Congestion. TATA GSM recorded the best SDCCH / Paging Channel Congestion.



TCH Congestion:

All operators met the benchmark for TCH congestion. TATA GSM performed the best on TCH congestion.

Call Drop Rate:

All operators met the benchmark for the parameter. Minimum call drop rate was recorded for Reliance GSM.

Worst Affected Cells Having More than 3% TCH Drop:

Telenor and Vodafone failed to meet the benchmark. Best performance was recorded for Reliance GSM.

Voice Quality

All operators met the benchmark. Best performance was recorded for Tata CDMA.

All the service providers were measuring this parameter as per the TRAI guidelines that have been stated in parameter description section.



Below are the month wise summary tables for each network parameter basis PMR data.

4.1.1 PMR DATA - JULY FOR 2G

	Network A	vailability	Connection E	stablishment (A	ccessibility)	Connection Maintenance (Retainability)		
Name of Service Provider Month July	BTSs Accumulated downtime (not available for service)	Worst affected BTSs due to downtime	Call Set-up Success Rate (within licensee's own network)	SDCCH/ Paging Chl. Congestion	TCH Congestion	Call Drop Rate (%age)	Worst affected cells having more than 3% TCH drop	%age of connection with good voice quality
Benchmark	≤ 2%	≤ 2%	≥ 95%	≤1%	≤ 2%	≤ 2%	≤ 3%	≥ 95%
Aircel(DWL)	0.11%	0.10%	98.78%	0.07%	0.24%	0.70%	3.00%	95.69%
Airtel	1.85%	0.00%	98.22%	0.11%	0.76%	0.53%	1.70%	96.46%
BSNL	1.91%	1.82%	97.12%	0.52%	0.95%	1.14%	2.88%	96.95%
Idea	0.08%	0.17%	98.66%	0.69%	0.84%	0.59%	2.25%	98.53%
Reliance GSM	0.16%	1.85%	98.83%	0.30%	0.16%	0.14%	0.45%	99.17%
TATA CDMA	0.03%	0.05%	97.94%	NA	0.88%	0.74%	2.73%	99.92%
TATA GSM	1.85%	0.00%	99.58%	0.06%	0.10%	0.43%	1.75%	97.37%
Telenor	0.23%	1.10%	98.59%	0.27%	0.40%	1.00%	3.78%	97.33%
Vodafone	0.22%	1.04%	99.39%	0.45%	0.61%	0.89%	2.71%	96.81%

4.1.2 PMR DATA -AUGUST FOR 2G

	Network	Availability	Connection I	Establishment (A	Accessibility)	Connection Maintenance (Retainability)		
Name of Service Provider Month August	BTSs Accumulated downtime (not available for service)	Worst affected BTSs due to downtime	Call Set-up Success Rate (within licensee's own network)	SDCCH/ Paging Chl. Congestion	TCH Congestion	Call Drop Rate (%age)	Worst affected cells having more than 3% TCH drop	%age of connection with good voice quality
Benchmark	≤2%	≤ 2%	≥ 95%	≤1%	≤2%	≤2%	≤3%	≥ 95%
Aircel(DWL)	0.07%	0.10%	99.18%	0.07%	0.15%	0.65%	2.90%	96.08%
Airtel	1.85%	0.00%	98.23%	0.08%	0.52%	0.56%	1.64%	96.55%
BSNL	1.90%	1.79%	95.93%	0.45%	1.74%	0.88%	2.87%	97.71%
Idea	0.08%	0.21%	98.85%	0.54%	0.69%	0.57%	2.13%	98.55%
Reliance GSM	0.15%	1.22%	99.43%	0.06%	0.22%	0.15%	0.44%	98.99%
TATA CDMA	0.09%	0.00%	98.24%	NA	0.99%	0.67%	2.62%	99.89%
TATA GSM	0.03%	0.00%	99.60%	0.05%	0.08%	0.42%	1.68%	97.50%
Telenor	0.23%	1.26%	98.61%	0.13%	0.32%	1.00%	3.60%	97.33%
Vodafone	0.13%	0.46%	99.44%	0.30%	0.56%	0.86%	2.70%	96.89%



4.1.3 PMR DATA - SEPTEMBER FOR 2G

	Network Av	ailability	Connection	ı Establishment	(Accessibility)	Connection N	Aaintenance (Retai	nability)
Name of Service Provider Month September	BTSs Accumulated downtime (not available for service)	Worst affected BTSs due to downtime	Call Set-up Success Rate (within licensee's own network)	SDCCH/ Paging Chl. Congestion	TCH Congestion	Call Drop Rate (%age)	Worst affected cells having more than 3% TCH drop	%age of connection with good voice quality
Benchmark	≤2%	≤2%	≥ 95%	≤1%	≤ 2%	≤ 2%	≤ 3%	≥ 95%
Aircel(DWL)	0.06%	0.10%	99.25%	0.07%	0.12%	0.68%	2.88%	96.10%
Airtel	0.03%	0.00%	98.26%	0.07%	0.30%	0.51%	1.60%	96.55%
BSNL	1.91%	1.66%	96.22%	0.51%	1.59%	1.19%	2.87%	97.52%
Idea	0.09%	0.19%	98.69%	0.59%	0.76%	0.60%	2.34%	98.59%
Reliance GSM	0.17%	1.08%	99.46%	0.07%	0.29%	0.16%	0.59%	98.78%
TATA CDMA	0.04%	0.00%	98.30%	NA	0.82%	0.45%	2.66%	99.93%
TATA GSM	1.21%	0.00%	99.59%	0.05%	0.08%	0.41%	1.63%	97.51%
Telenor	0.17%	0.73%	98.60%	0.18%	0.23%	0.97%	3.64%	97.34%
Vodafone	0.09%	0.23%	99.55%	0.28%	0.45%	0.79%	NA	96.94%



4.2 3 DAY DATA - CONSOLIDATED FOR 2G

A three day live measurement was conducted to measure the QoS provided by the operators. The table provided below gives a snapshot of the performance of all operators during live measurement.

	Network /	Availability	Connection E	stablishment	(Accessibility)	Connection M	cells having			
Name of Service Provider	BTSs Accumulate d downtime (not available for service)	Worst affected BTSs due to downtime	Call Set-up Success Rate (within licensee's own network)	SDCCH/ Paging Chl. Congestion (%age)	TCH Congestion (%age)	Call Drop Rate (%age)	affected cells having more than	connection with good		
Benchmark	≤ 2%	≤ 2%	≥ 95%	≤ 1%	≤ 2%	≤ 2%	≤ 3%	≥ 95%		
Aircel(DWL)	0.17%	0.00%	99.44%	0.07%	0.08%	0.56%	3.16%	96.48%		
Airtel	1.70%	0.00%	98.21%	0.06%	0.44%	0.55%	1.62%	96.49%		
BSNL	1.83%	0.07%	96.03%	0.48%	1.59%	1.26%	2.86%	97.42%		
Idea	0.06%	0.01%	98.85%	0.56%	0.70%	0.58%	2.26%	98.54%		
Reliance GSM	0.24%	0.43%	99.58%	0.11%	0.28%	0.16%	0.55%	99.04%		
TATA CDMA	0.10%	0.12%	98.11%	NA	0.54%	0.68%	2.80%	99.92%		
TATA GSM	0.64%	0.00%	99.57%	0.05%	0.07%	0.42%	1.81%	97.44%		
Telenor	0.17%	0.05%	98.62%	0.29%	0.34%	0.98%	3.80%	98.29%		
Vodafone	0.12%	0.01%	99.36%	0.46%	0.64%	0.82%	4.01%	96.95%		

NA: SDCCH/ Paging channel congestion not applicable for CDMA operators.

BTSs Accumulated Downtime:

All operators met the benchmark. Minimum BTS Accumulated downtime was recorded for Idea.

Worst Affected BTSs Due to Downtime:

All operators met the benchmark for worst affected BTSs due to downtime. Minimum Worst Affected BTSs Due to Downtime was recorded for Aircel, Airtel and Tata GSM.

Call Set-up Success Rate (CSSR):

All operators met the benchmark for CSSR. The maximum CSSR was observed for Reliance GSM.

SDCCH/ Paging Chl. Congestion:

All operators met the benchmark on SDCCH / Paging Channel Congestion. Tata GSM recorded the best SDCCH / Paging Channel Congestion.

TCH Congestion:

All operators met the benchmark for TCH congestion. Tata GSM performed the best on TCH congestion.

Call Drop Rate:

All operators met the benchmark for the parameter. Minimum call drop rate was recorded for Reliance GSM.

Worst Affected Cells Having More than 3% TCH Drop:

Aircel, Telenor and Vodafone failed to meet the benchmark. Best performance was recorded for Reliance GSM.

Voice Quality

All operators met the benchmark. Best performance was recorded for Tata CDMA.



Below are the month wise summary tables for each network parameter basis 3 day live data.

4.2.1 3 DAY DATA - JULY FOR 2G

	Network A	vailability	Connection E	stablishment (Ad	ccessibility)	Connection	n Maintenance (Rei	tainability)
Name of Service Provider 3 Day July	BTSs Accumulated downtime (not available for service)	Worst affected BTSs due to downtime	Call Set-up Success Rate (within licensee's own network)	SDCCH/ Paging Chl. Congestion	TCH Congestion	Call Drop Rate (%age)	Worst affected cells having more than 3% TCH drop	%age of connection with good voice quality
Benchmark	≤2%	≤2%	≥ 95%	≤1%	≤2%	≤2%	≤ 3%	≥ 95%
Aircel(DWL)	0.14%	0.00%	99.35%	0.07%	0.12%	0.63%	3.08%	96.04%
Airtel	1.98%	0.00%	98.18%	0.08%	0.61%	0.51%	1.69%	96.43%
BSNL	1.92%	0.01%	97.16%	0.42%	0.93%	1.06%	2.78%	97.15%
Idea	0.06%	0.02%	98.78%	0.63%	0.75%	0.60%	2.45%	98.48%
Reliance GSM	0.28%	0.85%	99.31%	0.19%	0.34%	0.16%	0.48%	99.15%
TATA CDMA	0.00%	0.00%	98.38%	NA	0.06%	0.78%	3.05%	99.92%
TATA GSM	0.10%	0.00%	99.57%	0.07%	0.12%	0.46%	2.06%	97.21%
Telenor	0.02%	0.11%	98.52%	0.66%	0.53%	0.99%	3.67%	100.00%
Vodafone	0.02%	0.04%	99.27%	0.78%	0.73%	0.88%	2.72%	96.83%

4.2.2 3 DAY DATA -AUGUST FOR 2G

	Network	Availability	Connection I	Establishment (#	Accessibility)	Connectio	n Maintenance (Re	tainability)
Name of Service Provider 3 Day August	BTSs Accumulated downtime (not available for service)	Worst affected BTSs due to downtime	Call Set-up Success Rate (within licensee's own network)	SDCCH/ Paging Chl. Congestion	TCH Congestion	Call Drop Rate (%age)	Worst affected cells having more than 3% TCH drop	%age of connection with good voice quality
Benchmark	≤2%	≤ 2%	≥ 95%	≤1%	≤2%	≤2%	≤3%	≥ 95%
Aircel(DWL)	0.19%	0.00%	99.42%	0.07%	0.07%	0.51%	3.65%	96.49%
Airtel	1.66%	0.00%	98.13%	0.06%	0.36%	0.63%	1.66%	96.34%
BSNL	1.79%	0.10%	95.46%	0.51%	1.92%	1.36%	2.89%	97.55%
Idea	0.06%	0.02%	98.78%	0.63%	0.75%	0.60%	2.45%	98.48%
Reliance GSM	0.20%	0.44%	99.71%	0.11%	0.25%	0.15%	0.50%	99.15%
TATA CDMA	0.26%	0.38%	97.85%	NA	0.35%	0.79%	2.96%	99.92%
TATA GSM	0.05%	0.00%	99.57%	0.06%	0.08%	0.44%	1.82%	97.48%
Telenor	0.21%	0.02%	98.63%	0.08%	0.30%	1.01%	3.89%	97.41%
Vodafone	0.09%	0.00%	99.48%	0.26%	0.52%	0.77%	2.65%	96.97%



4.2.3 3 DAY DATA - SEPTEMBER FOR 2G

	Network Av	ailability	Connectior	ı Establishment	(Accessibility)	Connection N	laintenance (Retair	nability)
Name of Service Provider 3 Day September	BTSs Accumulated downtime (not available for service)	Worst affected BTSs due to downtime	Call Set-up Success Rate (within licensee's own network)	SDCCH/ Paging Chl. Congestion	TCH Congestion	Call Drop Rate (%age)	Worst affected cells having more than 3% TCH drop	%age of connection with good voice quality
Benchmark	≤2%	≤2%	≥ 95%	≤1%	≤2%	≤2%	≤3%	≥ 95%
Aircel(DWL)	0.19%	0.00%	99.55%	0.07%	0.04%	0.55%	2.75%	96.52%
Airtel	1.46%	0.00%	98.31%	0.06%	0.36%	0.51%	1.50%	96.70%
BSNL	1.78%	0.10%	95.46%	0.51%	1.92%	1.36%	2.89%	97.56%
Idea	0.05%	0.00%	98.99%	0.43%	0.58%	0.54%	1.89%	98.68%
Reliance GSM	0.25%	0.00%	99.73%	0.05%	0.26%	0.16%	0.66%	98.81%
TATA CDMA	0.02%	0.00%	98.10%	NA	1.21%	0.46%	2.38%	99.93%
TATA GSM	0.84%	0.00%	99.57%	0.02%	0.02%	0.35%	1.54%	97.63%
Telenor	0.10%	0.02%	98.71%	0.13%	0.20%	0.95%	3.84%	97.44%
Vodafone	0.08%	0.00%	99.33%	0.35%	0.67%	0.80%	NA	97.06%



4.3 PMR DATA - 3 MONTHS- CONSOLIDATED FOR 3G

	Network	Availability	Connection	Establishmen	t (Accessibility)	Connection I	Connection Maintenance (Retainability)			
Name of Service Provider	Node Bs downtime (not available for service)	Worst affected Node Bs due to downtime	CSSR	RRC Congestion	Circuit Switched RAB Congestion	Call drop rate	Worst affected cells having more than 3% Circuit switched	%Circuit Switch Voice Quality (CSV quality)		
Benchmark	≤2%	≤2%	≥95%	≤1%	≤ 2%	≤ 2%	≤3%	≥95%		
Airtel 3G	0.06%	0.00%	99.70%	0.03%	0.07%	0.43%	1.02%	98.85%		
BSNL 3G	1.92%	1.78%	96.18%	0.73%	1.70%	1.20%	2.80%	97.33%		
ldea 3G	0.10%	0.20%	99.66%	0.47%	0.12%	0.34%	2.17%	98.51%		
TATA 3G	0.00%	0.00%	99.56%	0.13%	0.40%	0.42%	2.38%	99.71%		
Vodafone 3G	0.15%	0.44%	99.69%	0.24%	0.06%	0.31%	1.84%	98.85%		

Following are the parameter wise observations for wireless operators for Maharashtra & Goa circle:

Node Bs downtime:

All operators met the benchmark. Minimum Node Bs downtime was recorded for Tata 3G.

Worst affected Node Bs due to downtime:

All operators met the benchmark. Minimum worst affected Node Bs due to downtime was recorded for TATA 3G and Airtel 3G.

Call Set-up Success Rate (CSSR):

All operators met the benchmark for CSSR. The maximum CSSR was observed for Airtel 3G.

RRC Congestion:

All operators met the benchmark for RRC Congestion. The maximum RRC Congestion was observed for Airtel 3G.

Circuit Switched RAB Congestion:

All operators met the benchmark for Circuit Switched RAB Congestion. The minimum Circuit Switched RAB Congestion was observed for Vodafone 3G.

Circuit Switched Voice Call Drop Rate:

All operators met the benchmark for the parameter. Minimum call drop rate was recorded for Vodafone 3G.

Worst affected cells having more than 3% Circuit switched voice drop rate:

All operators met the benchmark for the parameter. Minimum Worst affected cells having more than 3% Circuit switched voice drop rate was recorded for Airtel 3G.

Circuit Switch Voice Quality:

All operators met the benchmark for the parameter. Best performance was recorded for Vodafone 3G.

All the service providers were measuring this parameter as per the TRAI guidelines that have been stated in parameter description section.



Below are the month wise summary tables for each network parameter basis PMR data.

4.3.1 PMR DATA - JULY FOR 3G

	Network	k Availability	Conne	ection Establisl (Accessibility)		Conn	ection Maint (Retainability	
Name of Service Provider Month July	Node Bs downtime (not available for service)	Worst affected Node Bs due to downtime	CSSR	RRC Congestion	Circuit Switched RAB Congestion	Call drop rate	Worst affected cells having more than 3% Circuit switched voice drop	%Circuit Switch Voice Quality (CSV quality)
Benchmark	≤ 2%	≤ 2%	≥ 95%	≤1%	≤ 2%	≤ 2%	≤ 3%	≥ 95%
Airtel 3G	0.08%	0.00%	99.72%	0.01%	0.06%	0.45%	1.14%	98.90%
BSNL 3G	1.97%	1.78%	96.28%	0.76%	1.71%	1.28%	2.79%	97.98%
Idea 3G	0.11%	0.18%	99.62%	0.37%	0.13%	0.34%	2.16%	98.54%
TATA 3G	0.00%	0.00%	99.61%	0.11%	0.55%	0.43%	2.45%	99.71%
Vodafone 3G	0.22%	0.46%	99.80%	0.25%	0.05%	0.86%	1.86%	99.20%

4.3.2 PMR DATA -AUGUST FOR 3G

	Network Ava	ailability	Connection Establishment (Accessibility)			Connection	Maintenance (Retainability)
Name of Service Provider Month August	Node Bs downtime (not available for service)	Worst affected Node Bs due to downtim e	CSSR	RRC Congestio n	Circuit Switched RAB Congestio n	Call drop rate	Worst affected cells having more than 3% Circuit switched voice drop rate	%Circuit Switch Voice Quality (CSV quality)
Benchmark	≤ 2%	≤ 2%	≥ 95%	≤1%	≤ 2%	≤2%	≤ 3%	≥ 95%
Airtel 3G	0.06%	0.00%	99.68%	0.06%	0.10%	0.44%	1.02%	98.84%
BSNL 3G	1.96%	1.85%	96.29%	0.65%	1.71%	1.12%	2.81%	96.12%
Idea 3G	0.10%	0.23%	99.67%	0.28%	0.10%	0.31%	1.86%	98.50%
TATA 3G	0.00%	0.00%	99.45%	0.19%	0.23%	0.42%	2.39%	99.71%
Vodafone 3G	0.13%	0.51%	99.45%	0.30%	0.08%	0.22%	1.71%	98.48%

4.3.3 PMR DATA - SEPTEMBER FOR 3G

Name of	Network Ava			ion Establis ccessibility)		Connection	Maintenance (Retainability)
Service Provider Month September	Node Bs downtime (not available for service)	affected Node Bs due to downtim	CSSR	RRC Congestio n	Circuit Switched RAB Congestio n	Call drop rate	affected cells having more than 3% Circuit	%Circuit Switch Voice Quality (CSV quality)
Benchmark	≤2%	≤2%	≥ 95%	≤1%	≤2%	≤2%	≤3%	≥ 95%
Airtel 3G	0.05%	0.00%	99.71%	0.02%	0.05%	0.40%	0.91%	98.82%
BSNL 3G	1.89%	1.71%	95.97%	0.78%	1.68%	1.21%	2.81%	97.93%
Idea 3G	0.10%	0.20%	99.67%	0.75%	0.13%	0.36%	2.48%	98.51%
TATA 3G	0.00%	0.00%	99.63%	0.10%	0.44%	0.40%	2.30%	99.71%
Vodafone 3G	0.10%	0.34%	99.83%	0.16%	0.05%	0.21%	1.96%	98.93%



4.4 3 DAY DATA - CONSOLIDATED FOR 3G

A three day live measurement was conducted to measure the QoS provided by the operators. The table provided below gives a snapshot of the performance of all operators during live measurement.

	Network	Availability	Connection E	stablishment	(Accessibility)	Connection I	Maintenance (Retainability)
Name of Service Provider	Node Bs downtime (not available for service)	Worst affected Node Bs due to downtime	CSSR	RRC Congestion	Circuit Switched RAB Congestion	Call drop rate	Worst affected cells having more than 3% Circuit switched	%Circuit Switch Voice Quality (CSV quality)
Benchmark	≤ 2%	≤ 2%	≥ 95%	≤ 1%	≤ 2%	≤ 2%	≤ 3%	≥ 95%
Airtel 3G	0.79%	0.00%	99.65%	0.16%	0.09%	0.43%	1.04%	99.20%
BSNL 3G	1.96%	0.07%	96.01%	0.84%	1.75%	1.30%	2.83%	98.21%
Idea 3G	0.07%	0.01%	99.64%	0.50%	0.14%	0.34%	2.08%	98.48%
TATA 3G	0.00%	0.00%	99.63%	0.10%	0.42%	0.41%	2.53%	99.71%
Vodafone 3G	0.20%	0.12%	99.76%	0.21%	0.04%	0.25%	1.77%	98.91%

Node Bs downtime:

All operators met the benchmark. Minimum Node Bs downtime was recorded for Tata 3G.

Worst affected Node Bs due to downtime:

All operators met the benchmark. Minimum worst affected Node Bs due to downtime was recorded for Airtel 3G and Tata 3G.

Call Set-up Success Rate (CSSR):

All operators met the benchmark for CSSR. The maximum CSSR was observed for Vodafone 3G.

RRC Congestion:

All operators met the benchmark for RRC Congestion. The minimum RRC Congestion was observed for Tata 3G.

Circuit Switched RAB Congestion:

All operators met the benchmark for Circuit Switched RAB Congestion. The maximum Circuit Switched RAB Congestion was observed for Vodafone 3G.

Circuit Switched Voice Call Drop Rate:

All operators met the benchmark for the parameter. Minimum call drop rate was recorded for Vodafone 3G.

Worst affected cells having more than 3% Circuit switched voice drop rate:

All operators met the benchmark for the parameter. Minimum Worst affected cells having more than 3% Circuit switched voice drop rate was recorded for Airtel 3G.

Circuit Switch Voice Quality:

All operators met the benchmark for the parameter. Maximum Circuit Switch Voice Quality was recorded for TATA 3G.

All the service providers were measuring this parameter as per the TRAI guidelines that have been stated in parameter description section.



Below are the month wise summary tables for each network parameter basis 3 day live data.

4.4.1 3 DAY DATA - JULY FOR 3G

	Network Availability		Conne	ection Establis (Accessibility)		Conn	ection Mainte (Retainability	
Name of Service Provider 3 Day July	Node Bs downtime (not available for service)	Worst affected Node Bs due to downtime	CSSR	RRC Congestion	Circuit Switched RAB Congestion	Call drop rate	Worst affected cells having more than 3% Circuit switched voice drop rate	%Circuit Switch Voice Quality (CSV quality)
Benchmark	≤ 2%	≤ 2%	≥ 95%	≤1%	≤ 2%	≤2%	≤ 3%	≥ 95%
Airtel 3G	0.22%	0.00%	99.64%	0.15%	0.07%	0.46%	1.06%	99.25%
BSNL 3G	0.19%	0.04%	96.82%	0.90%	1.90%	1.18%	2.85%	98.06%
Idea 3G	0.01%	0.01%	99.60%	0.48%	0.16%	0.34%	1.97%	98.45%
TATA 3G	0.00%	0.00%	99.60%	0.10%	0.26%	0.44%	2.73%	99.70%
Vodafone 3G	0.03%	0.09%	99.76%	0.27%	0.06%	0.22%	1.86%	98.95%

4.4.2 3 DAY DATA -AUGUST FOR 3G

	Network Ava	ailability		ion Establis ccessibility]		Connection I	Maintenance (Retainability)
Name of Service Provider 3 Day August	Node Bs downtime (not available for service)	Worst affected Node Bs due to downtim e	CSSR	RRC Congestio n	Circuit Switched RAB Congestio n	Call drop rate	worst affected cells having more than 3% Circuit switched voice drop	%Circuit Switch Voice Quality (CSV quality)
Benchmark	≤ 2%	≤ 2%	≥ 95%	≤1%	≤ 2%	≤2%	≤ 3%	≥ 95%
Airtel 3G	0.07%	0.00%	99.64%	0.23%	0.07%	0.46%	1.07%	98.80%
BSNL 3G	1.96%	0.07%	95.82%	0.88%	1.71%	1.36%	2.80%	98.80%
Idea 3G	0.09%	0.01%	99.60%	0.48%	0.16%	0.34%	1.97%	98.45%
TATA 3G	0.00%	0.00%	99.49%	0.18%	0.58%	0.43%	2.61%	99.70%
Vodafone 3G	0.17%	0.19%	99.67%	0.35%	0.04%	0.33%	1.73%	98.45%

4.4.3 3 DAY DATA - SEPTEMBER FOR 3G

Name of Service Provider 3 Day September	Network Availability		Connection Establishment (Accessibility)			Connection Maintenance (Retainability)			
	Node Bs downtime (not available for service)	Worst affected Node Bs due to downtim e	CSSR	RRC Congestio n	Circuit Switched RAB Congestio n	Call drop rate	Worst affected cells having more than 3% Circuit switched voice drop	%Circuit Switch Voice Quality (CSV quality)	
Benchmark	≤2%	≤2%	≥ 95%	≤1%	≤ 2%	≤2%	≤ 3%	≥ 95%	
Airtel 3G	0.04%	0.00%	99.66%	0.10%	0.13%	0.40%	0.99%	99.54%	
BSNL 3G	1.97%	0.11%	95.40%	0.75%	1.64%	1.36%	2.82%	98.39%	
Idea 3G	0.05%	0.00%	99.70%	0.53%	0.08%	0.34%	2.29%	98.53%	
TATA 3G	0.00%	0.00%	99.79%	0.03%	0.43%	0.36%	2.24%	99.72%	
Vodafone 3G	0.18%	0.08%	99.85%	0.02%	0.02%	0.22%	1.73%	98.93%	



	w	ireless Data-PI	MR	Wireless Data-Live Data			
Name of Service Provider	Activation done within 4 hours	PDP Context activation success rate	Drop Rate	Activation done within 4 hours	PDP Context activation success rate	Drop Rate	
Benchmark	≥ 95%	≥ 95%	≤ 5%	≥ 95%	≥ 95%	≤ 5%	
Aircel(DWL)	99.99%	97.42%	0.91%	NDR	96.98%	0.89%	
Airtel	NDR	99.16%	4.17%	NDR	99.74%	4.31%	
BSNL	NDR	97.76%	2.47%	NDR	96.84%	2.31%	
Idea	NDR	99.84%	1.15%	NDR	99.88%	1.18%	
Reliance GSM	NDR	NDR	NDR	NDR	NDR	NDR	
TATA CDMA	NDR	96.78%	1.05%	NDR	97.63%	0.99%	
TATA GSM	NDR	99.86%	1.94%	NDR	88.69%	0.97%	
Telenor	99.19%	99.53%	0.87%	98.97%	99.30%	0.86%	
Vodafone	100.00%	99.72%	4.45%	NDR	99.95%	1.97%	

4.5 WIRELESS DATA PMR & 3 DAY LIVE - CONSOLIDATED FOR 2G

NDR- No data received

Following are the parameter wise observations for wireless operators for Maharashtra & Goa circle:

Activation done within 4 hours:

All operators met the benchmark for Activation done within 4 hours in PMR and Live audit. Aircel had maximum percentage in Activation done within 4 hours for PMR data.

PDP Context activation success rate:

TATA GSM failed to meet the benchmark for PDP Context activation success rate during live audit. Maximum PDP Context activation Success rate was recorded for Tata GSM in PMR data and Vodafone in Live audit data.

Drop Rate:

All operators met the benchmark for Drop Rate. Minimum Drop Rate was recorded for Telenor in PMR and Live data.

Note: - Most of the operators are not submitted activation within 4hrs data.



4.6 WIRELESS DATA PMR & 3 DAY LIVE - CONSOLIDATED FOR 3G

	W	ireless Data-PI	VIR	Wir	Wireless Data-Live Data					
Name of Service Provider	Activation done within 4 hours	PDP Context activation success rate	Drop Rate	Activation done within 4 hours	PDP Context activation success rate	Drop Rate				
Benchmark	≥ 95%	≥ 95%	≤ 5%	≥ 95%	≥ 95%	≤ 5%				
Airtel 3G	NDR	98.70%	0.52%	NDR	99.48%	0.65%				
BSNL 3G	NDR	97.67%	2.48%	NDR	97.03%	2.48%				
Idea 3G	NDR	99.89%	0.85%	NDR	99.78%	0.88%				
TATA 3G	100.00%	100.00%	1.66%	NDR	NDR	2.94%				
Vodafone 3G	100.00%	99.63%	0.60%	NDR	99.61%	0.58%				

Note: NDR (No Data Received)

Following are the parameter wise observations for wireless operators for Maharashtra & Goa circle:

Activation done within 4 hours:

Most of the operators not submitted Activation done within 4 hours date for PMR audit as well as live.

PDP Context activation success rate:

All operators met the benchmark PDP Context activation success rate in PMR audit as well as live. Maximum PDP Context activation success rate was recorded for TATA 3G in PMR data and Idea 3G in Live data.

Drop Rate:

All operators met the benchmark for Drop Rate in PMR audit as well as live. Minimum Drop Rate was recorded for Airtel 3G in PMR data and Live data.

Note: Most of the operators were not submitted activation done within 4hrs data for monthly as well as 3days live.





	Metering	and Billing	Response customer fo		Level 1 Service	Service Requests
Name of Service Provider	%age complaints resolved within 4 weeks	%age complaints resolved within 6 weeks	Accessibility of call centre/ customer care	Percentage of calls answered by the operators (voice to	Call answered	Complaint /Request attended to Satisfaction
Benchmark	98%	100%	≥ 95%	≥ 95%	≥ 95%	
Aircel(DWL)	98.00%	98.00%	100.00%	100.00%	76.00%	97.00%
Airtel	98.00%	100.00%	100.00%	95.00%	85.33%	99.00%
BSNL	98.00%	100.00%	100.00%	91.75%	81.67%	97.00%
Idea	98.00%	100.00%	90.00%	100.00%	88.67%	96.00%
Reliance GSM	95.00%	100.00%	100.00%	100.00%	91.67%	96.00%
TATA CDMA	NA	NA	100.00%	100.00%	70.33%	99.00%
TATA GSM	100.00%	100.00%	100.00%	100.00%	88.33%	87.50%
Telenor	96.30%	100.00%	100.00%	100.00%	96.33%	83.00%
Vodafone	100.00%	100.00%	100.00%	100.00%	99.67%	100.00%

4.7 LIVE CALLING DATA - CONSOLIDATED

NA: Not applicable, no complaint during audit period

Resolution of billing complaints

As per the consumers (live calling exercise) Reliance GSM failed to meet the benchmark of resolving 98% complaints within 4 weeks and Aircel failed to meet the benchmark of 100% complaints within 6 weeks.

Accessibility of Call Centre/Customer Care-IVR

For the IVR aspect, all operators met the TRAI benchmark of 95% with most of the operators recording 100% for the parameter except Idea.

Customer Care / Helpline Assessment (voice to voice)

BSNL failed to meet the benchmark for the parameter Customer Care / Helpline Assessment (voice to voice)

Level 1 Service

As per the live calling results, none of the operators met the TRAI benchmark for level 1 service with calls being answered except Telenor and Vodafone.

Complaint/Request Attended to Satisfaction

All operators performed satisfactorily in terms of satisfaction of the customers for service requests. Reliance GSM and Vodafone recorded the best performance at 100%.





4.8 BILLING AND CUSTOMER CARE - CONSOLIDATED

	-	and billing ibility	Billing Co	mplaints	Response time to customer for assistance	Custom	ier care
Name of Service Provider	Postpaid Subscribers	Prepaid Subscribers	% of complaints resolved in 4 weeks	% of complaints resolved in 6 weeks	% of cases where credit/wavier is received within one week	Percentage of calls answered by the IVR	Percentage of calls answered by the operators (voice to
Benchmark	≤ 0.1%	≤ 0.1%	≥ 98%	≥ 100%	≥ 100%	≥ 95%	≥ 95%
Aircel(DWL)	0.00%	0.00%	100.00%	100.00%	100.00%	99.62%	98.04%
Airtel	0.10%	0.06%	100.00%	100.00%	100.00%	99.97%	96.20%
BSNL	0.00%	0.01%	100.00%	100.00%	100.00%	100.00%	97.88%
Idea	0.46%	0.11%	100.00%	100.00%	100.00%	98.76%	99.47%
Reliance GSM	0.09%	0.03%	100.00%	100.00%	100.00%	99.43%	89.13%
TATA CDMA	0.00%	0.00%	NA	NA	100.00%	NA	99.80%
TATA GSM	0.00%	0.00%	100.00%	100.00%	100.00%	96.79%	94.69%
Telenor	NA	0.01%	100.00%	100.00%	100.00%	99.49%	98.92%
Vodafone	0.04%	0.00%	100.00%	100.00%	100.00%	99.63%	97.46%

NA: - Not applicable

Metering and Billing Credibility – Post-paid Subscribers

For the billing disputes of post-paid subscribers, it was observed that Idea failed to meet the TRAI benchmark for the parameter. Tata GSM and Tata CDMA had the best performance with 0.00% billing disputes.

Metering and Billing Credibility – Prepaid Subscribers

For the prepaid customers all operators met the benchmark of charging disputes except Idea. TATA CDMA & GSM and Vodafone performed the best with 0.00% disputes.

Resolution of billing complaints

All operators met the TRAI benchmark of resolution of billing complaints within 4 weeks and within 6 weeks.

Note: Tata CDAM had zero complaint during the audit period and they don't have separate IVR data for CDMA, all IVR calls included in Tata GSM.

Response Time to customer for assistance - % of cases in which advance waiver is received within one week

All the operators met the TRAI benchmark of providing credit or waiver within one week in case of complaints received.

Customer Care Percentage of calls answered by the IVR

All operators met the benchmark for IVR call being attended.



Customer Care Percentage of calls answered by the operators (Voice to Voice) within 90 seconds

Reliance GSM and Tata GSM failed to meet the TRAI specified benchmark of 95%. TATA CDMA recorded the best performance for the parameter.



4.9 INTER OPERATOR CALL ASSESSMENT - CONSOLIDATED

				6. Inter Opera	ator Call Assessn	nent				
Inter operator call Assessment To↓ From→	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Aircel(DWL)	NA	100.00%	100.00%	100.00%	NS	100.00%	100.00%	100.00%	100.00%	100.00%
Airtel	100.00%	NA	100.00%	100.00%	NS	100.00%	100.00%	100.00%	100.00%	100.00%
BSNL	100.00%	100.00%	NA	100.00%	NS	100.00%	100.00%	100.00%	100.00%	100.00%
Idea	100.00%	100.00%	100.00%	NA	NS	100.00%	100.00%	100.00%	100.00%	100.00%
Reliance CDMA	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
Reliance GSM	100.00%	100.00%	100.00%	100.00%	NS	NA	100.00%	100.00%	100.00%	100.00%
TATA CDMA	100.00%	100.00%	100.00%	100.00%	NS	100.00%	NA	100.00%	100.00%	100.00%
TATA GSM	100.00%	100.00%	100.00%	100.00%	NS	100.00%	100.00%	NA	100.00%	100.00%
Telenor	100.00%	100.00%	100.00%	100.00%	NS	100.00%	100.00%	100.00%	NA	100.00%
Vodafone	100.00%	100.00%	100.00%	100.00%	NS	100.00%	100.00%	100.00%	100.00%	NA



Maximum Problem faced by the calling operator to other operator. The orange colour denotes performance below circle average.

In the inter-operator call assessment, most of the operators did not face any problems in connecting to other operators.



4.10 COMPARISON BETWEEN IMRB AND OPERATOR'S DATA FOR PMR 2G

		Network	Availability			Connect	tion Establish	iment (Acce	ssibility)			Connec	tion Mainten	ance (Retai	inability)		Point of	
Name of Service Provider	downtir	BTSs Accumulated downtime (not available for service) BTSs Accumulated Worst affected BT due to downtim			Call Set-up Success S Rate			SDCCH/ Paging Chl. Congestion		TCH Congestion		Call drop rate		ected cells e than 3%			Interconnection (POI) Congestion	
Benchmark	≤2	!%	≤2	!%	≥ 95%		≤1%		≤2	%	≤ 2	!%	≤3	%	29	5%	≤ 0.	.5%
	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB
Aircel	0.08%	0.08%	0.08%	0.10%	99.07%	99.07%	0.07%	0.07%	0.17%	0.17%	0.68%	0.68%	2.92%	2.93%	95.96%	95.96%	0.00%	0.00%
Airtel	0.03%	1.25%	0.00%	0.00%	98.23%	98.23%	0.09%	0.09%	0.60%	0.53%	0.54%	0.53%	1.66%	1.65%	96.51%	96.52%	0.00%	0.00%
BSNL	1.91%	1.89%	1.76%	1.75%	96.42%	96.42%	0.50%	0.50%	1.43%	1.43%	1.19%	1.05%	2.88%	2.87%	97.39%	97.40%	0.00%	0.00%
Idea	0.08%	0.08%	0.19%	0.19%	98.73%	98.73%	0.61%	0.61%	0.76%	0.76%	0.58%	0.58%	2.24%	2.24%	98.56%	98.56%	0.67%	0.00%
RCOM GSM	0.18%	0.16%	1.25%	1.39%	99.22%	99.24%	0.10%	0.15%	0.27%	0.22%	0.15%	0.15%	0.49%	0.49%	98.98%	98.98%	0.00%	0.00%
TATA CDMA	0.05%	0.05%	0.00%	0.02%	98.16%	98.16%	0.00%	NA	0.90%	0.90%	0.62%	0.61%	2.67%	2.67%	99.91%	99.91%	0.00%	0.00%
TATA GSM	0.03%	1.02%	0.00%	0.00%	99.59%	99.59%	0.05%	0.05%	0.09%	0.09%	0.42%	0.42%	1.68%	1.69%	97.46%	97.46%	0.00%	0.00%
Telenor	0.21%	0.21%	1.03%	1.03%	98.60%	98.60%	0.19%	0.19%	0.32%	0.32%	0.99%	0.99%	3.67%	3.67%	97.33%	97.33%	0.00%	0.00%
Vodafone	0.17%	0.15%	0.67%	0.58%	99.46%	99.46%	0.35%	0.34%	0.54%	0.54%	0.85%	0.84%	2.67%	4.03%	96.88%	96.88%	0.00%	0.00%

4.11 COMPARISON BETWEEN IMRB AND OPERATOR'S DATA FOR PMR 3G

		Network	Availability			Connect	ion Establisł	ment (Acce	essibility)			Connec	tion Mainter	ance (Retai	inability)		Point of	
Name of Service Provider	der (not available for service) Worst affected Nor Bs due to downtim			CS	SR	RRC Cor	gestion	Circuit Swi Conge		Call dro	op rate	Worst affe having mor Circuit st	re than 3%	%Circuit Sv Qua (CSV q	lity	Interconne		
Benchmark	≤2	!%	≤2	2%	≥ 9	5%	si	1%	≤2	!%	≤ 2	2%	≤3	%	29	5%	≤ 0	.5%
	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB	Operators	IMRB
Airtel 3G	0.07%	0.06%	0.00%	0.00%	99.70%	99.70%	0.04%	0.03%	0.08%	0.07%	0.44%	0.43%	1.06%	1.02%	98.87%	98.85%	0.00%	0.00%
BSNL 3G	1.87%	1.92%	1.73%	1.78%	96.00%	96.18%	0.67%	0.73%	1.67%	1.70%	1.17%	1.20%	2.73%	2.80%	97.13%	97.33%	0.00%	0.00%
Idea 3G	0.10%	0.10%	0.20%	0.20%	99.66%	99.66%	0.47%	0.47%	0.12%	0.12%	0.34%	0.34%	2.17%	2.17%	98.51%	98.51%	0.00%	0.00%
TATA 3G	0.00%	0.00%	0.00%	0.00%	99.03%	99.56%	0.13%	0.13%	0.18%	0.40%	0.42%	0.42%	2.38%	2.38%	100.00%	99.71%	0.00%	0.00%
Vodafone 3G	0.14%	0.15%	0.65%	0.44%	99.82%	99.69%	0.12%	0.24%	0.04%	0.06%	0.21%	0.31%	1.74%	1.84%	98.94%	98.85%	0.00%	0.00%

Value calculated by Operator and IMRB match

Value calculated by Operator and IMRB do not match





5 CRITICAL FINDINGS

PMR Consolidated (Network Parameters) for 2G

Telenor and Vodafone failed to meet the benchmark for Worst Affected Cells having more than 3% TCH drop.

3 Day Live Measurement (Network Parameters) for 2G

Aircel, Telenor and Vodafone failed to meet the benchmark of Worst Affected Cells having more than 3% TCH Drop.

Wireless Data Services for 2G & 3G

 TATA GSM failed to meet the benchmark for PDP Context activation success rate during live audit

Note: Most of the operators were not submitted activation done within 4hrs data for monthly as well as 3days live.

Live Calling

- As per the consumers (live calling exercise) Reliance GSM and Telenor failed to meet the benchmark of resolving 98% complaints within 4 weeks and Aircel failed to meet the benchmark of 100% complaints within 6 weeks.
- BSNL failed to meet the benchmark for the parameter Customer Care / Helpline Assessment (voice to voice)
- As per the live calling results, none of the operators met the TRAI benchmark for level 1 service with calls being answered except Telenor and Vodafone.

Metering and billing credibility

- For the billing disputes of post-paid subscribers, it was observed that Idea failed to meet the TRAI benchmark for the parameter.
- > For the prepaid customers all operators met the benchmark of charging disputes except Idea.
- > Reliance GSM and Tata GSM failed to meet the TRAI specified benchmark of 95%.

Note: Tata CDAM had zero complaint during the audit period and they don't have separate IVR data for CDMA, all IVR calls included in Tata GSM.

Drive test 2G

Voice quality

- In Amravati, Raigad, Yavatmal, Ghadchiroli, Dhule, Nagpur SSA, BSNL failed to meet the benchmark for indoor as well as outdoor location.
- In Pune, Osmanabad, Wardha, Ratnagiri, Patbhani, Sangali, SSA BSNL failed to meet the benchmark for voice quality in outdoor location.



- In Sangali SSA, Reliance GSM failed to meet the benchmark for voice quality in indoor as well as outdoor locations.
- In Pune, Osmanabad, Chandrapur, Bhandara, Dhule, Ghadchiroli and Nagpur SSA, Reliance GSM failed to meet the benchmark for voice quality in outdoor location.
- In Nanded SSA, BSNL and Reliance GSM failed to meet the benchmark for voice quality in indoor location.
- In Kudal SSA, Tata CDMA failed to meet the benchmark for voice quality in indoor as well as outdoor location.
- > In Pune SSA, Idea failed to meet benchmark for voice quality in outdoor location.
- > In Dhule SSA, Telenor failed to meet the benchmark for outdoor location.

CSSR

- In Amravati, Yavatamal SSA BSNL failed to meet the benchmark for CSSR in indoor as well outdoor location.
- In Pune, Raigad (Pen), Osmanabad and Dhule SSA BSNL failed to meet the benchmark for CSSR in outdoor location.

Drop Rate

- In Amravati, Yavatamal SSA BSNL failed to meet the benchmark for drop rate in indoor as well outdoor location
- BSNL in Pune, Raigad, Wardha, Nanded, Nagpur, Ghadchiroli and Dhule and Osmanabad SSA failed to meet the benchmark for drop rate in outdoor location.
- > In Bhandara SSA, BSNL failed to meet the benchmark for drop rate in indoor location.
- Reliance GSM in Osmanabad and Pune SSA failed to meet the benchmark for drop rate in outdoor location.

Drive test 3G

Voice quality

- In Amravati, Wardha, Dhule and Bhandara SSA, Airtel 3G failed to meet the benchmark for voice quality in outdoor location.
- In Nagpur and Bhandara SSA BSNL 3G failed to meet the benchmark for drop rate in outdoor location.
- Airtel 3G in Nagpur and BSNL 3G in Wardha failed to meet the benchmark for voice quality in indoor & outdoor location.

CSSR

- > In Raigad (Pen) BSNL 3G failed to meet the benchmark for CSSR in outdoor location.
- In Osmanabad, Yavatamal, Bhandara and Wardha BSNL 3G failed to meet the benchmark for CSSR in indoor & outdoor location.

Drop Rate

- BSNL 3G failed to meet the benchmark in Amravati, Pune, Osmanabad, Raigad (Pen), Parbhani, Dhule for call drop rate in outdoor locations.
- > In Bhandara BSNL 3G failed to meet the benchmark for drop rate in indoor location.
- BSNL 3G failed to meet the benchmark in Yavatamal and Wardha for call drop rate in indoor as well outdoor locations.



6 PARAMETER DESCRIPTION& DETAILED FINDINGS - COMPARISON BETWEEN PMR DATA, 3 DAY LIVE DATA AND LIVE CALLING DATA FOR 2G

6.1 BTS ACCUMULATED DOWNTIME

6.1.1 PARAMETER DESCRIPTION

- **C** The parameter of network availability would be measured from following sub-parameters
 - 1. BTSs Accumulated downtime (not available for service)
 - 2. Worst affected BTSs due to downtime
- 1. Definition BTSs (Base Transceiver Station) accumulated downtime (not available for service) shall basically measure the downtime of the BTSs, including its transmission links/circuits during the period of a month, but excludes all planned service downtime for any maintenance or software up gradation. For measuring the performance against the benchmark for this parameter the downtime of each BTS lasting more than 1 hour at a time in a day during the period of a month were considered.

2. Computation Methodology -

BTS accumulated downtime (not available for service) = Sum of downtime of BTSs in a month in hours i.e. total outage time of all BTSs in hours during a month / (24 x Number of days in a month x Number of BTSs in the network in licensed service area) x 100


3. TRAI Benchmark -

- **a.** BTSs Accumulated downtime (not available for service) $\leq 2\%$
- 4. Audit Procedure -
 - The fault alarm details at the OMC (MSC) for the network outages (due to own network elements and infrastructure service provider end outages) was audited
 - All the BTS in service area were considered. Planned outages due to network up gradation, routine maintenance were not considered.



- Any outage as a result of force majeure were not considered at the time of calculation
- Data is extracted from system log of the server of the operator. This data is in raw format which is further processed to arrive at the cumulative values.
- List of operating sites with cell details and ids are taken from the operator.
- When there is any outage a performance report gets generated in line with that cell resulting and master base of the Accumulated downtime and worst affected BTS due to downtime.

6.1.2 KEY FINDINGS - CONSOLIDATED

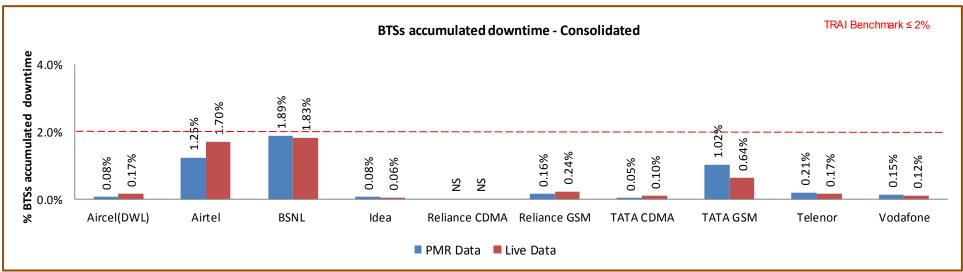


Data Source: Operations and Maintenance Center (OMC) of the operators


All operators met the benchmark on aspect of BTS accumulated downtime as per audit/PMR data.



6.1.2.1 KEY FINDINGS - MONTH 1

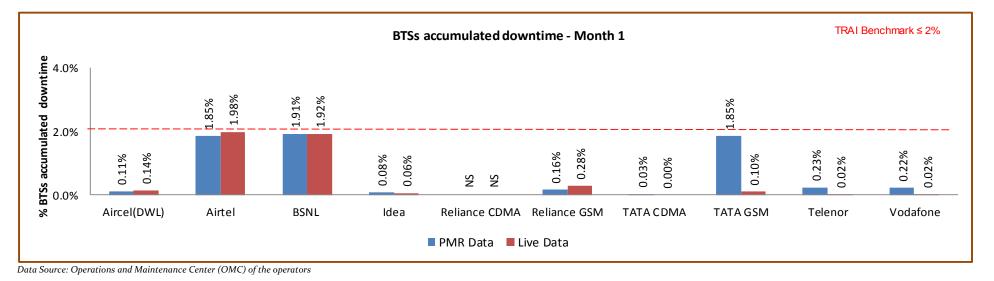




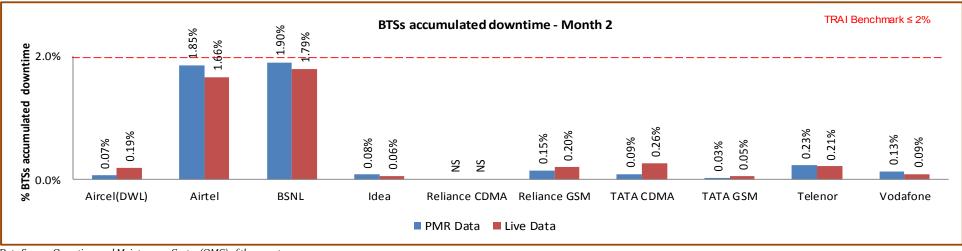

Data Source: Operations and Maintenance Center (OMC) of the operators

6.1.2.3 KEY FINDINGS – MONTH 3

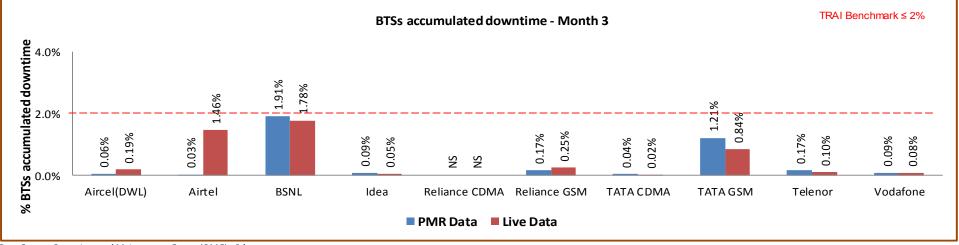

Data Source: Operations and Maintenance Center (OMC) of the operators



6.2 WORST AFFECTED BTS DUE TO DOWNTIME

6.2.1 PARAMETER DESCRIPTION

• Definition - Worst Affected BTS due to downtime shall basically measure percentage of BTS having downtime greater than 24 hours in a month. Planned outages were not considered as part while computing.


For measuring the parameter "Percentage of worst affected BTSs due to downtime" the downtime of each BTS lasting for more than 1 hour at a time in a day during the period of a month was considered.

• Computation Methodology -

Worst affected BTSs due to downtime = (Number of BTSs having accumulated downtime greater than 24 hours in a month /Number of BTS in Licensed Service Area) * 100

- TRAI Benchmark
 - **a.** Worst affected BTSs due to downtime $\leq 2\%$
- Audit Procedure
 - i. The fault alarm details at the OMC (MSC) for the network outages (due to own network elements and infrastructure service provider end outages) was audited
 - ii. All the BTS in service area were considered. Planned outages due to network up gradation, routine maintenance were not considered.
 - iii. Data is extracted from system log of the server of the operator. This data is in raw format which is further processed to arrive at the cumulative values.
 - iv. Any outage as a result of force majeure was not considered at the time of calculation.
 - v. List of operating sites with cell details and ids are taken from the operator.
 - vi. All the BTS having down time greater than 24 hours is assessed and values of BTS accumulated downtime is computed in accordance.

6.2.2 KEY FINDINGS- CONSOLIDATED

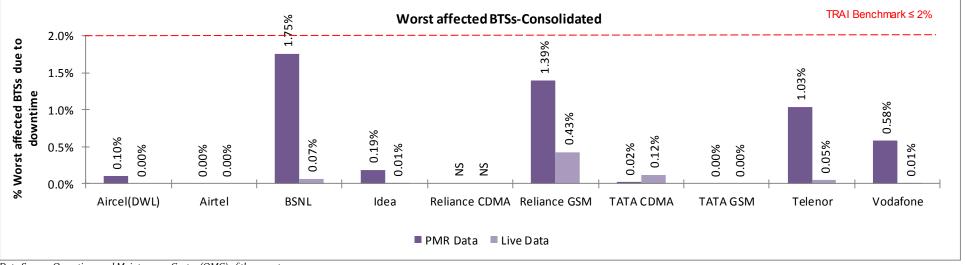


Data Source: Operations and Maintenance Center (OMC) of the operators

All operators met the benchmark for worst affected BTSs due to downtime as per audit/PMR data.

Significant difference was observed between PMR & live measurement data for BSNL Telenor, reliance GSM & CDMA and Vodafone. The possible reason for the variation could be the difference in time frame of data as PMR data is for 30 days and live measurement data is for three days.




6.2.2.1 KEY FINDINGS - MONTH 1

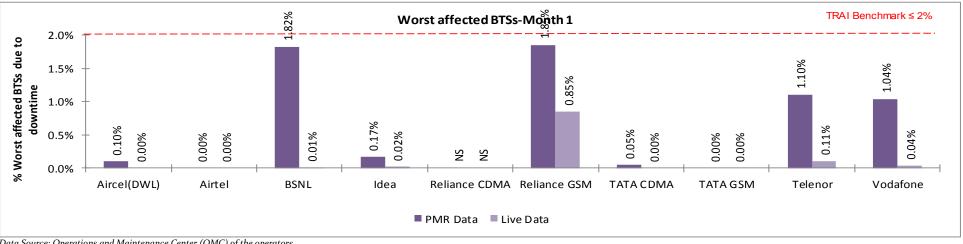


Data Source: Operations and Maintenance Center (OMC) of the operators



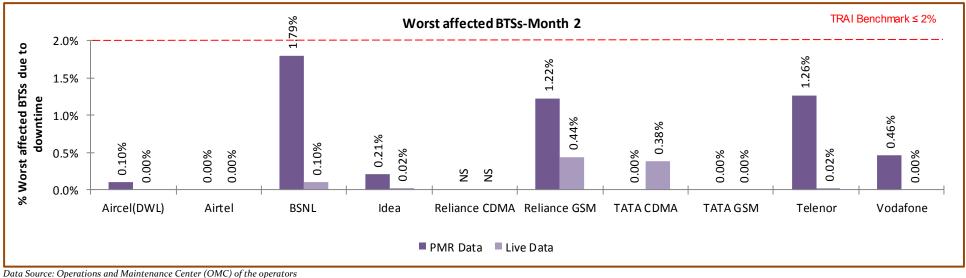



6.2.2.3 KEY FINDINGS - MONTH 3

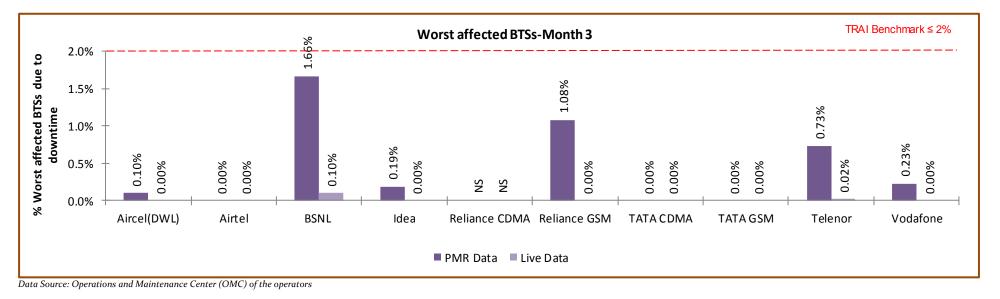



6.3 CALL SET UP SUCCESS RATE

6.3.1 PARAMETER DESCRIPTION

- **1. Definition:** The ratio of successful calls established to total calls is known as Call Set-Up Success Rate (CSSR).
- 2. Computation Methodology-


(Calls Established / Total Call Attempts) * 100

Call Established means the following events have happened in call setup:-

- ✤ call attempt is made
- \clubsuit the TCH is allocated
- \clubsuit the call is routed to the outward path of the concerned MSC
- 3. TRAI Benchmark≥ 95%
- 4. Audit Procedure -
 - 🗞 The cell-wise data generated through counters/ MMC available in the switch for traffic measurements
 - SSR calculation should be measured using OMC generated data only
 - 🗞 Measurement should be only in Time Consistent Busy Hour (CBBH) period for all days of the week
 - ♥ Counter data is extracted from the NOC of the operators.
 - 🗞 Total calls established include all calls established excluding Signaling blocking, TCH Drop and TCH blocking.
 - 🔖 The numerator and denominator values are derived from adding the counter values from the MSC.




6.3.2 KEY FINDINGS - CONSOLIDATED

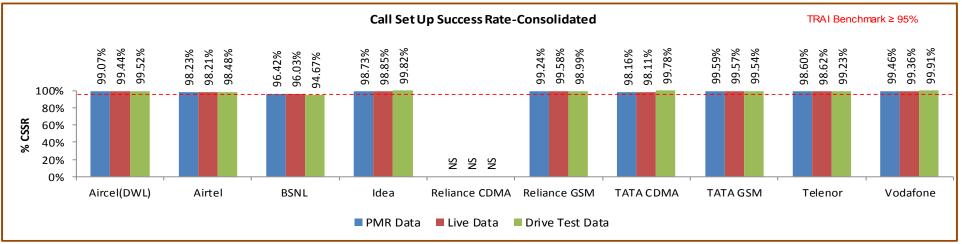


Data Source: Network Operations Center(NOC) of the operators

All operators met the TRAI benchmark as per audit/PMR, 3days live. During drive test

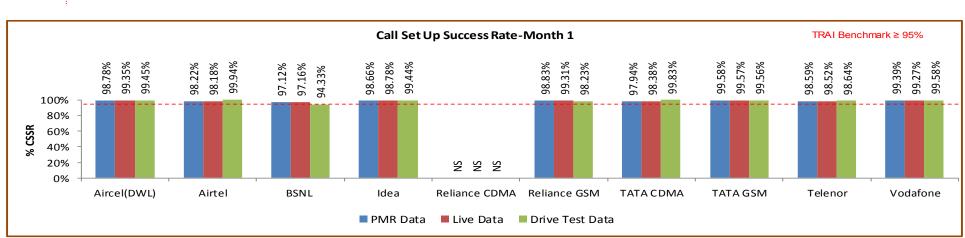


6.3.2.1 KEY FINDINGS – MONTH 1

6.3.2.2 KEY FINDINGS - MONTH 2

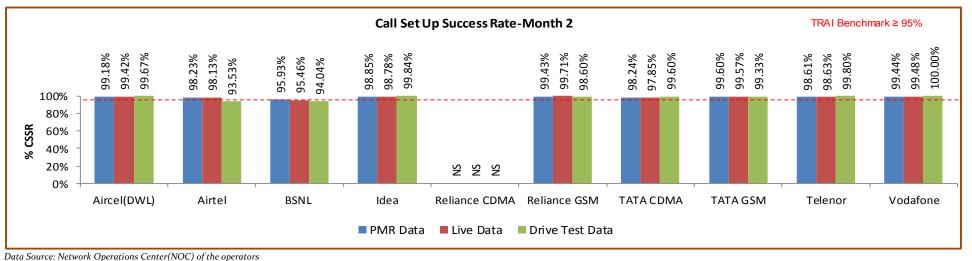



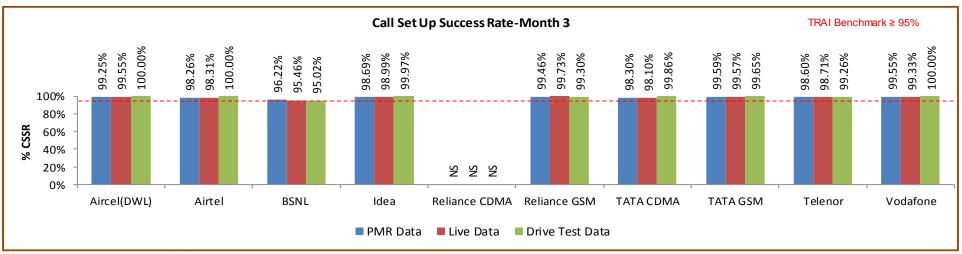



6.4 NETWORK CHANNEL CONGESTION- PAGING CHANNEL /TCH CONGESTION/POI

6.4.1 PARAMETER DESCRIPTION


- **1. Definition:** It means a call is not connected because there is no free channel to serve the call attempt. This parameter represents congestion in the network. It happens at three levels:
 - 😓 SDCCH Level: Stand-alone dedicated control channel
 - ✤ TCH Level: Traffic Channel
 - ✤ POI Level: Point of Interconnect
- 2. Computational Methodology:
 - ⓑ SDCCH / TCH Congestion% = [(A1 x C1) + (A2 x C2) +.....+ (An x Cn)] / (A1 + A2 +...+ An)
 - Where:-A1 = Number of attempts to establish SDCCH / TCH made on day 1
 - C1 = Average SDCCH / TCH Congestion % on day 1
 - A2 = Number of attempts to establish SDCCH / TCH made on day 2
 - C₂ = Average SDCCH / TCH Congestion % on day 2
 - An = Number of attempts to establish SDCCH / TCH made on day n
 - Cn = Average SDCCH / TCH Congestion % on day n
 - \forall POI Congestion% = [(A1 x C1) + (A2 x C2) +.....+ (An x Cn)] / (A1 + A2 +...+ An)
 - Where:-A1 = POI traffic offered on all POIs (no. of calls) on day 1
 - C1 = Average POI Congestion % on day 1
 - A2 = POI traffic offered on all POIs (no. of calls) on day 2
 - C₂ = Average POI Congestion % on day 2

- An = POI traffic offered on all POIs (no. of calls) on day n
- Cn = Average POI Congestion % on day n

3. Benchmark:

- SDCCH Congestion: $\leq 1\%$, TCH Congestion: $\leq 2\%$, POI Congestion: $\leq 0.5\%$
- 4. Audit Procedure -
 - Solution Audit of the details of SDCCH and TCH congestion percentages computed by the operator (using OMC–Switch data only) would be conducted
 - 🗞 The operator should be measuring this parameter during Time consistent busy hour (TCBH) only SDCCH

6.4.2 KEY FINDINGS - SDCCH/PAGING CHANNEL CONGESTION (CONSOLIDATED)

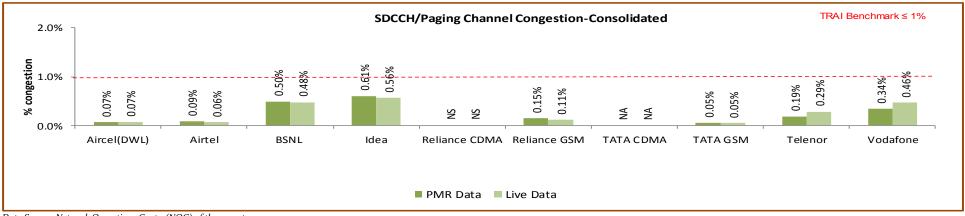


Data Source: Network Operations Center(NOC) of the operators

All operators met the benchmark as per PMR/audit Data. NA: SDCCH/ Paging channel congestion not applicable for CDMA operators.




6.4.2.1 KEY FINDINGS - MONTH 1

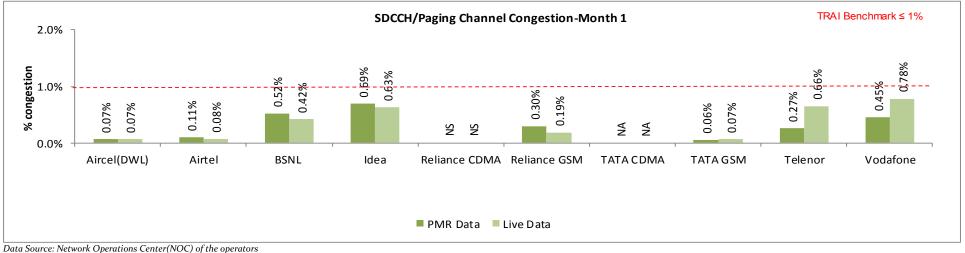


Butu bouree. Network Operations Center(110C) of the operators



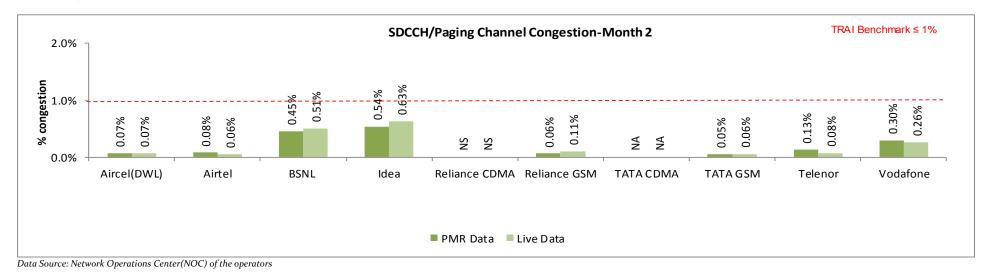




6.4.2.3 KEY FINDINGS – MONTH 3

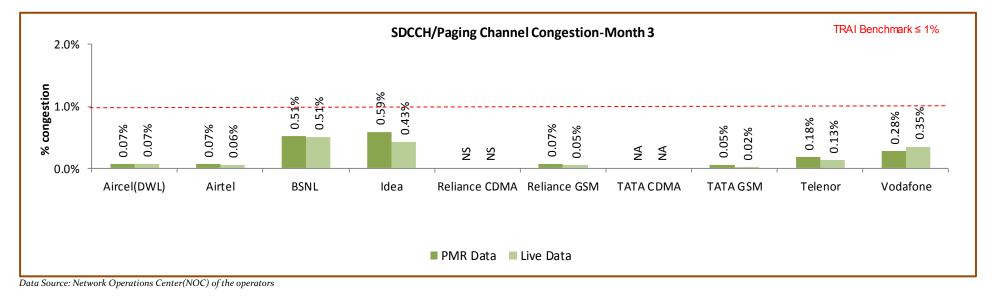



6.4.3 KEY FINDINGS - TCH CONGESTION (CONSOLIDATED)

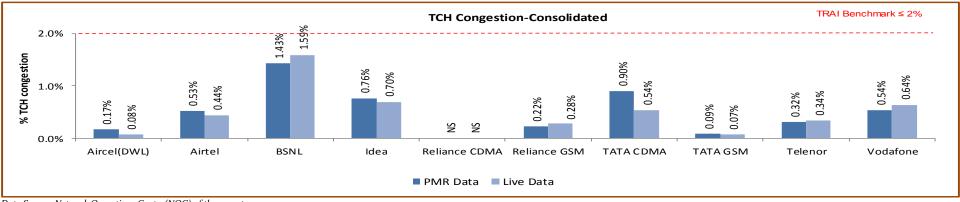


Data Source: Network Operations Center(NOC) of the operators

All operators met the benchmark as per audit/PMR report.


Significant difference was observed between PMR & live measurement data for BSNL, Telenor. The possible reason for the variation could be the difference in time frame of data as PMR data is for 30 days and live measurement data is for three days.

6.4.3.1 KEY FINDINGS - MONTH 1

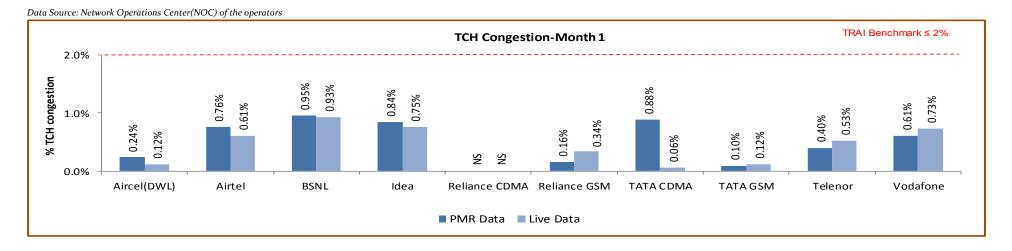


TRAI Required and Telecom Regulatory Authority of India

6.4.3.2 KEY FINDINGS – MONTH 2

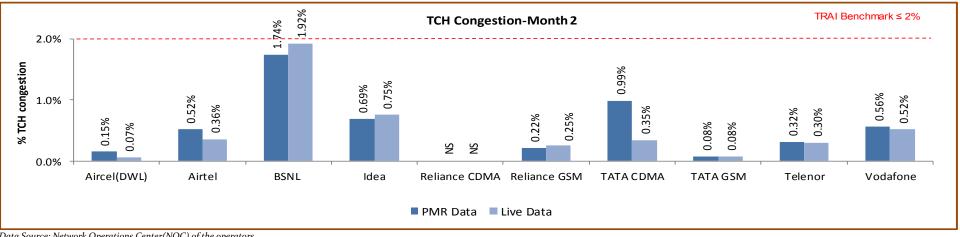



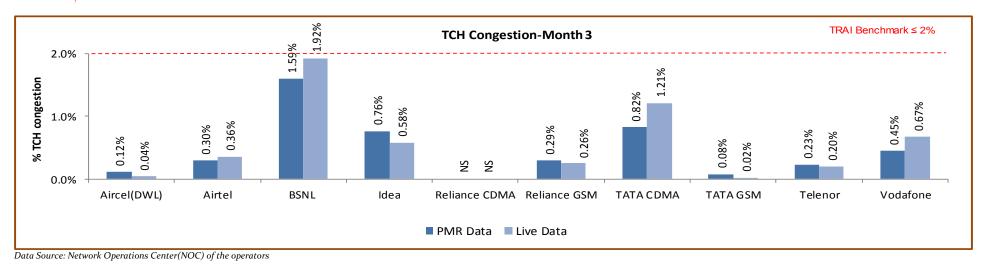

	5. POI Congestion													
				Audit Res	ults for POI Congestio	n- PMR data								
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
Total number of working POIs		78	500	68	950	NS	74	392	192	31	210			
No. of POIs not meeting benchmark		0	0	0	2	NS	0	0	0	0	0			
Total Capacity of all POIs (A) - in erlangs		61975	905061	296699	3418579	NS	110304	201938	265983	1781563	242477929			
Traffic served for all POIs (B)- in erlangs		36942	482312	152009	858538	NS	45361	77085	141036	239096	5272180			
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%			
			l	ive Measureme	nt Results for POI Cor	gestion- 3 Day dat	a							
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
Total number of working POIs		78	500	68	951	NS	72	392	1 92	31	210			
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0			
Total Capacity of all POIs (A) - in erlangs		61192	634677	295491	3465845	NS	109556	201938	265900	998609	242477929			
Traffic served for all POIs (B)- in erlangs		17343	471835	1 46970	847999	NS	44756	76030	117894	233998	5272180			
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%			

6.4.4 KEY FINDINGS – POI CONGESTION (CONSOLIDATED) – AVERAGE OF 3 MONTHS

Data Source: Network Operations Center(NOC) of the operators

All operators met the benchmark of POI Congestion as per PMR/audit Data.



6.4.4.1 KEY FINDINGS – MONTH 1

				5. P	OI Congestion						
			Aud	dit Results for P	OI Congestion-	PMR data-July					
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of working POIs		78	500	68	952	NS	43	392	192	29	211
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		20091	304033	98779	1156419	NS	32228	68015	62454	161535	6527109
Traffic served for all POIs (B)- in erlangs		12364	157476	49714	276463	NS	14795	26202	44621	80147	143982
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%
			Live Meas	urement Result	s for POI Conge	stion- 3 Day data	-July				
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of working POIs		78	500	68	954	NS	43	392	192	29	211
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		19867	305701	98244	1158231	NS	32228	68015	62454	152764	6527109
Traffic served for all POIs (B)- in erlangs		5885	156996	49641	282067	NS	14795	25404	25167	80061	143982
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%



6.4.4.2 KEY FINDINGS – MONTH 2

	5. POI Congestion												
					_	- PMR data-August							
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total number of working POIs		78	500	68	952	NS	43	392	192	33	211		
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0		
Total Capacity of all POIs (A) - in erlangs		20744	301282	98574	1147903	NS	33439	66961	101459	1148710	1396109		
Traffic served for all POIs (B)- in erlangs		12469	162260	50741	288689	NS	14550	24816	47062	80948	242683		
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%		
			Live Mea	surement Resu	ts for POI Cong	estion- 3 Day data-	August						
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total number of working POIs		78	500	68	952	NS	43	392	192	33	211		
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0		
Total Capacity of all POIs (A) - in erlangs		20560	30475	97644	1138231	NS	33987	66961	101459	192792	1396109		
Traffic served for all POIs (B)- in erlangs		5748	155273	49999	282067	NS	14267	24313	47691	76994	242683		
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%		



6.4.4.3 KEY FINDINGS – MONTH 3

	5. POI Congestion												
			Au	dit Results for P	OI Congestion- PM	R data-September							
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total number of working POIs		78	500	69	946	NS	135	392	192	31	209		
No. of POIs not meeting benchmark		0	0	0	2	NS	0	0	0	0	0		
Total Capacity of all POIs (A) - in erlangs		21140	299746	99346	1114258	NS	44636	66961	102070	471319	234554711		
Traffic served for all POIs (B)- in erlangs		12109	162577	51555	293386	NS	16015	26067	49354	78001	4885516		
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%		
			Live Meas	urement Result	s for POI Congestio	n- 3 Day data-Septen	ıber						
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
NDR		78	500	69	946	NS	130	392	192	31	209		
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0		
Total Capacity of all POIs (A) - in erlangs		20766	298502	99602	1169382	NS	43341	66961	101987	653053	234554711		
Traffic served for all POIs (B)- in erlangs		5709	159567	47330	283866	NS	15694	26313	45036	76943	4885516		
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%		



6.5 CALL DROP RATE

6.5.1 PARAMETER DESCRIPTION


- 1. Definition The dropped call rate is the ratio of successfully originated calls that were found to drop to the total number of successfully originated calls that were correctly released.
 - **Total calls dropped** = All calls ceasing unnaturally i.e. due to handover or due to radio loss
 - ♥ **Total calls established** = All calls that have TCH allocation during busy hour
- 2. Computational Methodology: (Total Calls Dropped / Total Calls Established) x 100

3. TRAI Benchmark -

- \bigcirc Call drop rate $\leq 2\%$
- 4. Audit Procedure -
 - Solution of the relevant quarter kept in OMC-R at MSCs and used for arriving at CDR was used
 - Solution The operator should only be considering those calls which are dropped during Time consistent busy hour (TCBH) for all days of the relevant quarter.




6.5.2 KEY FINDINGS - CONSOLIDATED

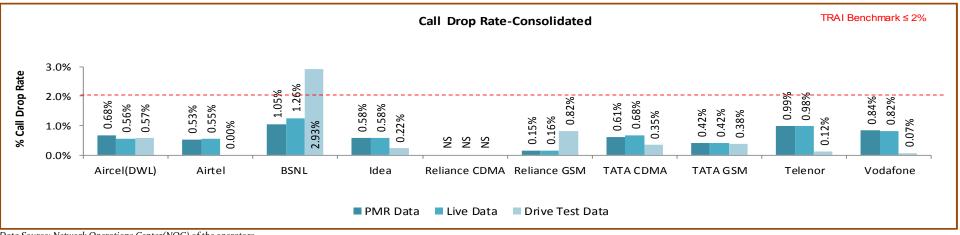


Data Source: Network Operations Center(NOC) of the operators

All operators met the benchmark for call drop rate during audit. During drive test BSNL failed to meet the TRAI benchmark.

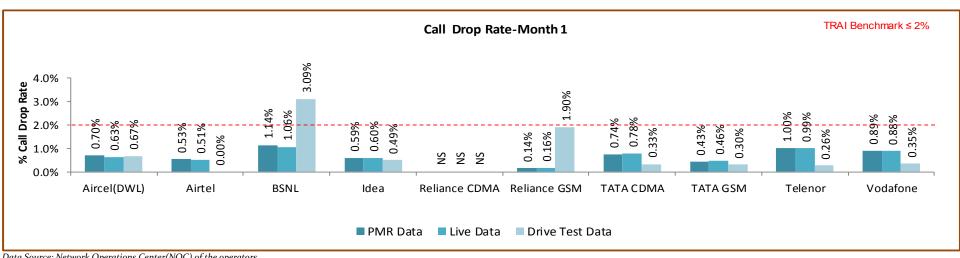


6.5.2.1 KEY FINDINGS - MONTH 1

6.5.2.2 KEY FINDINGS - MONTH 2

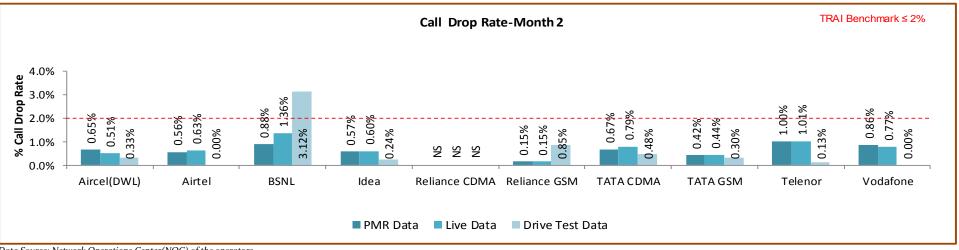



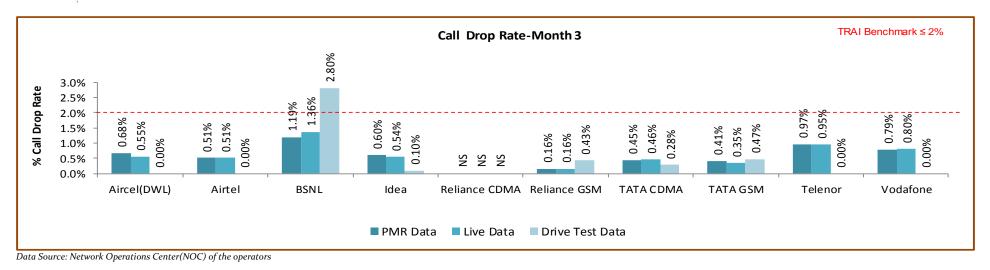



6.6 CELLS HAVING GREATER THAN 3% TCH DROP

6.6.1 PARAMETER DESCRIPTION

- 1. Definition- Worst Affected Cells having more than 3% TCH drop shall measure the ratio of total number of cells in the network to the ratio of cells having more than 3% TCH drop.
- 2. Computational Methodology: (Total number of cells having more than 3% TCH drop during CBBH/ Total number of cells in the network) x 100

3. TRAI Benchmark -

Solution Worst affected cells having more than 3% TCH drop rate $\leq 3\%$


4. Audit Procedure -

Solution of the relevant quarter kept in OMC-R at MSCs and used for arriving at CDR would be conducted.

The operator should only be considering those calls which are dropped during Cell Bouncing Busy hour (CBBH) for all days of the relevant quarter.




6.6.2 KEY FINDINGS - CONSOLIDATED

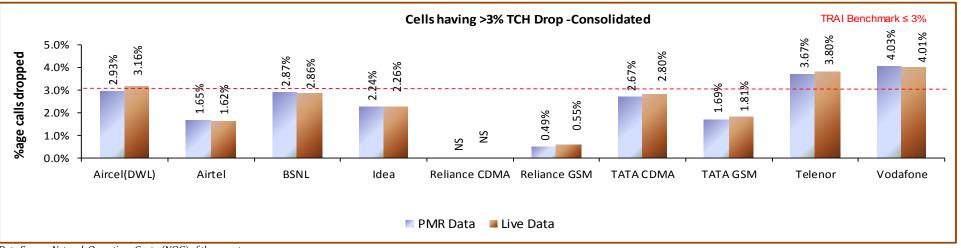


Data Source: Network Operations Center(NOC) of the operators

Aircel, BSNL and Telenor failed to meet the TRAI benchmark in PMR data and Live data and Vodafone failed to meet in PMR Data.

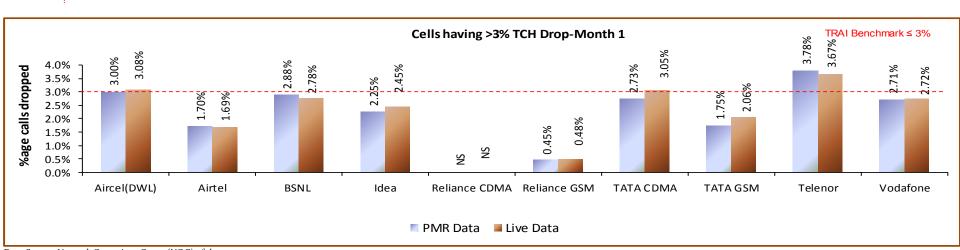


6.6.2.1 KEY FINDINGS – MONTH 1

6.6.2.2 KEY FINDINGS – MONTH 2

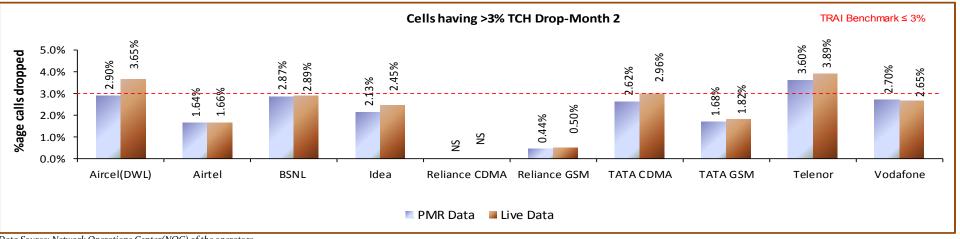



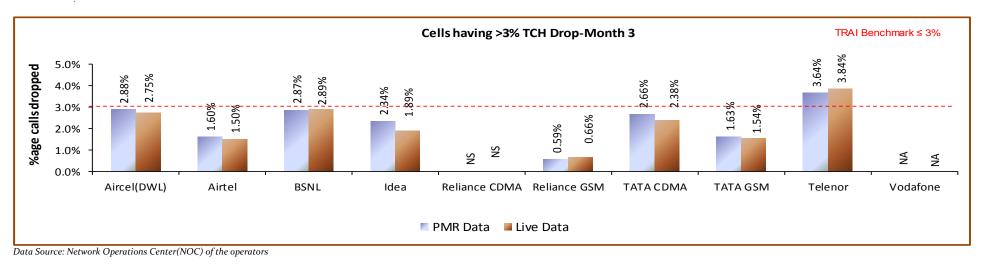



6.7 VOICE QUALITY

6.7.1 PARAMETER DESCRIPTION

1. Definition:


- ⓑ for GSM service providers the calls having a value of o −5 are considered to be of good quality (on a seven point scale)
- ✤ For CDMA the measure of voice quality is Frame Error Rate (FER). FER is the probability that a transmitted frame will be received incorrectly. Good voice quality of a call is considered when it FER value lies between 0 4 %

2. Computational Methodology:

- Solutions with good voice quality = (No. of voice samples with good voice quality / Total number of samples) x 100
- **3.** TRAI Benchmark: ≥ 95%
- 4. Audit Procedure
 - a. A sample of calls would be taken randomly from the total calls established.
 - b. The operator should only be considering those calls which are meeting the desired benchmark of good voice quality.




6.7.2 KEY FINDINGS

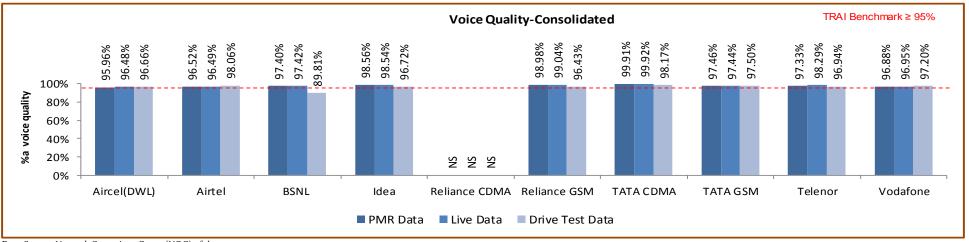


Data Source: Network Operations Center(NOC) of the operators

TATA CDMA failed to meet the benchmark for PMR Data and Live Data. During drive test BSNL failed to meet the TRAI benchmark.

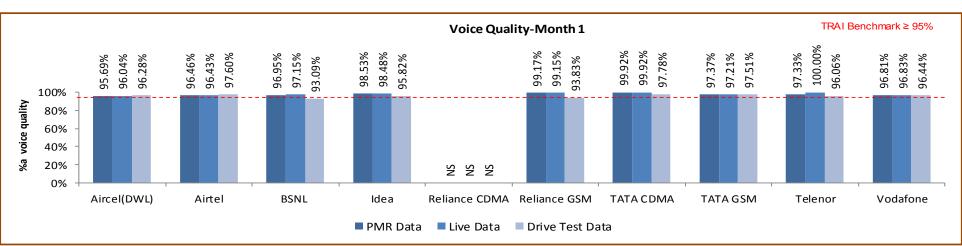


6.7.2.1 KEY FINDINGS - MONTH 1

6.7.2.2 KEY FINDINGS - MONTH 2

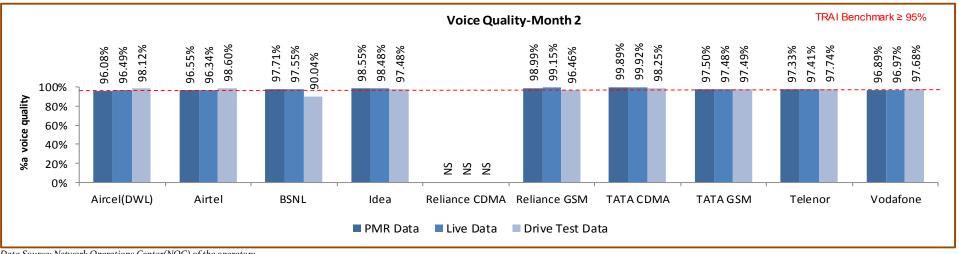

Data Source: Network Operations Center(NOC) of the operators



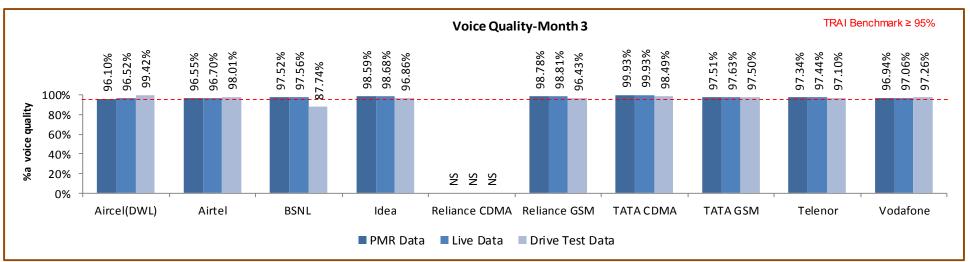

7 PARAMETER DESCRIPTION & DETAILED FINDINGS - COMPARISON BETWEEN PMR DATA, 3 DAY LIVE DATA AND LIVE CALLING DATA FOR 3G

7.1 NODE BS DOWNTIME

7.1.1 PARAMETER DESCRIPTION

C The parameter of network availability would be measured from following sub-parameters

1. Node Bs downtime (not available for service)

2. Worst affected Node Bs due to downtime

- Definition Node Bs downtime (not available for service): In the case of 3G networks, instead of BTS the nomenclature is Node B. The measurement methodology for the parameter Node B Accumulated downtime (not available for service) will be similar to the existing parameter for BTSs Accumulated downtime (not available for service).
- Data Extraction/collection methodology Data extraction to be done from appropriate counters. Auditors should be aware of counter details and definitions for each operator.
- **Source of Data:** Network Operation Center (NOC) or a Central Server
- **Computation Methodology** –

Node Bs downtime (not available for service) = Sum of downtime of Node Bs in a month in hours i.e. total outage time of all Node Bs in hours during a month / (24 x Number of days in a month x Number of Node Bs in the network in licensed service area) x 100

3. TRAI Benchmark -


a. Node Bs downtime (not available for service) $\leq 2\%$

4. Audit Procedure -

The fault alarm details at the OMC (MSC) for the network outages (due to own network elements and infrastructure service provider end outages) was audited



- All the Node Bs in service area was considered. Planned outages due to network up gradation, routine maintenance were not considered.
- Any outage as a result of force majeure were not considered at the time of calculation
- Data is extracted from system log of the server of the operator. This data is in raw format which is further processed to arrive at the cumulative values.
- List of operating sites with cell details and ids are taken from the operator.
 - When there is any outage a performance report gets generated in line with that cell resulting and master base of the Node Bsdowntime and worst affected Node Bs due to downtime.

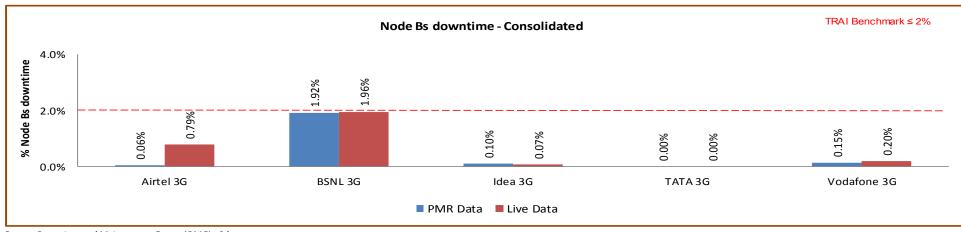


7.1.2 KEY FINDINGS - CONSOLIDATED

Source: Operations and Maintenance Center (OMC) of the operators

All operators met the TRAI benchmark.




7.1.2.1 KEY FINDINGS - MONTH 1

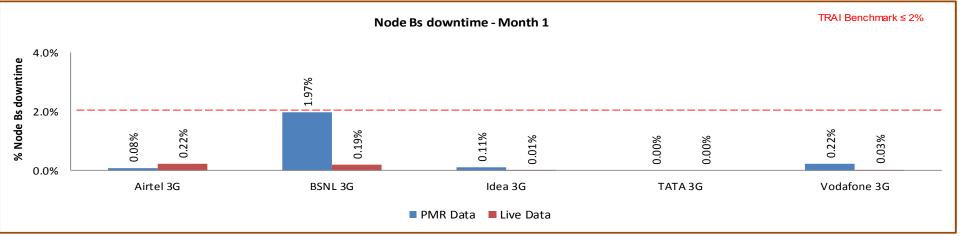


Data Source: Operations and Maintenance Center (OMC) of the operators

^{7.1.2.2} KEY FINDINGS – MONTH 2

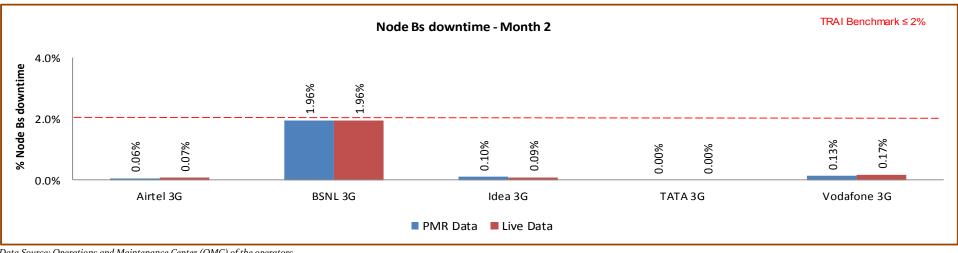



7.1.2.3 KEY FINDINGS – MONTH 3

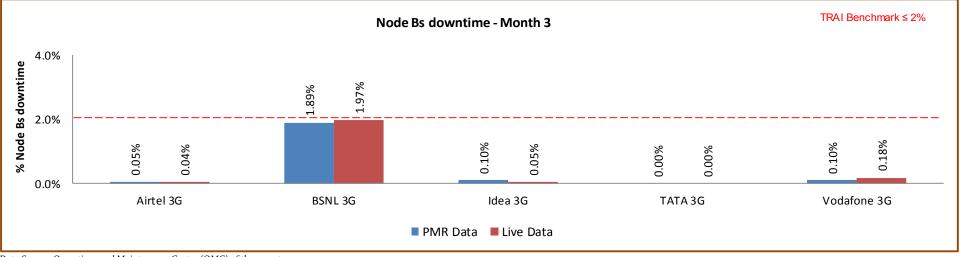

Data Source: Operations and Maintenance Center (OMC) of the operators



7.2 WORST AFFECTED NODE BS DUE TO DOWNTIME

7.2.1 PARAMETER DESCRIPTION

• Definition – Worst Affected Node Bs due to downtime shall basically measure percentage of Node Bs having downtime greater than 24 hours in a month. Planned outages were not considered as part while computing.

For measuring the parameter "Percentage of worst affected Node Bs due to downtime" the downtime of each Node B lasting for more than 1 hour at a time in a day during the period of a month was considered.

• Computation Methodology -


Worst affected Node Bs due to downtime = (Number of Node Bs having accumulated downtime greater than 24 hours in a month /Number of Node Bs in Licensed Service Area) * 100

- TRAI Benchmark
 - **b.** Worst affected Node Bss due to downtime $\leq 2\%$
- Audit Procedure
 - i. The fault alarm details at the OMC (MSC) for the network outages (due to own network elements and infrastructure service provider end outages) was audited
 - ii. All the Node Bs in service areas were considered. Planned outages due to network up gradation, routine maintenance were not considered.
 - iii. Data is extracted from system log of the server of the operator. This data is in raw format which is further processed to arrive at the cumulative values.
 - iv. Any outage as a result of force majeure was not considered at the time of calculation.
 - v. List of operating sites with cell details and ids are taken from the operator.




vi. All the Node Bs having down time greater than 24 hours is assessed and values of NodeBs accumulated downtime is computed in accordance.



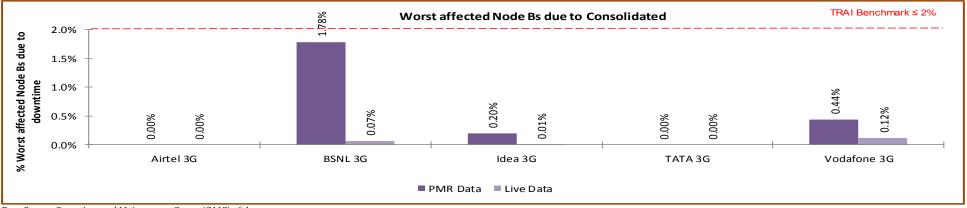

Data Source: Operations and Maintenance Center (OMC) of the operators


All operators met the TRAI benchmark for worst affected Node Bs due to downtime as per audit/PMR data.

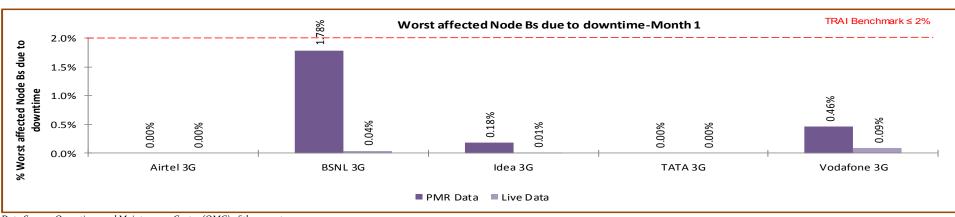

7.2.2.1 KEY FINDINGS - MONTH 1


Data Source: Operations and Maintenance Center (OMC) of the operators

7.2.2.2 KEY FINDINGS – MONTH 2

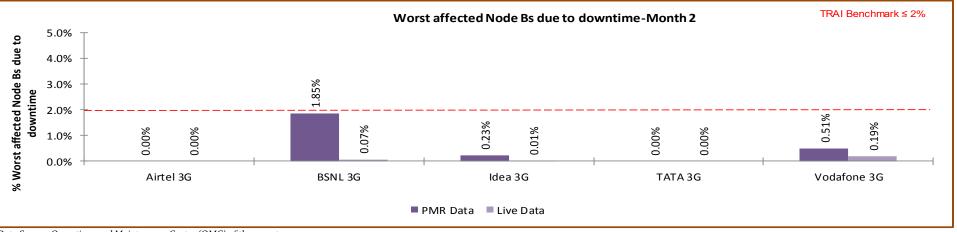

Data Source: Operations and Maintenance Center (OMC) of the operators

^{7.2.2.3} KEY FINDINGS - MONTH 3

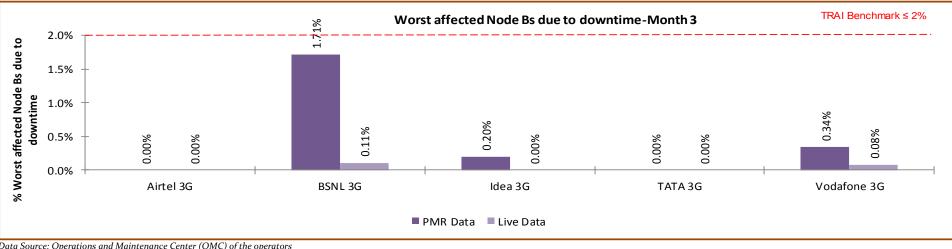

Data Source: Operations and Maintenance Center (OMC) of the operators



7.3 CALL SET UP SUCCESS RATE

7.3.1 PARAMETER DESCRIPTION

- 1. **Definition:** This parameter is same for 2G Networks as well as 3G Networks. However, the network elements involved in both the networks are different. Call Set-up Success Rate is defined as the ratio of Established Calls to Call Attempts. For establishing a call in 3G Networks, User Equipment (UE) accesses the Universal Terrestrial Radio Access Network (UTRAN) and establishes an RRC connection. Once RRC connection is established the Non Access Stratum (NAS) messages are exchanged between the UE and the Core Network (CN). The last step of the call setup is the establishment of a Radio Access Bearer (RAB) between the CN and the UE. However, any RAB abnormal release after RAB Assignment Response or Alerting/Connect message is to be considered as a dropped call.
- 2. Data Extraction/collection methodology Data extraction to be done from appropriate counters. Auditors should be aware of counter details and definitions for each operator.
- 3. Source of Data: Network Operation Center (NOC) or a Central Server

4. Computation Methodology-(RRC Established / Total RRC Attempts) * 100


RRC Established means the following events have happened in RRC setup:-

- ✤ RRC attempt is made
- ✤ The RRC established
- Solution The RRC is routed to the outward path of the concerned MSC
- **5. TRAI Benchmark≥** 95%
- 6. Audit Procedure -
 - The cell-wise data generated through counters/ MMC available in the switch for traffic measurements



- **CSSR** calculation should be measured using OMC generated data only
- Measurement should be only in Time Consistent Busy Hour (CBBH) period for all days of the week
- Counter data is extracted from the NOC of the operators.
- **•** Total calls established include all calls established excluding RAB congestion.
 - ♥ The numerator and denominator values are derived from adding the counter values from the MSC.

7.3.2 KEY FINDINGS - CONSOLIDATED

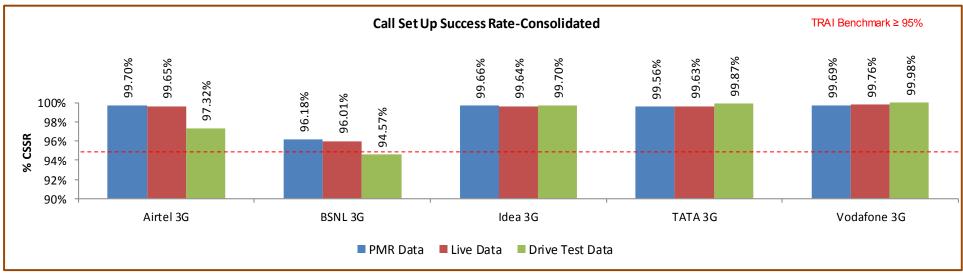


Data Source: Network Operations Center(NOC) of the operators

All operators met the TRAI benchmark as per audit/PMR 3days live. During drive test BSNL 3G failed to meet the TRAI benchmark.




7.3.2.1 KEY FINDINGS - MONTH 1

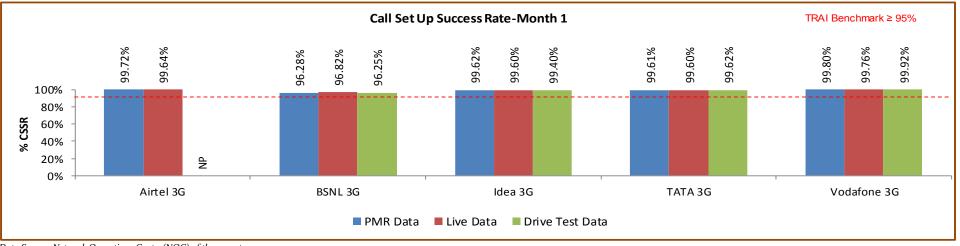


Data Source: Network Operations Center(NOC) of the operators



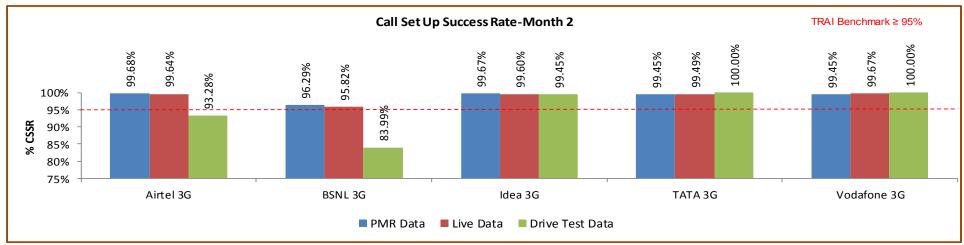



7.3.2.3 KEY FINDINGS – MONTH 3

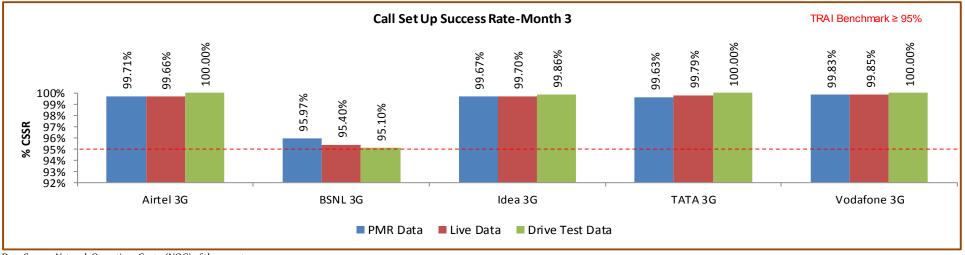

Data Source: Network Operations Center(NOC) of the operators



7.4 NETWORK CHANNEL CONGESTION- RRC CONGESTION/ CIRCUIT SWITCHED RAB CONGESTION

7.4.1 PARAMETER DESCRIPTION

- **1. Definition** (**RRC Congestion**): This parameter has been amended to include RRC Congestion in 3G Networks.
- 2. **Definition (Circuit Switched RAB congestion):** Circuit Switched RAB congestion is similar to Traffic Channel Congestion. Therefore, the existing parameter has been amended to include RAB congestion in 3G Networks.
- 3. Point of Interconnection (POI) Congestion: This parameter denotes congestion at the outgoing traffic between two networks and is equally applicable for 2G networks and 3G networks.
 - \clubsuit RRC Level: Stand-alone dedicated control channel
 - ✤ RAB Level: Traffic Channel
 - ✤ POI Level: Point of Interconnect
- 4. Data Extraction/collection methodology Data extraction to be done from appropriate counters. Auditors should be aware of counter details and definitions for each operator.
- 5. Source of Data: Network Operation Center (NOC) or a Central Server
- 6. Computational Methodology:
 - ♣ RRC / RAB Congestion% = [(A1 x C1) + (A2 x C2) +.....+ (An x Cn)] / (A1 + A2 +...+ An)
 - Where:-A1 = Number of attempts to establish RRC/ RAB made on day 1
 - C1 = Average RRC / RAB Congestion % on day 1
 - A2 = Number of attempts to establish RRC / RAB made on day 2
 - C₂ = Average RRC / RAB Congestion % on day 2
 - An = Number of attempts to establish RRC / RAB made on day n
 - Cn = Average RRC / RAB Congestion % on day n

- ♥ POI Congestion% = [(A1 x C1) + (A2 x C2) +.....+ (An x Cn)] / (A1 + A2 +...+ An)
 - Where:-A1 = POI traffic offered on all POIs (no. of calls) on day 1
 - C1 = Average POI Congestion % on day 1
 - A2 = POI traffic offered on all POIs (no. of calls) on day 2
 - C2 = Average POI Congestion % on day 2
 - An = POI traffic offered on all POIs (no. of calls) on day n
 - Cn = Average POI Congestion % on day n

7. Benchmark:


𝔅 RRC Congestion: ≤ 1%, RAB Congestion: ≤ 2%, POI Congestion: ≤ 0.5%

8. Audit Procedure -

- Audit of the details of RRC and RAB congestion percentages computed by the operator (using OMC–Switch data only) would be conducted
 - 🗞 The operator should be measuring this parameter during Time consistent busy hour (TCBH) only RRC




7.4.2 KEY FINDINGS - RRC CONGESTION (CONSOLIDATED)

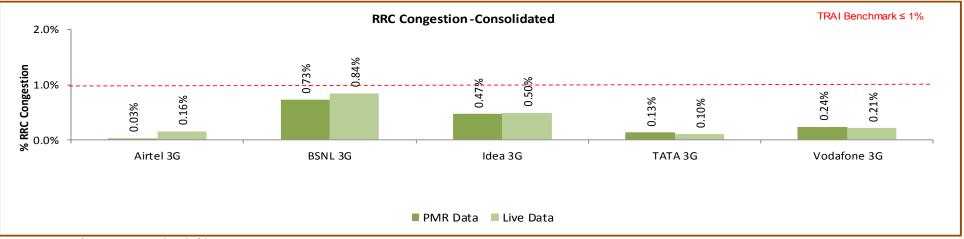


Data Source: Network Operations Center(NOC) of the operators

All operators met the TRAI benchmark for PMR and live audit.




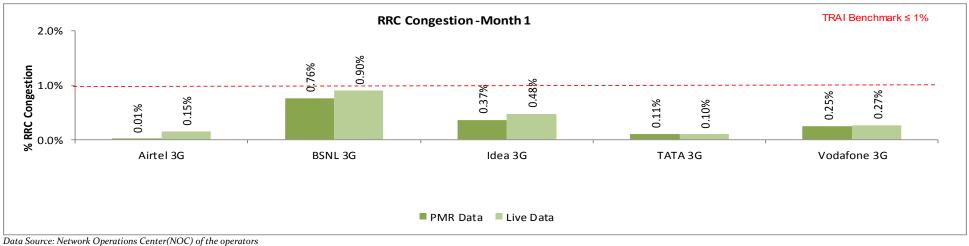






7.4.2.2 KEY FINDINGS – MONTH 2

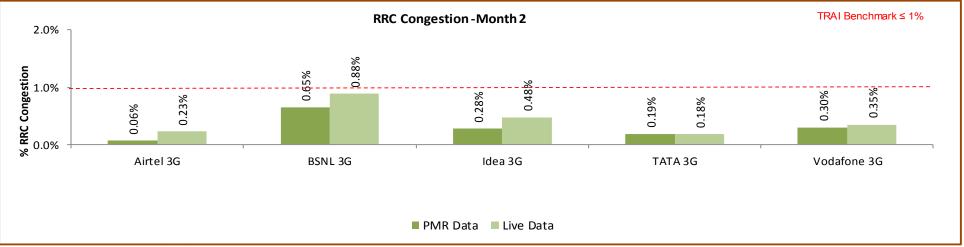


Data Source: Network Operations Center(NOC) of the operators



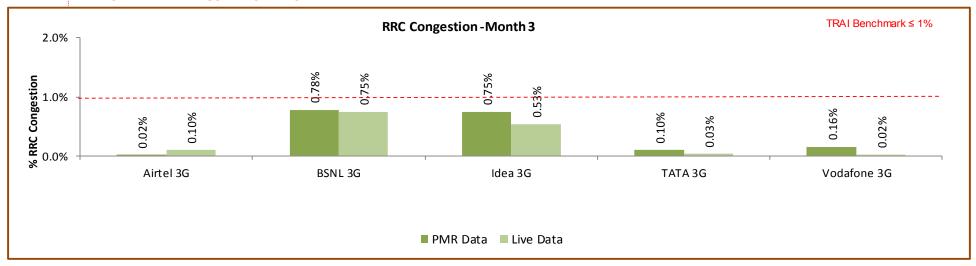



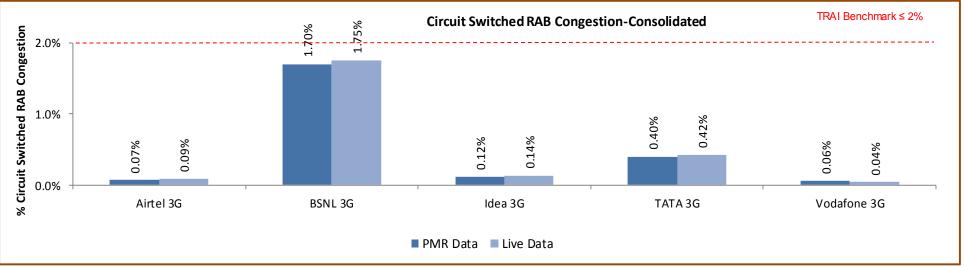


Data Source: Network Operations Center(NOC) of the operators

All operators met the benchmark as per audit/PMR report.


Significant difference was observed between PMR & live measurement data for BSNL, Airtel and TATA. The possible reason for the variation could be the difference in time frame of data as PMR data is for 30 days and live measurement data is for three days.




7.4.3.1 KEY FINDINGS - MONTH 1

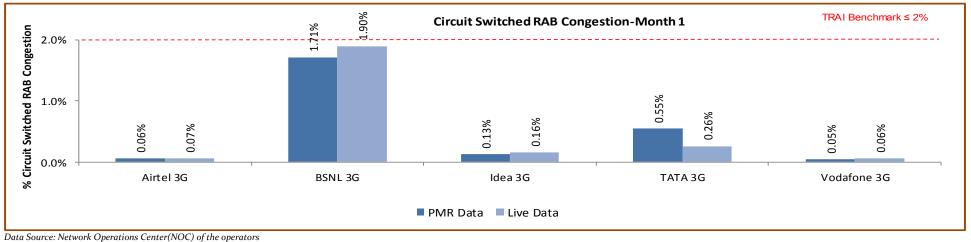

^{7.4.3.2} KEY FINDINGS - MONTH 2

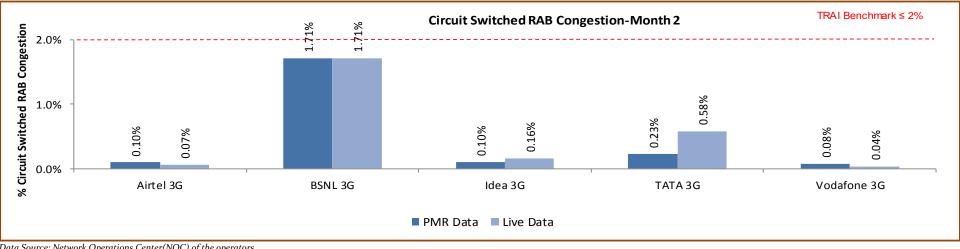

7.4.3.3 KEY FINDINGS – MONTH 3

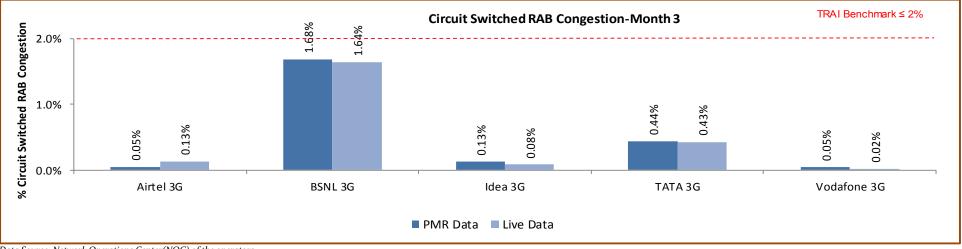



5. POI Congestion						
Audit Results for POI Congestion- PMR data						
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	950	192	210
No. of POIs not meeting benchmark		0	0	2	0	0
Total Capacity of all POIs (A) - in erlangs		905061	296699	3418579	265425	242477929
Traffic served for all POIs (B)- in erlangs		482312	152009	858538	141036	5272180
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	0.00%
Li	ve Measurement	Results for POI O	ongestion- 3 Day	data		
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	952	192	210
No. of POIs not meeting benchmark		0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		632977	295474	3475845	218937	242477929
Traffic served for all POIs (B)- in erlangs		471835	147973	847999	95370	5272180
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	0.00%

7.4.4 KEY FINDINGS – POI CONGESTION (CONSOLIDATED) – AVERAGE OF 3 MONTHS

Data Source: Network Operations Center(NOC) of the operators

All operators met the benchmark of POI Congestion as per PMR/audit Data.



7.4.4.1 KEY FINDINGS – MONTH 1

5. POI Congestion						
Audit Results for POI Congestion- PMR data-July						
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	952	192	211
No. of POIs not meeting benchmark		0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		304033	98779	1156419	62454	6527109
Traffic served for all POIs (B)- in erlangs		157476	49714	276463	44621	143982
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%
L	ive Measureme	nt Results for Po	OI Congestion- 3	B Day data-July		
POI congestion	Benchmark	Airtel 3G	BSNL 3G	ldea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	954	192	211
No. of POIs not meeting benchmark		0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		304001	98244	1158231	58475	6527109
Traffic served for all POIs (B)- in erlangs		156996	49641	282067	25167	143982
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%



7.4.4.2 KEY FINDINGS – MONTH 2

5. POI Congestion						
Audit Results for POI Congestion- PMR data-August						
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	952	192	211
No. of POIs not meeting benchmark		0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		301282	98574	1147903	101459	1396109
Traffic served for all POIs (B)- in erlangs		162260	50741	288689	47062	242683
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	0.00%
Live	Measurement	Results for POI (Congestion- 3 Da	ay data-August		
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	952	192	211
No. of POIs not meeting benchmark		0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		30475	97644	1148231	58475	1396109
Traffic served for all POIs (B)- in erlangs		155273	49999	282067	25167	242683
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	0.00%



7.4.4.3 KEY FINDINGS – MONTH 3

5. POI Congestion							
Audit Results for POI Congestion- PMR data-September							
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G	
Total number of working POIs		500	69	946	192	209	
No. of POIs not meeting benchmark		0	0	2	0	0	
Total Capacity of all POIs (A) - in erlangs		299746	99346	1114258	101512	234554711	
Traffic served for all POIs (B)- in erlangs		162577	51555	293386	49354	4885516	
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	0.00%	
Live	Live Measurement Results for POI Congestion- 3 Day data-September						
POI congestion	Benchmark	Airtel 3G	BSNL 3G	ldea 3G	TATA 3G	Vodafone 3G	
Total number of working POIs		500	69	949	192	209	
No. of POIs not meeting benchmark		0	0	0	0	0	
Total Capacity of all POIs (A) - in erlangs		298502	99585	1169382	101987	234554711	
Traffic served for all POIs (B)- in erlangs		159567	48334	283866	45036	4885516	
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	0.00%	



7.5 CIRCUIT SWITCHED VOICE DROP RATE

7.5.1 PARAMETER DESCRIPTION

- 1. Definition The Call Drop Rate measures the inability of Network to maintain a call and is defined as the ratio of abnormal speech disconnects with respect to all speech disconnects (both normal and abnormal). In 3G Networks, a normal disconnect is initiated from the Mobile Switching Centre (MSC) at completion of the call by a RAB Disconnect message. An abnormal RAB disconnect can be initiated by either UTRAN or CN and includes Radio Link Failures, Uplink (UL) or Downlink (DL) interference or any other reason.
 - 🗞 Total No. of voice RAB abnormally released = All calls ceasing unnaturally i.e. due to handover or due to radio loss
 - **No. of voice RAB normally released** = All calls that have RAB allocation during busy hour
- 2. Data Extraction/collection methodology Data extraction to be done from appropriate counters. Auditors should be aware of counter details and definitions for each operator.
- 3. Source of Data: Network Operation Center (NOC) or a Central Server
- 4. Computational Methodology: (No. of voice RAB normally released / (No. of voice RAB normally released + RAB abnormally released)x 100

Key Performance Indicator Term	Definition			
#RAB Normal Release(CSV)	Number of voice RAB normally Released			
#RAB Abnormal Release(CSV)	Number of voice RAB abnormally Released			


5. TRAI Benchmark -

 \clubsuit Circuit switched voice drop rate $\leq 2\%$

6. Audit Procedure -


- Audit of traffic data of the relevant quarter kept in OMC-R at MSCs and used for arriving at CDR was used
- So The operator should only be considering those calls which are dropped during Time consistent busy hour (TCBH) for all days of the relevant quarter.

7.5.2 KEY FINDINGS - CONSOLIDATED

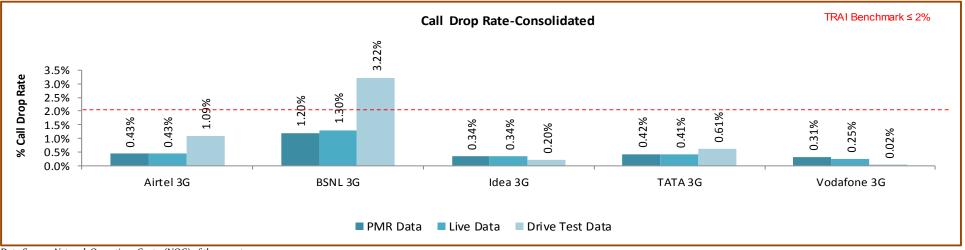

Data Source: Network Operations Center(NOC) of the operators


All operators met the benchmark for call drop rate during audit. During drive test BSNL 3G failed to meet the TRAI benchmark.

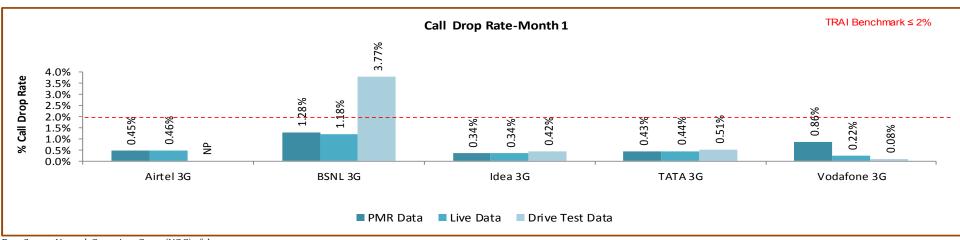


7.5.2.1 KEY FINDINGS - MONTH 1



7.5.2.2 KEY FINDINGS – MONTH 2

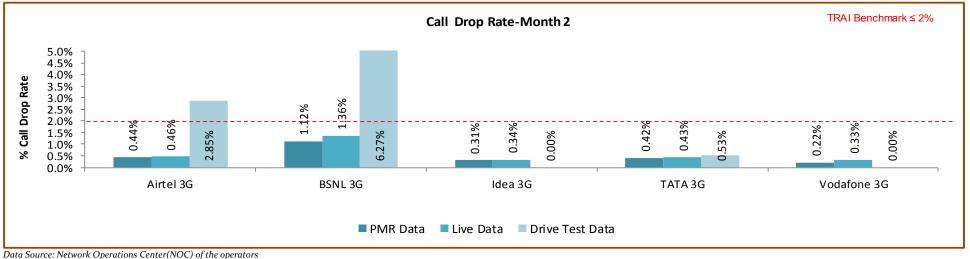



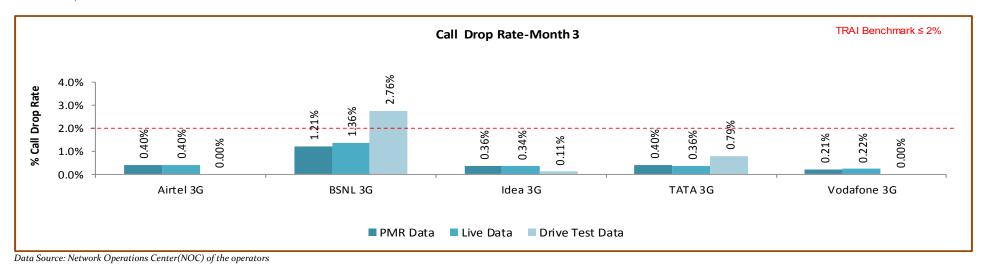



7.6 WORST AFFECTED CELLS HAVING MORE THAN 3% CIRCUIT SWITCHED VOICE DROP RATE

7.6.1 PARAMETER DESCRIPTION

1. Definition- Cells having more than 3% circuit switch voice quality: The existing parameter has been amended to cover 3G Networks to assess worst affected cells having more than 3% CSV Drop Rate.

2. Data Extraction/collection methodology - Data extraction to be done from appropriate counters. Auditors should be aware of counter details and definitions for each operator.

3. Source of Data: Network Operation Center (NOC) or a Central Server

4. Computational Methodology: (Number of cells having CSV drop rate > 3% during CBBH in a month/ Total number of cells in the licensed area) x 100

- 5. TRAI Benchmark -
 - W Worst affected cells having CSV drop rate > 3% during CBBH in a month \leq 3%


6. Audit Procedure -

• Audit of traffic data of the relevant quarter kept in OMC-R at MSCs and used for arriving at CDR would be conducted.

The operator should only be considering those calls which are dropped during Cell Bouncing Busy hour (CBBH) for all days of the relevant quarter.




7.6.2 KEY FINDINGS - CONSOLIDATED

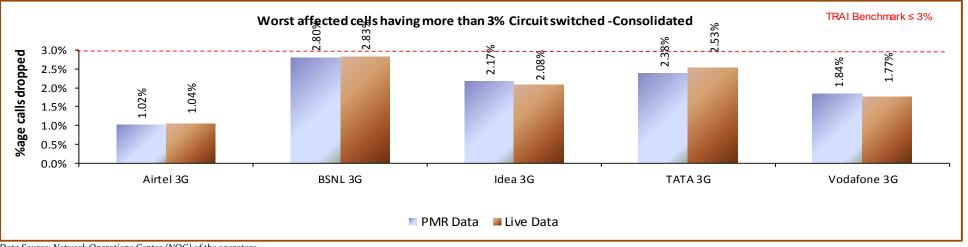


Data Source: Network Operations Center (NOC) of the operators

All operators met the benchmark during audit.

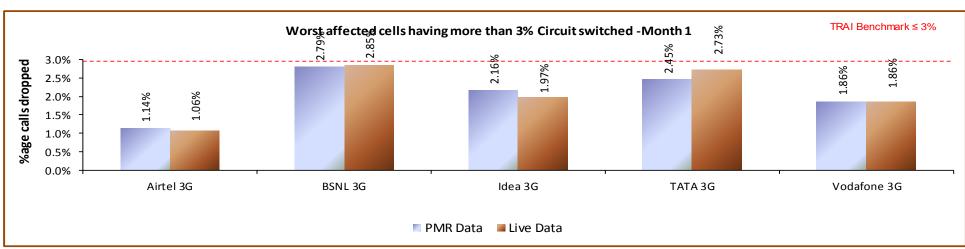


7.6.2.1 KEY FINDINGS - MONTH 1

7.6.2.2 KEY FINDINGS – MONTH 2

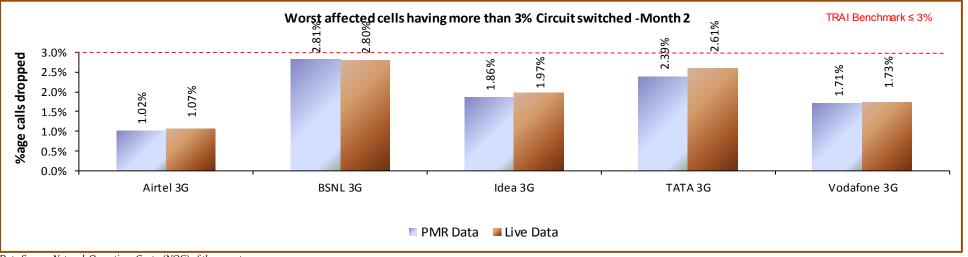

Data Source: Network Operations Center(NOC) of the operators



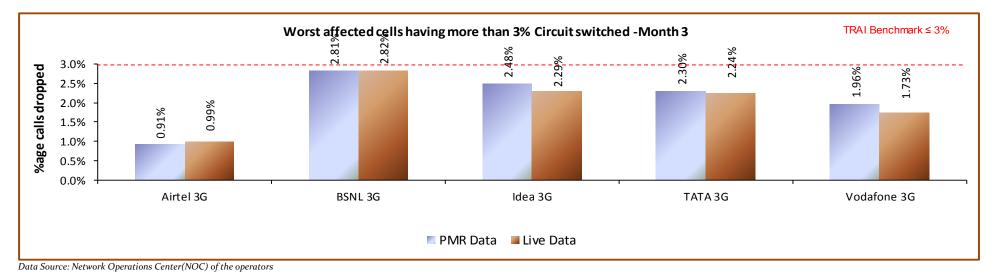



7.7 CIRCUIT SWITCH VOICE QUALITY

7.7.1 PARAMETER DESCRIPTION

5. Definition:


- ⓑ for GSM service providers the calls having a value of o −5 are considered to be of good quality (on a seven point scale)
- ♣ For CDMA the measure of voice quality is Frame Error Rate (FER). FER is the probability that a transmitted frame will be received incorrectly. Good voice quality of a call is considered when it FER value lies between 0 4 %

6. Computational Methodology:

- Solutions with good voice quality = (No. of voice samples with good voice quality / Total number of samples) x 100
- **7. TRAI Benchmark**:≥ 95%
- 8. Audit Procedure
 - a. A sample of calls would be taken randomly from the total calls established.
 - b. The operator should only be considering those calls which are meeting the desired benchmark of good voice quality.




7.7.2 KEY FINDINGS

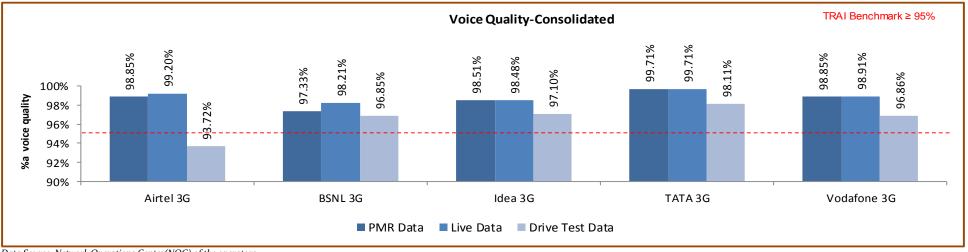

Data Source: Network Operations Center(NOC) of the operators


All operators met the benchmark in live audit. Airtel 3G failed to meet the TRAI benchmark for voice quality.

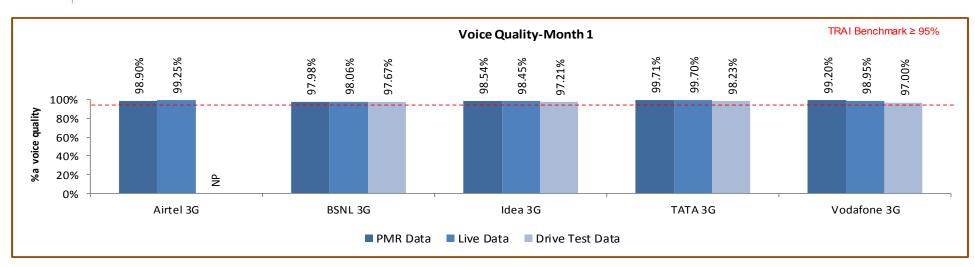

7.7.2.1 KEY FINDINGS – MONTH 1




7.7.2.2 KEY FINDINGS – MONTH 2

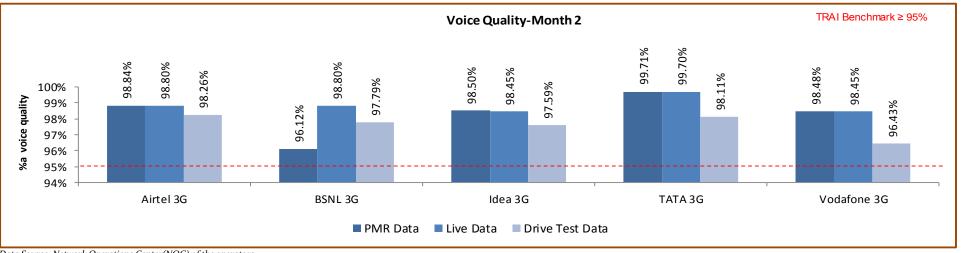

Data Source: Network Operations Center(NOC) of the operators




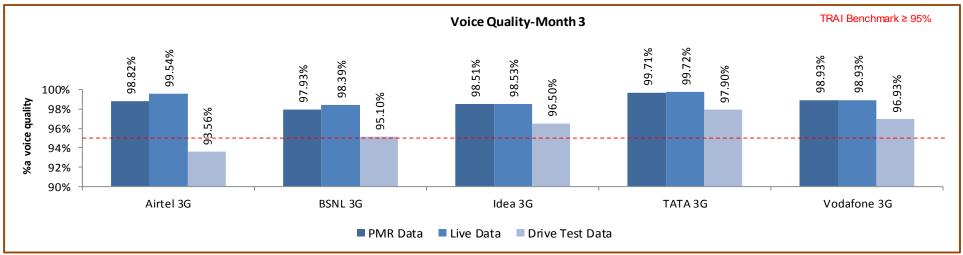



8 PARAMETER DESCRIPTION & DETAILED FINDINGS - WIRELESS DATA SERVICES (2G)


8.1 ACTIVATION DONE WITHIN 4 HOURS

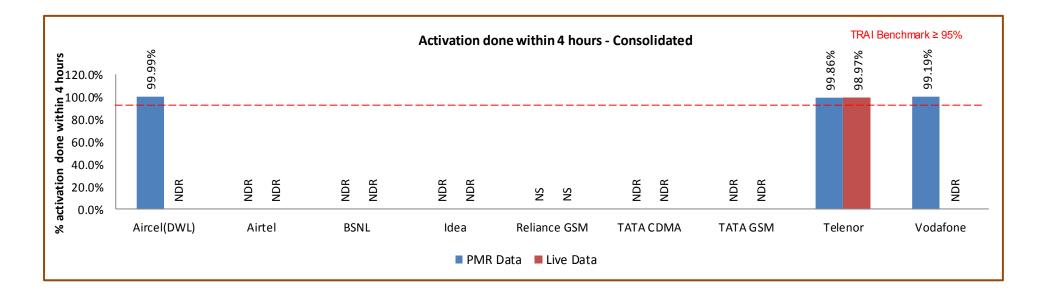

All operators met the TRAI benchmark.




8.2 PDP CONTEXT ACTIVATION SUCCESS RATE

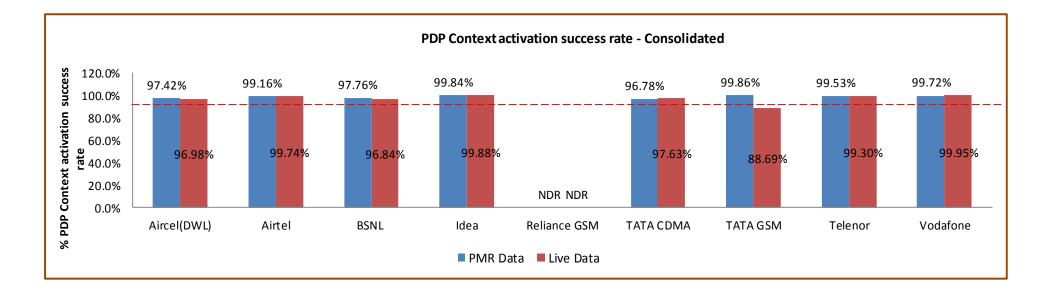

Tata GSM failed to meet the TRAI benchmark for PDP context activation success rate.



8.3 DROP RATE

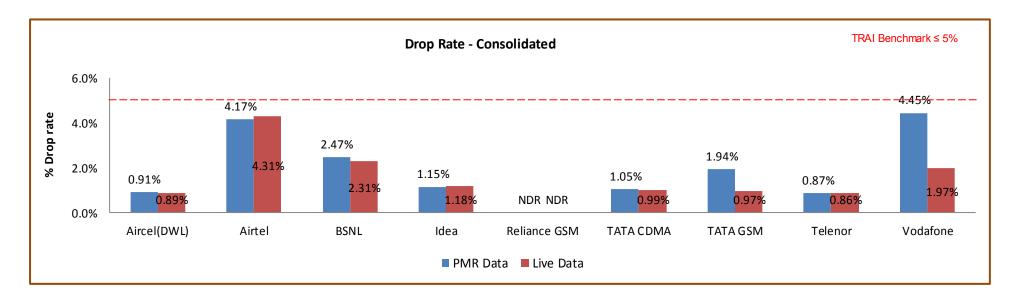


All operators met the TRAI benchmark for drop rate.



9 PARAMETER DESCRIPTION & DETAILED FINDINGS - WIRELESS DATA SERVICES (3G)


9.1 ACTIVATION DONE WITHIN 4 HOURS

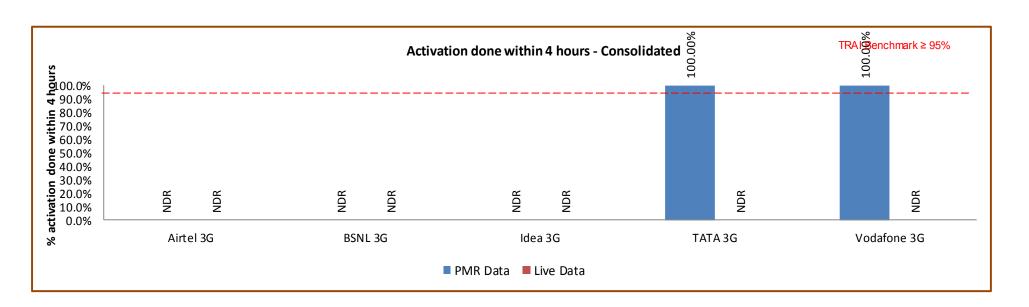

All operators met the TRAI benchmark.




9.2 PDP CONTEXT ACTIVATION SUCCESS RATE

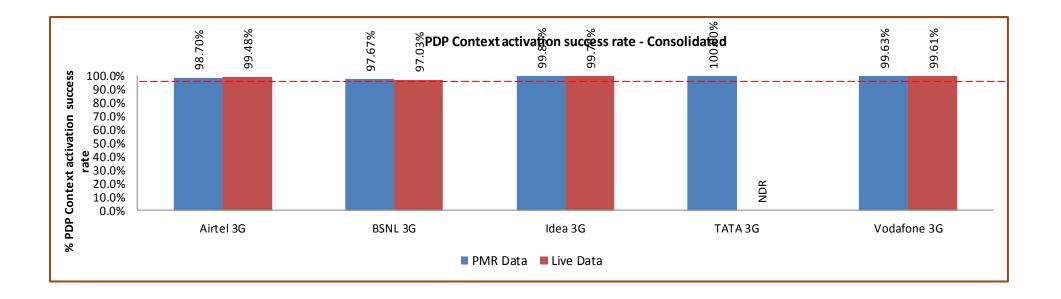

All operators met the TRAI benchmark.



9.3 DROP RATE

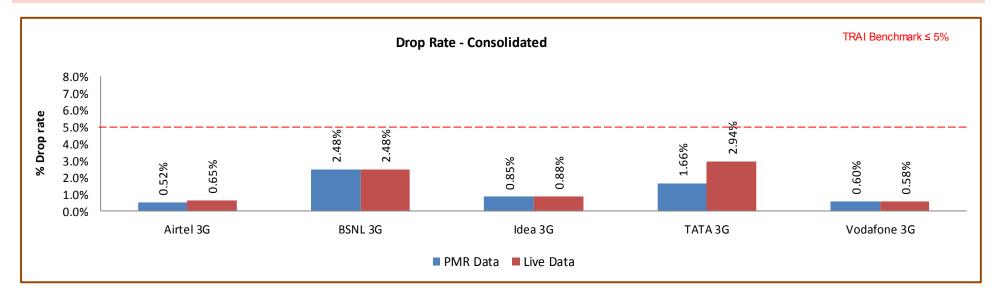

All operators met the TRAI benchmark.



10 PARAMETER DESCRIPTION AND DETAILED FINDINGS – NON-NETWORK PARAMETERS

10.1 METERING AND BILLING CREDIBILITY

The billing complaints for postpaid are calculated by averaging over one billing cycle in a quarter. For example, there are three billing cycles in a quarter, the data for each billing cycle is calculated separately and then averaged over.

The charging complaints for prepaid are calculated by taking all complaints in a quarter.

10.1.1 PARAMETER DESCRIPTION

All the complaints related to billing/ charging as per clause 3.7.2 of QoS regulation of 20thDecember, 2009 were covered. The types of billing complaints covered are listed below.

- ♥ Payments made and not credited to the subscriber account
- ♥ Payment made on time but late payment charge levied wrongly
- ✤ Wrong roaming charges
- ✤ Double charges
- Scharging for toll free services
- ✤ Local calls charged/billed as STD/ISD or vice versa
- ✤ Calls or messages made disputed
- ♦ Validity related complaints
- ♥ Credit agreed to be given in resolution of complaint, but not accounted in the bill
- ♦ Charging for services provided without consent
- 🗞 Charging not as per tariff plans or top up vouchers/ special packs etc.
- ✤ Overcharging or undercharging




In addition to the above, any billing complaint which leads to billing error, waiver, refund, credit, or any adjustment is also considered as valid billing complaint for calculating the number of disputed bills.

- Computational Methodology:
 - Billing complaints per 100 bills issued (Post-paid) = (Total billing complaints** received during the relevant billing cycle / Total bills generated* during the relevant billing cycle)*100
 - *Operator to include all types of bills generated for customers. This would include printed bills, online bills and any other forms of bills generated
 - **Billing complaints here shall include only dispute related issues (including those that may arise because of a lack of awareness at the subscribers' end). It does not include any provisional issues (such as delayed dispatch of billing statements, etc.) in which the operator has opened a ticket internally.
 - Charging complaints per 100 subscribers (Prepaid) = (Total charging complaints received during the quarter/ Total number of subscribers reported by the operator at the end of the quarter) * 100
- **TRAI Benchmark:** <= 0.1%
- ➔ Audit Procedure:
 - Audit of billing complaint details for the complaints received during the quarter and used for arriving at the benchmark reported to TRAI would be conducted
 - For Postpaid, the total billing complaints would be audited by averaging over billing cycles in a quarter
 - For Prepaid, the data of total charging complaints in a quarter would be taken for the purpose of audit






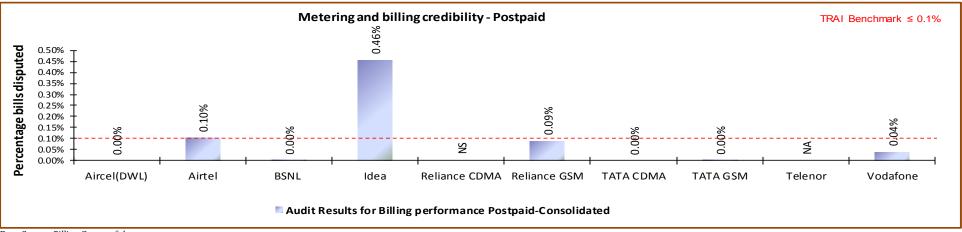

Data Source: Billing Center of the operators

Idea failed to meet the benchmark of 0.1% post-paid metering and billing credibility.

10.1.3 KEY FINDINGS - METERING AND BILLING CREDIBILITY (PREPAID)

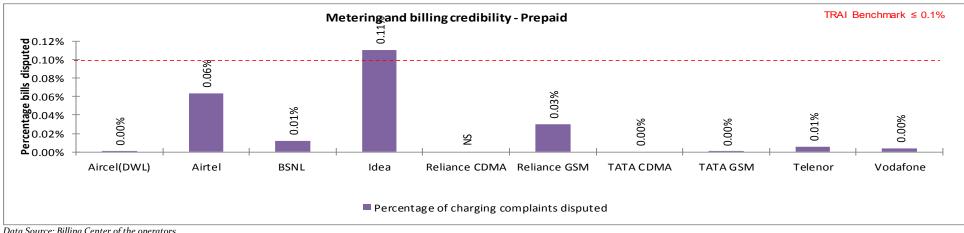

Data Source: Billing Center of the operators

All operators met the benchmark for metering and billing credibility of prepaid subscribers except Idea.

10.2 RESOLUTION OF BILLING/ CHARGING COMPLAINTS

10.2.1 PARAMETER DESCRIPTION

Calculation of Percentage resolution of billing complaints

The calculation methodology (given below) as per QoS regulations 2009 (7 of 2009) was followed to -calculate resolution of billing complaints.

Resolution of billing complaints within 4 weeks:

%age of billing complaints (for post-paid customers)/ charging, credit & validity (for pre-paid customers) resolved within 4 weeks =

number of billing complaints for post-paid customers/charging, credit/ validity complaints for pre-paid customers resolved within 4 weeks during the quarter X 100

number of billing/charging, credit / validity complaints received during the quarter

Resolution of billing complaints within 6 weeks:

%age of billing complaints (for post-paid customers)/ charging, credit & validity (for pre-paid customers) resolved within 6 weeks =

number of billing complaints for post-paid customers/charging, credit/ validity complaints for pre-paid customers resolved within 6 weeks during the quarter X 100


number of billing/charging, credit / validity complaints received during the quarter

**Billing complaints here shall include only dispute related issues (including those that may arise because of a lack of awareness at the subscribers' end). It does not include any provisional issues (such as delayed dispatch of billing statements, etc.) in which the operator has opened a ticket internally. Complaints raised by the consumers to operator are only considered as part of the calculation.

- Solution The complaints that get marked as invalid by the operator are not considered for calculation as those complaints cannot be considered as resolved by the operator.
- *** Date of resolution in this case would refer to the date when a communication has taken place from the operator's end to inform the complainant about the final resolution of the issue / dispute.

Benchmark: 98% complaints resolved within 4 weeks, 100% within 6 weeks.

10.2.2 KEY FINDINGS- WITHIN 4 WEEKS

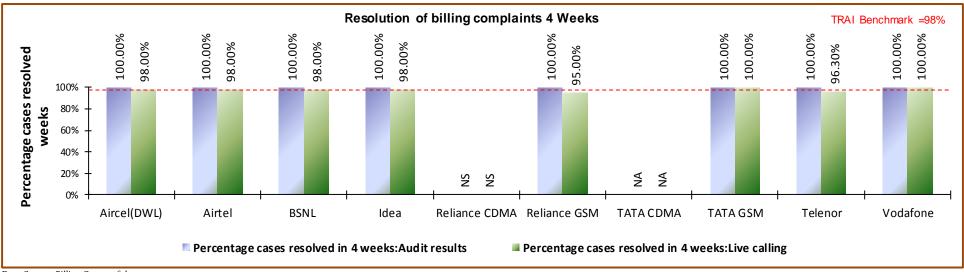


Data Source: Billing Center of the operators

NA: Not applicable, NS: No service

All operators met the TRAI benchmark of resolution of billing complaints within 4 weeks and Reliance GSM failed to meet Percentage cases resolved in 4 weeks: Live calling.



10.2.3 KEY FINDINGS WITHIN 6 WEEKS

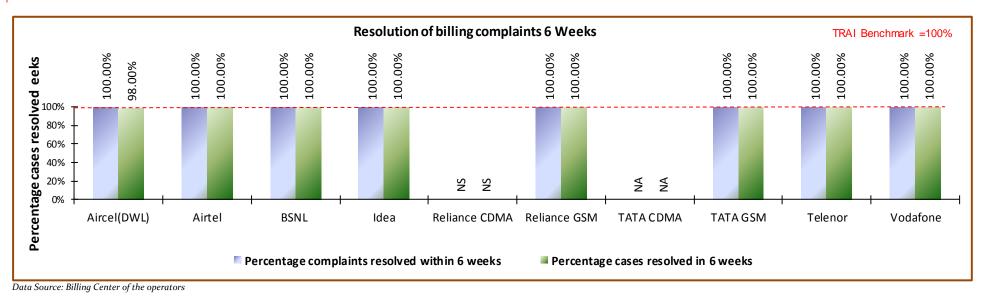

NA: Not applicable, NS: No service

All operators met the TRAI benchmark of resolution of billing complaints within 6 weeks. Aircel, Airtel, BSNL, Idea, Reliance GSM Tata CDMA and Telenor failed to meet Percentage cases resolved in 6 weeks.




10.3 PERIOD OF APPLYING CREDIT/WAVIER

10.3.1 PARAMETER DESCRIPTION

- **Computational Methodology:**
 - Period of applying credit waiver = (number of cases where credit waiver is applied within 7 days/ total number of cases eligible for credit waiver) * 100
- **C** TRAI Benchmark:
 - ♦ Period of applying credit waiver within 7 days: 100%
- ➔ Audit Procedure:
 - ♦ Operator to provide details of:-
 - List of all eligible cases along with
 - **•** Date of applying credit waiver to all the eligible cases.
 - **D**ate of resolution of complaint for all eligible cases



10.3.2 KEY FINDINGS

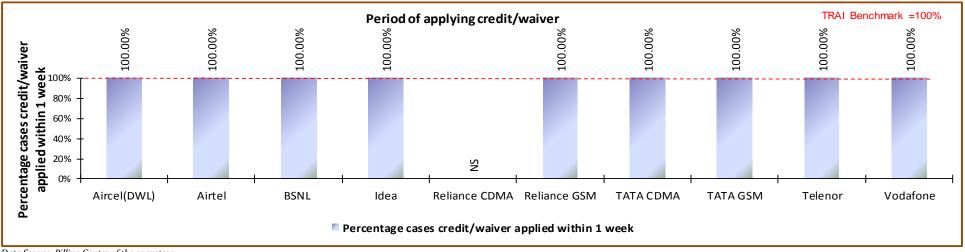

Data Source: Billing Center of the operators


All operators met the benchmark for this parameter.



10.4 CALL CENTRE PERFORMANCE-IVR

10.4.1 PARAMETER DESCRIPTION

- Computational Methodology:
 - 😓 Call centre performance IVR = (Number of calls connected and answered by IVR/ All calls attempted to IVR) * 100
- **TRAI** Benchmark: >= 95%
- ➔ Audit Procedure:
 - Solution of the following from their central call centre/ customer service database:
 - Total calls connected and answered by IVR
 - Total calls attempted to IVR
 - \clubsuit Also live calling is done to test the calls connected and answered by IVR

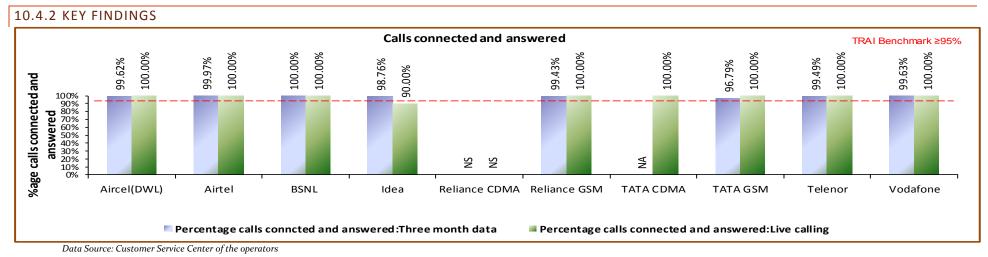

All operators met the TRAI benchmark except Idea during live calling..

10.5 CALL CENTRE PERFORMANCE-VOICE TO VOICE


10.5.1 PARAMETER DESCRIPTION

- **Computational Methodology:**
 - Call centre performance Voice to Voice = (Number of calls answered by operator within 90 seconds/ All calls attempted to connect to the operator) * 100
- ➔ Audit Procedure:
 - ♥ Operators provide details of the following from their central call centre/ customer service database:
 - Total calls connected and answered by operator within 90 seconds
 - Total calls attempted to connect to the operator
 - \clubsuit Also live calling was done to test the calls answered within 90 seconds by the operator

Benchmark: 95% calls to be answered within 90 seconds




10.5.2 KEY FINDINGS

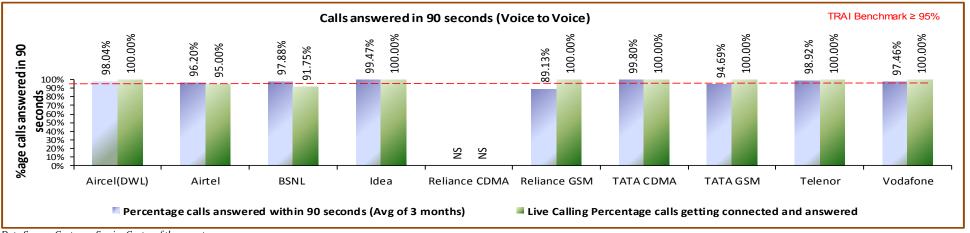

Data Source: Customer Service Center of the operators

Reliance GSM and Tata GSM were not able to meet the benchmark as per audit. However, as per live calling done to customers, the performance was good for all the operators except BSNL.

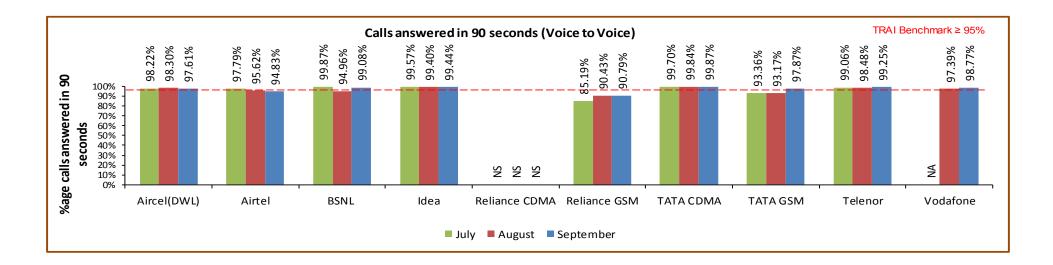




10.6 TERMINATION/CLOSURE OF SERVICE

10.6.1 PARAMETER DESCRIPTION

- Computational Methodology:
 - 🤟 Time taken for closure of service = (number of closures done within 7 days/ total number of closure requests) * 100
- TRAI Benchmark: 0
 - ✤ Termination/Closure of Service: <=7 days</p>
- Audit Procedure: 0
 - ♥ Operator provide details of the following from their central billing/CS database:
 - Date of lodging the closure request (all requests in given period) 0
 - Date of closure of service 0

10.6.2 KEY FINDINGS

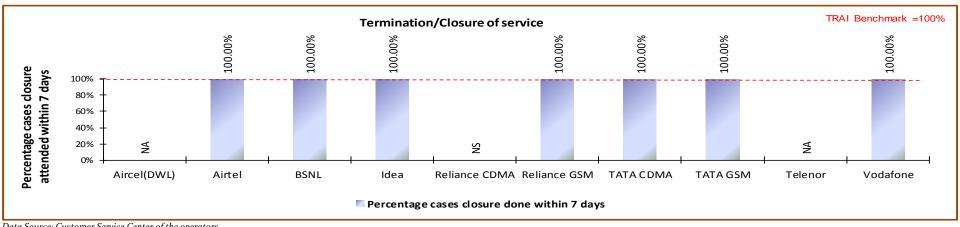

Data Source: Customer Service Center of the operators

All operators met the TRAI benchmark for the parameter.




10.7 REFUND OF DEPOSITS AFTER CLOSURE

10.7.1 PARAMETER DESCRIPTION

- Computational Methodology:
 - Solution Time taken for refund for deposit after closures = (number of cases of refund after closure done within 60 days/ total number of cases of refund after closure) * 100
 - Solution Any case where the operators need to return the amount back to consumers post closure of service in form of cheque/cash is considered to be refund.
- **C** TRAI Benchmark:
 - 🌣 Time taken for refund for deposit after closures: 100% within 60 days
- ➔ Audit Procedure:
 - ♥ Operator provide details of the following from their central billing/refund database:
 - Dates of completion of all 'closure requests' resulting in requirement of a refund by the operator.
 - Dates of refund pertaining to all closure request received during the relevant quarter



10.7.2 KEY FINDINGS

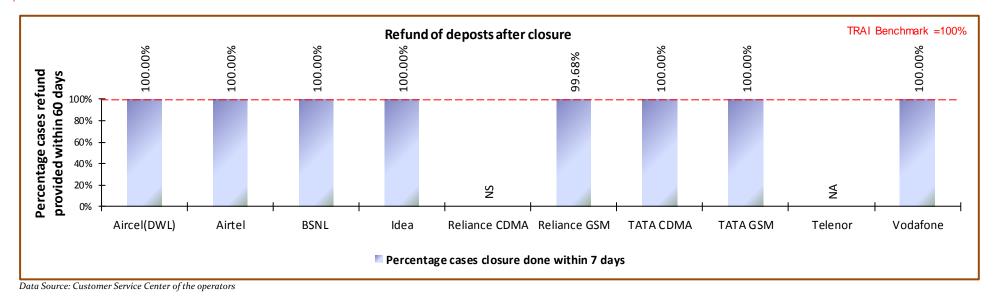

All operators met the TRAI benchmark for the parameter.



11 DETAILED FINDINGS - DRIVE TEST DATA

11.1 OPERATOR ASSISTED DRIVE TEST - VOICE

The drive test was conducted simultaneously for all the operators present in the Maharashtra & Goa circle. As per the new directive given by TRAI headquarters, drive test in the quarter were conducted at a SSA level. SSAs have been defined in two categories by TRAI as per the criticality of the SSA.

- 3. Normal SSA
- 4. Difficult SSA

The drive test in Normal SSA was conducted for three days with minimum distance of 250 kilometers over three days. The drive test in difficult SSAs was conducted for six days with minimum distance of 500 kilometers over six days. The selection of routes ensured that the maximum towns, villages, highways are covered as part of drive test. The routes were selected post discussion with TRAI regional teams. The holding period for all test calls was 120 seconds and gap between calls was 10 seconds.

For measuring voice quality RxQual samples for GSM operators and Frame Error Rate (FERs) for CDMA service providers were measured. RxQual greater than 5 meant that the sample was not of appropriate voice quality and for CDMA operators FERs of more than 4 were considered bad. Call drops were measured by the number of calls that were dropped to the total number of calls established during the drive test. Similarly CSSR was measured as the ratio of total calls established to the total call attempts made. Signal strength was measured in Dbm with strength > -75 dbm for indoor, -85 dbm for in-vehicle and > -95 dbm outdoor routes.

The schedule and operators involved in the operator assisted drive test for Maharashtra & Goa circle are given below.

2G	3G
Aircel(DWL)	Airtel 3G
Airtel	BSNL 3G
BSNL	Idea 3G
Idea	TATA 3G
Reliance CDMA	Vodafone 3G
Reliance GSM	
TATA CDMA	
TATA GSM	
Telenor	
Vodafone	



11.1.1 AMRAVATI SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
September	AMRAVATI	15-09-2016	17-09-2016	267


11.1.1.1 ROUTE DETAILS - AMRAVATI SSA

Category	Type of location		September AMRAVATI	
		Day 1	Day 2	Day 3
Outdoor	Major Roads Highways With in the City	MORSHI WARUD BENODA	ACHALPUR PARATHWADA	AMRAVATI AMRAVATI BYPASS ROAD
Indoor	Shopping complex Office complex	LAKHARA HIWARKHED		

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.1.1 Route Map - AMRAVATI DAY 1

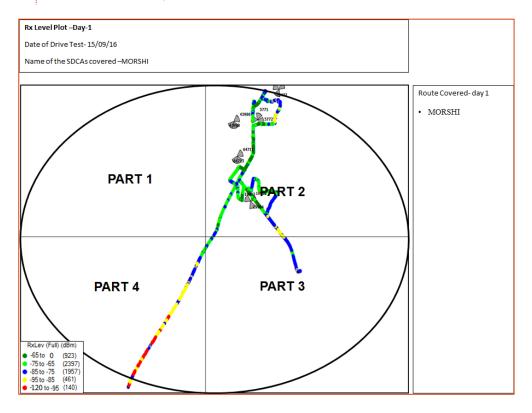




11.1.1.2 Route Map - AMRAVATI DAY 2

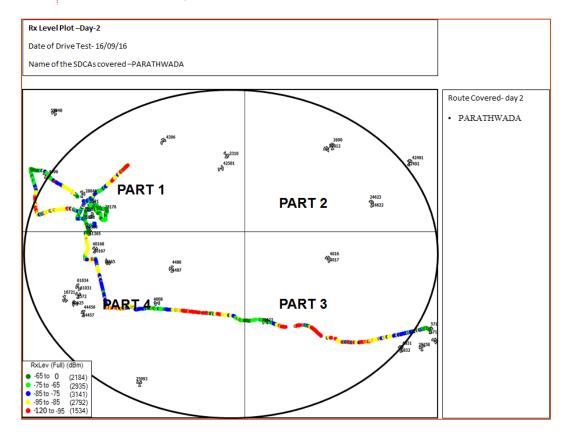



11.1.1.3 Route Map - AMRAVATI DAY 3

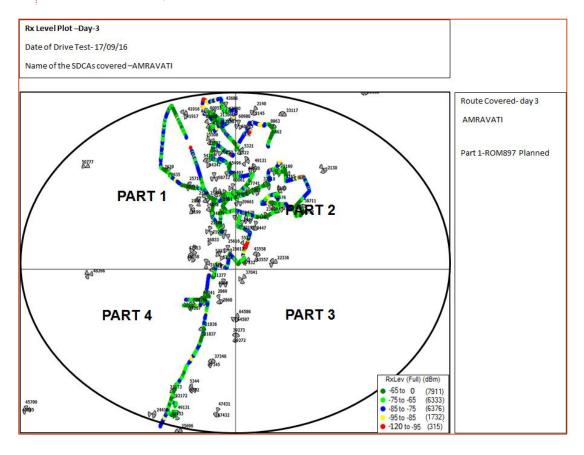



AMRAVATI	Dimark	Air	cel	Air	tel	BS	NL	Id	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	enor	Voda	afone
Parameter's	B'mark	In door	Outdoor																
0 to -75 dBm				98.91%	63.58%	85.16%	56.28%	94.62%	77.31%	99.37%	48.52%	100.00%	99.97%	99.35%	92.36%	63.91%	41.83%	100.00%	84.19%
0 to -85 dBm				100.00%	87.89%	99.87%	91.87%	99.96%	97.43%	100.00%	75.34%	100.00%	99.99%	100.00%	99.72%	96.75%	73.95%	100.00%	95.97%
0 to -95 dBm				100.00%	97.86%	100.00%	99.29%	100.00%	99.87%	100.00%	93.90%	100.00%	100.00%	100.00%	100.00%	100.00%	96.68%	100.00%	97.68%
Voice quality	≥ 95%	Ν	IC	98.21%	97.81%	90.18%	77.76%	98.76%	96.45%	99.85%	97.99%	99.04%	98.72%	99.96%	96.71%	98.74%	97.85%	99.71%	97.16%
CSSR	≥ 95%	, n	15	100.00%	100.00%	94.86%	93.50%	100.00%	100.00%	100.00%	98.82%	100.00%	100.00%	100.00%	99.62%	100.00%	97.93%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	2.26%	2.78%	0.00%	0.00%	0.00%	1.18%	0.00%	0.00%	0.00%	0.38%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%			0.00%	0.00%	2.88%	2.84%	0.00%	0.00%	0.00%	0.30%	0.00%	0.00%	0.00%	0.76%	0.00%	0.00%	0.00%	0.00%
Hands off success rate				100.00%	100.00%	99.26%	94.58%	NA	98.50%	100.00%	99.16%	100.00%	100.00%	100.00%	99.15%	98.91%	100.00%	100.00%	100.00%

11.1.1.4 Drive Test Results -AMRAVATI SSA 2G

Voice Quality

BSNL failed to meet the benchmark for voice quality in outdoor as well as indoor locations.

Call Set Success Rate (CSSR)

BSNL failed to meet the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in outdoor as well as indoor locations.



AMRAVATI	B'mark	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafo	one 3G
Parameter's	DIIIdIK	In door	Outdoor								
0 to -75 dBm		75.01%	33.27%	95.03%	54.55%	18.67%	9.87%	99.05%	89.49%	90.67%	67.14%
0 to -85 dBm		98.34%	63.80%	100.00%	80.58%	74.70%	41.14%	100.00%	98.96%	94.46%	85.00%
0 to -95 dBm		100.00%	83.53%	100.28%	94.50%	99.38%	92.82%	100.00%	100.00%	97.45%	95.14%
Voice quality	≥ 95%	97.45%	93.47%	98.72%	98.92%	NA	NA	100.00%	96.99%	100.00%	96.52%
CSSR	≥ 95%	100.00%	100.00%	98.15%	95.33%	100.00%	100.00%	100.00%	99.28%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	1.85%	4.67%	0.00%	0.00%	0.00%	0.72%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	0.00%	3.73%	0.00%	0.00%	0.00%	0.73%	0.00%	0.00%
Hands off success rate		100.00%	100.00%	100.00%	98.29%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%

11.1.1.5 Drive Test Results - AMRAVATI SSA 3G

Voice Quality

Airtel 3G failed to meet the benchmark for voice quality in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL 3G failed to meet the benchmark for call drop rate in outdoor locations.



11.1.1.1 Data Drive Test Results - Amravati SSA-2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	96	31	107	56	83	115	162
Average throughput for Packet Data			122	41	149	77	89	174	168
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.1.2 Data Drive Test Results - Amravati SSA-3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100
Minimum download speed		2271	570	1069	2260	3917
Average throughput for Packet Data		3245	1088	2525	2526	4270
Latency	<250ms	100	100	100	100	100



11.1.2 RAIGARD (PEN) SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
August	Raigad(Pen)	29-08-2016	31-08-2016	266


11.1.2.1 ROUTE DETAILS - RAIGARD (PEN) SSA

Category	Type of location		August Raigad(Pen)										
		Day 1	Day 2	Day 3									
	Major Roads	KARJAT VINEGAON	MAHAD KARANJKHOL SAREKAR ALI	CHENDHARE									
Outdoor	Highways	KHALAPUR KAPOLI NANOSE AMNORI	MIDC MAHAD MADAJI TEA SHOP MAHASALA HOTEL SIDDHI	DALINAGAR THIKRUL NAKA MITRA									
	With in the City	KALAMJE MANGAON	POLADPUR ROHA PUBLIC SCHOOL	PEN RAMWADI									
Indoor	Shopping complex Office complex	BAMNOLI RODAS NAGR PALI DAPODE	HEENA SUPER MARKET HOTEL ROHA PRIDE	MELEGHAR									

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.2.2 Route Map – RAIGARD (PEN) DAY 1

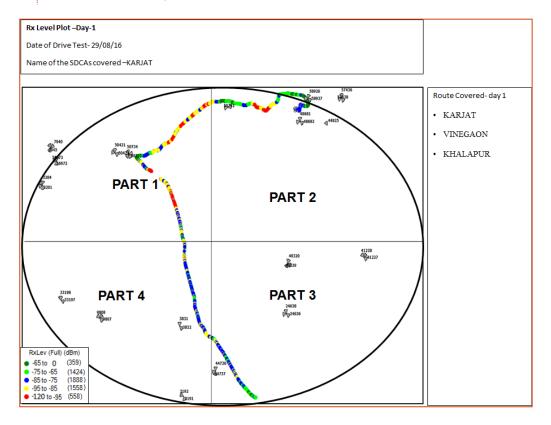




11.1.2.3 Route Map - RAIGARD (PEN) DAY 2

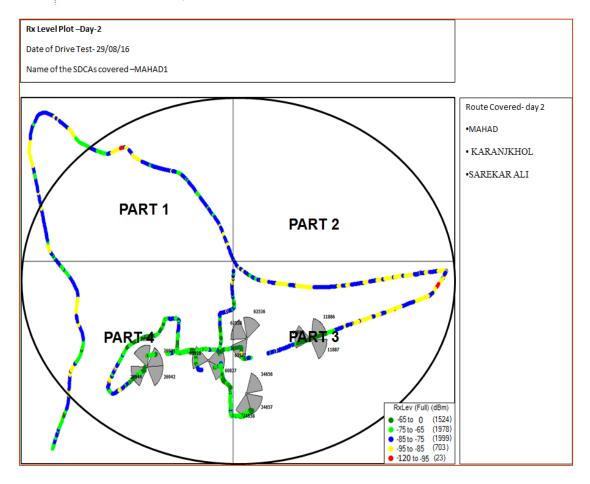



11.1.2.4 Route Map - RAIGARD (PEN) DAY 3

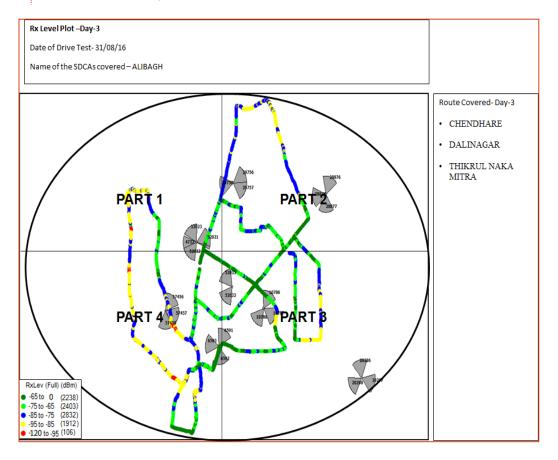



Raigad(Pen)	B'mark	Air	cel	Aiı	tel	BS	NL	Id	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm		99.40%	65.76%	70.57%	41.52%	5.16%	9.28%	95.91%	58.66%	54.13%	47.36%	99.97%	99.88%	98.30%	92.41%	67.95%	54.75%	88.91%	86.48%
0 to -85 dBm		100.00%	89.91%	98.76%	71.23%	60.20%	42.79%	99.76%	89.53%	84.17%	75.65%	100.00%	99.95%	100.00%	99.45%	90.43%	82.76%	96.29%	97.92%
0 to -95 dBm		100.00%	98.85%	100.00%	92.98%	65.66%	69.12%	100.00%	99.49%	99.74%	96.08%	100.00%	100.00%	100.00%	100.00%	100.00%	97.53%	100.00%	99.77%
Voice quality	≥ 95%	99.48%	97.54%	99.82%	98.66%	94.89%	91.56%	98.63%	96.54%	98.24%	96.35%	99.87%	96.67%	99.79%	96.58%	98.68%	98.65%	99.73%	97.84%
CSSR	≥ 95%	100.00%	99.51%	100.00%	100.00%	95.45%	86.75%	100.00%	99.66%	98.36%	97.20%	100.00%	99.02%	100.00%	98.95%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls		0.00%	0.49%	0.00%	0.00%	4.11%	13.25%	0.00%	0.34%	1.64%	2.80%	0.00%	0.98%	0.00%	1.05%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.49%	0.00%	0.00%	0.00%	9.88%	0.00%	1.02%	1.67%	0.48%	0.00%	1.24%	0.00%	0.35%	0.00%	0.00%	0.00%	0.00%
Hands off success rate		100.00%	98.12%	100.00%	100.00%	100.00%	95.43%	0.00%	99.12%	100.00%	99.48%	100.00%	100.00%	100.00%	99.27%	100.00%	99.90%	100.00%	99.71%

11.1.2.5 Drive Test Results - RAIGARD (PEN) SSA 2G

Voice Quality

BSNL fail to meet the benchmark in indoor and outdoor locations.

Call Set Success Rate (CSSR)

BSNL fail to meet the benchmark for CSSR in outdoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in outdoor locations.



Raigad(Pen)	B'mark	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	4 3G	Vodafone 3G	
Parameter's	DIIIdIK	In door	Outdoor	In door	Outdoor						
0 to -75 dBm				30.41%	28.59%	74.61%	36.16%	99.08%	93.29%	72.97%	64.74%
0 to -85 dBm				75.84%	43.57%	99.42%	73.94%	100.00%	97.90%	93.32%	84.96%
0 to -95 dBm					58.01%	99.99%	93.09%	100.00%	100.00%	100.00%	96.61%
Voice quality	≥ 95%			100.00%	97.47%	NA	NA	98.60%	97.70%	98.50%	95.50%
CSSR	≥ 95%	N	IP	98.00%	82.27%	100.00%	100.67%	100.00%	99.35%	100.00%	100.00%
%age Blocked calls				2.00%	17.73%	0.00%	0.66%	0.00%	0.65%	0.00%	0.00%
Call drop rate	≤2%				7.19%	0.00%	0.00%	0.00%	0.98%	0.00%	0.00%
Hands off success rate					100.00%	100.00%	98.31%	NA	99.24%	100.00%	100.00%

11.1.2.6 Drive Test Results - RAIGARD (PEN) SSA 3G

NP: Not participated

Voice Quality

BSNL 3G failed to meet the benchmark for voice quality in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL 3G failed to meet the benchmark for drop rate in outdoor locations.



•

11.1.2.1 Data Drive Test Results - RAIGARD (PEN) SSA-2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100	100	100	100
Minimum download speed		102	120	76	111	54	104	159	156
Average throughput for Packet Data		123	148	59	132	65	130	184	174
Latency	<250ms	100	100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.2.2 Data Drive Test Results - RAIGARD (PEN) SSA-3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%		100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100
Minimum download speed		NP	732	1390	3010	3720
Average throughput for Packet Data			1558	2112	3431	4195
Latency	<250ms		NA	100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.3 PUNE SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled	
July	Pune	25-07-2016	30-07-2016	571	


11.1.3.1 ROUTE DETAILS - PUNE SSA

Category	Type of location	July Pune						
		Day 1	Day 2	Day 3	Day 4	Day 5	Day 6	
	Major Roads	1.Katraj 2 hadapsir 3 theur 4 keshnand	r 4 keshnand rada 6 Deccan Pashan 9 kothrud 7 4 keshnand raod 7 Nigdi 8 Talwade 9 Neharunagar 10 Nigdi pradhikaran 11 Hinjewadi 12 wakad	1.chakan Shikrapur 2 chakan midc 3 Narayangaon 4 Manchar 5 Rajgurunagar 6Junnar	1.Baramati 2 Indapur Local 3 Kurkumbh MIDC 4 Daund 5 Urli kanchan 6.bhigwan	1.Kamshet 2.karla 3 lonavala 4 khandala	1 Prati Balaji Temple,ketkavale 2 Bhor 3 Lavasa	
Outdoor	Highways							
	With in the City	5 yerwada 6 Deccan 7 Aundh 8 Pashan 9 kothrud						
Indoor	Shopping complex to ch	10 Shivajinagar 11 Swargate						
Indoor	Office complex							

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.3.2 Route Map - PUNE DAY 1

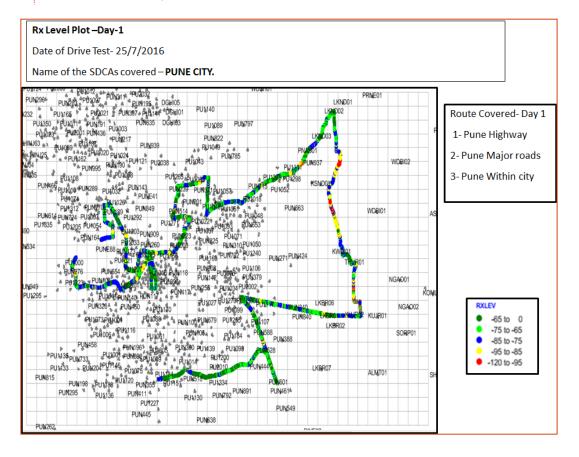




11.1.3.3 Route Map - PUNE DAY 2

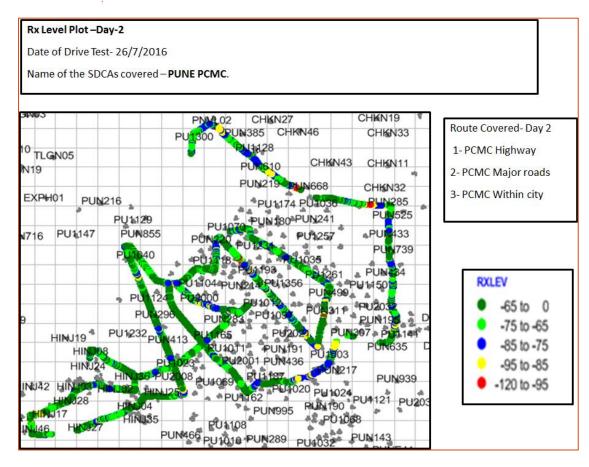




11.1.3.4 Route Map - PUNE DAY 3

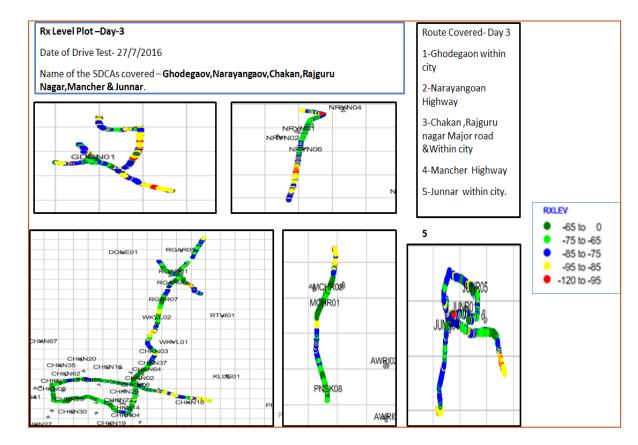




11.1.3.5 Route Map - PUNE DAY 4

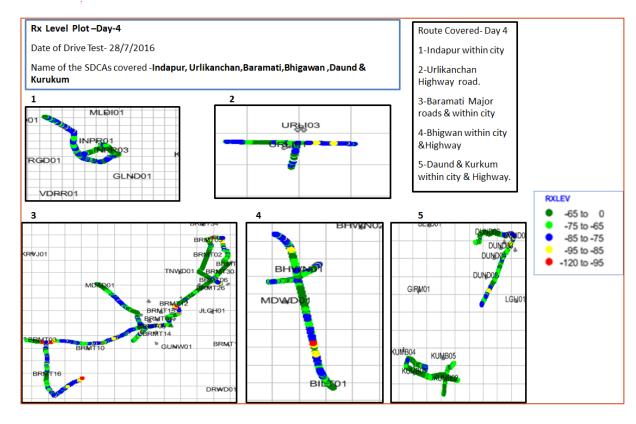




11.1.3.6 Route Map - PUNE DAY 5

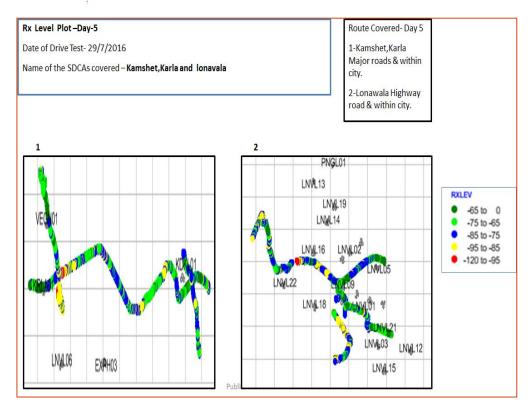



11.1.3.7 Route Map - PUNE DAY 6

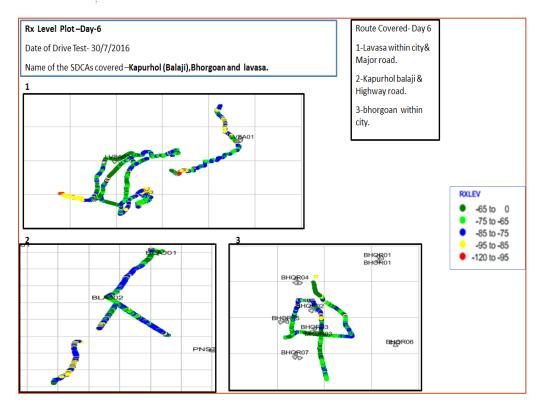



Pune	B'mark	Air	cel	Air	tel	BS	NL	Id	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	enor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm		86.11%	85.39%	92.58%	63.49%	33.77%	53.71%	58.71%	58.25%	45.64%	31.20%	99.99%	99.95%	99.91%	91.88%	83.83%	70.83%	86.11%	85.39%
0 to -85 dBm		99.88%	96.95%	98.42%	87.07%	83.38%	90.75%	95.04%	88.02%	91.78%	65.36%	99.99%	99.98%	100.00%	99.02%	98.50%	91.16%	99.88%	96.95%
0 to -95 dBm		100.00%	99.77%	98.53%	97.33%	99.71%	98.27%	99.52%	99.09%	99.90%	92.83%	100.00%	100.00%	100.00%	100.00%	100.00%	99.23%	100.00%	99.77%
Voice quality	≥ 95%	99.36%	95.38%	98.55%	95.90%	98.43%	92.16%	97.73%	94.49%	98.50%	86.96%	98.36%	97.86%	99.56%	96.39%	97.84%	95.80%	99.36%	95.38%
CSSR	≥ 95%	100.00%	99.07%	100.00%	99.86%	99.07%	94.85%	100.00%	98.94%	100.00%	97.79%	100.00%	99.58%	100.00%	99.31%	100.00%	99.55%	100.00%	99.07%
%age Blocked calls		0.00%	0.93%	0.00%	0.14%	0.93%	5.15%	0.00%	0.90%	0.00%	1.99%	0.00%	0.42%	0.00%	0.69%	0.00%	0.45%	0.00%	0.93%
Call drop rate	≤2%	0.00%	0.94%	0.00%	0.00%	0.94%	2.95%	0.00%	1.04%	0.83%	3.39%	0.00%	0.63%	0.00%	0.52%	0.00%	0.15%	0.00%	0.94%
Hands off success rate		100.00%	97.08%	NA	100.00%	100.00%	91.67%	100.00%	98.09%	100.00%	98.64%	100.00%	100.00%	100.00%	99.29%	100.00%	97.80%	100.00%	97.08%

11.1.3.8 Drive Test Results -PUNE SSA 2G

Voice Quality

BSNL, Idea and Reliance GSM failed to meet the benchmark for voice quality in outdoor locations.

Call Set Success Rate (CSSR)

BSNL failed to meet the benchmark for CSSR in outdoor locations.

Call Drop Rate

BSNL and Reliance GSM failed to meet the benchmark for call drop rate in outdoor locations.



Pune	B'mark	Airte	Airtel 3G		L 3G	Idea	a 3G	TAT	A 3G	Vodaf	one 3G
Parameter's	DIIIdIK	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor
0 to -75 dBm				31.28%	46.29%	61.69%	53.68%	99.59%	91.44%	92.51%	72.18%
0 to -85 dBm				86.29%	77.12%	86.17%	78.83%	99.93%	98.33%	99.08%	89.39%
0 to -95 dBm				100.00%	95.07%	99.83%	94.92%	100.00%	100.00%	99.98%	98.19%
Voice quality	≥ 95%		IP	100.00%	96.29%	NA	NA	99.70%	97.30%	97.31%	95.79%
CSSR	≥ 95%		11	100.00%	96.31%	100.00%	98.36%	100.00%	99.36%	100.00%	99.80%
%age Blocked calls				0.00%	3.69%	0.00%	1.64%	0.00%	0.64%	0.00%	0.20%
Call drop rate	≤2%]		0.93%	3.07%	1.67%	0.45%	0.00%	0.64%	0.00%	0.21%
Hands off success rate				100.00%	100.00%	100.00%	99.98%	0.00%	99.32%	100.00%	100.00%

11.1.3.9 Drive Test Results - PUNE SSA 3G

NP: Not participated

Voice Quality

All operators met the benchmark for call drop rate in outdoor as well as indoor locations

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL 3G failed to meet the benchmark for drop rate in outdoor locations



11.1.3.1 Data Drive Test Results - PUNE SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100	100	100	100
Minimum download speed		107	103	124	133	35	111	150	107
Average throughput for Packet Data		124	118	136	159	66	139	171	124
Latency	<250ms	100	100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.3.2 Data Drive Test Results - PUNE SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%		100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100
Minimum download speed		NP	574	2000	3075	3637
Average throughput for Packet Data			731	2889	3379	4142
Latency	<250ms		100	100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.4 KUDAL (SINDHUDURGA) SSA

Month	Name of SSA	Start date	End Date	Kilometer Travelled
August	Sidhudurg(Kudal)	25-09-2016	27-09-2016	365


11.1.4.1 ROUTE DETAILS - KUDAL(SINDHUDURGA) SSA

Category	Type of location	August Sidhudurg(Kudal)									
		Day 1	Day 2	Day 3							
Outdoor	Major Roads Highways With in the City	JAMSANDE TULASHI NAGAR KADAM WADI.	KANAKAVALI LOKMAT KUDAL SANGIRDE ANAND NAGAR OROS NAVJAGAR VIKAS PRADHIKRAN	SAWANTWADI GADI-ADDA							
Indoor	Shopping complex Office complex	MALVAN TARKARLI CHAUKE	VAIBHAVWADI SUDHAKARA RAORANE BANK OF INDIA	MHDA COLONY SAKAVWADI							

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.4.2 Route Map - KUDAL (SINDHUDURGA) DAY 1

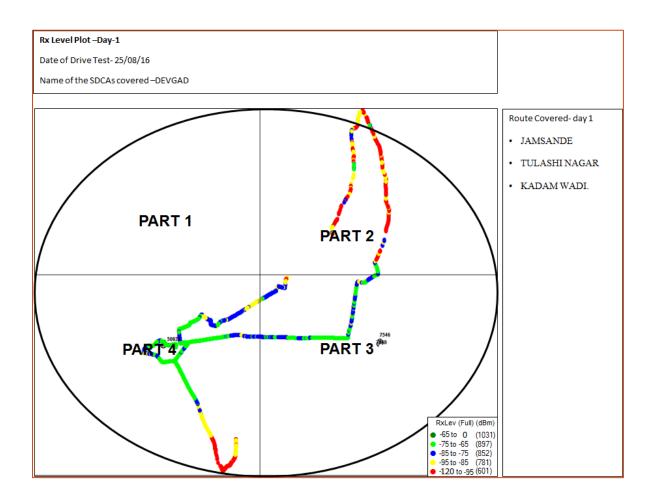




11.1.4.3 Route Map - KUDAL (SINDHUDURGA) DAY 2

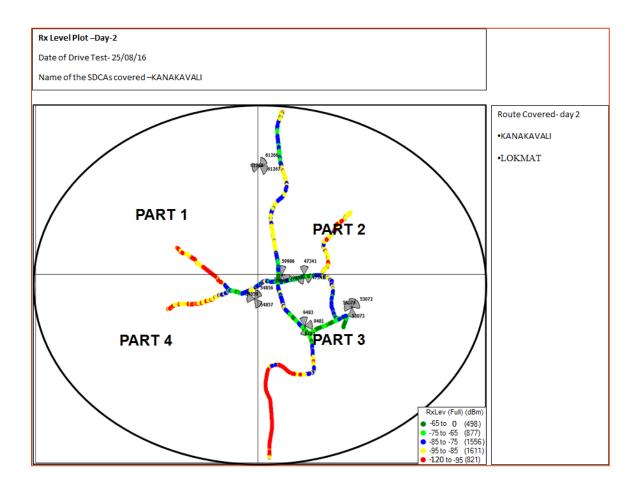



11.1.4.4 Route Map - KUDAL (SINDHUDURGA) DAY 3

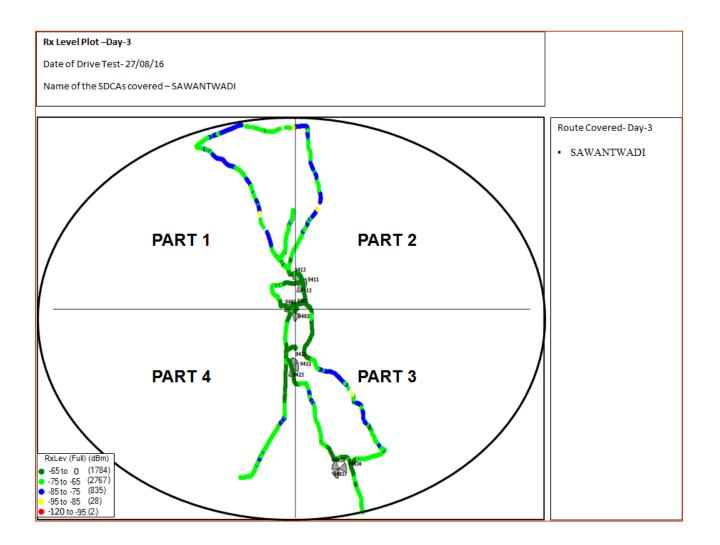



11.1.4.5 Drive Test Results - KUDAL (SINDHUDURGA) SSA 2G

Kudal (Sidhudurg)	B'mark	Air	cel	Aiı	tel	BS	NL	ld	Idea		ce GSM	TATA CDMA		TATA GSM		Telenor		Vodafone	
Parameter's	DIIIdIK	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor								
0 to -75 dBm		96.20%	33.56%	96.70%	38.78%			97.62%	38.37%			100.00%	99.93%	92.07%	90.84%	87.27%	52.12%	99.89%	72.74%
0 to -85 dBm		99.67%	79.69%	100.00%	62.21%			100.00%	71.86%			100.00%	99.98%	99.84%	99.17%	99.63%	82.48%	100.00%	90.07%
0 to -95 dBm		100.00%	98.28%	100.00%	86.91%			100.00%	93.21%			100.00%	99.99%	100.00%	99.94%	100.00%	97.05%	100.00%	98.09%
Voice quality	≥ 95%	100.00%	97.80%	99.40%	99.28%	NI	DR	98.00%	97.37%	N	DR	66.26%	65.60%	98.73%	96.28%	99.50%	97.67%	95.09%	96.32%
CSSR	≥ 95%	100.00%	100.00%	100.00%	100.00%	INI	DK	100.00%	99.48%	IN IN	UN	100.00%	100.00%	100.00%	99.26%	100.00%	99.46%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	0.00%	0.00%			0.00%	0.52%			0.00%	0.00%	0.00%	0.74%	0.00%	0.54%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	0.00%	0.00%			0.00%	0.00%			0.00%	0.00%	0.00%	0.75%	0.00%	0.54%	0.00%	0.00%
Hands off success rate		NA	100.00%	100.00%	100.00%			NA	100.00%			100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%

NDR: no data received

Voice Quality

TATA CDMA failed to meet the benchmark in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.4.6 Drive Test Results – KUDAL (SINDHUDURGA) SSA 3G

Sidhudurg (Kudal)	Dimark	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafo	one 3G
Parameter's	B'mark	In door	Outdoor								
0 to -75 dBm						95.05%	24.57%			93.53%	55.47%
0 to -85 dBm						100.00%	45.68%			98.67%	67.90%
0 to -95 dBm						100.00%	69.90%			98.67%	81.72%
Voice quality	≥ 95%		IP	N	סר	NA	NA	N	ic i	98.81%	95.50%
CSSR	≥ 95%			INL		100.00%	100.00%	6 NS		100.00%	100.00%
%age Blocked calls						0.00%	0.00%			0.00%	0.00%
Call drop rate	≤2%					0.00%	0.00%			0.00%	0.00%
Hands off success rate						NA	100.00%			100.00%	100.00%

NP: Not participated, NDR: No data received, NS: No services

Voice Quality

All operators met the benchmark for CSSR in outdoor as well as indoor locations

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.4.1 Data Drive Test Results - KUDAL (SINDHUDURGA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%	100	100		100		100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100		100		100	100	100
Minimum download speed		101	104	NDR	133	NDR	114	164	129
Average throughput for Packet Data		121	128		155		152	164	163
Latency	<250ms	100	100		100		100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.4.2 Data Drive Test Results - KUDAL (SINDHUDURGA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%			100		100
Succesful Data Transmission upload speed attempts	>75%			100		100
Minimum download speed		NP	NDR	1400	NS	3745
Average throughput for Packet Data				2426		4263
Latency	<250ms			100		100

All operators met the TRAI benchmark for data drive test.



11.1.5 OSMANABAD SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
July	Osmanabad	19-07-2016	21-07-2016	235

11.1.5.1 ROUTE DETAILS - OSMANABAD SSA

Category	Type of location		July Osmanabad	
		Day 1	Day 2	Day 3
	Major Roads			
Outdoor	Highways	Pranda, Bhoo, Washi, Kallamcity, Maijor	Lohara,Naldurg,Jalkot,Murum,Omerga city & maijor roads:Naldurg-Jalkot	Osmanabad & Tuljapur city &
	With in the City	roads,Highways:Terkheda to	National highway,Omerga National	Maijor roads of Osmanabad & Tuljapur city
lede en	Shopping complex	yermalla	highway	rajuparency
Indoor	Office complex			




Category	Type of location	July Osmanabad									
		Day 1	Day 2	Day 3							
	Major Roads										
Outdoor	Highways	Pranda, Bhoo, Washi, Kallamcity, Maijor	Lohara, Naldurg, Jalkot, Murum, Omerga city & maijor roads: Naldurg-Jalkot	Osmanabad & Tuljapur city &							
	With in the City	roads,Highways:Terkheda to	National highway,Omerga National	Maijor roads of Osmanabad & Tuljapur city							
Index.	Shopping complex	yermalla	highway	rujapur city							
Indoor	Office complex										

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.5.2 ROUTE MAP - OSMANABAD DAY 1

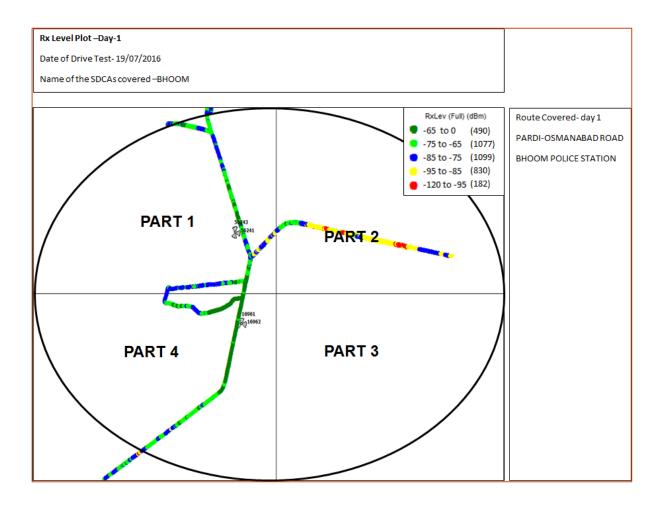




11.1.5.3 Route Map - OSMANABAD DAY 2

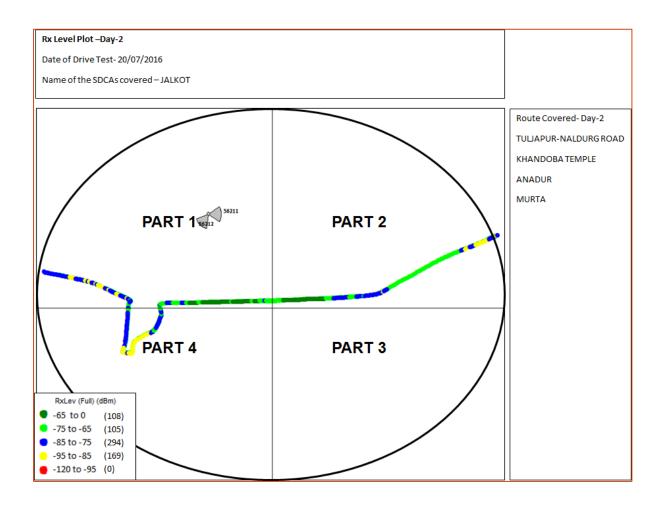



11.1.5.4 Route Map - OSMANABAD DAY 3

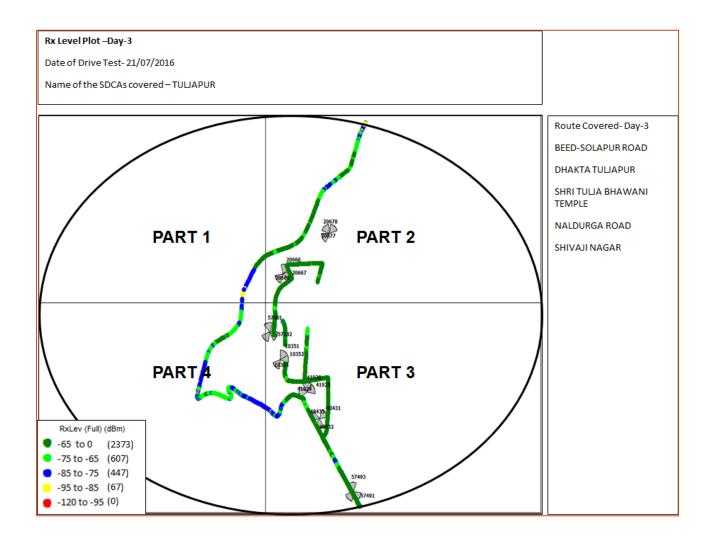



Osmanabad	B'mark	Air	cel	Air	tel	BS	NL	Id	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm		93.13%	76.74%	90.78%	68.73%	NA	15.10%	99.56%	68.24%	99.41%	40.52%	100.00%	99.94%	95.90%	91.42%	98.33%	71.20%	100.00%	67.79%
0 to -85 dBm		100.00%	87.25%	97.02%	90.32%	NA	61.68%	100.00%	94.36%	100.00%	61.87%	100.00%	99.96%	99.99%	99.40%	100.00%	90.39%	100.00%	90.29%
0 to -95 dBm		100.00%	96.69%	97.19%	98.74%	NA	19.21%	100.00%	99.37%	100.00%	82.61%	100.00%	100.00%	100.00%	100.00%	100.00%	99.39%	100.00%	98.90%
Voice quality	≥ 95%	99.29%	99.45%	98.77%	98.74%	NA	92.95%	98.93%	96.52%	99.94%	92.24%	97.80%	97.53%	99.91%	98.71%	99.24%	96.36%	98.26%	97.32%
CSSR	≥ 95%	100.00%	100.00%	100.00%	100.00%	NA	92.08%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	99.54%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	0.00%	0.00%	NA	5.66%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.46%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	0.00%	0.00%	NA	4.01%	0.00%	0.00%	0.00%	2.04%	0.00%	0.00%	0.00%	0.46%	0.00%	0.00%	0.00%	0.00%
Hands off success rate		100.00%	100.00%	100.00%	100.00%	NA	99.69%	91.30%	98.71%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%

11.1.5.5 Drive Test Results -OSMANABAD SSA 2G

Voice Quality

Reliance GSM and BSNL failed to meet the benchmark in outdoor locations.

Call Set Success Rate (CSSR)

BSNL fail to meet the benchmark in outdoor locations.

Call Drop Rate

Reliance GSM and BSNL failed to meet the benchmark in outdoor locations.



11.1.5.6 Drive Test Results - OSMANABAD SSA 3G

Osmanabad	Dimork	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafone 3G	
Parameter's	B'mark	In door	Outdoor	In door	Outdoor						
0 to -75 dBm				100.00%	8.27%	33.37%	35.08%	100.00%	98.23%	78.46%	35.61%
0 to -85 dBm			:		37.17%	61.21%	69.16%	100.00%	98.79%	100.00%	72.10%
0 to -95 dBm					54.56%	88.47%	91.52%	100.00%	100.00%	100.00%	93.73%
Voice quality	≥ 95%		IP	100.00%	97.29%	NA	NA	99.49%	99.56%	99.70%	97.11%
CSSR	≥ 95%		11	86.96%	93.13%	100.00%	99.20%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls					2.75%	0.00%	0.40%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%				10.07%	0.00%	0.40%	0.00%	0.00%	0.00%	0.00%
Hands off success rate					100.00%	100.00%	98.99%	NA	100.00%	100.00%	100.00%

NP: Not Participated

Voice Quality

All operators met the benchmark for voice quality in indoor as well as outdoor locations.

Call Set Success Rate (CSSR)

BSNL₃G failed to meet the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL₃G failed to meet the benchmark for call drop rate in outdoor locations



11.1.5.1 Data Drive Test Results - OSMANABAD SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100	100	100	100
Minimum download speed		103	124	38	90	67	117	107	147
Average throughput for Packet Data		130	151	48	127	110	153	141	165
Latency	<250ms	100	100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.5.2 Data Drive Test Results - OSMANABAD SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%		100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100
Minimum download speed		NP	739	1856	4034	3566
Average throughput for Packet Data			618	2515	4745	4090
Latency	<250ms		NA	100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.6 SANGALI SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
July	Sangali	05-07-2016	07-07-2016	350


11.1.6.1 ROUTE DETAILS - SANGALI SSA

			July			
Category	Type of location		Sangali			
		Day 1	Day 2	Day 3		
	Major Roads			Astha Major road, Ashta		
A 11	Highways		Jath Highway, Jath Major road, Karad	Within city,		
Outdoor	inginways	Sangli-Mirja Highway, Sangli-	Kavethemahakal Within city,	Islamapur Highway, Islampur		
	With in the City	Miraj Major road, Sangli-Miraj	Kavethemahakal Major Raod,	Major road,		
		Within city.	Khanapur Major road , Tasgaon Within	Palus-Kiloskarwadi Within		
led-er-	Shopping complex		city,	city,		
Indoor	Office complex		Vita Major road	Shirala With in city.		

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.6.2 Route Map - SANGALI DAY 1

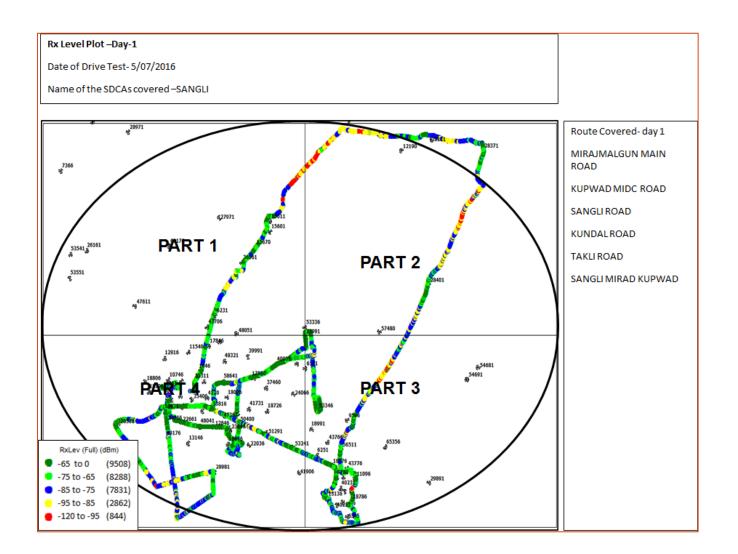




11.1.6.3 Route Map - SANGALI DAY 2

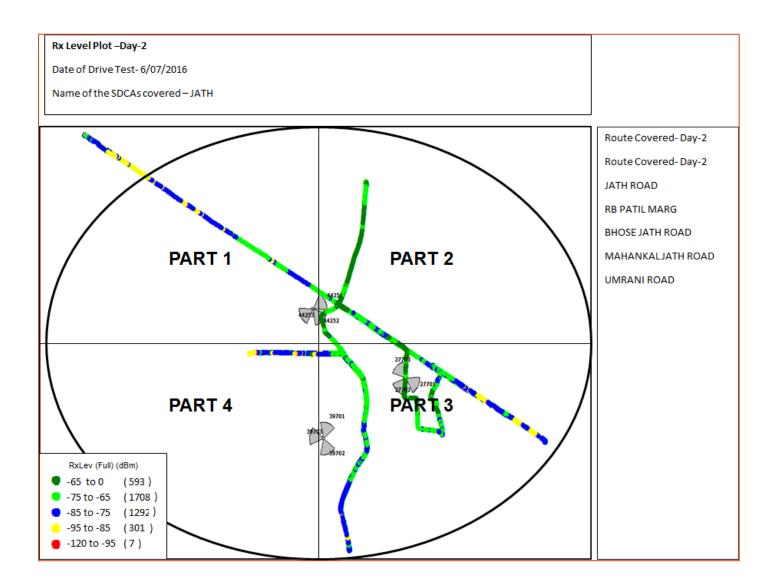



11.1.6.4 Route Map - SANGALI DAY 3

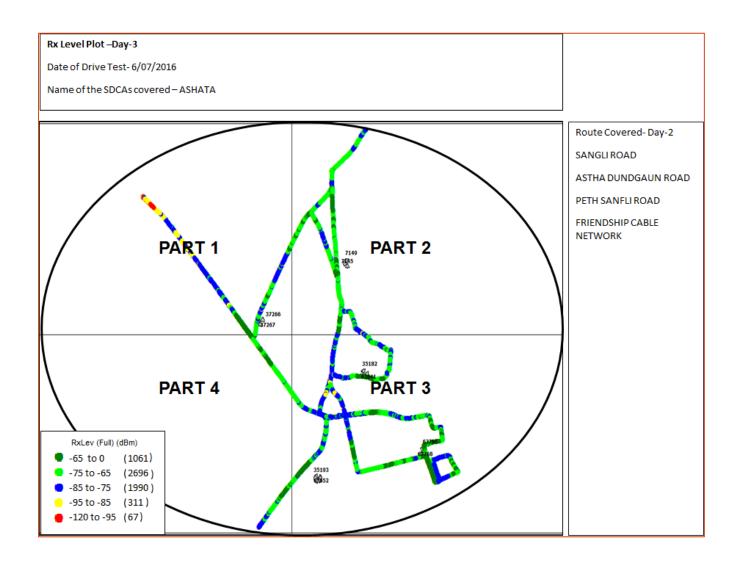



Sangali	B'mark	Air	cel	Air	tel	BS	NL	Id	ea	Relianc	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm		56.37%	55.21%	100.00%	62.92%	26.29%	25.69%	36.66%	54.35%	14.56%	29.49%	99.97%	99.96%	95.51%	91.52%	99.96%	85.79%	99.28%	91.26%
0 to -85 dBm		99.14%	89.82%	100.00%	89.58%	89.73%	83.77%	80.48%	88.83%	53.56%	61.63%	99.97%	99.99%	99.99%	99.81%	100.00%	98.20%	99.93%	98.89%
0 to -95 dBm		100.00%	99.81%	100.00%	98.27%	73.06%	98.86%	99.85%	99.43%	95.76%	92.58%	100.00%	100.00%	100.00%	100.00%	100.00%	99.99%	100.00%	99.82%
Voice quality	≥ 95%	99.17%	97.23%	99.25%	98.32%	97.07%	92.25%	99.47%	96.14%	93.05%	92.27%	97.67%	97.47%	99.55%	96.91%	98.94%	95.17%	97.73%	96.10%
CSSR	≥ 95%	100.00%	100.00%	100.00%	100.00%	98.84%	97.22%	100.00%	99.72%	100.00%	97.44%	100.00%	100.00%	100.00%	99.67%	100.00%	96.19%	100.00%	99.78%
%age Blocked calls		0.00%	0.00%	0.00%	0.00%	1.16%	2.78%	0.00%	0.00%	0.00%	2.28%	0.00%	0.00%	0.00%	0.32%	0.00%	3.18%	0.00%	0.26%
Call drop rate	≤2%	0.00%	0.63%	0.00%	0.00%	1.18%	1.31%	0.00%	0.00%	0.00%	0.87%	0.00%	0.29%	0.00%	0.00%	0.00%	0.64%	0.00%	0.00%
Hands off success rate		100.00%	98.46%	100.00%	99.77%	98.28%	97.80%	100.00%	99.14%	100.00%	96.27%	100.00%	99.81%	100.00%	99.47%	100.00%	99.67%	100.00%	98.03%

11.1.6.5 Drive Test Results -SANGALI SSA 2G

Voice Quality

BSNL, failed in outdoor and Reliance GSM failed to meet the benchmark in indoor as well as outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.6.6 Drive Test Results - SANGALI SSA 3G

July	Dimark	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafone 3G	
Sangali	B'mark	In door	n door 🛛 Outdoor		Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor
0 to -75 dBm				30.60%	49.28%	75.61%	29.70%	93.16%	91.26%	29.05%	27.49%
0 to -85 dBm				50.08%	85.16%	88.06%	62.86%	100.00%	99.84%	66.26%	57.15%
0 to -95 dBm				69.33%	96.91%	94.56%	91.83%	100.00%	100.00%	99.61%	84.32%
Voice quality	≥ 95%		IP	99.93%	99.37%	NA	NA	100.00%	98.70%	96.38%	98.23%
CSSR	≥ 95%		12	100.00%	97.58%	98.33%	99.27%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls				0.00%	2.42%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%			1.28%	1.42%	0.00%	0.00%	0.00%	0.67%	0.00%	0.00%
Hands off success rate				0.00%	93.22%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%

NP: Not participated

Voice Quality

All operators met the benchmark for voice quality in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.6.1 Data Drive Test Results - SANGALI SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%	100	100		100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100		100	100	100	100	100
Minimum download speed		103	138	NDR	100	54	113	112	151
Average throughput for Packet Data		129	168		140	102	148	149	167
Latency	<250ms	100	100		100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.6.2 Data Drive Test Results - SANGALI SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%			100	100	100
Succesful Data Transmission upload speed attempts	>75%			100	100	100
Minimum download speed		NP	NDR	1894	4429	3465
Average throughput for Packet Data				3082	4975	3935
Latency	<250ms			100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.7 YAVATAMAL SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
Septembe	r Yavatmal	22-09-2016	24-09-2016	305


11.1.7.1 ROUTE DETAILS - YAVATAMAL SSA

Category	Type of location	September Yavatmal								
		Day 1	Day 2	Day 3						
Outdoor	Major Roads Highways With in the City	Within city of Babulgoan Highway, Within city of	Highway, Within city of Yavatmal	Major roads Maregoan						
Indoor	Shopping complex	Within city of Kalamb	Yavatmai							

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.7.2 ROUTE MAP - YAVATAMAL DAY 1

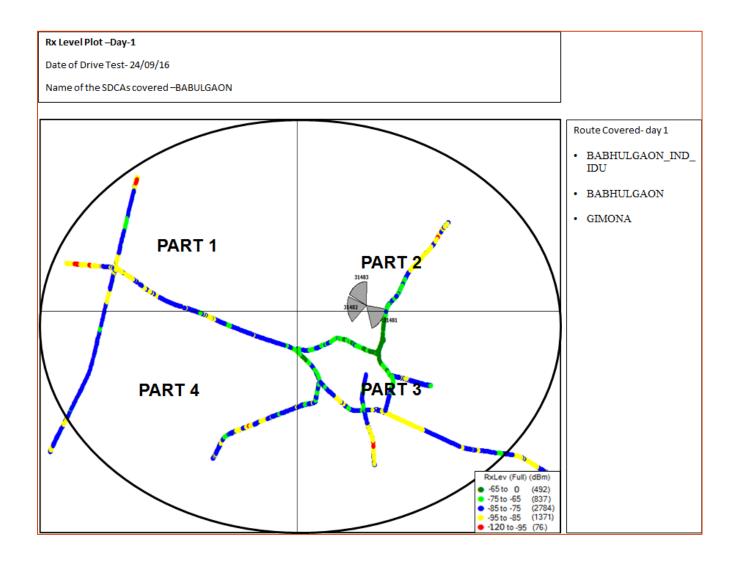




11.1.7.3 Route Map - YAVATAMAL DAY 2

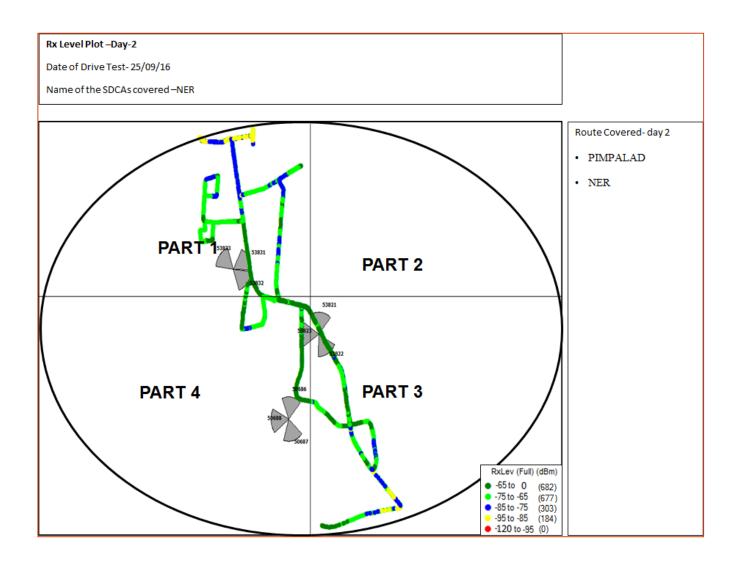





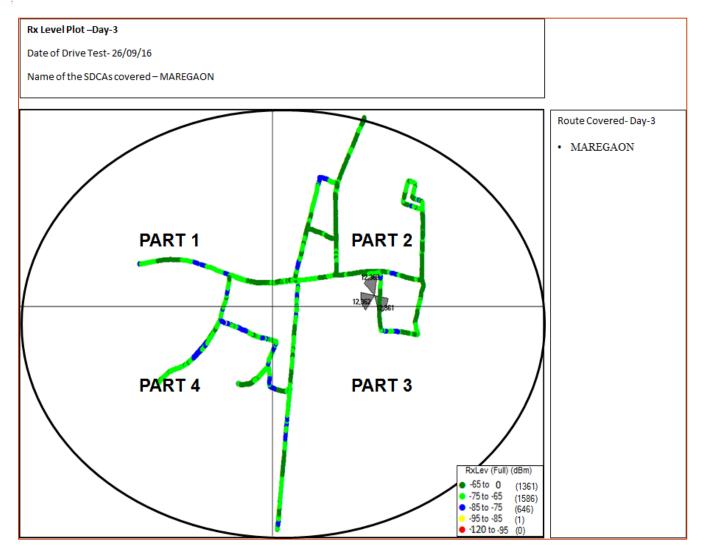



11.1.7.5 Drive Test Results -YAVATAMAL SSA 2G

Yavatmal	B'mark	Aircel		Air	tel	BS	NL	Id	ea	Relianc	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm		-		100.00%	50.54%	41.07%	37.01%	99.91%	76.37%	88.59%	47.03%	100.00%	99.95%	98.54%	91.37%	100.00%	76.86%	97.36%	96.74%
0 to -85 dBm				100.00%	85.09%	77.88%	84.15%	99.96%	98.05%	100.00%	76.70%	100.00%	99.98%	99.48%	99.72%	100.00%	95.57%	99.93%	99.62%
0 to -95 dBm				100.00%	98.63%	98.12%	99.31%	100.00%	99.89%	100.00%	94.72%	100.00%	100.00%	100.00%	100.00%	100.00%	99.97%	100.00%	99.90%
Voice quality	≥ 95%	N		97.24%	98.93%	91.74%	89.20%	99.26%	96.73%	99.92%	96.22%	99.96%	98.35%	98.65%	97.45%	97.64%	96.43%	99.46%	97.13%
CSSR	≥ 95%	- NS	3	100.00%	100.00%	89.33%	90.92%	100.00%	100.00%	100.00%	99.43%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	10.67%	9.08%	0.00%	0.00%	0.00%	0.57%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%			0.00%	0.00%	5.97%	6.24%	0.00%	0.00%	0.00%	0.86%	0.00%	0.00%	0.00%	0.92%	0.00%	0.00%	0.00%	0.00%
Hands off success rate				100.00%	100.00%	98.57%	98.51%	NA	99.77%	NA	100.00%	100.00%	100.00%	100.00%	99.29%	100.00%	98.86%	100.00%	100.00%

NS: No Services

Voice Quality

BSNL failed to meet the benchmark for voice quality in outdoor as well as indoor locations..

Call Set Success Rate (CSSR)

BSNL failed to meet the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.7.6 Drive Test Results - YAVATAMAL SSA 3G

September	Airt		Airtel 3G		BSNL 3G		Idea 3G		TATA 3G		one 3G
Yavatmal	B'mark	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor
0 to -75 dBm		90.54%	29.78%	25.91%	40.59%	86.10%	31.36%	100.00%	96.48%	95.52%	61.67%
0 to -85 dBm		100.00%	59.86%	85.79%	81.68%	97.89%	70.39%	100.00%	99.39%	100.00%	85.60%
0 to -95 dBm		100.00%	83.81%	100.00%	99.04%	99.90%	95.90%	100.00%	100.00%	100.00%	96.77%
Voice quality	≥ 95%	98.04%	97.17%	99.84%	99.60%	NA	NA	100.00%	99.76%	99.96%	96.65%
CSSR	≥ 95%	100.00%	100.00%	89.61%	91.29%	100.00%	100.00%	100.00%	99.40%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	10.39%	8.71%	0.00%	0.00%	0.00%	0.60%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	7.25%	5.67%	0.00%	0.00%	0.00%	0.60%	0.00%	0.00%
Hands off success rate		100.00%	100.00%	97.62%	96.32%	100.00%	99.63%	100.00%	100.00%	100.00%	100.00%

Voice Quality

All operators met the benchmark for voice quality in outdoor as well as indoor locations.

Call Set Success Rate (CSSR)

BSNL 3G failed to meet the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL 3G failed to meet the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.7.1 Data Drive Test Results - YAVATAMAL SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	119	47	98	63	73	129	159
Average throughput for Packet Data			139	394	157	81	80	164	179
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.7.2 Data Drive Test Results - YAVATAMAL SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%	100	100	100		
Succesful Data Transmission upload speed attempts	>75%	100	100	100		
Minimum download speed		3156	2376	1125	NS	NDR
Average throughput for Packet Data		3579	299	2623		
Latency	<250ms	100	100	100		



11.1.8 WARDHA SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
September	Wardha	19-09-2016	21-09-2016	299


11.1.8.1 ROUTE DETAILS - WARDHA SSA

Catagony	Type of location	September Wardha								
Category	Type of location	Day 1	Day 2	Day 3						
Outdoor	Major Roads Highways With in the City	Highway, Major roads of Wardha	Within city of Arvi, Within city and Highway of Selu	Highway and Major roads of Hinganghat						
Indoor	Shopping complex Office complex									

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.8.2 ROUTE MAP - WARDHA DAY 1

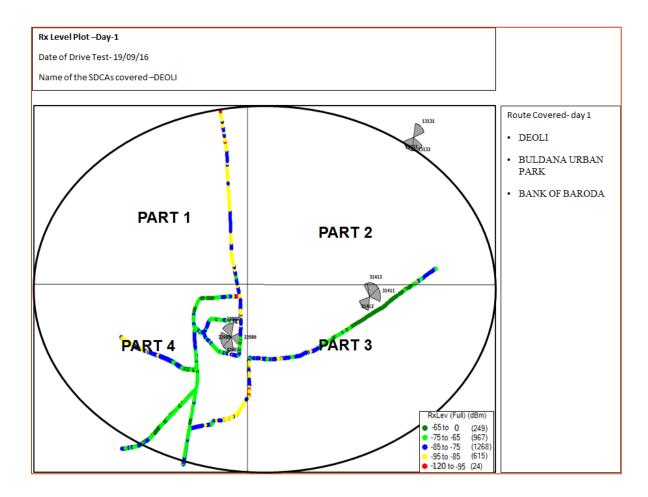




11.1.8.3 Route Map - WARDHA DAY 2

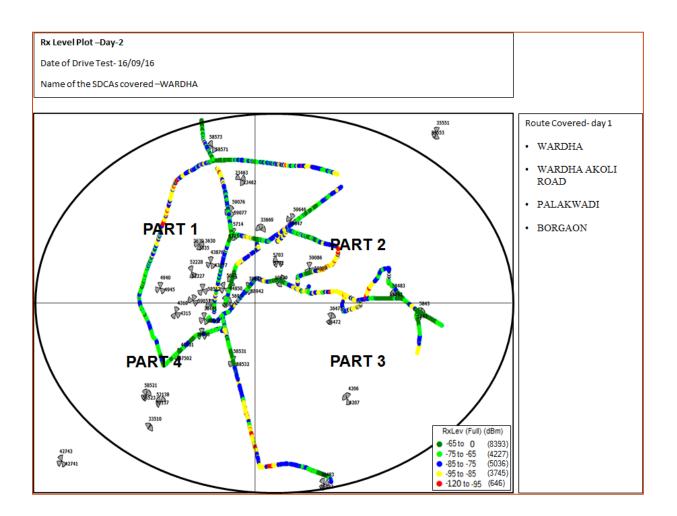



11.1.8.4 Route Map - WARDHA DAY 3

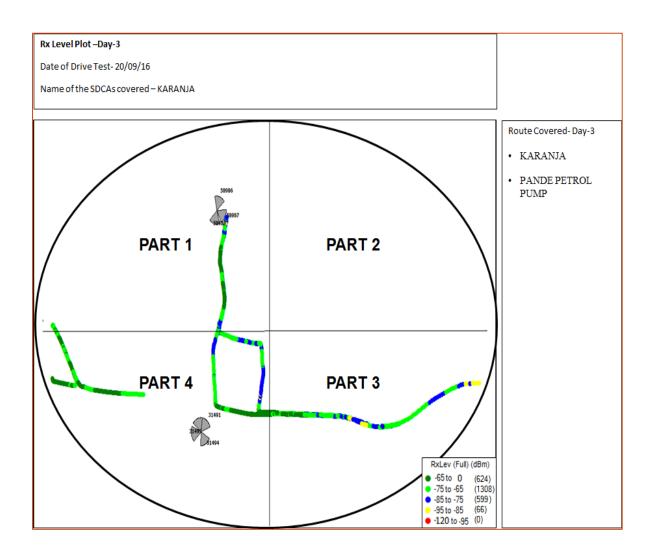



196

11.1.8.5 Drive Test Results -WARDHA SSA 2G

Wardha	B'mark	Air	cel	Air	tel	BS	NL	Id	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm		81.90%	67.76%	97.38%	57.09%	30.60%	24.52%	86.22%	86.42%	84.92%	53.39%	100.00%	99.94%	96.64%	90.92%	85.97%	86.69%	93.07%	95.56%
0 to -85 dBm		100.00%	95.07%	99.26%	81.62%	89.37%	80.40%	99.94%	99.31%	98.52%	82.24%	100.00%	99.99%	99.95%	99.80%	99.53%	97.10%	99.94%	99.24%
0 to -95 dBm		100.00%	100.00%	99.26%	96.68%	99.57%	97.57%	100.00%	99.96%	100.00%	98.71%	100.00%	100.00%	100.00%	100.00%	100.00%	99.99%	100.00%	99.85%
Voice quality	≥ 95%	99.84%	98.45%	98.51%	98.26%	96.93%	94.08%	98.54%	96.56%	99.94%	96.00%	99.53%	98.67%	99.77%	96.84%	99.36%	96.19%	99.04%	98.12%
CSSR	≥ 95%	100.00%	100.00%	100.00%	100.00%	95.77%	95.61%	100.00%	100.00%	100.00%	99.16%	100.00%	99.46%	100.00%	99.44%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	0.00%	0.00%	4.23%	4.39%	0.00%	0.00%	0.00%	0.84%	0.00%	0.54%	0.00%	0.56%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	0.00%	0.00%	2.94%	1.77%	0.00%	0.00%	0.00%	0.00%	0.00%	0.54%	0.00%	0.56%	0.00%	0.00%	0.00%	0.00%
Hands off success rate		100.00%	95.00%	100.00%	100.00%	100.00%	87.64%	100.00%	99.23%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	99.04%	100.00%	100.00%

Voice Quality

BSNL failed to meet the benchmark for voice quality in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in outdoor locations.



September	Dimark	mark Airtel		BSN	L 3G	Idea	a 3G	TAT	4 3G	Vodafo	one 3G
Wardha	B'mark	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor
0 to -75 dBm		98.09%	21.17%	29.56%	24.98%	18.56%	42.95%	NA	90.29%	89.22%	55.86%
0 to -85 dBm		99.16%	48.09%	86.21%	68.62%	74.62%	69.63%	NA	99.54%	100.00%	72.28%
0 to -95 dBm		99.95%	74.69%	99.26%	97.18%	99.96%	92.77%	NA	100.00%	100.00%	90.24%
Voice quality	≥ 95%	98.57%	93.51%	90.93%	90.19%	NA	NA	NA	99.64%	99.98%	97.37%
CSSR	≥ 95%	100.00%	100.00%	92.31%	91.13%	100.00%	100.00%	NA	100.00%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	7.69%	8.87%	0.00%	0.00%	NA	0.00%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	8.33%	3.98%	0.00%	0.00%	NA	0.00%	0.00%	0.00%
Hands off success rate		100.00%	100.00%	100.00%	82.88%	NA	100.00%	NA	100.00%	100.00%	100.00%

11.1.8.6 Drive Test Results - WARDHA SSA 3G

Voice Quality

Airtel 3G failed to meet the benchmark for voice quality in outdoor locations and BSNL 3G failed in outdoor as well as indoor locations.

Call Set Success Rate (CSSR)

BSNL 3G failed to meet benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL 3G failed to meet benchmark for call drop rate in outdoor as well as indoor locations.



11.1.8.1 Data Drive Test Results - WARDHA SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100	100	100	100
Minimum download speed		98	122	52	101	63	81	138	167
Average throughput for Packet Data		123	136	62	135	85	88	163	180
Latency	<250ms	100	100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.8.2 Data Drive Test Results - WARDHA SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100
Minimum download speed		3468	505	1114	2012	4196
Average throughput for Packet Data		2941	861	2796	3379	4487
Latency	<250ms	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.9 RATNAGIRI SSA



Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
August	Ratnagiri	22-08-2016	24-08-2016	377


11.1.9.1 Route Details - RATNAGIRI SSA

Category	Type of location		August Ratnagiri	
		Day 1	Day 2	Day 3
	Major Roads			
Outdoor	Highways	Highway,	Major road of Dapoli, Within city of Guhagar,	Within city of Lanja, Within city of Rajapur,
	With in the City	Within city of Chiplun, Within city of sangameshwar.	Highway, Withincity of	Highway , Major Road of
Indoor	Shopping complex	, ,	Khed	Ratnagiri.
	Office complex			

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.


11.1.9.2 Route Map - RATNAGIRI DAY 1



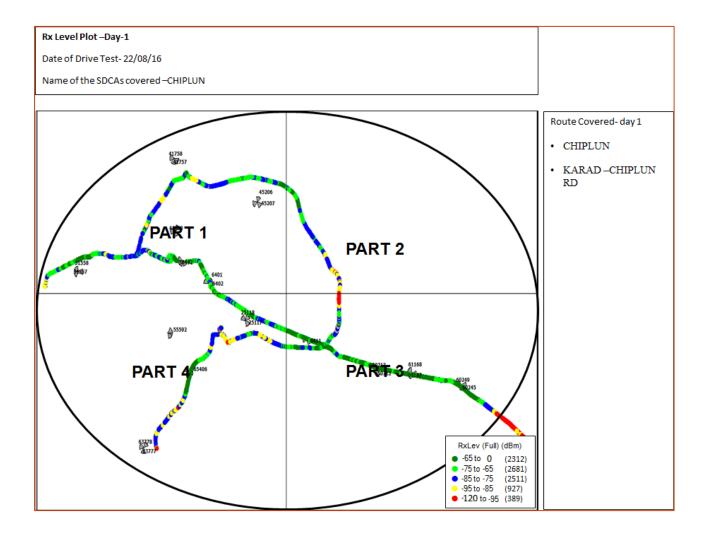


11.1.9.3 Route Map - RATNAGIRI DAY 2



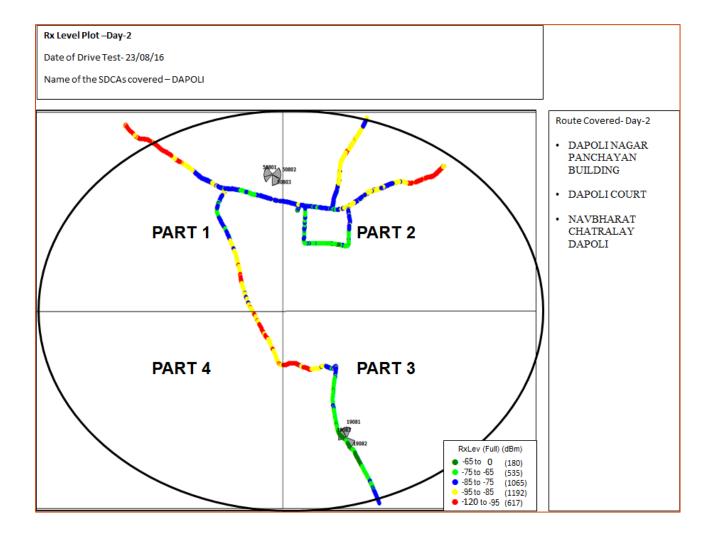



11.1.9.4 Route Map - RATNAGIRI DAY 3

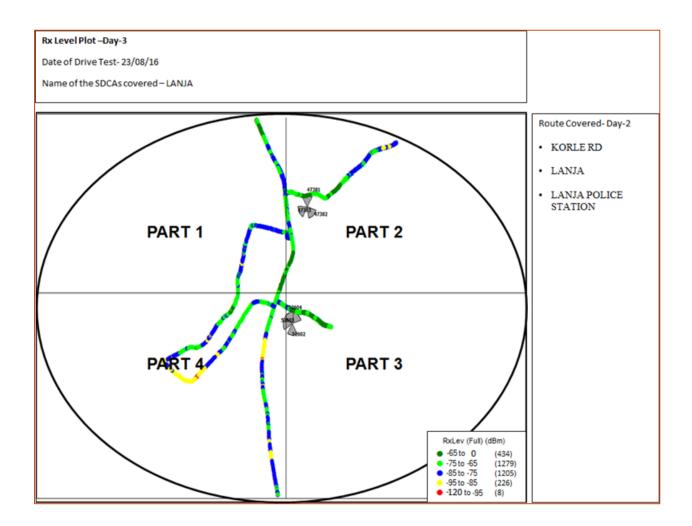



11.1.9.5 Drive Test Results -RATNAGIRI SSA 2G

Ratnagiri	B'mark	Air	cel	Air	tel	BS	NL	ld	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm				99.85%	50.06%	70.00%	39.64%	88.18%	56.21%	83.20%	38.10%	99.96%	99.94%	93.74%	90.86%	99.88%	55.41%	95.23%	87.84%
0 to -85 dBm				100.00%	79.28%	87.62%	72.04%	97.92%	85.59%	99.95%	72.02%	100.00%	99.99%	99.90%	99.17%	100.00%	81.90%	100.00%	98.26%
0 to -95 dBm				100.00%	93.26%	99.92%	89.10%	100.00%	100.00%	100.00%	94.82%	100.00%	100.00%	100.00%	99.92%	100.00%	96.78%	100.00%	99.84%
Voice quality	≥ 95%	N	c	98.27%	98.81%	96.37%	87.01%	99.41%	97.03%	100.00%	96.94%	98.57%	96.62%	96.46%	96.09%	99.29%	98.35%	98.12%	98.05%
CSSR	≥ 95%	IN IN	5	100.00%	100.00%	97.94%	96.71%	100.00%	100.00%	100.00%	97.14%	100.00%	100.00%	100.00%	99.67%	100.00%	99.53%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	2.06%	2.63%	0.00%	0.00%	0.00%	2.86%	0.00%	0.00%	0.00%	0.39%	0.00%	3.18%	0.00%	0.00%
Call drop rate	≤2%			0.00%	0.00%	0.00%	0.68%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.40%	0.00%	0.00%	0.00%	0.00%
Hands off success rate				100.00%	100.00%	100.00%	97.94%	100.00%	98.09%	NA	100.00%	100.00%	100.00%	99.28%	100.00%	100.00%	100.00%	NA	100.00%

NS: No Services

Voice Quality

BSNL failed to meet the benchmark for voice quality in outdoor locations

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.9.6 Drive Test Results - RATNAGIRI SSA 3G

August	Dimark	Airte	Airtel 3G		L 3G	Idea	a 3G	TAT	A 3G	Vodafo	one 3G
Ratnagiri	B'mark	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor
0 to -75 dBm				92.87%	41.11%	98.12%	52.65%	95.58%	92.34%	90.24%	56.60%
0 to -85 dBm				57.45%	70.69%	94.47%	79.39%	100.00%	97.96%	98.53%	78.58%
0 to -95 dBm				0.00%	90.91%	94.47%	95.76%	100.00%	99.75%	99.89%	93.68%
Voice quality	≥ 95%			100.00%	99.54%	NA	NA	99.98%	97.65%	96.82%	96.21%
CSSR	≥ 95%	N	IP	97.65%	98.80%	NA	99.43%	100.00%	98.48%	100.00%	100.00%
%age Blocked calls					19.20%	NA	0.57%	0.00%	0.72%	0.00%	0.00%
Call drop rate	≤2%				1.62%	NA	0.57%	0.00%	0.76%	0.00%	0.00%
Hands off success rate				0.00%	93.75%	NA	NA	100.00%	100.00%	100.00%	100.00%

NP: Not participated

Voice Quality

All operators met the benchmark for voice quality in outdoor as well as indoor locations

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.9.1 Data Drive Test Results - RATNAGIRI SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	119	65	106	104	101	126	156
Average throughput for Packet Data			146	76	143	129	116	159	165
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.9.2 Data Drive Test Results - RATNAGIRI SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%		100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100
Minimum download speed		NP	2212	1745	2722	3705
Average throughput for Packet Data			3998	2505	3083	4001
Latency	<250ms		100	100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.10 PARBHANI SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
August	PARBHANI	04-08-2016	06-08-2016	255


11.1.10.1 ROUTE DETAILS - PARBHANI SSA

Category	Type of location		August PARBHANI	
		Day 1	Day 2	Day 3
Outdoor Indoor	Major Roads Highways With in the City Shopping complex	GOLAIT NAGAR MANWATH EKTHA NAGAR RATNAPUR URBAAN ALI HAH NAGAR GUJARI BAZAAR SANT DASGANU NAGAR RAM KRISHAN NAGAR INDRA GANDHI NAGAR SAI NAGAR GOPEGAON-PATHRI RD PATHRI URBAN CO-OP CREDIT SO PATHARI- POKHARANI ROAD MURTUZA	ALANDIRD NANDED TO AUNDHA RD MAA KRUSHANI HARDWARE AUNDHA NAGNATH JYOTHRLINGA OF LORD JAWAHAR NOVODAYA VIDYALYA CHANDGAVHAN BAHIRJI NAGAR	VED NAGAR GANGAKHED. PARLI GANGAKHED ROAD. GANGAKHED Rd. BHAGYA NAGAR Mamdapur Shriramnagr Borkhed Shelgaon maratha
	Office complex	COLONY		

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.10.2 Route Map - PARBHANI DAY 1

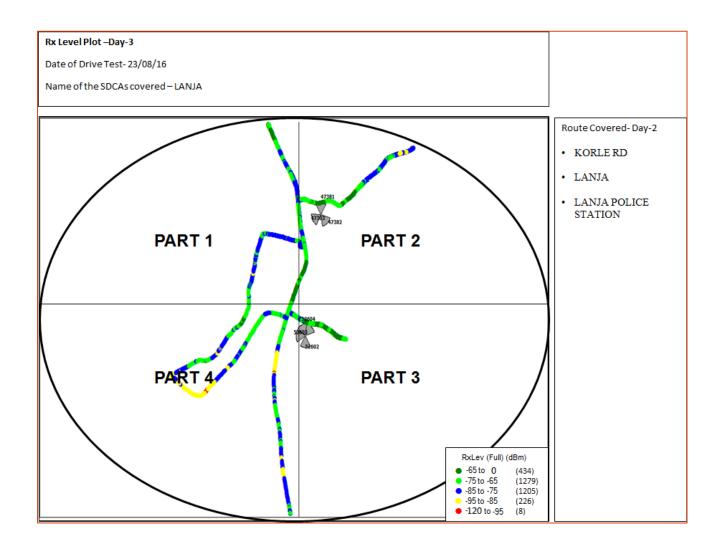




11.1.10.3 Route Map - PARBHANI DAY 2

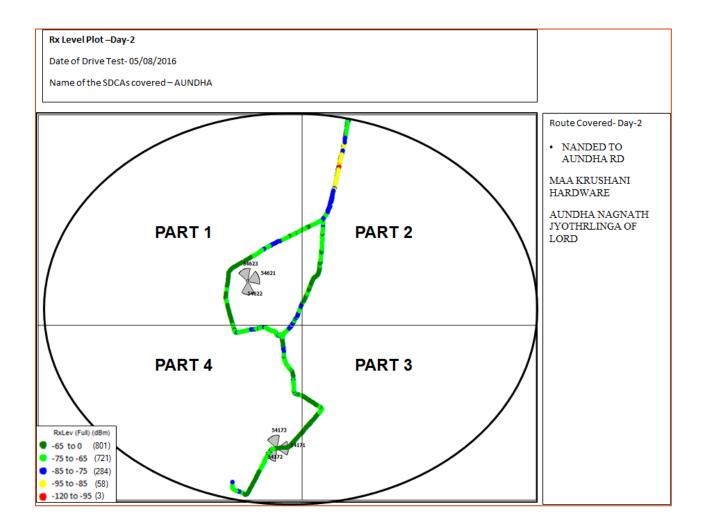



11.1.10.4 Route Map - PARBHANI DAY 3

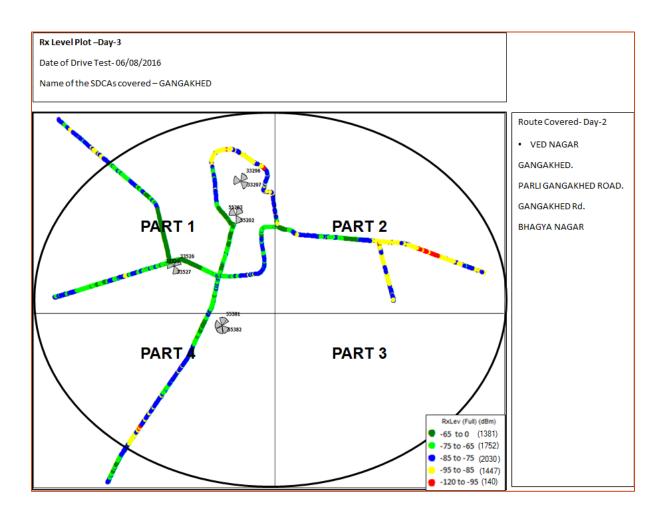



PARBHANI	B'mark	Air	rcel	Air	tel	BS	NL			Relian	e GSM	TATA	CDMA	TATA	GSM	Tele	enor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm				98.60%	58.93%	38.13%	46.48%					100.00%	99.96%	96.97%	92.01%	99.12%	57.69%	99.99%	92.74%
0 to -85 dBm				96.66%	85.52%	99.95%	82.57%					100.00%	99.97%	99.99%	99.64%	100.00%	85.29%	100.00%	97.77%
0 to -95 dBm				96.66%	96.50%	99.99%	93.29%					100.00%	100.00%	100.00%	100.00%	100.00%	98.83%	100.00%	99.63%
Voice quality	≥ 95%			99.56%	97.45%	99.77%	85.91%					99.44%	98.26%	99.95%	98.02%	98.97%	96.35%	99.53%	98.97%
CSSR	≥ 95%	N	IS	100.00%	100.00%	98.59%	96.52%	ND	ж	N	DR	100.00%	99.05%	100.00%	99.55%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	1.41%	3.48%					0.00%	0.95%	0.00%	0.45%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%			0.00%	0.00%	1.43%	1.35%					0.00%	0.96%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Hands off success rate				100.00%	100.00%	100.00%	97.83%					100.00%	100.00%	100.00%	99.34%	100.00%	100.00%	NA	100.00%

11.1.10.5 Drive Test Results -PARBHANI SSA 2G

NDR: No data received, NS: No Services

Voice Quality

BSNL failed to meet the benchmark for voice quality in outdoor locations

.Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.10.6 Drive Test Results - PARBHANI SSA 3G

August	Dimark	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafo	one 3G
PARBHANI	B'mark	In door	Outdoor								
0 to -75 dBm				50.25%	45.37%			99.33%	91.84%	91.75%	40.51%
0 to -85 dBm				75.10%	80.38%			100.00%	97.40%	100.00%	74.16%
0 to -95 dBm				100.00%	94.66%			100.00%	100.00%	100.00%	94.69%
Voice quality	≥ 95%		IP	100.00%	97.12%	NI	DR	100.00%	99.21%	100.00%	96.21%
CSSR	≥ 95%		16	100.00%	96.20%		DN	100.00%	98.21%	100.00%	100.00%
%age Blocked calls				0.00%	3.80%			0.00%	1.79%	0.00%	0.00%
Call drop rate	≤2%			0.00%	2.19%			0.00%	1.82%	0.00%	0.00%
Hands off success rate				NA	95.56%			0.00%	94.64%	100.00%	100.00%

NP: Not participated, NDR: No data received

Voice Quality

All operators met the benchmark for voice quality in outdoor as well as indoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL 3G failed to meet the benchmark for call drop rate in outdoor locations.



11.1.10.1 Data Drive Test Results - PARBHANI SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100		100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100		100	100	100
Minimum download speed		NS	126	44	176	NDR	73	157	135
Average throughput for Packet Data			148	52	205]	79	175	162
Latency	<250ms		100	100	100		100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.10.2 Data Drive Test Results - PARBHANI SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%		100		100	100
Succesful Data Transmission upload speed attempts	>75%		100		100	100
Minimum download speed		NS	1412	NDR	2797	3498
Average throughput for Packet Data			1672		1548	3926
Latency	<250ms		100		100	100

All operators met the TRAI benchmark for data drive test.



11.1.11 NANDED SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
August	Nanded	11-08-2016	13-08-2016	271


11.1.11.1 ROUTE DETAILS - NANDED SSA

Category	Type of location		August Nanded	
,	- //	Day 1	Day 2	Day 3
	Major Roads	LOHA OLD LOHA ROAD	1.BILOLI 2.VIJAYANAGAR 3.BODHAN NANDED ROAD	1.DEGLOOR NANDED ROAD 2.DEGLOOR MARKET
Outdoor	Highways	KANDHAR SHARIF ROAD	4.DHARMABAD 5.BALAPUR DHARMABAD 6.BODHAN DHARMABAD ROAD	COMMITTEE. 3.DEGLOOR 4.SHANTANU MOTORS
	With in the City	SUMAIYYA NAGAR TAKHAT SACHKHAND SRI HAZUR ABCHAL NANDED	7.RUKMININAGAR 8.MONDHA 9.MUDKHED BHOKAR ROAD	5.MUKHED 6.BANK OF BARODA ATM 7.MUKHED POLICE STATION.
Indoor	Shopping complex Office complex		10.MUDKHED 11. MUDKED UMRI ROAD STATE BANK OF INDIA	8.NAIGAON 9.NARSI

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.






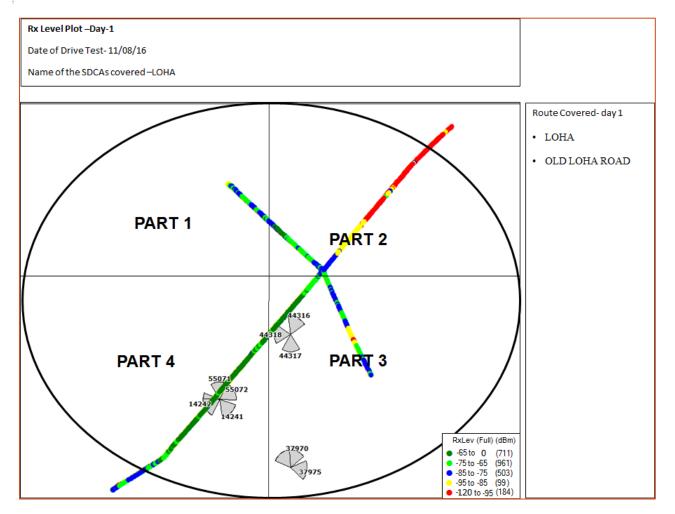




11.1.11.3 Route Map - NANDED DAY 2

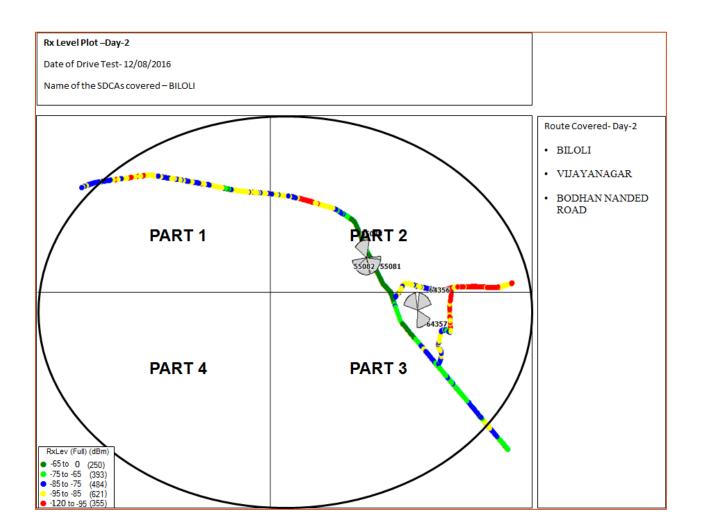



11.1.11.4 Route Map - NANDED DAY 3

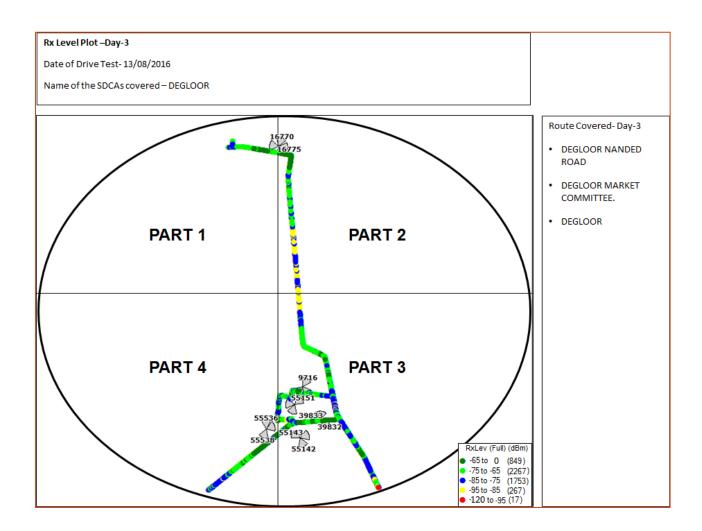



11.1.11.5 Drive Test Results -NANDED SSA 2G

Nanded	B'mark	Air	cel	Air	tel	BS	NL	ld	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm				99.26%	58.24%	1.50%	2.84%	58.14%	56.79%	40.69%	55.01%	99.95%	99.94%	97.88%	91.28%	94.57%	75.57%	88.10%	96.75%
0 to -85 dBm				99.99%	85.32%	48.68%	35.93%	94.62%	89.44%	81.15%	80.46%	100.00%	99.98%	99.98%	98.74%	100.00%	87.72%	99.97%	99.47%
0 to -95 dBm				100.00%	97.19%	87.27%	67.89%	99.96%	99.46%	99.96%	97.09%	100.00%	100.00%	100.00%	100.00%	100.00%	99.15%	100.00%	99.83%
Voice quality	≥ 95%	N	c	98.23%	97.78%	97.21%	90.61%	99.16%	97.87%	86.62%	97.96%	99.14%	97.74%	99.74%	97.91%	98.90%	96.15%	98.81%	96.12%
CSSR	≥ 95%		5	100.00%	100.00%	96.81%	95.34%	100.00%	100.00%	98.36%	99.02%	100.00%	100.00%	100.00%	99.01%	100.00%	99.66%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	3.19%	4.66%	0.00%	0.00%	1.64%	0.98%	0.00%	0.00%	0.00%	0.99%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%			0.00%	0.00%	0.00%	2.26%	0.00%	0.00%	0.00%	1.48%	0.00%	0.00%	0.00%	0.50%	0.00%	0.34%	0.00%	0.00%
Hands off success rate				NA	100.00%	0.00%	98.57%	100.00%	100.00%	100.00%	87.84%	100.00%	100.00%	100.00%	99.25%	100.00%	97.86%	100.00%	100.00%

NS: No Services

Voice Quality

BSNL and Reliance GSM fail to meet the benchmark in indoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in outdoor locations.



11.1.11.6 Drive Test Results - NANDED SSA 3G

August	Dimark	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafo	one 3G
Nanded	B'mark	In door	Outdoor								
0 to -75 dBm				0.79%	26.14%	53.01%	24.41%	100.00%	91.70%	87.87%	37.75%
0 to -85 dBm				56.80%	54.57%	97.12%	67.14%	100.00%	98.11%	100.00%	69.63%
0 to -95 dBm				97.41%	78.25%	100.00%	95.70%	100.00%	100.00%	100.00%	91.23%
Voice quality	≥ 95%	N N	IP	100.00%	99.39%	NA	NA	100.00%	97.07%	99.08%	95.80%
CSSR	≥ 95%			100.00%	96.68%	100.00%	100.00%	100.00%	98.95%	100.00%	100.00%
%age Blocked calls				0.00%	3.32%	0.00%	0.00%	0.00%	1.05%	0.00%	0.00%
Call drop rate	≤2%			0.00%	1.91%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Hands off success rate				0.00%	98.83%	NA	100.00%	0.00%	100.00%	100.00%	100.00%

NP: Not Participated

Voice Quality

All operators met the benchmark for voice quality in outdoor as well as indoor locations

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.11.1 Data Drive Test Results - NANDED SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	132	71	116	90	82	129	152
Average throughput for Packet Data			153	45	167	115	87	153	166
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.11.2 Data Drive Test Results - NANDED SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%		100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100
Minimum download speed		NP	6689	1145	1405	3580
Average throughput for Packet Data			3057	2399	1573	4016
Latency	<250ms		100	100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.12 NAGPUR SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
September	Nagpur	12-09-2016	14-09-2016	310


11.1.12.1 ROUTE DETAILS - NAGPUR SSA

Category	Type of location		September Nagpur	
		Day 1	Day 2	Day 3
	Major Roads	NAGPUR	KALAMESWAR	KAMPTEE GOLF CLUB WARIS PURA SANJAY NAGAR BENGALI
Outdoor	Highways	MOMINPURA	BRAMNAHI KATOL NABIRA LAYOUT PANCHWATI	COLONY LALA OLI NTPC MAUDA PROJECT
	With in the City	DHANTOLI VANJARI KAMPTEE RD. UMER RD	JANKI NAGAR ARJUN NAGAR	MAUDA PARSHIVNI
Indoor	Shopping complex		WAGHODA SAVNER	DATTA PRABHU TRADE PARSHIVNI SBI RAMTEK
macor	Office complex			RAJAJI WARD, SITALWADI

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.12.2 Route Map - NAGPUR DAY 1

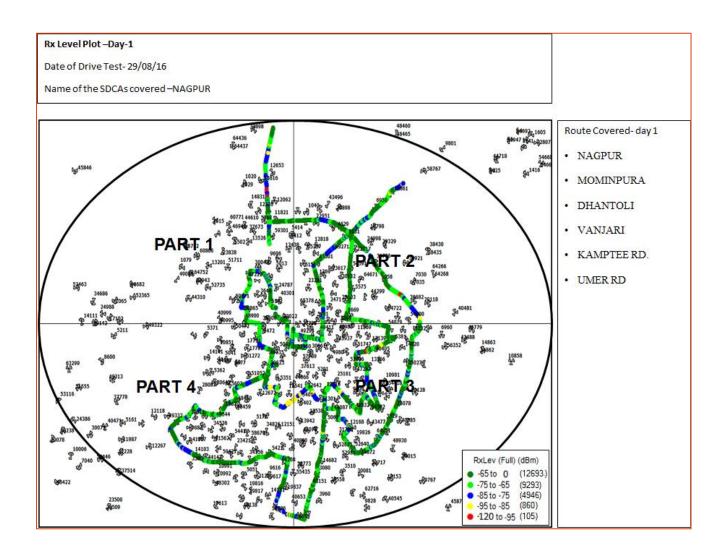




11.1.12.3 Rote Map - NAGPUR DAY 2

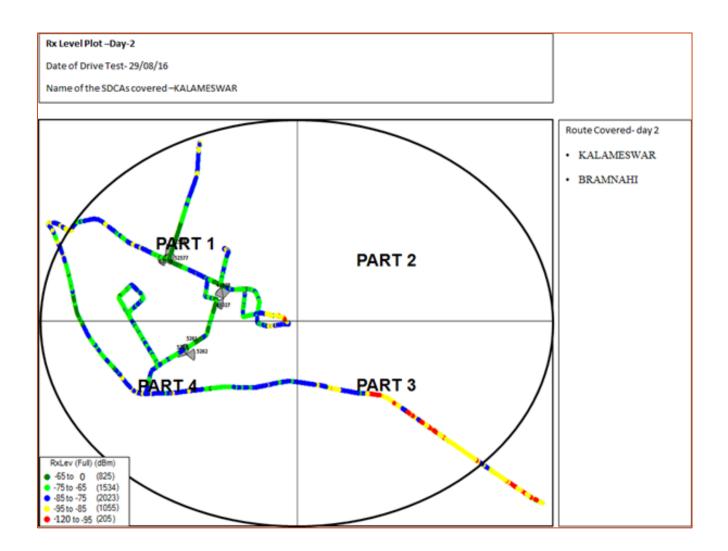



11.1.12.4 Route Map - NAGPUR DAY 3

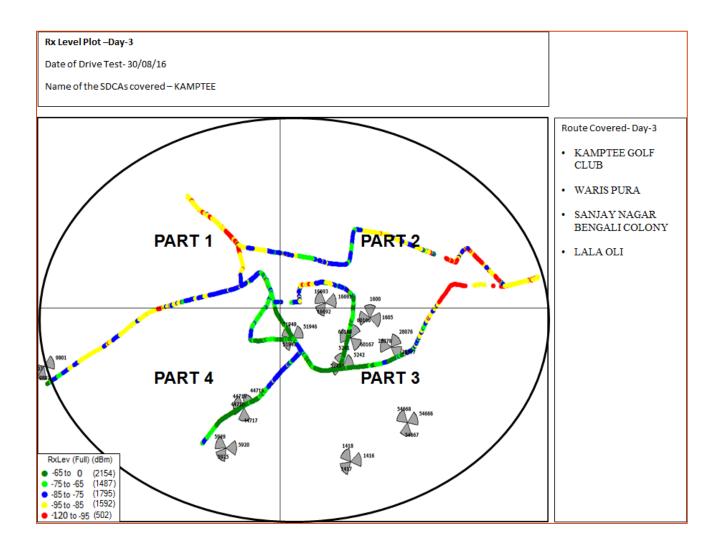



11.1.12.5 Drive Test Results -NAGPUR SSA 2G

Nagpur	B'mark	Air	cel	Air	tel	BS	NL	Id	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm				99.97%	59.54%	81.16%	66.26%	98.31%	87.16%	99.08%	58.11%	100.00%	99.94%	96.62%	92.85%	96.31%	62.66%	96.61%	93.03%
0 to -85 dBm				100.00%	85.09%	99.92%	97.60%	99.97%	98.28%	99.93%	83.00%	100.00%	100.00%	99.98%	99.67%	100.00%	86.57%	99.91%	98.57%
0 to -95 dBm				100.00%	96.94%	100.00%	99.96%	100.00%	99.87%	100.00%	97.83%	100.00%	100.00%	100.00%	100.00%	100.00%	98.27%	100.00%	99.54%
Voice quality	≥ 95%			99.09%	95.81%	88.14%	82.45%	98.00%	96.13%	98.21%	89.86%	98.79%	98.97%	99.94%	96.31%	99.73%	97.07%	99.54%	96.46%
CSSR	≥ 95%	N	5	100.00%	100.00%	98.39%	98.38%	100.00%	100.00%	100.00%	99.70%	100.00%	100.00%	100.00%	99.11%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	1.61%	1.62%	0.00%	0.00%	0.00%	0.30%	0.00%	0.00%	0.00%	0.89%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%			0.00%	0.00%	0.00%	2.82%	0.00%	0.00%	0.00%	1.50%	0.00%	0.29%	0.00%	0.60%	0.00%	0.00%	0.00%	0.00%
Hands off success rate				100.00%	100.00%	94.12%	97.47%	100.00%	99.50%	100.00%	98.39%	100.00%	100.00%	100.00%	99.24%	NA	99.48%	100.00%	100.00%

NS: No Services

Voice Quality

Reliance GSM fail to meet the benchmark in outdoor locations and BSNL failed in indoor as well as outdoor location.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in outdoor locations.



11.1.12.6 Drive Test Results - NAGPUR SSA 3G

September	Dimark	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafo	one 3G
Nagpur	B'mark	In door	Outdoor								
0 to -75 dBm		15.03%	24.11%	51.42%	34.86%	99.88%	41.68%	99.23%	93.89%	95.36%	55.62%
0 to -85 dBm		74.50%	52.77%	93.84%	64.80%	100.00%	75.74%	100.00%	99.45%	100.00%	83.89%
0 to -95 dBm		99.06%	78.18%	100.00%	84.67%	100.00%	96.16%	100.00%	100.00%	100.00%	96.57%
Voice quality	≥ 95%	87.24%	83.85%	99.92%	88.56%	NA	NA	100.00%	96.67%	99.67%	95.18%
CSSR	≥ 95%	100.00%	100.00%	100.00%	98.58%	100.00%	100.00%	100.00%	99.23%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	0.00%	1.42%	0.00%	0.00%	0.00%	0.77%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	0.00%	0.96%	0.00%	0.00%	0.00%	1.55%	0.00%	0.00%
Hands off success rate		100.00%	100.00%	100.00%	99.58%	NA	100.00%	NA	99.01%	NA	100.00%

Voice Quality

Airtel 3G failed to meet the benchmark for voice quality indoor & outdoor locations and BSNL failed in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.12.1 Data Drive Test Results - NAGPUR SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	146	43	103	45	84	129	173
Average throughput for Packet Data			165	56	140	67	91	162	183
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.12.2 Data Drive Test Results - NAGPUR SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100
Minimum download speed		3282	1216	1181	2016	4120
Average throughput for Packet Data		3656	3090	2765	2393	4423
Latency	<250ms	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.13 LATUR SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
September	Latur	01-09-2016	03-09-2016	300

11.1.13.1 ROUTE DETAILS - LATUR SSA


Catagony	Type of location	September Latur								
Category	Type of location	Day 1	Day 2	Day 3						
	Major Roads	AUSA VINEGAON	MAHAD KARANJKHOL SAREKAR ALI	CHENDHARE						
Outdoor		KHALAPUR BABHULGAON	MIDC MAHAD MADAJI TEA SHOP	DALINAGAR						
	Highways	NANOSE AMNORI	SIRURA HOTEL SIDDHI UDGIR	THIKRUL NAKA MITRA						
	With in the City	KALAMJE NILANGA	LATUR PUBLIC SCHOOL	KAMKHED						
Indeen	Shopping complex	BAMNOLI RODAS NAGR	HEENA SUPER MARKET	RAMWADI						
Indoor	Office complex	KILLARI APODE	HOTEL LATUR PRIDE	MELEGHAR						

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.13.2

Route Map - LATUR DAY 1

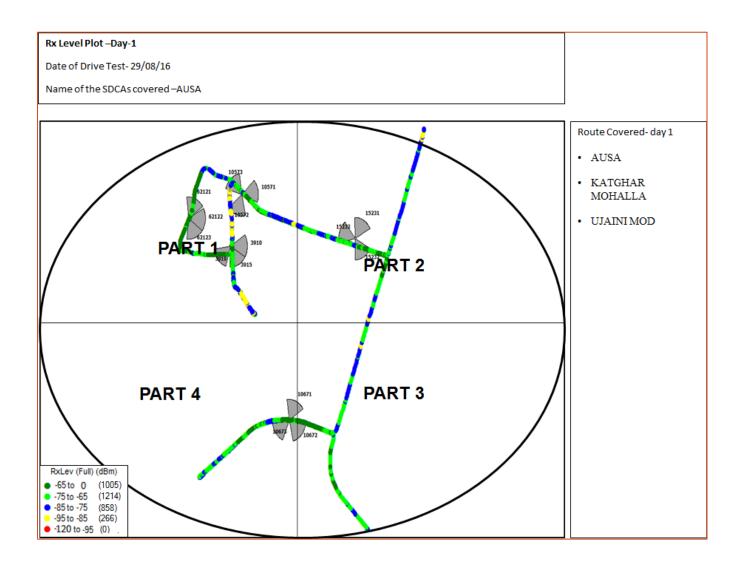




11.1.13.3 Route Map - LATUR DAY 2

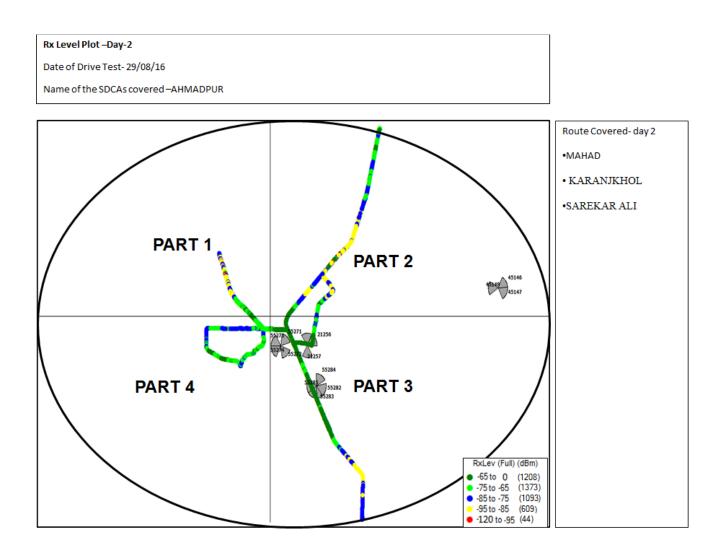



11.1.13.4 Route Map - LATUR DAY 3

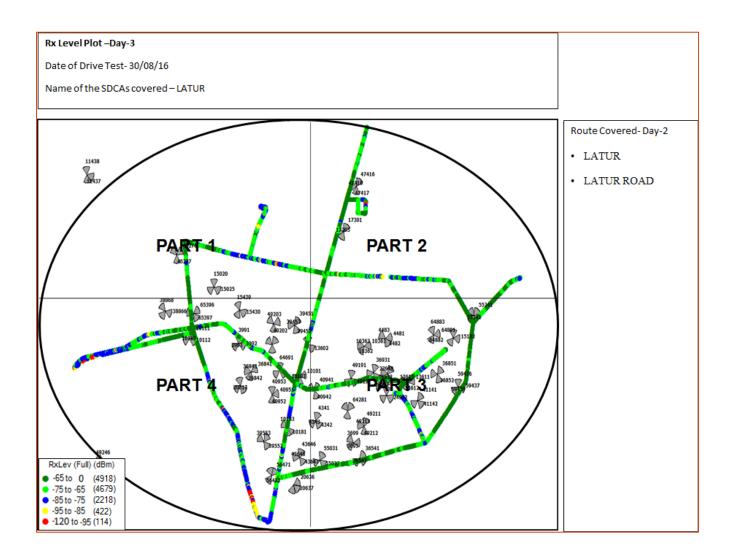



11.1.13.5 Drive Test Results -LATUR SSA 2G

LATUR	B'mark	Air	Aircel		Aircel		Airtel BSNL		NL	Idea		Reliance GSM		TATA CDMA		TATA	GSM	Telenor		Vodafone	
Parameter's	DIIIdIK	In door	In door Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor		
0 to -75 dBm					67.70%	39.86%	61.15%	97.43%	88.54%	81.26%	55.75%	99.99%	99.94%	95.49%	91.00%	88.01%	84.23%	92.19%	97.04%		
0 to -85 dBm				99.75%	90.95%	99.95%	93.41%	100.00%	98.37%	98.62%	85.50%	100.00%	100.00%	99.97%	99.58%	100.00%	97.27%	99.98%	99.57%		
0 to -95 dBm				100.00%	98.90%	100.00%	99.06%	100.00%	99.77%	99.95%	98.59%	100.00%	100.00%	100.00%	100.00%	100.00%	99.94%	100.00%	99.88%		
Voice quality	≥ 95%				97.30%	96.34%	95.07%	98.46%	95.74%	99.60%	98.18%	98.10%	96.93%	99.77%	97.01%	98.44%	95.86%	97.83%	96.68%		
CSSR	≥ 95%	N	5	100.00%	100.00%	98.68%	95.64%	100.00%	100.00%	100.00%	99.48%	100.00%	100.00%	100.00%	99.12%	100.00%	99.57%	100.00%	100.00%		
%age Blocked calls				0.00%	0.00%	1.30%	4.36%	0.00%	0.00%	0.00%	0.52%	0.00%	0.00%	0.00%	0.88%	0.00%	0.00%	0.00%	0.00%		
Call drop rate	≤2%		-		0.00%	1.32%	1.75%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.89%	0.00%	0.00%	0.00%	0.00%		
Hands off success rate				100.00%	100.00%	100.00%	93.64%	100.00%	99.23%	100.00%	100.00%	100.00%	100.00%	100.00%	99.30%	100.00%	100.00%	100.00%	100.00%		

Voice Quality

All operators met the benchmark for voice quality in outdoor as well as indoor locations

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.13.6 Drive Test Results - LATUR SSA 3G

September	Dimark	Airte	Airtel 3G In door Outdoor		L 3G	Idea	a 3G	TATA 3G		Vodafone 3G	
LATUR	B'mark	In door			Outdoor	In door	Outdoor	In door	Outdoor	In door	Outdoor
0 to -75 dBm				65.45%	52.09%	39.73%	44.04%	94.53%	91.12%	98.79%	64.47%
0 to -85 dBm					75.16%	58.95%	72.38%	100.00%	99.63%	99.32%	83.45%
0 to -95 dBm			Γ		92.57%	91.40%	90.11%	100.00%	100.00%	100.00%	92.96%
Voice quality	≥ 95%		ND		98.90%	NA	NA	98.79%	97.40%	99.08%	97.22%
CSSR	≥ 95%		NP		95.04%	100.00%	99.20%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls					4.96%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%				1.74%	0.00%	0.40%	0.00%	1.22%	0.00%	0.00%
Hands off success rate					91.54%	100.00%	96.35%	100.00%	100.00%	100.00%	100.00%

NP: Not Participated

Voice Quality

All operators met the benchmark for voice quality in outdoor as well as indoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.13.1 Data Drive Test Results - LATUR SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	123	29	124	64	115	112	153
Average throughput for Packet Data			150	44	152	105	148	152	164
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.13.2 Data Drive Test Results - LATUR SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%		100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100
Minimum download speed		NP	875	1765	3526	4001
Average throughput for Packet Data			2048	2390	3894	4308
Latency	<250ms		NA	100	100	4308

All operators met the TRAI benchmark for data drive test.



11.1.14 GADCHIROLI SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
September	Gadchiroli	29-09-2016	01-10-2016	215


11.1.14.1 ROUTE DETAILS - GADCHIROLI SSA

Category	Type of location		September Gadchiroli								
8,		Day 1	Day 2	Day 3							
	Major Roads	AHERI	ARMORI								
Outdoor	Highways	ALLAPALLI	ARMORI	WADSA							
	With in the City	ASTHI	PORLA	DESAIGANJ							
Indoor	Shopping complex	CHAMORSI	ADAPALLI								
muoor	Office complex	AASTHI RD	GADCHIROLI								

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.14.2 ROUTE MAP - GADCHIROLI DAY 1

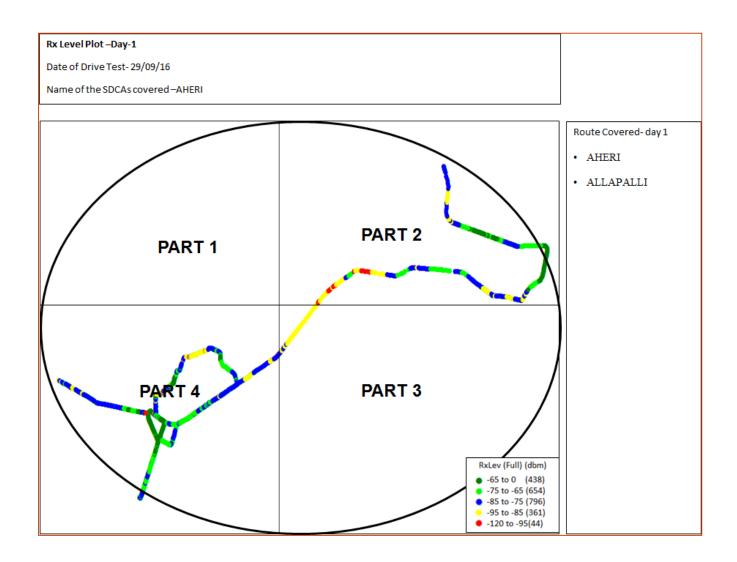




11.1.14.3 Route Map - GADCHIROLI DAY 2

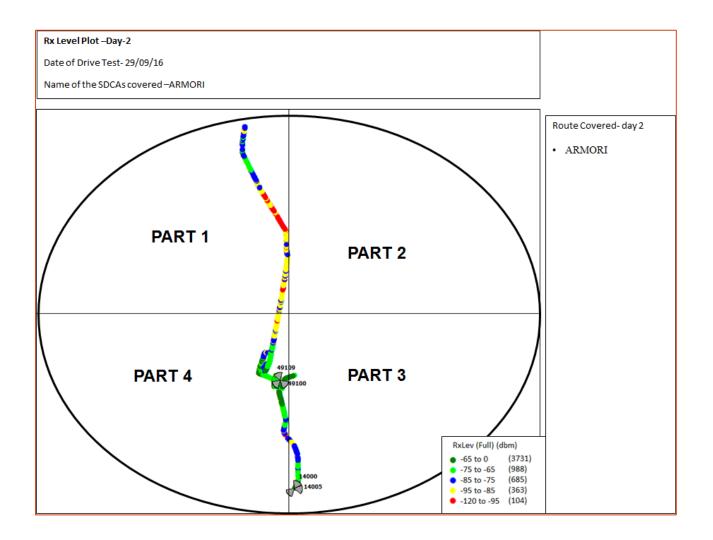



11.1.14.4 Route Map - GADCHIROLI DAY 3

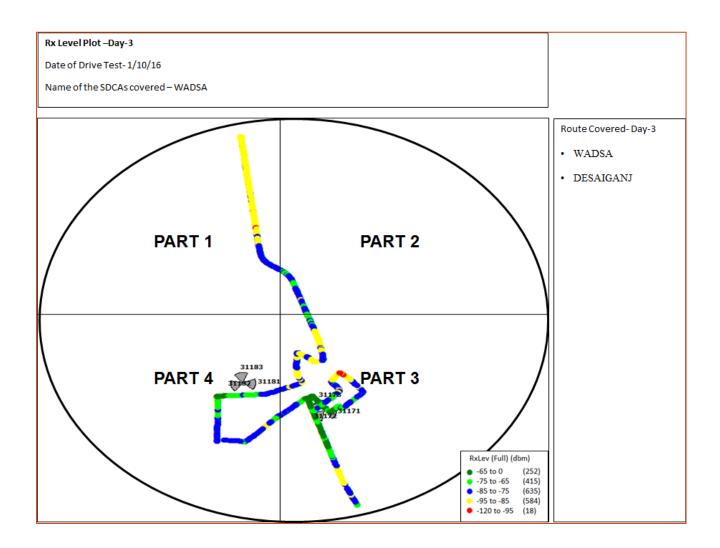



11.1.14.5 Drive Test Results -GADCHIROLI SSA 2G

Gadchiroli	Dimark	Air	Aircel		tel	BSNL		Idea		Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	enor	Vodafone	
Parameter's	B'mark	In door	In door Outdoor	In door	Outdoor	In door	Outdoor												
0 to -75 dBm					61.02%	NA	28.66%	77.39%	63.05%	77.27%	34.71%	100.00%	99.94%	97.58%	92.11%	98.53%	75.21%	95.92%	87.93%
0 to -85 dBm				99.87%	80.74%	NA	69.35%	99.92%	94.90%	99.43%	66.58%	100.00%	100.00%	100.00%	99.32%	99.63%	95.88%	99.92%	97.65%
0 to -95 dBm				100.00%	93.72%	NA	87.27%	100.00%	99.65%	99.89%	88.64%	100.00%	100.00%	100.00%	100.00%	100.00%	99.61%	100.00%	99.54%
Voice quality	≥ 95%	N	NC		97.87%	90.11%	90.36%	97.98%	96.85%	99.32%	93.46%	100.00%	98.95%	100.00%	99.72%	99.33%	99.64%	99.42%	97.44%
CSSR	≥ 95%	IN .	NS	100.00%	100.00%	98.70%	98.31%	100.00%	100.00%	100.00%	99.52%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	0.00%	3.24%	0.00%	0.00%	0.00%	0.48%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%				0.00%	1.66%	2.94%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Hands off success rate					100.00%	100.00%	98.55%	100.00%	99.71%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%

NS: No services

Voice Quality

Reliance GSM failed to meet the benchmark for voice quality in outdoor locations and BSNL failed in indoor as well as outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in outdoor locations.



11.1.14.6 Drive Test Results - GADCHIROLI SSA 3G

September	Dimork	Airte	el 3G	BSN	BSNL 3G		ldea 3G		A 3G	Vodafo	one 3G
Gadchiroli	B'mark	In door	Outdoor	In door Outdoor		In door	Outdoor	In door	Outdoor	In door	Outdoor
0 to -75 dBm		55.10%	23.63%			10.72%	20.63%			85.51%	70.21%
0 to -85 dBm		99.67%	51.80%			79.71%	74.64%			85.80%	81.95%
0 to -95 dBm		100.00%	79.92%			99.75%	93.54%			89.57%	95.76%
Voice quality	≥ 95%	99.33%	95.23%	NDD		NA	NA	NS		97.62%	97.04%
CSSR	≥ 95%	100.00%	100.00%	NDR		100.00%	100.00%			100.00%	100.00%
%age Blocked calls		0.00%	0.00%			0.00%	0.00%			0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%			0.00%	0.00%			0.00%	0.00%
Hands off success rate		100.00%	100.00%			100.00%	100.00%			NA	100.00%

NDR: No data received, NS: No Services

Voice Quality

All operators met the benchmark for voice quality in outdoor as well as indoor locations

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.14.1 Data Drive Test Results - GADCHIROLI SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	114	31	90	66	104	138	159
Average throughput for Packet Data			131	4748	183	84	134	162	189
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.14.2 Data Drive Test Results - GADCHIROLI SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%	100	100	100		100
Succesful Data Transmission upload speed attempts	>75%	100	100	100		100
Minimum download speed		3233	1424	945	NS	3990
Average throughput for Packet Data		3858	1357	2482		4606
Latency	<250ms	100	100	100		100

All operators met the TRAI benchmark for data drive test.



11.1.15 DHULE SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
September	Dhule	07-09-2016	09-09-2016	288


11.1.15.1 ROUTE DETAILS - DHULE SSA

Category	Type of location		September Dhule	
		Day 1	Day 2	Day 3
	Major Roads	DONDAICHA BYPASS DONDAICHA	NANDURBAR	
Outdoor	Highways	GOPAL PUR A RD, SHAHADA	NAVAPUR	DHULE
	With in the City	SHIRISH KUMAR NAGAR SARASWATI COLONY	ADARSH NAGAR SAKRI, TALODA	WALWADI
Indoor	Shopping complex	SHIRPUR, AMODE DAHIVAD, SINDKHEDA	VINAL NAGAR	
	Office complex	SIDDHARTH NAGAR		

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.15.2 Route Map - DHULE DAY 1

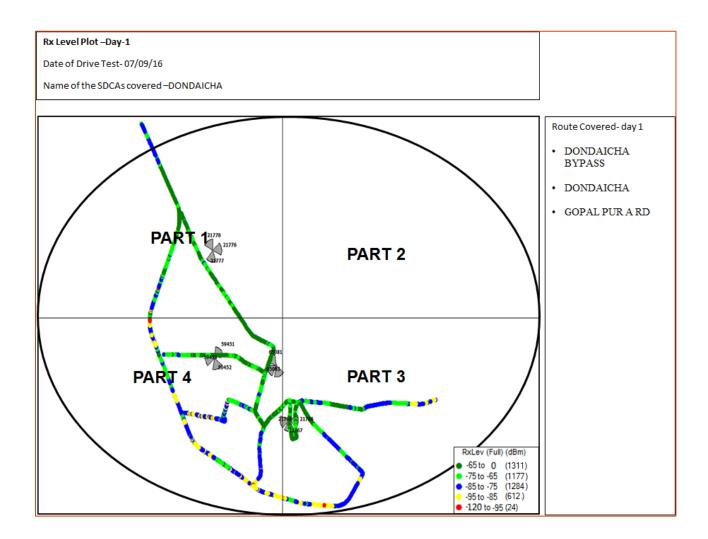




11.1.15.3 Route Map - DHULE DAY 2

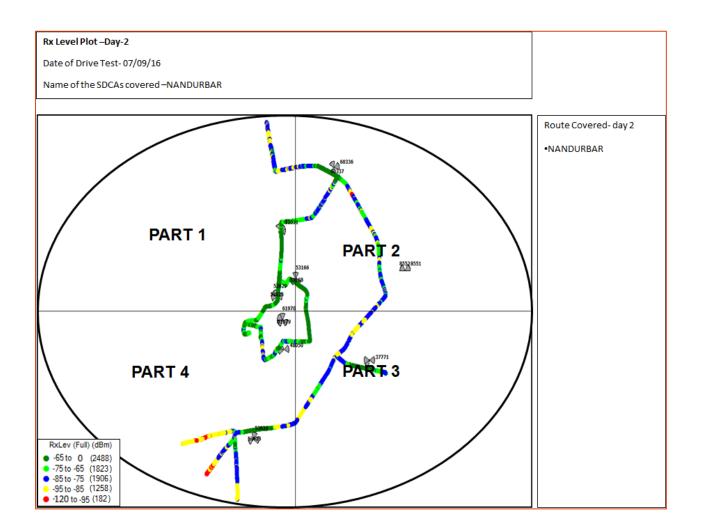



11.1.15.4 Route Map - DHULE DAY 3

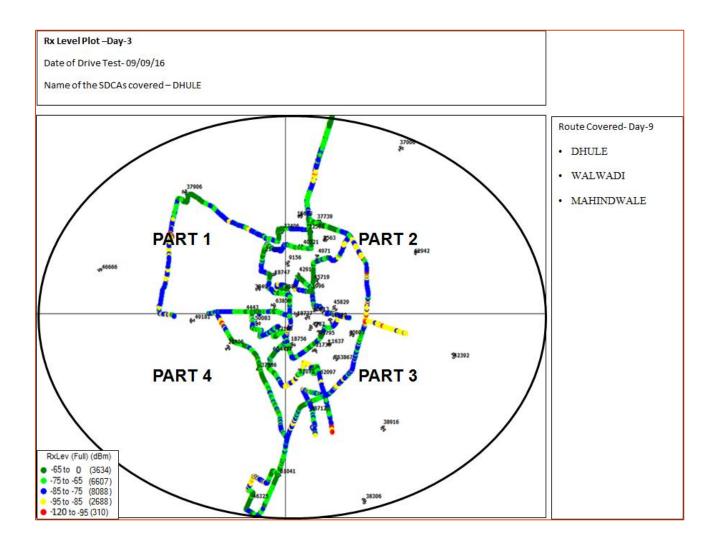



11.1.15.5 Drive Test Results -DHULE SSA 2G

Dhule	B'mark	Air	cel	Air	tel	BS	NL	Id	еа	Relianc	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	afone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm				98.41%	45.10%	73.92%	59.21%	90.25%	64.36%	99.60%	41.88%	100.00%	99.97%	99.61%	91.43%	86.25%	66.80%	93.98%	96.21%
0 to -85 dBm				98.70%	78.15%	99.92%	15.10%	99.87%	93.85%	100.00%	70.19%	100.00%	100.00%	100.00%	99.74%	99.67%	93.35%	96.38%	99.38%
0 to -95 dBm				98.79%	95.43%	100.00%	13.77%	100.00%	99.77%	100.00%	91.89%	100.00%	100.00%	100.00%	100.00%	100.00%	99.24%	100.00%	99.80%
Voice quality	≥ 95%	N		97.99%	97.83%	94.08%	51.43%	98.19%	96.05%	98.97%	93.95%	95.23%	98.75%	100.00%	97.02%	97.92%	94.83%	99.90%	95.54%
CSSR	≥ 95%		3	100.00%	100.00%	92.37%	95.73%	100.00%	99.68%	100.00%	97.99%	100.00%	100.00%	100.00%	100.00%	98.33%	98.62%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	7.63%	4.27%	0.00%	0.32%	0.00%	2.01%	0.00%	0.00%	0.00%	0.00%	1.67%	1.18%	0.00%	0.00%
Call drop rate	≤2%			0.00%	0.00%	0.92%	2.11%	0.00%	1.27%	0.00%	0.68%	0.00%	0.64%	0.00%	0.00%	0.00%	0.20%	0.00%	0.00%
Hands off success rate				100.00%	100.00%	100.00%	98.66%	100.00%	100.00%	100.00%	99.74%	100.00%	100.00%	100.00%	100.00%	100.00%	98.48%	NA	100.00%

Voice Quality

Reliance GSM and Telenor fail to meet the benchmark in outdoor locations and BSNL failed in indoor as well as outdoor locations.

Call Set Success Rate (CSSR)

BSNL failed to meet the benchmark for CSSR in indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in outdoor locations.



11.1.15.6 Drive Test Results - DHULE SSA 3G

September	Dimode	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafo	one 3G
Dhule	B'mark	In door	Outdoor								
0 to -75 dBm		98.81%	12.32%	7.17%	34.56%	98.34%	52.23%	NA	92.12%	95.95%	89.18%
0 to -85 dBm		100.00%	39.43%	25.57%	68.06%	100.00%	83.53%	NA	99.26%	98.70%	93.08%
0 to -95 dBm		100.00%	71.60%	87.01%	92.05%	100.00%	96.81%	NA	100.00%	99.91%	97.12%
Voice quality	≥ 95%	98.83%	90.69%	99.67%	98.16%	NA	NA	NA	100.00%	99.27%	95.28%
CSSR	≥ 95%	100.00%	100.00%	98.15%	95.33%	100.00%	99.50%	NA	100.00%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	1.85%	4.67%	0.00%	0.32%	NA	0.00%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	0.00%	3.73%	0.00%	0.64%	NA	0.00%	0.00%	0.00%
Hands off success rate		100.00%	100.00%	100.00%	98.29%	NA	99.54%	NA	100.00%	100.00%	100.00%

Voice Quality

Airtel 3G failed to meet the benchmark for voice quality in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL 3G failed to meet the benchmark for call drop rate in outdoor locations.



11.1.15.1 Data Drive Test Results - DHULE SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	121	51	109	42	115	144	140
Average throughput for Packet Data			146	66	156	76	149	162	174
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.15.2 Data Drive Test Results - DHULE SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100
Minimum download speed		1959	736	1117	3985	3706
Average throughput for Packet Data		2621	870	2297	4835	4317
Latency	<250ms	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.16 CHANDRAPUR SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
September	Chandrapur	26-09-2016	28-09-2016	300


11.1.16.1 ROUTE DETAILS - CHANDRAPUR SSA

Catagony	Type of location		September Chandrapur	
Category	rype or location	Day 1	Day 2	Day 3
	Major Roads	BHADRAVATI	CHANDRAPUR SUPER THERMAL	FOREST COLONY PATEL NAGAR
Outdoor	Highways	GHUGUS	POWER STATION, LOHARA VILLAGE,	SHARDA COLONY SAHAKAR COLONY,
	With in the City	RAMNAGAR KHANJI WARORA	CHANDRAPUR, KHUTALA, DATALA RAJIV GANDHI COLLEGE OF ENGG.	BRAHMAPURI
	Shopping complex	KIANDI WANONA	RESEARCH, BOKARE WADA, MUL	NAGBHIR, MENDHA GOVT. POLYTECNIC
Indoor	Office complex			,BRAMHAPURI

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.16.2 ROUTE MAP - CHANDRAPUR DAY 1

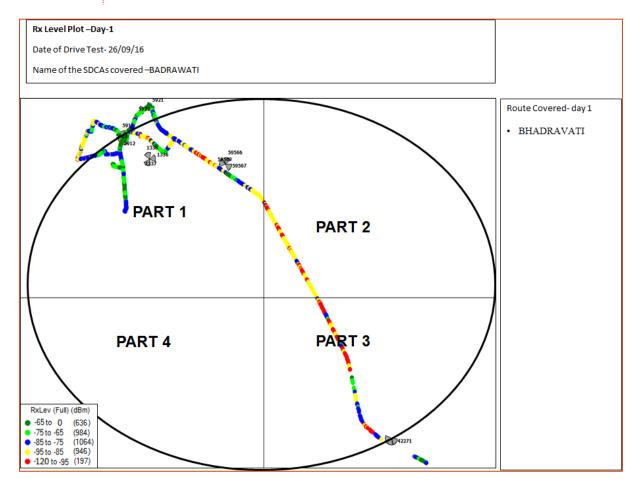




11.1.16.3 Route Map - CHANDRAPUR DAY 2

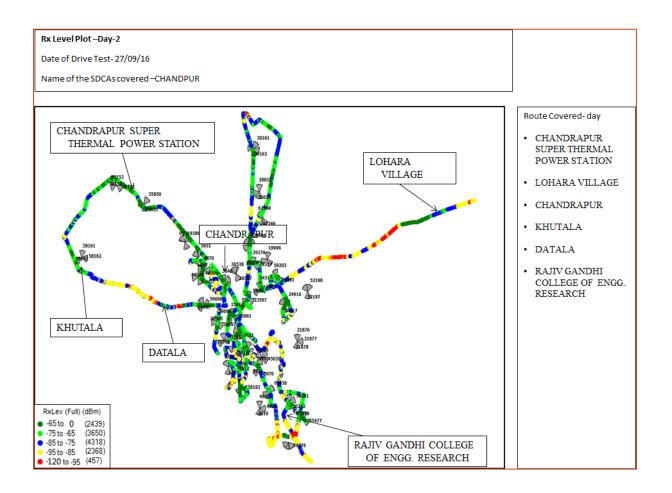



11.1.16.4 Route Map - CHANDRAPUR DAY 3

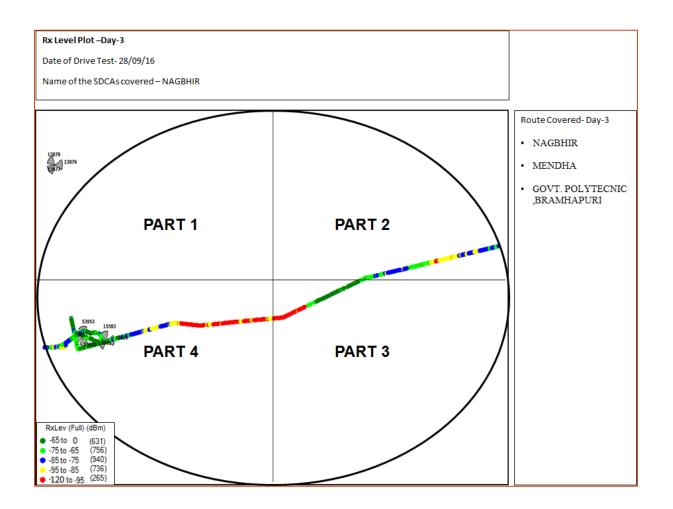



11.1.16.5 Drive Test Results -CHANDRAPUR SSA 2G

Chandrapur	B'mark	Air	cel	Air	tel	BS	NL	ld	ea	Reliand	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	DIIIdIK	In door	Outdoor																
0 to -75 dBm				99.70%	46.96%	67.05%	48.58%	99.72%	82.61%	61.64%	54.25%	100.00%	99.99%	94.48%	90.71%	94.77%	70.74%	99.36%	91.01%
0 to -85 dBm				100.00%	78.77%	100.00%	89.66%	99.96%	98.36%	77.80%	82.31%	100.00%	99.99%	99.97%	98.96%	100.00%	95.59%	99.99%	98.82%
0 to -95 dBm				100.00%	96.34%	100.08%	100.00%	99.99%	99.85%	99.73%	97.58%	100.00%	100.00%	100.00%	100.00%	100.00%	99.75%	100.00%	99.74%
Voice quality	≥ 95%			99.66%	98.07%	95.15%	95.63%	98.75%	97.67%	96.00%	93.24%	97.38%	98.29%	99.77%	98.47%	98.88%	96.42%	99.06%	97.58%
CSSR	≥ 95%	N	5	100.00%	100.00%	98.21%	95.98%	100.00%	100.00%	100.00%	99.42%	100.00%	99.32%	100.00%	99.31%	100.00%	99.76%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	0.00%	3.74%	0.00%	0.00%	0.00%	0.58%	0.00%	0.68%	0.00%	0.69%	0.00%	0.24%	0.00%	0.00%
Call drop rate	≤2%			0.00%	0.00%	0.00%	1.80%	0.00%	0.00%	0.00%	0.58%	0.00%	0.00%	0.00%	0.35%	0.00%	0.00%	0.00%	0.00%
Hands off success rate				NA	100.00%	100.00%	98.15%	100.00%	100.00%	100.00%	98.84%	100.00%	100.00%	100.00%	99.53%	100.00%	98.89%	100.00%	100.00%

Voice Quality

Reliance GSM fail to meet the benchmark in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.16.6 Drive Test Results - CHANDRAPUR SSA 3G

September	Dimark	Airte	el 3G	BSN	L 3G	Idea	a 3G	TAT	A 3G	Vodafo	one 3G
Chandrapur	B'mark	In door	Outdoor								
0 to -75 dBm		94.70%	21.70%	35.73%	32.59%	54.75%	29.92%	NA	91.43%	91.39%	59.35%
0 to -85 dBm		99.90%	52.69%	92.81%	83.81%	98.17%	63.33%	NA	95.05%	97.99%	71.16%
0 to -95 dBm		100.00%	82.64%	100.00%	100.00%	100.00%	94.30%	NA	100.00%	100.00%	92.86%
Voice quality	≥ 95%	98.51%	95.54%	96.52%	95.14%	NA	NA	NA	97.59%	97.56%	97.00%
CSSR	≥ 95%	100.00%	100.00%	99.07%	98.82%	100.00%	99.75%	NA	99.35%	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	0.93%	1.18%	0.00%	0.25%	NA	0.65%	0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	0.00%	0.95%	0.00%	0.25%	NA	0.98%	0.00%	0.00%
Hands off success rate		100.00%	100.00%	100.00%	98.61%	NA	99.54%	NA	95.71%	100.00%	100.00%

Voice Quality

All operators met the benchmark for voice quality in outdoor as well as indoor locations

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

All operators met the benchmark for call drop rate in outdoor as well as indoor locations.



11.1.16.7 Data Drive Test Results - CHANDRAPUR SSA-2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	115	95	103	61	115	138	168
Average throughput for Packet Data			147	89	156	86	153	164	184
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.16.8 Data Drive Test Results - CHANDRAPUR SSA-3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%	100	100	100	100	100
Minimum download speed		2503	3114	1139	2332	4246
Average throughput for Packet Data		3154	2985	2258	3177	4525
Latency	<250ms	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.



11.1.17 BHANDARA SSA

Month	Name of SSA Covered	Start date	End Date	Kilometer Travelled
September	Bhandara	03-10-2016	05-10-2016	230


11.1.17.1 ROUTE DETAILS - BHANDARA SSA

			September	
Category	Type of location		Bhandara	
	Major Roads	Day 1	Day 2	Day 3
	Major Roads	1- Bhandra- Nagpur Highway	1- Bhandra- Nagpur Highway	1- Mohadi-Nagpur Highway
Outdoor	Highways	2- Bhandara - Gondia Highway	2- Bhandara - Gondia Highway	2- Mohadi- Gondia Highway
	With in the City	3-Near Railway Station Area	3-Near Railway Station Area	3-Police Station Road
Indoor	Shopping complex	4- Near Bus Stand Area	4- Near Bus Stand Area	4- Near Bus Stand Area
muoor	Office complex	5- Market Area	5- Market Area	5- Market Area

The route maps given in the report are provided for the purpose of identifying the routes traversed during the drive tests. We November observe three different colours (Red/Green/Yellow) of the lines, which signify signal strength; however these maps are for a single operator and have not been referred to any findings in this report. IMRB submits detailed operator wise Drive Test reports separately.




11.1.17.2 Route Map - BHANDARA DAY 1

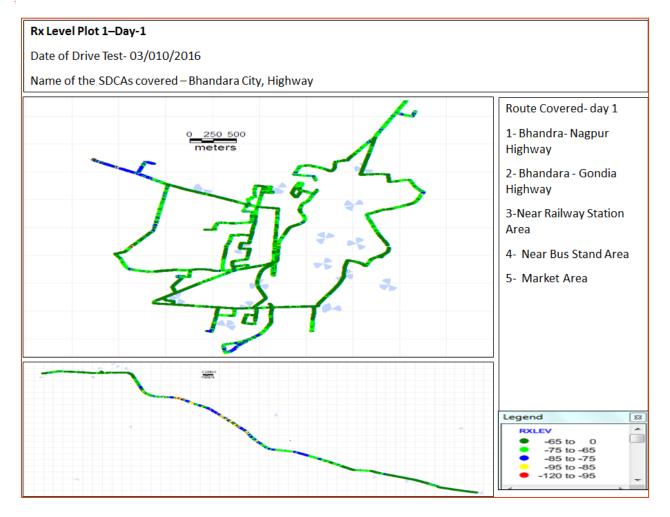




11.1.17.3 Route Map - BHANDARA DAY 2

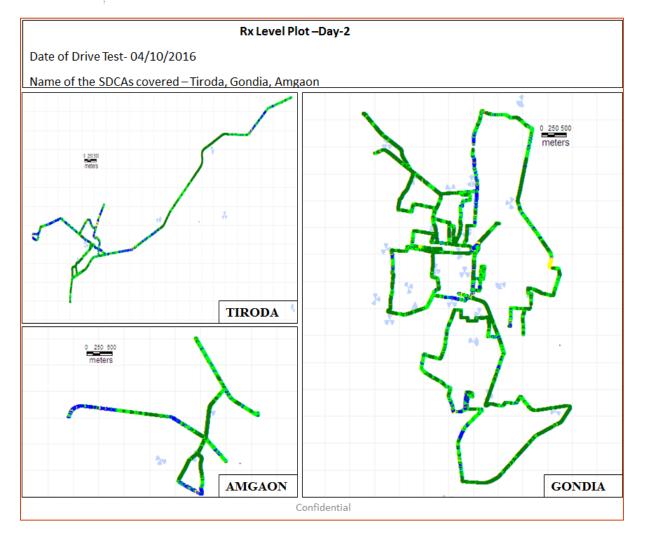



11.1.17.4 Route Map - BHANDARA DAY 3

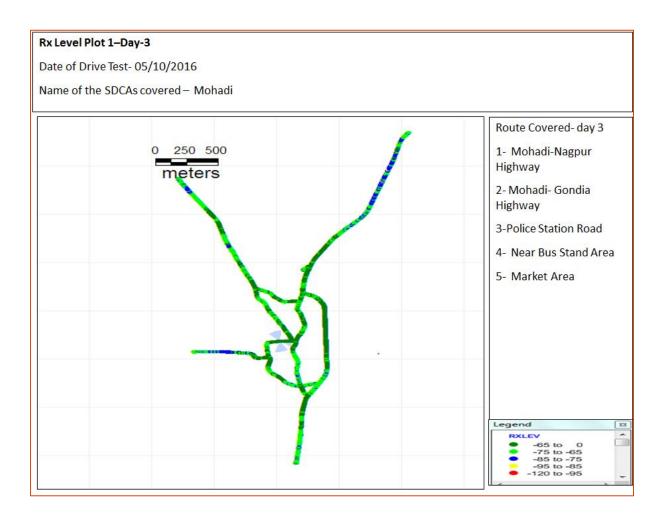



Bhandara	B'mark	Air	cel	Air	tel	BS	NL	Id	ea	Relianc	e GSM	TATA	CDMA	TATA	GSM	Tele	nor	Voda	fone
Parameter's	BINdIK	In door	Outdoor																
0 to -75 dBm				94.90%	44.68%	30.69%	24.53%	96.91%	83.32%	69.15%	47.42%	100.00%	99.96%	99.33%	92.93%	88.63%	55.68%	100.00%	93.29%
0 to -85 dBm				99.97%	79.55%	89.63%	80.44%	99.93%	98.34%	99.66%	76.50%	100.00%	99.99%	100.00%	99.69%	99.81%	87.51%	100.00%	98.97%
0 to -95 dBm				100.00%	95.89%	99.86%	97.62%	100.00%	99.90%	100.00%	96.26%	100.00%	100.00%	100.00%	100.00%	100.00%	98.88%	100.00%	99.76%
Voice quality	≥ 95%		10	98.09%	98.55%	96.93%	94.08%	99.01%	97.42%	95.65%	93.32%	99.43%	97.79%	98.72%	96.33%	98.03%	96.69%	99.21%	96.04%
CSSR	≥ 95%	N	13	100.00%	100.00%	95.77%	95.29%	100.00%	100.00%	100.00%	99.12%	100.00%	99.13%	100.00%	99.38%	100.00%	100.00%	100.00%	100.00%
%age Blocked calls				0.00%	0.00%	4.23%	4.71%	0.00%	0.00%	0.00%	0.88%	0.00%	0.87%	0.00%	0.62%	0.00%	0.00%	0.00%	0.00%
Call drop rate	≤2%		0.00%	0.00%	2.94%	1.77%	0.00%	0.00%	0.00%	0.30%	0.00%	1.31%	0.00%	0.63%	0.00%	0.00%	0.00%	0.00%	
Hands off success rate				100.00%	100.00%	100.00%	87.64%	100.00%	99.62%	98.61%	100.00%	100.00%	100.00%	100.00%	99.37%	100.00%	99.45%	NA	100.00%

11.1.17.5 Drive Test Results -BHANDARA SSA 2G

Voice Quality

BSNL and Reliance GSM fail to meet the benchmark in outdoor locations.

Call Set Success Rate (CSSR)

All operators met the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in indoor locations.



September	Dimork	Airte	el 3G	BSNL 3G		Idea 3G		TATA 3G		Vodafo	one 3G
Bhandara	B'mark	In door	Outdoor								
0 to -75 dBm		67.22%	25.29%	29.77%	25.22%	54.40%	28.98%			95.44%	61.37%
0 to -85 dBm		99.78%	56.47%	87.06%	67.55%	91.99%	65.40%	6		97.73%	82.78%
0 to -95 dBm		100.00%	83.89%	100.25%	97.55%	100.00%	94.04%			100.00%	95.18%
Voice quality	≥ 95%	97.40%	93.62%	98.67%	90.20%	NA	NA	N	s	97.45%	95.83%
CSSR	≥ 95%	100.00%	100.00%	94.87%	93.12%	100.00%	99.74%		5	100.00%	100.00%
%age Blocked calls		0.00%	0.00%	3.85%	5.16%	0.00%	0.26%	—		0.00%	0.00%
Call drop rate	≤2%	0.00%	0.00%	4.05%	1.40%	0.00%	0.00%			0.00%	0.00%
Hands off success rate		100.00%	100.00%	100.00%	89.46%	100.00%	98.10%			100.00%	100.00%

11.1.17.6 Drive Test Results - BHANDARA SSA 3G

NS: No Services

Voice Quality

Airtel and BSNL failed to meet the benchmark for voice quality in outdoor locations.

Call Set Success Rate (CSSR)

BSNL failed to meet the benchmark for CSSR in outdoor as well as indoor locations.

Call Drop Rate

BSNL failed to meet the benchmark for call drop rate in indoor locations.



11.1.17.1 Data Drive Test Results - BHANDARA SSA -2G

Name of the Parameter	Bench Mark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance GSM	TATA GSM	Telenor	Vodafone
Succesful Data Transmission download speed attempts	>80%		100	100	100	100	100	100	100
Succesful Data Transmission upload speed attempts	>75%		100	100	100	100	100	100	100
Minimum download speed		NS	123	57	67	61	103	117	152
Average throughput for Packet Data			148	72	183	86	127	152	179
Latency	<250ms		100	100	100	100	100	100	100

All operators met the TRAI benchmark for data drive test.

11.1.17.2 Data Drive Test Results - BHANDARA SSA -3G

Name of the Parameter	Bench Mark	Airtel 3G	BSNL 3G	Idea 3G	Tata 3G	Vodafone 3G
Succesful Data Transmission download speed attempts	>80%	100	100	100		100
Succesful Data Transmission upload speed attempts	>75%	100	100	100		100
Minimum download speed		3100	3725	884	NS	3960
Average throughput for Packet Data		3831	4117	2647		4432
Latency	<250ms	100	100	100		100

All operators met the TRAI benchmark for data drive test.



12 ANNEXURE- CONSOLIDATED-2G

12.1 NETWORK AVAILABILITY

				Audit Result	ts for Network Availab	ility- PMR data					
	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Number of BTSs in the licensed service area		5 921	32905	21144	36226	NS	8075	5639	14038	13593	35054
Sum of downtime of BTSs in a month (in hours)		3578	304875	296796	21838	NS	9452	2133	106455	21133	38116
BTSs accumulated downtime (not available for service)	≤ 2%	0.08%	1.25%	1.89%	0.08%	NS	0.16%	0.05%	1.02%	0.21%	0.15%
Number of BTSs having accumulated downtime >24 hours		6	0	371	68	NS	112	1	0	140	203
Worst affected BTSs due to downtime	≤ 2%	0.10%	0.00%	1.75%	0.19%	NS	1.39%	0.02%	0.00%	1.03%	0.58%
			Live N	Aeasurement R	esults for Network Ava	ilability- 3 Day live	e data				
	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Number of BTSs in the licensed service area		5922	32863	21135	36119	NS	8105	5639	14070	13568	34922
Sum of downtime of BTSs in a month (in hours)		721	40252	27860	1453	NS	1409	388	6513	1663	3094
BTSs accumulated downtime (not available for service)	≤ 2%	0.17%	1.70%	1.83%	0.06%	NS	0.24%	0.10%	0.64%	0.17%	0.12%
Number of BTSs having accumulated downtime >24 hours		0	0	15	4	NS	35	7	0	7	5
Worst affected BTSs due to downtime	≤ 2%	0.00%	0.00%	0.07%	0.01%	NS	0.43%	0.12%	0.00%	0.05%	0.01%

Data Source: Operations and Maintenance Center (OMC) of the operators



12.2 CONNECTION ESTABLISHMENT (ACCESSIBILITY)

	Audit Results for CSSR, SDCCH and TCH congestion- PMR data													
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
CSSR	≥ 95%	99.07%	98.23%	96.42%	98.73%	NS	99.24%	98.16%	99.59%	98.60%	99.46%			
SDCCH/Paging channel congestion	≤1%	0.07%	0.09%	0.50%	0.61%	NS	0.15%	NA	0.05%	0.19%	0.34%			
TCH congestion	≤2%	0.17%	0.53%	1.43%	0.76%	NS	0.22%	0.90%	0.09%	0.32%	0.54%			
Live measurement results for CSSR, SDCCH and TCH congestion- 3 Day Data														
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
CSSR	≥95%	99.44%	98.21%	96.03%	98.85%	NS	99.58%	98.11%	99.57%	98.62%	99.36%			
SDCCH/Paging channel congestion	≤1%	0.07%	0.06%	0.48%	0.56%	NS	0.11%	NA	0.05%	0.29%	0.46%			
TCH congestion	≤2%	0.08%	0.44%	1.59%	0.70%	NS	0.28%	0.54%	0.07%	0.34%	0.64%			
			Drive test resu	ults for CSSR (Av	erage of drive tests) a	nd blocked calls- D	rive Test Data							
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
Total number of call attempts		1239	6968	6527	6815	NS	4449	4592	5269	5076	6822			
Total number of successful calls established		1233	6862	6179	6803	NS	4404	4582	5245	5037	6816			
CSSR	≥ 95%	99.52%	98.48%	94.67%	99.82%	NS	98.99%	99.78%	99.54%	99.23%	99.91%			
%age blocked calls		0.48%	1.52%	5.33%	0.18%	NS	1.01%	0.22%	0.46%	0.77%	0.09%			

Data Source: Network Operations Center(NOC) of the operators and Data Source: Drive test reports submitted by operators to auditors



12.3 Connection Maintenance (Retainability)

	Audit Results for Call drop rate and for number of cells having more than 3% TCH-PMR data													
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
Total number of calls established		142933402	939548854	320374422	1776503710	NS	153531445	80454535	243417288	609881066	1141709236			
Total number of calls dropped		969856	4987549	3375598	10360329	NS	234106	493881	1026713	6024594	9625237			
Call drop rate	≤ 2%	0.68%	0.53%	1.05%	0.58%	NS	0.15%	0.61%	0.42%	0.99%	0.84%			
Total number of cells in the network		17904	100455	62163	108741	NS	24325	16303	41540	41457	71679			
Total number of cells having more than 3% TCH		524	1653	1786	2434	NS	120	435	700	1522	2892			
Worst affected cells having more than 3% TCH	≤ 3%	2.93%	1.65%	2.87%	2.24%	NS	0.49%	2.67%	1.69%	3.67%	4.03%			
Live measurement results for Call drop rate and for number of cells having more than 3% TCH- 3 Day data														
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
Total number of calls established		177036040	89896358	27277210	171463470	NS	14576931	8339299	23633155	58463446	113672084			
Total number of calls dropped		998431	494555	343744	995925	NS	22719	56359	98931	575394	928390			
Call drop rate	≤ 2%	0.56%	0.55%	1.26%	0.58%	NS	0.16%	0.68%	0.42%	0.98%	0.82%			
Total number of cells in the network		17888	100321	62139	108813	NS	24315	16797	41501	40805	71679			
Total number of cells having more than 3% TCH		565	1622	1775	2459	NS	133	470	750	1552	2877			
Worst affected cells having more than 3% TCH	≤ 3%	3.16%	1.62%	2.86%	2.26%	NS	0.55%	2.80%	1.81%	3.80%	4.01%			
			Drive test	results for Call	drop rate (Average of	drive tests) - Drive	Test Data							
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
Total number of calls established		1233	6862	6180	6823	NS	4405	4582	5244	5089	6816			
Total number of calls dropped		7	0	181	15	NS	36	16	20	6	5			
Call drop rate	≤ 2%	0.57%	0.00%	2.93%	0.22%	NS	0.82%	0.35%	0.38%	0.12%	0.07%			

Data Source: Network Operations Center(NOC) of the operators and Drive test reports submitted by operators to auditors



12.4 VOICE QUALITY

				Audit Re	sults for Voice quality	-PMR Data						
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of sample calls		23316455464	344048287206	292140967	207390889348	NS	20019707033	2777599266	36649487709	104761129376	193565796533	
Total number of calls with good voice quality		22374005403	332073690762	284530841	204406571785	NS	19815504589	32190606934	35718251947	101966023479	187525436374	
%age calls with good voice quality	≥ 95%	95.96%	96.52%	97.40%	98.56%	NS	98.98%	99.91%	97.46%	97.33%	96.88%	
Live measurement results for Voice quality-3 Day data												
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of sample calls		10171143443	33109033242	27277018	19993490512	NS	1977223660	277533985	3510738758	10503584402	18500555496	
Total number of calls with good voice quality		9813048456	31946701857	26573217	19702133285	NS	1958232376	3494823457	3420748179	10324158796	17936610704	
%age calls with good voice quality	≥ 95%	96.48%	96.49%	97.42%	98.54%	NS	99.04%	99.92%	97.44%	98.29%	96.95%	
			Drive	test results for N	/oice quality (Average	of drive tests) - D	r data					
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of sample calls		209628	4058959	429124	1746765	NS	1308261	NA	10024864	657219	1368903	
Total number of calls with good voice quality		202634	3980078	385387	1689522	NS	1261613	NA	9774070	637123	1330550	
%age calls with good voice quality	≥ 95%	96.66%	98.06%	89.81%	96.72%	NS	96.43%	98.17%	97.50%	96.94%	97.20%	

Data Source: Network Operations Center(NOC) of the operators and Drive test reports submitted by operators to auditors



12.5 POI CONGESTION

Audit Results for POI Congestion- PMR data												
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of working POIs		78	500	68	950	NS	74	392	192	31	210	
No. of POIs not meeting benchmark		0	0	0	2	NS	0	0	0	0	0	
Total Capacity of all POIs (A) - in erlangs		61975	905061	296699	3418579	NS	110304	201938	265983	1781563	242477929	
Traffic served for all POIs (B)- in erlangs		36942	482312	152009	858538	NS	45361	77085	141036	239096	5272180	
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%	
			L	ive Measureme	ent Results for POI Cor	gestion- 3 Day dat	a					
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of working POIs		78	500	68	951	NS	72	392	192	31	210	
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0	
Total Capacity of all POIs (A) - in erlangs		61192	634677	295491	3465845	NS	109556	201938	265900	998609	242477929	
Traffic served for all POIs (B)- in erlangs		17343	471835	146970	847999	NS	44756	76030	117894	233998	5272180	
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%	

Data Source: Network Operations Center(NOC) of the operators



13 ANNEXURE – CONSOLIDATED-3G

13.1 NETWORK AVAILABILITY

	Audit Results	for Network Avai	lability- PMR data	1		
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
(Number of Node Bs in the network in the licensed service area		19121	8256	25021	9249	19443
Sum of downtime (i.e. total outage time) of Node Bs		8687	117963	19119	174	21384
Node Bs downtime (not available for service)	≤2%	0.06%	1.92%	0.10%	0.00%	0.15%
Number of Node Bs having accumulated downtime of >24 hours in a month		0	147	51	0	85
Worst affected Node Bs due to downtime	≤ 2%	0.00%	1.78%	0.20%	0.00%	0.44%
Live M	easurement Res	ults for Network	Availability- 3 Day	/ live data		
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
(Number of Node Bs in the network in the licensed service area		18713	8238	24707	9250	19443
Sum of downtime (i.e. total outage time) of Node Bs		10625	11629	1300	18	2852
Node Bs downtime (not available for service)	≤2%	0.79%	1.96%	0.07%	0.00%	0.20%
Number of Node Bs having accumulated downtime of >24 hours in a month		0	6	2	0	23
Worst affected Node Bs due to downtime	≤ 2%	0.00%	0.07%	0.01%	0.00%	0.12%

Data Source: Operations and Maintenance Center (OMC) of the operators



13.2 CONNECTION ESTABLISHMENT (ACCESSIBILITY)

Audit Results for	CSSR, RRC Conge	stion and Circuit	Switched RAB Co	ngestion- PMR da	ata	
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
CSSR	≥ 95%	99.70%	96.18%	99.66%	99.56%	99.69%
RRC Congestion	≤1%	0.03%	0.73%	0.47%	0.13%	0.24%
Circuit Switched RAB Congestion	≤ 2%	0.07%	1.70%	0.12%	0.40%	0.06%
Live measurement resu	Its for CSSR, RRC	Congestion and C	Circuit Switched R	AB Congestion- 3	Day Data	
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
CSSR	≥ 95%	99.65%	96.01%	99.64%	99.63%	99.76%
RRC Congestion	≤1%	0.16%	0.84%	0.50%	0.10%	0.21%
Circuit Switched RAB Congestion	≤ 2%	0.09%	1.75%	0.14%	0.42%	0.04%
Drive test results	for CSSR (Average	e of three drive to	ests) and blocked	calls- Drive Test [Data	
CSSR	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of RRC attempts (A)		3582	6414	5608	2300	5808
Total number of RRC established (B)		3486	6066	5591	2297	5807
Call setup success rate (B/A*100)	≥ 95%	97.32%	94.57%	99.70%	99.87%	99.98%
%age blocked calls		2.68%	5.43%	0.30%	0.13%	0.02%

Data Source: Network Operations Center(NOC) of the operators and Data Source: Drive test reports submitted by operators to auditors



13.3 CONNECTION MAINTENANCE (RETAINABILITY)

	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
	Benchmark	AirtersG	BSINE SG	lueabo	TATA 3G	vouarone 3G
Fotal calls successfully established (A) Number of voice RAB normally released)		154866239	70087764	541952857	88229021	228904223
Fotal calls dropped after establishment (B) Number of voice RAB abnormally released)		660334	843852	1832001	366627	716377
Call drop rate (B/A*100)	≤2%	0.43%	1.20%	0.34%	0.42%	0.31%
Fotal no. of cells in the licensed service area (B)		57079	24822	94707	27515	59746
No. of affected cells having CSV call drop rate >3% during (CBBH) in a month (A)		581	696	2059	655	1099
Worst affected cells having more than 3% Circuit switched voice drop rate (A/B*100)	≤ 3%	1.02%	2.80%	2.17%	2.38%	1.84%
Live measurement results for Call drop r	ate and Worst af	fected cells havir	ng more than 3% (Circuit switched v	oice drop rate - 3	B Day data
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Fotal calls successfully established (A) Number of voice RAB normally released)		18405819	6986630	52499033	8535658	26335541
Fotal calls dropped after establishment (B) Number of voice RAB abnormally released)		79833	90881	178139	34921	66877
Call drop rate (B/A*100)	≤ 2%	0.43%	1.30%	0.34%	0.41%	0.25%
Fotal no. of cells in the licensed service area (B)		55808	24810	94282	27506	59746
No. of affected cells having CSV call drop rate >3% during (CBBH) in a month (A)		579	701	1961	695	1058
Worst affected cells having more than 3% Circuit switched voice drop rate (A/B*100)	≤ 3%	1.04%	2.83%	2.08%	2.53%	1.77%
Drive test res	ults for Call drop	rate (Average of	three drive tests)	- Drive Test Data	·	
Call drop rate	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Fotal calls successfully established (A) Number of voice RAB normally released)		3488	6060	5605	2294	5807
fotal calls dropped after establishment (B) Number of voice RAB abnormally released)		38	195	11	14	1

Data Source: Network Operations Center(NOC) of the operators and Drive test reports submitted by operators to auditors



13.4 VOICE QUALITY

	Audit Resu	Ilts for Voice qua	ity -PMR Data			
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	72006957	857436459949	259467606000	343320054991
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	70087764	844702247626	258714962294	339365437338
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	98.85%	97.33%	98.51%	99.71%	98.85%
	Live measureme	nt results for Void	e quality-3 Day d	lata		
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	7088963	83019690665	25177768500	45469523298
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	6962300	81755541524	25104595251	44975515336
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	99.20%	98.21%	98.48%	99.71%	98.91%
Drive test	results for Voice	quality (Average	of three drive te	sts) - DT data		
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		6481048	545560	83019690665	6804966	3267206
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		6073878	527528	2580831	6676123	3164701
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	93.72%	96.85%	97.10%	98.11%	96.86%

Data Source: Network Operations Center(NOC) of the operators and Drive test reports submitted by operators to auditors



13.5 POI CONGESTION

	Audit Resul	ts for POI Conges	tion- PMR data			
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	950	192	210
No. of POIs not meeting benchmark		0	0	2	0	0
Total Capacity of all POIs (A) - in erlangs		905061	296699	3418579	265425	242477929
Traffic served for all POIs (B)- in erlangs		482312	152009	858538	141036	5272180
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%
Li	ve Measurement	Results for POI C	ongestion- 3 Day	data		
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	952	192	210
No. of POIs not meeting benchmark		0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		632977	295474	3475845	218937	242477929
Traffic served for all POIs (B)- in erlangs		471835	147973	847999	95370	5272180
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%

Data Source: Network Operations Center(NOC) of the operators



14 ANNEXURE – CUSTOMER SERVICES

14.1 METERING AND BILLING CREDIBILITY

			Auc	lit Results for Bi	lling performan	ce Postpaid-Consolid	ated				
Billing Performance	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
			Mete	ring and billing o	credibility - Pos	tpaid (Avg of 3 billing	cycles)				
				Metering	and billing cred	libility - Postpaid		1		1	
Total bills generated during the period		3721	1865210	778270	5641526	NS	475575	54332	398881	NA	4408371
Total number of bills disputed		0	1891	9	25658	NS	423	0	4	NA	1702
Total number of valid billing complaints		0	279	0	3514	NS	423	0	4	NA	1127
Total complaints considered invalid		0	1612	9	22144	NS	0	0	0	NA	575
Percentage bills disputed (Avg of 3 billing cycles)	≤0.1%	0.00%	0.10%	0.00%	0.46%	NS	0.09%	0.00%	0.00%	NA	0.04%
					July						
Total bills generated during the first billing cycle		1267	650252	264540	1863274	NS	152378	18161	133909	NA	1483748
Total number of bills disputed in first billing cycle		0	558	4	9224	NS	136	0	2	NA	464
Total number of valid billing complaints (billing cycle 1)		0	85	0	1174	NS	136	0	2	NA	267
Total complaints considered invalid (billing cycle 1)		0	473	4	8050	NS	0	0	0	NA	197
Percentage bills disputed (first billing cycle)	≤0.1%	0.00%	0.09%	0.00%	0.50%	NS	0.09%	0.00%	0.00%	NA	0.03%
					August						
Total bills generated during the second billing cycle		1254	639789	258958	1882468	NS	165472	18152	133232	NA	1467891
Total number of bills disputed in second billing cycle		0	665	5	8700	NS	147	0	2	NA	403
Total number of valid billing complaints (billing cycle 2)		0	117	0	1223	NS	147	0	2	NA	269
Total complaints considered invalid (billing cycle 2)		0	548	5	7477	NS	0	0	0	NA	134
Percentage bills disputed (second billing cycle)	≤0.1%	0.00%	0.10%	0.00%	0.46%	NS	0.09%	0.00%	0.00%	NA	0.03%

Data Source: Billing Center of the operators



September											
Total bills generated during the third billing cycle		1200	575169	254772	1895784	NS	157725	18019	131740	NA	1456732
Total number of bills disputed in third billing cycle		0	668	0	7734	NS	140	0	0	NA	835
Total number of valid billing complaints (billing cycle 3)		0	77	0	1117	NS	140	0	0	NA	591
Total complaints considered invalid (billing cycle 3)		0	591	0	6617	NS	0	0	0	NA	244
Percentage bills disputed (third billing cycle)	≤0.1%	0.00%	0.12%	0.00%	0.41%	NS	0.09%	0.00%	0.00%	NA	0.06%

Data Source: Billing Center of the operators

	Metering and billing credibility - Prepaid													
Performance prepaid	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone			
Total number of charging complaints (valid) - sum of 3 months		83	3751	966	9172	NS	3641	0	6	27	1825			
Total complaints considered invalid (sum of 3 months)		0	20385	1182	14693	NS	0	0	0	0	335			
Total number of charging complaints (sum of 3 months)		83	24136	2148	23865	NS	3641	0	6	27	2160			
Total no of customers served (Sum of 3 months)		8062820	38090315	17396734	21616103	NS	12175655	1196696	5504538	456789	51493467			
Percentage of charging complaints disputed Data Source: Billing Capter of the operators	≤0.1%	0.00%	0.06%	0.01%	0.11%	NS	0.03%	0.00%	0.00%	0.01%	0.00%			

Data Source: Billing Center of the operators



				Resoluti	on of Billin	g Complaints					
			Resolu			tpaid+Prepaid)-Conso	lidated				
Billing Performance	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of billing/charging complaints		166	26027	2157	49523	NS	4064	0	10	27	4437
Total number of complaints resolved in favour of customer		83	4030	966	12686	NS	4064	0	10	27	3527
Total complaints considered invalid		83	21997	1191	36837	NS	0	0	0	0	910
Number of complaints resolved in 4 weeks		83	4030	966	12686	NS	4064	0	10	27	3527
Percentage complaints resolved within 4 weeks	≥ 98%	100.00%	100.00%	100.00%	100.00%	NS	100.00%	NA	100.00%	100.00%	100.00%
Number of complaints resolved in 6 weeks		83	4030	966	12686	NS	4064	0	10	27	3527
Percentage complaints resolved within 6 weeks	100.00%	100.00%	100.00%	100.00%	100.00%	NS	100.00%	NA	100.00%	100.00%	100.00%
				Perio	d of applying cr	edit / waiver					
Total number of complaints where credit/waiver is required		83	4030	966	12686	NS	4064	0	10	0	3527
Percentage cases in which credit/waiver was received within 1 week	100%	100.00%	100.00%	100.00%	100.00%	NS	100.00%	100.00%	100.00%	100.00%	100.00%
				Live calling resu	lts for resolutio	on of billing complaint	s				
Resolution of billing complaints	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total Number of calls made		100	100	100	100	NS	100	NA	10	27	100
Number of cases resolved in 4 weeks		98	98	98	98	NS	95	NA	10	26	100
Percentage cases resolved in 4 weeks	≥ 98%	98.00%	98.00%	98.00%	98.00%	NS	95.00%	NA	100.00%	96.30%	100.00%
Number of cases resolved in 6 weeks		98	100	100	100	NS	100	NA	10	27	100
Percentage cases resolved in 6 weeks	100.00%	98.00%	100.00%	100.00%	100.00%	NS	100.00%	NA	100.00%	100.00%	100.00%

Data Source: Billing Center of the operators

14.2 CUSTOMER CARE



					Customer	Care							
			Audit res	sults for custom	er care (IVR and	voice-to-Voice) -Con	solidated						
Customer Care Assessment	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total number of call attempts to customer care for assistance		6666542	4600523	5499253	73046396	NS	4383200	0	918153	13601910	135686437		
Number of calls getting connected and answered (electronically)		6640908	4599155	5499253	72138315	NS	4358424	0	888637	13532836	135187672		
Percentage calls getting connected and answered	≥95%	99.62%	99.97%	100.00%	98.76%	NS	99.43%	NA	96.79%	99.49%	99.63%		
Audit results for customer care (voice-to-Voice)- (Avg of 3 months)-Consolidated													
Customer Care Assessment	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total Number of calls received (3 months)		6719440	4721606	1973506	12563861	NS	1017786	90469	1495212	3072256	59368939		
Total Number of calls answered within 90 seconds (3 months)		6588010	4542327	1931655	12497295	NS	907157	90289	1415814	3039079	57858413		
Percentage calls answered within 90 seconds (Avg of 3 months)	≥95%	98.04%	96.20%	97.88%	99.47%	NS	89.13%	99.80%	94.69%	98.92%	97.46%		
					July								
Total calls received (Month 1)		2205877	1768640	595359	4160890	NS	277250	32201	537718	1014258	0		
Total calls answered within 90 seconds (Month 1)		2166535	1729483	594583	4142936	NS	236193	32105	502005	1004680	0		
% calls answered within 90 seconds (Month 1)	≥ 95%	98.22%	97.79%	99.87%	99.57%	NS	85.19%	99.70%	93.36%	99.06%	NA		



				-	August			-	_		
Total calls received (Month 2)		2298854	1590853	689158	4262342	NS	384068	30963	495903	1062908	56513860
Total calls answered within 90 seconds (Month 2)		2259664	1521176	654431	4236917	NS	347311	30914	462047	1046740	55038469
% calls answered within 90 seconds (Month 2)	≥ 95%	98.30%	95.62%	94.96%	99.40%	NS	90.43%	99.84%	93.17%	98.48%	97.39%
					Septembe	er					
Total calls received (Month 3)		2214709	1362113	688989	4140629	NS	356468	27305	461591	995090	2855079
Total calls answered within 90 seconds (Month 3)		2161811	1291668	682641	4117442	NS	323653	27270	451762	987659	2819944
% calls answered within 90 seconds (Month 3)	≥ 95%	97.61%	94.83%	99.08%	99.44%	NS	90.79%	99.87%	97.87%	99.25%	98.77%
				Live callin	g results for cus	tomer care (IVR)					
Customer Care Assessment	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of call attempts to customer care for assistance		100	100	100	300	NS	100	100	100	100	100
Number of calls getting connected and answered (electronically)		100	100	100	270	NS	100	100	100	100	100
Percentage calls getting connected and answered	≥95%	100.00%	100.00%	100.00%	90.00%	NS	100.00%	100.00%	100.00%	100.00%	100.00%
				Live calling resu	Ilts for custome	r care (Voice to Voice)				
Customer Care Assessment	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total Number of calls received		44	100	97	100	NS	100	100	100	100	100
Total Number of calls getting connected and answered		44	95	89	100	NS	100	100	100	100	100
Live Calling Percentage calls getting connected and answered	≥ 95%	100.00%	95.00%	91.75%	100.00%	NS	100.00%	100.00%	100.00%	100.00%	100.00%

14.3 TERMINATION / CLOSURE OF SERVICE

	Audit results for termination / closure of service-Consolidated										
Termination	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of closure request		0	11487	14238	29580	NS	504	1633	3317	0	600
Number of requests attended within 7 days		0	11487	14238	29580	NS	504	1633	3317	0	600
Percentage cases in which termination done within 7 days	100.00%	NA	100.00%	100.00%	100.00%	NS	100.00%	100.00%	100.00%	NA	100.00%

Data Source: Customer Service Center of the operators

14.4 TIME TAKEN FOR REFUND OF DEPOSITS AFTER CLOSURE

	Audit results for refund of deposits-Consolidated										
Refund	ind Benchmark Aircel(DWL) Airtel BSNL Idea Reliance CDMA Reliance GSM TATA CDMA TATA GSM Telenor Vodafone										
Total number of cases requiring refund of deposits		18	1144	1024	6189	NS	4693	198	83	0	14842
Total number of cases where refund was made within 60 days		18	1144	1024	6189	NS	4678	198	83	0	14842
Percentage cases in which refund was receive within 60 days Data Source: Billing Center of the operators	100.00%	100.00%	100.00%	100.00%	100.00%	NS	99.68%	100.00%	100.00%	NA	100.00%

Data Source: Billing Center of the operators



14.5 LIVE CALLING RESULTS FOR RESOLUTION OF SERVICE REQUESTS

	Live calling results for resolution of service requests										
Resolution of service requests	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total Number of calls made	100	100	100	100	NS	100	100	80	100	100	
Number of cases resolved to satisfaction	97	99	97	96	NS	96	99	70	83	100	
Percentage cases resolved in four weeks	97.00%	99.00%	97.00%	96.00%	NS	96.00%	99.00%	87.50%	83.00%	100.00%	

Data Source: Live calls made by auditors from operator's network

14.6 LIVE CALLING RESULTS FOR LEVEL 1 SERVICES

	Live calling for level 1 services										
Level 1 services	Level 1 services Aircel(DWL) Airtel BSNL Idea Reliance CDMA Reliance GSM TATA CDMA TATA GSM Telenor Vodafone										
Total no. of calls made		300	300	300	300	NS	300	300	300	300	300
Calls answered		228	256	245	266	NS	275	211	265	289	299
% of calls connected	≥ 95%	76.00%	85.33%	81.67%	88.67%	NS	91.67%	70.33%	88.33%	96.33%	99.67%

Data Source: Live calls made by auditors from operator's network



14.7 LEVEL 1 SERVICE CALLS MADE

All the numbers given in mandatory list in Section 2.4.2.4.1 were tested. The following table provides the numbers that are activated for each operator. A tick (<) for an operator signifies that the number was active for the operator.

Live calls were made to the active numbers to test the calls answered. The details of the same have been given below for each operator.

	Aircel				
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		18	14
101	Fire	Y		18	14
102	Ambulance	Y		18	14
104	Health Information Helpline		Ν		
108	Emergency and Disaster Management Helpline	Y		18	14
138	All India Helpline for Passengers	Y		18	14
1412	Public Road Transport Utility Service		Ν		
181	Chief Minister Helpline		N		
182	Indian Railway Security Helpline		Ν		
1033	Road Accident Management Service		Ν		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		Ν		
1056	Emergency Medical Services		N		
106X	State of the Art Hospitals		N		
1063	Public Grievance Cell DoT Hq		N		
1064	Anti-Corruption Helpline		Ν		



280



1070	Relief Commission for Natural Calamities	Y		18	13
1071	Air Accident Helpline	Y		17	13
1072	Rail Accident Helpline		Ν		
1073	Road Accident Helpline	Y		18	14
1077	Control Room for District Collector		Ν		
10120	Call Alert (Crime Branch)	Y		18	14
10121	Women Helpline	Y		18	13
10127	National AIDS Helpline to NACO	Y		17	13
101212	Central Accident and Trauma Services (CATS)		Ν		
10580	Educational & Vocational Guidance and Counselling		Ν		
105812	Mother and Child Tracking (MCTH)		Ν		
10740	Central Pollution Control Board		Ν		
10741	Pollution Control Board		Ν		
1511	Police Related Service for all Metro Railway Project		Ν		
1512	Prevention of Crime in Railway	Y		18	13
1514	National Career Service(NCS)		Ν		
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations		Ν		
155214	Labour Helpline		Ν		
11203	Sashastra Seema Bal (SSB)	Y		18	13
112012	National Do Not Call Registry	Y		17	13
11212	Complaint of Electricity	Y		17	13
11216	Drinking Water Supply	Y		17	13
11250	Election Commission of India	Y		17	13
	Total	17		300	228
	Airtel				



Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		18	15
101	Fire	Y		18	15
102	Ambulance	Y		17	15
104	Health Information Helpline		Ν		
108	Emergency and Disaster Management Helpline	Y		18	15
138	All India Helpline for Passengers	Y		18	15
1412	Public Road Transport Utility Service	Y		18	16
181	Chief Minister Helpline		Ν		
182	Indian Railway Security Helpline		Ν		
1033	Road Accident Management Service		Ν		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'	Y		17	15
1056	Emergency Medical Services		Ν		
106X	State of the Art Hospitals		Ν		
1063	Public Grievance Cell DoT Hq	Y		17	15
1064	Anti-Corruption Helpline		Ν		
1070	Relief Commission for Natural Calamities	Y		18	15
1071	Air Accident Helpline	Y		17	15
1072	Rail Accident Helpline		Ν		
1073	Road Accident Helpline		Ν		
1077	Control Room for District Collector		Ν		
10120	Call Alert (Crime Branch)		Ν		
10121	Women Helpline		Ν		
10127	National AIDS Helpline to NACO	Y		17	15



101212	Central Accident and Trauma Services (CATS)	Y		17	15
10580	Educational & Vocational Guidance and Counselling		Ν		
105812	Mother and Child Tracking (MCTH)		N		
10740	Central Pollution Control Board		Ν		
10741	Pollution Control Board	Y		18	15
1511	Police Related Service for all Metro Railway Project		Ν		
1512	Prevention of Crime in Railway	Y		18	15
1514	National Career Service(NCS)	Y		18	15
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations		N		
155214	Labour Helpline	Y		18	15
11203	Sashastra Seema Bal (SSB)		N		
112012	National Do Not Call Registry	Y		18	15
11212	Complaint of Electricity		Ν		
11216	Drinking Water Supply		Ν		
11250	Election Commission of India		Ν		
	Total	17		300	256
	BSNL				
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		23	19
101	Fire	Y		24	19
102	Ambulance	Y		23	19
104	Health Information Helpline		Ν		
108	Emergency and Disaster Management Helpline		N		
138	All India Helpline for Passengers	Y		23	19



1412	Public Road Transport Utility Service		N		
181	Chief Minister Helpline	Y		23	19
182	Indian Railway Security Helpline	Y		23	19
1033	Road Accident Management Service		Ν		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		N		
1056	Emergency Medical Services	Y		23	19
106X	State of the Art Hospitals		N		
1063	Public Grievance Cell DoT Hq		N		
1064	Anti Corruption Helpline	Y		23	18
1070	Relief Commission for Natural Calamities	Y		23	19
1071	Air Accident Helpline		N		
1072	Rail Accident Helpline		N		
1073	Road Accident Helpline		N		
1077	Control Room for District Collector		N		
10120	Call Alart (Crime Branch)		N		
10121	Women Helpline	Y		23	19
10127	National AIDS Helpline to NACO		N		
101212	Central Accident and Trauma Services (CATS)		N		
10580	Educationa & Vocational Guidance and Counselling		N		
105812	Mother and Child Tracking (MCTH)		N		
10740	Central Pollution Control Board		N		
10741	Pollution Control Board		N		
1511	Police Related Service for all Metro Railway Project		N		
1512	Prevention of Crime in Railway		N		



1514	National Career Service(NCS)		N		
15100	Free Legal Service Helpline		N		
155304	Municipal Corporations		N		
155214	Labour Helpline		N		
11203	Sashastra Seema Bal (SSB)	Y		23	19
112012	National Do Not Call Registry	Y		23	19
11212	Complaint of Electricity	Y		23	18
11216	Drinking Water Supply		Ν		
11250	Election Commission of India		Ν		
	Total	13		300	245
	Idea				
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		18	16
101	Fire	Y		18	16
102	Ambulance	Y		17	16
104	Health Information Helpline				
108	Emergency and Disaster Management Helpline		Ν		
138	All India Helpine for Passangers	Y		17	15
1412	Public Road Transport Utility Service				
181	Chief Minister Helpline	Y		18	16
182	Indian Railway Security Helpline	Y		17	16
1033	Road Accident Management Service				
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		Ν		
1056	Emergency Medical Services		N		
106X	State of the Art Hospitals		N		
1063	Public Grievance Cell DoT Hq	Y		17	15



1064	Anti Corruption Helpline	Y		18	15
1070	Relief Commission for Natural Calamities	Y		18	16
1071	Air Accident Helpline	Y		18	16
1072	Rail Accident Helpline		Ν		
1073	Road Accident Helpline		Ν		
1077	Control Room for District Collector		Ν		
10120	Call Alart (Crime Branch)	Y		17	16
10121	Women Helpline		Ν		
10127	National AIDS Helpline to NACO	Y		18	16
101212	Central Accident and Trauma Services (CATS)		Ν		
10580	Educationa & Vocational Guidance and Counselling		Ν		
105812	Mother and Child Tracking (MCTH)		Ν		
10740	Central Pollution Control Board		Ν		
10741	Pollution Control Board		Ν		
1511	Police Related Service for all Metro Railway Project				
1512	Prevention of Crime in Railway	Y		18	15
1514	National Career Service(NCS)	Y		17	16
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations				
155214	Labour Helpline	Y		18	16
11203	Sashastra Seema Bal (SSB)	Y		18	15
112012	National Do Not Call Registry		Ν		
11212	Complaint of Electricity		Ν		
11216	Drinking Water Supply	Y		18	15
11250	Election Commission of India		Ν		
	Total	17		300	266



	Reliance GSM					
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected	
100	Police	Y		22	20	
101	Fire	Y		21	20	
102	Ambulance	Y		22	20	
104	Health Information Helpline	Y		22	20	
108	Emergency and Disaster Management Helpline	Y		22	20	
138	All India Helpine for Passangers		Ν			
1412	Public Road Transport Utility Service		N			
181	Chief Minister Helpline		N			
182	Indian Railway Security Helpline		Ν			
1033	Road Accident Management Service	Y		21	20	
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'	Y		22	20	
1056	Emergency Medical Services		N			
106X	State of the Art Hospitals		N			
1063	Public Grievance Cell DoT Hq		Ν			
1064	Anti Corruption Helpline		Ν			
1070	Relief Commission for Natural Calamities	Y		22	19	
1071	Air Accident Helpline		N			
1072	Rail Accident Helpline		N			
1073	Road Accident Helpline		N			
1077	Control Room for District Collector		Ν			
10120	Call Alart (Crime Branch)		N			
10121	Women Helpline		N			
10127	National AIDS Helpline to NACO		Ν			



101212	Central Accident and Trauma Services (CATS)		Ν		
10580	Educationa & Vocational Guidance and Counselling	Y		21	19
105812	Mother and Child Tracking (MCTH)	Y		21	20
10740	Central Pollution Control Board	Y		21	20
10741	Pollution Control Board		Ν		
1511	Police Related Service for all Metro Railway Project		N		
1512	Prevention of Crime in Railway	Y		21	19
1514	National Career Service(NCS)		Ν		
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations		Ν		
155214	Labour Helpline		Ν		
11203	Sashastra Seema Bal (SSB)		N		
112012	National Do Not Call Registry	Y		21	19
11212	Complaint of Electricity	Y		21	19
11216	Drinking Water Supply		Ν		
11250	Election Commission of India		Ν		
	Total	14		300	275
	TATA CDMA				
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		19	13
101	Fire	Y		18	13
102	Ambulance	Y		19	14
104	Health Information Helpline		Ν		
108	Emergency and Disaster Management Helpline		N		
138	All India Helpine for Passangers		Ν		



1412	Public Road Transport Utility Service		N		
181	Chief Minister Helpline		N		
182	Indian Railway Security Helpline	Y	19		13
1033	Road Accident Management Service	Y		19	14
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		N		
1056	Emergency Medical Services		N		
106X	State of the Art Hospitals		N		
1063	Public Grievance Cell DoT Hq		N		
1064	Anti Corruption Helpline		N		
1070	Relief Commission for Natural Calamities		N		
1071	Air Accident Helpline	Y		19	14
1072	Rail Accident Helpline	Y		19	13
1073	Road Accident Helpline	Y		19	13
1077	Control Room for District Collector		Ν		
10120	Call Alart (Crime Branch)		N		
10121	Women Helpline	Y		18	13
10127	National AIDS Helpline to NACO	Y		19	13
101212	Central Accident and Trauma Services (CATS)		N		
10580	Educationa & Vocational Guidance and Counselling		N		
105812	Mother and Child Tracking (MCTH)		N		
10740	Central Pollution Control Board		N		
10741	Pollution Control Board		N		
1511	Police Related Service for all Metro Railway Project		N		
1512	Prevention of Crime in Railway	Y		19	13



1514	National Career Service(NCS)		N		
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations		Ν		
155214	Labour Helpline		N		
11203	Sashastra Seema Bal (SSB)	Y		19	13
112012	National Do Not Call Registry	Y		18	13
11212	Complaint of Electricity	Y		19	13
11216	Drinking Water Supply	Y		19	13
11250	Election Commission of India	Y		18	13
	Total	16		300	211
	TATA GSM				
Level 1 Number	Type of Service	Working	Not	Calls	Calls
		WORKINg	Working	Made	Connected
100	Police	Y		19	17
101	Fire	Y		18	16
102	Ambulance		N		
104	Health Information Helpline		N		
108	Emergency and Disaster Management Helpline		Ν		
138	All India Helpine for Passangers	Y		18	17
1412	Public Road Transport Utility Service		Ν		
181	Chief Minister Helpline		Ν		
182	Indian Railway Security Helpline	Y		18	16
1033	Road Accident Management Service		Ν		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		Ν		
1056	Emergency Medical Services		Ν		
106X	State of the Art Hospitals		Ν		
1063	Public Grievance Cell DoT Hq		N		



1064	Anti Corruption Helpline		Ν		
1070	Relief Commission for Natural Calamities		Ν		
1071	Air Accident Helpline	Y		19	16
1072	Rail Accident Helpline		Ν		
1073	Road Accident Helpline		Ν		
1077	Control Room for District Collector		Ν		
10120	Call Alart (Crime Branch)	Y		19	17
10121	Women Helpline	Y		19	16
10127	National AIDS Helpline to NACO	Y		19	17
101212	Central Accident and Trauma Services (CATS)		Ν		
10580	Educationa & Vocational Guidance and Counselling		Ν		
105812	Mother and Child Tracking (MCTH)		N		
10740	Central Pollution Control Board		Ν		
10741	Pollution Control Board		Ν		
1511	Police Related Service for all Metro Railway Project		Ν		
1512	Prevention of Crime in Railway	Y		19	16
1514	National Career Service(NCS)		N		
15100	Free Legal Service Helpline	Y		18	17
155304	Municipal Corporations		N		
155214	Labour Helpline	Y		19	17
11203	Sashastra Seema Bal (SSB)	Y		19	16
112012	National Do Not Call Registry	Y		19	16
11212	Complaint of Electricity	Y		19 17	
11216	Drinking Water Supply	Y		19	17
11250	Election Commission of India	Y		19	17
	Total	16		300	265



	Telenor					
Level 1 Number	Type of Service	Working Not Working		Calls Made	Calls Connected	
100	Police	Y		20	20	
101	Fire	Y		20	19	
102	Ambulance	Y		20	19	
104	Health Information Helpline		Ν			
108	Emergency and Disaster Management Helpline		Ν			
138	All India Helpine for Passangers	Y		20	20	
1412	Public Road Transport Utility Service		N	N		
181	Chief Minister Helpline		N			
182	Indian Railway Security Helpline	Y	20		19	
1033	Road Accident Management Service		N			
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		Ν			
1056	Emergency Medical Services		N			
106X	State of the Art Hospitals		N			
1063	Public Grievance Cell DoT Hq		N			
1064	Anti Corruption Helpline		N			
1070	Relief Commission for Natural Calamities	Y		20	20	
1071	Air Accident Helpline	Y		20	20	
1072	Rail Accident Helpline	Y		20	19	
1073	Road Accident Helpline	Y		20	19	
1077	Control Room for District Collector		Ν			
10120	Call Alart (Crime Branch)	Y		20	19	
10121	Women Helpline	Y		20	19	
10127	National AIDS Helpline to NACO	Y		20	19	



101212	Central Accident and Trauma Services (CATS)		N		
10580	Educationa & Vocational Guidance and Counselling		N		
105812	Mother and Child Tracking (MCTH)		N		
10740	Central Pollution Control Board		Ν		
10741	Pollution Control Board		Ν		
1511	Police Related Service for all Metro Railway Project		Ν		
1512	Prevention of Crime in Railway		Ν		
1514	National Career Service(NCS)		Ν		
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations		Ν		
155214	Labour Helpline		Ν		
11203	Sashastra Seema Bal (SSB)	Y		20	19
112012	National Do Not Call Registry	Y		20	19
11212	Complaint of Electricity	Y		20	19
11216	Drinking Water Supply		Ν		
11250	Election Commission of India		Ν		
	Total	15		300	289
	Vodafone				
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		18	18
101	Fire	Y		18	18
102	Ambulance	Y		17	17
104	Health Information Helpline		N		
108	Emergency and Disaster Management Helpline	Y		18	18
138	All India Helpline for Passengers	Y		18	18



1412	Public Road Transport Utility Service	Y		18	18
181	Chief Minister Helpline		N		
182	Indian Railway Security Helpline		N		
1033	Road Accident Management Service		Ν		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'	Y		17 17	
1056	Emergency Medical Services		Ν		
106X	State of the Art Hospitals		N		
1063	Public Grievance Cell DoT Hq	Y		17	17
1064	Anti-Corruption Helpline		N		
1070	Relief Commission for Natural Calamities	Y		18	17
1071	Air Accident Helpline	Y		17	17
1072	Rail Accident Helpline		N		
1073	Road Accident Helpline		N		
1077	Control Room for District Collector		N		
10120	Call Alert (Crime Branch)		N		
10121	Women Helpline		N		
10127	National AIDS Helpline to NACO	Y		17	17
101212	Central Accident and Trauma Services (CATS)	Y		17	17
10580	Educational & Vocational Guidance and Counselling		N		
105812	Mother and Child Tracking (MCTH)		N		
10740	Central Pollution Control Board		N		
10741	Pollution Control Board	Y		18	18
1511	Police Related Service for all Metro Railway Project		N		
1512	Prevention of Crime in Railway	Y		18	18



1514	National Career Service(NCS)	Y	Y 18		18
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations	orations N			
155214	Labour Helpline	Y	/ 18		18
11203	Sashastra Seema Bal (SSB)		N		
112012	National Do Not Call Registry	Y		18 18	
11212	Complaint of Electricity		Ν		
11216	Drinking Water Supply		Ν		
11250	Election Commission of India		Ν		
	Total	17		300	299

Data Source: Live calls made by auditors from operator's network

15 COUNTER DETAILS



SI No.	КРІ	Formula with Counter Description
1	CSSR= (No of established Calls / No of Attempted Calls)%	<u>No of established Calls = ([Assignment Requests]-([Failed Assignments (Signaling Channel)]+[Failed Assignments during MOC on the A Interface</u> (Including Directed Retry)]+[Failed Assignments during MTC on the A Interface (Including Directed Retry)]+[Failed Assignments during Emergency Call on the A Interface (Including Directed Retry)] +[Failed Assignments during Call Re-establishment on the A Interface (Including Directed Retry)]+[Failed Mode Modify Attempts (MOC) (TCHF)]+[Failed Mode Modify Attempts (MTC) (TCHF)]+[Failed Mode Modify Attempts (Emergency Call) (TCHF)]+[Failed Mode Modify Attempts (Call Re-establishment) (TCHF)]+[Failed Mode Modify Attempts (MOC) (TCHH)]+[Failed Mode Mode Modify Attempts (Call Re-establishment) (TCHF)]+[Failed Mode Modify Attempts (MOC) (TCHH)]+[Failed Mode Mode Modify Attempts (Call Re-establishment) (TCHF)]+[Failed Mode Modify Attempts (MOC) (TCHH)]+[Failed Mode Mode Modify Attempts (Call Re-establishment) (TCHH)]))/ <u>No of Attempted Calls =</u> ([Assignment Requests (Signaling Channel) (TCH)] + [Assignment Requests (Signaling Channel) (SDCCH)] + [Assignment Requests (TCHF Only)] + [Assignment Requests (TCHF Only)] + [Assignment Requests (TCHF Preferred, Channel Type Unchangeable)] + [Assignment Requests (TCHF Preferred, Channel Type Unchangeable)] + [Assignment Requests (TCHF Preferred, Channel Type Changeable)] + [Assignment Requests (TCHF Preferred, Channel Type Changeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Changeable)])
2	SDCCH congestion= (SDCCH Failure/SDCCH attempts)%	<u>SDCCH Failure=</u> ([Channel Assignment Failures (All Channels Busy or Channels Unconfigured) in Immediate Assignment Procedure (SDCCH)] + [Failed Internal Intra-Cell Handovers (No Channel Available) (SDCCH)] + [Number of Unsuccessful Incoming Internal Inter-Cell Handovers (No Channel Available) (SDCCH)] + [Failed Incoming External Inter-Cell Handovers (No Channel Available) (SDCCH)]/ <i>SDCCH attempts</i> = ([Channel Assignment Requests in Immediate Assignment Procedure (SDCCH)] + [Internal Intra-Cell Handover Requests (SDCCH)] + [Number of Incoming Internal Inter-Cell Handover Requests (SDCCH) (900/850/810-900/850/810)] + [Number of Incoming Internal Inter-Cell Handover Requests (SDCCH) (1800/1900-1800/1900)] + [Number of Incoming Internal Inter-Cell Handover Requests (SDCCH) (900/850/810-1800/1900)] + [Number of Incoming Internal Inter-Cell Handover Requests (SDCCH) (1800/1900-900/850/810)] + [Incoming External Inter-Cell Handover Requests (SDCCH) (900/850/810-900/850/810)] + [Incoming External Inter-Cell Handover Requests (SDCCH) (1800/1900-1800/1900)] + [Incoming External Inter-Cell Handover Requests (SDCCH) (900/850/810-1800/1900)] + [Incoming External Inter-Cell Handover Requests (SDCCH) (900/850/810)] + [Incoming External Inter-Cell Handover Requests (SDCCH) (900/850/810)])
3	TCH congestion= (TCH Failures /TCH Attempts)%	TCH Failures= ((Failed TCH Seizures due to Busy TCH (Signaling Channel)+([Failed Assignments (First Assignment, No Channel Available in Assignment Procedure)]+[Failed Assignments (First Assignment, No Channel Available in Directed Retry Procedure)]+[Failed Assignments (Reconnection to Old Channels, No Channel Available in Assignment)]+[Failed Assignment]]+[Failed Assignments (Reconnection to Old Channels, No Channel Available in Directed Retry)])/ <u>TCH</u> Attempts = ([Assignment Requests (Signaling Channel) (TCH)] + [Assignment Requests (Signaling Channel) (SDCCH)] + [Assignment Requests (TCHF Only)] + [Assignment Requests (TCHH Only]] + [Assignment Requests (TCHF Preferred, Channel Type Unchangeable)] + [Assignment Requests (TCHF or TCHH, Channel Type Unchangeable)] + [Assignment Requests (TCHF Preferred, Channel Type Changeable)] + [Assignment Requests (TCHF Or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF Or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF Or TCHH, Channel Type Changeable)] + [Assignment Requests (TCHF Or TCHH, Channel Type
4	Call Drop Rate= (The total no of dropped calls*100)/Total no of calls successfully established (where traffic channel is allotted)	<u>The total no of dropped calls</u> ([Call Drops on Radio Interface in Stable State (Traffic Channel)] + [Call Drops on Radio Interface in Handover State (Traffic Channel)] + [Call Drops Due to No MR from MS for a Long Time (Traffic Channel)] + [Call Drops due to Abis Terrestrial Link Failure (Traffic Channel)] + [Call Drops due to Equipment Failure (Traffic Channel)] + [Call Drops due to Forced Handover (Traffic Channel)] + [Call Drops due to local switching Start Failure] + [Call Drops due to Failures to Return to Normal Call from local switching])/ <u>Total no of calls successfully established (where traffic channel is allotted)</u> = ([Assignment Requests]-([Failed Assignments (Signaling Channel)]+[Failed Assignments during MOC on the A Interface (Including Directed Retry)]+[Failed Assignments during MTC on the A Interface (Including Directed Retry)]+[Failed Assignments during Call Re-establishment on the A Interface (Including Directed Retry)]+[Failed Mode Modify Attempts (MOC) (TCHF)]+[Failed Mode Modify Attempts (MOC) (TCHF)])+



5	Call Drop Rate= (No of cells having call drop rate >3% during CBBH in a month*100)/Total no of cells in the licensed service area	Above formula with counters being used in CBBH.
6	Connection with good quality voice= (Connection with good quality voice/Total voice samples)%	Connection with good quality voice =((Number of MRs on Downlink TCHF (Receive Quality Rank 0)+Number of MRs on Downlink TCHF (Receive Quality Rank 1)+Number of MRs on Downlink TCHF (Receive Quality Rank 2)+Number of MRs on Downlink TCHF (Receive Quality Rank 3)+Number of MRs on Downlink TCHF (Receive Quality Rank 4)+Number of MRs on Downlink TCHF (Receive Quality Rank 0)+Number of MRs on Downlink TCHH (Receive Quality Rank 1)+Number of MRs on Downlink TCHH (Receive Quality Rank 0)+Number of MRs on Downlink TCHH (Receive Quality Rank 1)+Number of MRs on Downlink TCHH (Receive Quality Rank 2)+Number of MRs on Downlink TCHH (Receive Quality Rank 3)+Number of MRs on Downlink TCHH (Receive Quality Rank 3)+Number of MRs on Downlink TCHH (Receive Quality Rank 3)+Number of MRs on Downlink TCHH (Receive Quality Rank 3)+Number of MRs on Downlink TCHH (Receive Quality Rank 5))/ <u>Total voice samples=((Number of MRs on Downlink TCHF (Receive Quality Rank 0)+Number of MRs on Downlink TCHF (Receive Quality Rank 1)+Number of MRs on Downlink TCHF (Receive Quality Rank 1)+Number of MRs on Downlink TCHF (Receive Quality Rank 1)+Number of MRs on Downlink TCHF (Receive Quality Rank 1)+Number of MRs on Downlink TCHF (Receive Quality Rank 2)+Number of MRs on Downlink TCHF (Receive Quality Rank 4)+Number of MRs on Downlink TCHF (Receive Quality Rank 4)+Number of MRs on Downlink TCHF (Receive Quality Rank 4)+Number of MRs on Downlink TCHF (Receive Quality Rank 4)+Number of MRs on Downlink TCHF (Receive Quality Rank 4)+Number of MRs on Downlink TCHF (Receive Quality Rank 5)+Number of MRs on Downlink TCHF (Receive Quality Rank 1)+Number of MRs on Downlink TCHH (Receive Quality Rank 2)+Number of MRs on Downlink TCHF (Receive Quality Rank 2)+Number of MRs on Downlink TCHF (Receive Quality Rank 2)+Number of MRs on Downlink TCHF (Receive Quality Rank 2)+Number of MRs on Downlink TCHF (Receive Quality Rank 3)+Number of MRs on Downlink TCHH (Receive Quality Rank 2)+Number of MRs on Downlink TCHH (Receive Quality Rank 3)+Number of MRs on Downlin</u>

15.1.1 ERICSSON

Ericsson provides network support to Aircel, Airtel, Idea, BSNL and Reliance GSM in the circle.

SI No.	KPI	Ericsson
1	CSSR= (No of established Calls / No of Attempted Calls)%	CSSR (No of established Calls / No of Attempted Calls)=(TCASSALL/TASSALL)*100
2	SDCCH congestion= (SDCCH Failure/SDCCH attempts)%	SDCCH congestion (SDCCH Failure/SDCCH attempts)% = (CCONGS/CCALLS)*100



3	TCH congestion= (TCH Failures /TCH Attempts)%	TCH congestion (TCH Failures /TCH Attempts)%= (CNRELCONG+TNRELCONG)/TASSALL)*100
4	Call Drop Rate= (The total no of dropped calls*100)/Total no of calls successfully established (where traffic channel is allotted)	Call Drop Rate (Total no dropped calls/No of established calls)%= (TNDROP)/TCASSALL*100
5	Call Drop Rate= (No of cells having call drop rate >3% during CBBH in a month*100)/Total no of cells in the licensed service area	Above formula with counters being used in CBBH.
6	Connection with good quality voice= (Connection with good quality voice/Total voice samples)%	Connection with good quality voice (Connection with good quality voice samples 0-5 /Total voice samples)= 100 * (QUAL50DL + QUAL40DL + QUAL30DL + QUAL20DL + QUAL10DL + QUAL00DL) / (QUAL70DL + QUAL60DL + QUAL50DL + QUAL40DL + QUAL30DL + QUAL20DL + QUAL10DL + QUAL00DL)

Ericsson Counters

Counter	Counter Description
TCASSALL	Number of assignment complete messages on TCH for all MS classes
TASSALL	Number of first assignment attempts on TCH for all MS classes.
CNRELCONG	Number of released connections on SDCCH due to TCH or Transcoder (TRA) congestion.
TNRELCONG	Number of released TCH signalling connections due to transcoder resource congestion during immediate assignment on TCH
CCONGS	Congestion counter for SDCCH. Stepped per congested allocation attempt.
CCALLS	Channel allocation attempt counter on SDCCH.
TNDROP	The total number of dropped TCH Connections.
QUAL00DL	Number of quality 0 reported on downlink.
QUAL10DL	Number of quality 1 reported on downlink.
QUAL20DL	Number of quality 2 reported on downlink.
QUAL30DL	Number of quality 3 reported on downlink.
QUAL40DL	Number of quality 4 reported on downlink.
QUAL50DL	Number of quality 5 reported on downlink.
QUAL60DL	Number of quality 6 reported on downlink.



QUAL70DL

15.1.2 NSN (NOKIA SIEMENS NETWORKS)

NSN provides network support to Vodafone in the circle.

Sl No.	КРІ	NSN
1	CSSR= (No of established Calls / No of Attempted Calls)%	CSSR= 100-100*((SDCCH_BUSY_ATT)-(TCH_SEIZ_DUE_SDCCH_CON) + (SDCCH_RADIO_FAIL)+(SDCCH_RF_OLD_HO)+(SDCCH_USER_ACT)+(SDCCH_BCSU_RESET)+(SDCCH_NETW_A CT)+(SDCCH_BTS_FAIL)+(SDCCH_LAPD_FAIL)+ (BLCK_8I_NOM)/ {(CH_REQ_MSG_REC)+(PACKET_CH_REQ)}- {(GHOST_CCCH_RES)-(REJ_SEIZ_ATT_DUE_DIST)}
2	SDCCH congestion= (SDCCH Failure/SDCCH attempts)%	SDCCH congestion = (sdcch_busy_atttch_seiz_due_sdcch_con)/{(CH_REQ_MSG_REC)+(PACKET_CH_REQ)}- {(GHOST_CCCH_RES)-(REJ_SEIZ_ATT_DUE_DIST)}
3	TCH congestion= (TCH Failures /TCH Attempts)%	TCH congestion = BLCK_8I_NOM / {(TCH_NORM_SEIZ)+(MSC_I_SDCCH_TCH_AT)+(BSC_I_SDCCH_TCH_AT)}
4	Call Drop Rate= (The total no of dropped calls*100)/Total no of calls successfully established (where traffic channel is allotted)	TCH Drop = (drop_after_tch_assign)-(tch_re_est_release) / {(TCH_NORM_SEIZ)+(MSC_I_SDCCH_TCH_AT)+(BSC_I_SDCCH_TCH_AT)}
5	Call Drop Rate= (No of cells having call drop rate >3% during CBBH in a month*100)/Total no of cells in the licensed service area	Above formula with counters being used in CBBH.
6	Connection with good quality voice= (Connection with good quality voice/Total voice samples)%	Connection with good quality voice= (FREQ_DL_QUAL0+FREQ_DL_QUAL1+FREQ_DL_QUAL2+FREQ_DL_QUAL3+FREQ_DL_QUAL4+FREQ_DL_QUAL 5) / (FREQ_DL_QUAL0+FREQ_DL_QUAL1+FREQ_DL_QUAL2+FREQ_DL_QUAL3+FREQ_DL_QUAL4+FREQ_DL_QUAL 5+FREQ_DL_QUAL6+FREQ_DL_QUAL7)






15.2 BLOCK SCHEMATIC DIAGRAMS

15.2.1 ERICSSON

Ericsson provides network support to Aircel, Airtel, Idea, BSNL and Reliance GSM in the circle.

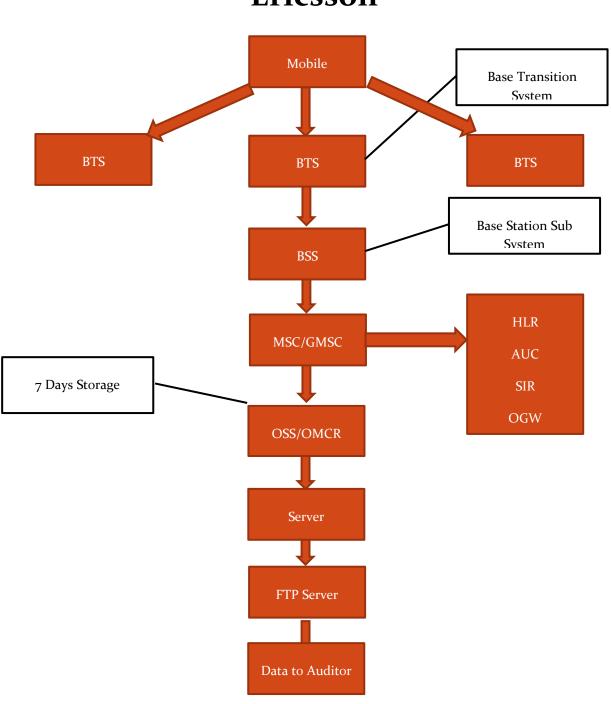






IMRB

eTech

15.2.2 NSN (NOKIA SIEMENS NETWORKS)

NSN provides network support to Vodafone in the circle.

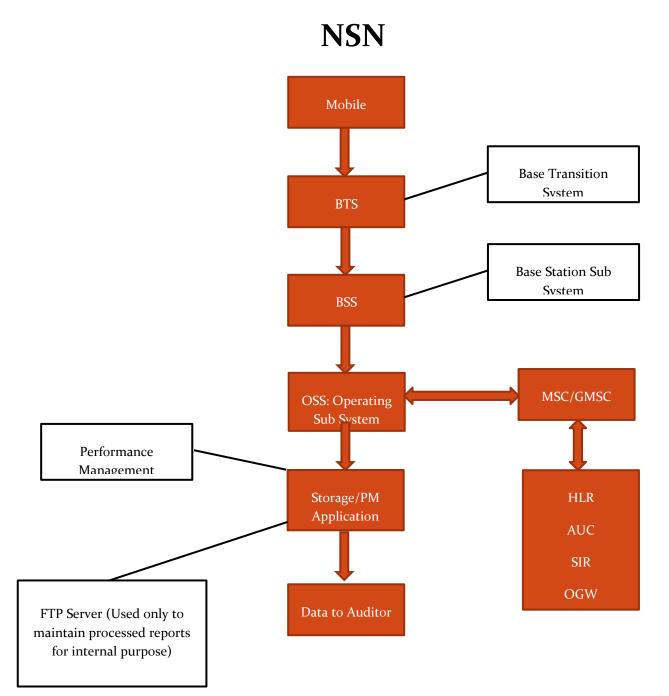



				1. Net	work Availabili	tγ					
			Audit	Results for Net	work Availabilit	y- PMR data-July	1				
	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Number of BTSs in the licensed service area		1974	10960	7048	12023	NS	2704	1918	4690	4527	11819
Sum of downtime of BTSs in a month (in hours)		1681	151240	100015	7230	NS	3214	397	64530	7753	19002
BTSs accumulated downtime (not available for service)	≤ 2%	0.11%	1.85%	1.91%	0.08%	NS	0.16%	0.03%	1.85%	0.23%	0.22%
Number of BTSs having accumulated downtime >24 hours		2	0	128	20	NS	50	1	0	50	123
Worst affected BTSs due to downtime	≤2%	0.10%	0.00%	1.82%	0.17%	NS	1.85%	0.05%	0.00%	1.10%	1.04%
			Live Measurem	ent Results for	Network Availa	bility- 3 Day live	data-July				
	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Number of BTSs in the licensed service area		1974	10944	7040	12023	NS	2704	1918	4690	4511	11819
Sum of downtime of BTSs in a month (in hours)		194	15597	9738	514	NS	541	20	3527	629	1708
BTSs accumulated downtime (not available for service)	≤2%	0.14%	1.98%	1.92%	0.06%	NS	0.28%	0.00%	0.10%	0.02%	0.02%
Number of BTSs having accumulated downtime >24 hours		0	0	1	2	NS	23	0	0	5	5
Worst affected BTSs due to downtime	≤2%	0.00%	0.00%	0.01%	0.02%	NS	0.85%	0.00%	0.00%	0.11%	0.04%



			2	. Connection Es	tablishment (A	ccessibility)						
			Audit Result	s for CSSR, SDC	CH and TCH con	gestion- PMR dat	ta-July					
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
CSSR	≥ 95%	98.78%	98.22%	97.12%	98.66%	NS	98.83%	97.94%	99.58%	98.59%	99.39%	
SDCCH/Paging channel congestion	≤1%	0.07%	0.11%	0.52%	0.69%	NS	0.30%	NA	0.06%	0.27%	<mark>0.45%</mark>	
TCH congestion	≤2%	0.24%	0.76%	0.95%	0.84%	NS	0.16%	0.88%	0.10%	0.40%	0.61%	
Live measurement results for CSSR, SDCCH and TCH congestion- 3 Day Data-July												
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
CSSR	≥ 95%	99.35%	98.18%	97.16%	98.78%	NS	99.31%	98.38%	99.57%	98.52%	99.27%	
SDCCH/Paging channel congestion	≤1%	0.07%	0.08%	0.42%	0.63%	NS	0.19%	NA	0.07%	0.66%	0.78%	
TCH congestion	≤ 2%	0.12%	0.61%	0.93%	0.75%	NS	0.34%	0.06%	0.12%	0.53%	0.73%	
		Drive	est results for CS	SR (Average of o	lrive tests) and	blocked calls- D	rive Test Data-July					
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of call attempts		906	1669	1165	1618	NS	1073	1201	1351	1544	1434	
Total number of successful calls established		901	1668	1099	1609	NS	1054	1199	1345	1523	1428	
CSSR	≥ 95%	99.45%	99.94%	94.33%	99.44%	NS	98.23%	99.83%	99.56%	98.64%	99.58%	
%age blocked calls		0.55%	0.06%	5.67%	0.56%	NS	1.77%	0.17%	0.44%	1.36%	0.42%	

			3	3. Connection M	aintenance (Re	tainability)						
		Audit Res	ults for Call drop	rate and for nun	nber of cells hav	ving more than 3	% TCH-PMR data-J	uly				
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of calls established		47845583	323696261	95659300	591718384	NS	51692578	25851495	82377469	203105487	370688157	
Total number of calls dropped		336242	1702862	1087802	3485827	NS	74061	191170	356877	2036444	3287148	
Call drop rate	≤2%	0.70%	0.53%	1.14%	0.59%	NS	0.14%	0.74%	0.43%	1.00%	0.89%	
Total number of cells in the network		5967	33447	20721	36081	NS	8212	5194	13874	13766	35834	
Total number of cells having more than 3% TCH		179	567	597	811	NS	37	142	242	520	971	
Worst affected cells having more than 3% TCH	≤3%	3.00%	1.70%	2.88%	2.25%	NS	0.45%	2.73%	1.75%	3.78%	2.71%	
Live measurement results for Call drop rate and for number of cells having more than 3% TCH- 3 Day data-July												
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of calls established		59486754	30109592	9177206	55870347	NS	4895458	2890923	7989652	20471499	36616333	
Total number of calls dropped		375538	155042	96873	336585	NS	7808	22594	36859	203347	323976	
Call drop rate	≤2%	0.63%	0.51%	1.06%	0.60%	NS	0.16%	0.78%	0.46%	0.99%	0.88%	
Total number of cells in the network		5969	33411	20697	36218	NS	8112	5711	13819	13321	35834	
Total number of cells having more than 3% TCH		184	566	576	886	NS	39	174	284	489	976	
Worst affected cells having more than 3% TCH	≤3%	3.08%	1.69%	2.78%	2.45%	NS	0.48%	3.05%	2.06%	3.67%	2.72%	
		Dr	ive test results fo	or Call drop rate	(Average of driv	ve tests) - Drive	Test Data-July					
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of calls established		901	1668	1099	1628	NS	1055	1199	1345	1541	1428	
Total number of calls dropped		6	0	34	8	NS	20	4	4	4	5	
Call drop rate	≤2%	0.67%	0.00%	3.09%	0.49%	NS	1.90%	0.33%	0.30%	0.26%	0.35%	



				4. 1	Voice quality								
			Au	dit Results for \	/oice quality -P	MR Data-July							
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total number of sample calls		7743915522	115472099592	95659300	69044100101	NS	6821539238	1019002096	12167335240	33959701460	65039392506		
Total number of calls with good voice quality		7410351632	111383002223	92745095	68032574359	NS	6764590198	12089801875	11847637737	33051931545	62961654028		
%age calls with good voice quality	≥ 95%	95.69%	96.46%	96.95%	98.53%	NS	99.17%	99.92%	97.37%	97.33%	96.81%		
Live measurement results for Voice quality-3 Day data-July													
Voice quality	ality Benchmark Aircel(DWL) Airtel BSNL Idea Reliance CDMA Reliance GSM TATA CDMA TATA GSM Telenor Vodafone												
Total number of sample calls		813614695	11130745896	9177206	6760198071	NS	664286124	96946729	1201786153	3538132863	6362600828		
Total number of calls with good voice quality		781357584	10732948347	8916002	6657371144	NS	658667526	1195923480	1168242135	3538132863	6160828190		
%age calls with good voice quality	≥ 95%	96.04%	96.43%	97.15%	98.48%	NS	99.15%	99.92%	97.21%	100.00%	96.83%		
			Drive test result	ts for Voice qua	lity (Average of	drive tests) - DT	data-July						
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total number of sample calls		168863	860258	122467	410710	NS	NA	NA	2510391	214477	327300		
Total number of calls with good voice quality		162588	839643	113999	393530	NS	NA	NA	2447768	206028	315642		
%age calls with good voice quality	≥95%	96.28%	97.60%	93.09%	95.82%	NS	93.83%	97.78%	97.51%	96.06%	96.44%		



				5. P	OI Congestion						
			Aud	dit Results for Po	OI Congestion-	PMR data-July					
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of working POIs		78	500	68	952	NS	43	392	192	29	211
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		20091	304033	98779	1156419	NS	32228	68015	62454	161535	6527109
Traffic served for all POIs (B)- in erlangs		12364	157476	49714	276463	NS	14795	26202	44621	80147	143982
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%
			Live Meas	urement Result	s for POI Conge	stion- 3 Day data	-July				
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of working POIs		78	500	68	954	NS	43	392	192	29	211
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		19867	305701	98244	1158231	NS	32228	68015	62454	152764	6527109
Traffic served for all POIs (B)- in erlangs		5885	156996	49641	282067	NS	14795	25404	25167	80061	143982
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%

17 ANNEXURE – AUGUST-2G



				2. Connectio	n Establishment (A	ccessibility)						
			Audit Resul	ts for CSSR, SDC	CH and TCH conges	tion- PMR data-Septe	mber					
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
CSSR	≥ 95%	99.25%	98.26%	96.22%	98.69%	NS	99.46%	98.30%	99.59%	98.60%	99.55%	
SDCCH/Paging channel congestion	≤1%	0.07%	0.07%	0.51%	0.59%	NS	0.07%	NA	0.05%	0.18%	0.28%	
TCH congestion	≤2%	0.12%	0.30%	1.59%	0.76%	NS	0.29%	0.82%	0.08%	0.23%	0.45%	
Live measurement results for CSSR, SDCCH and TCH congestion- 3 Day Data-September												
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
CSSR	≥ 95%	99.55%	98.31%	95.46%	98.99%	NS	99.73%	98.10%	99.57%	98.71%	99.33%	
SDCCH/Paging channel congestion	≤1%	0.07%	0.06%	0.51%	0.43%	NS	0.05%	NA	0.02%	0.13%	0.35%	
TCH congestion	≤2%	0.04%	0.36%	1.92%	0.58%	NS	0.26%	1.21%	0.02%	0.20%	0.67%	
		Drive test r	esults for CSSR	(Average of thr	ee drive tests) and	blocked calls- Drive T	est Data-Septemb	er				
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of call attempts		30	3677	3836	3964	NS	3020	2126	2577	2026	3805	
Total number of successful calls established		30	3677	3645	3963	NS	2999	2123	2568	2011	3805	
CSSR	≥ 95%	100.00%	100.00%	95.02%	99.97%	NS	99.30%	99.86%	99.65%	99.26%	100.00%	
%age blocked calls		0.00%	0.00%	4.98%	0.03%	NS	0.70%	0.14%	0.35%	0.74%	0.00%	

	2. Connection Establishment (Accessibility)												
			Audit Resu	lts for CSSR, SD	CCH and TCH co	ngestion- PMR dat	a-August						
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
CSSR	≥ 95%	99.18%	98.23%	95.93%	98.85%	NS	99.43%	98.24%	99.60%	98.61%	99.44%		
SDCCH/Paging channel congestion	≤1%	0.07%	0.08%	0.45%	0.54%	NS	0.06%	NA	0.05%	0.13%	0.30%		
TCH congestion	≤ 2%	0.15%	0.52%	1.74%	0.69%	NS	0.22%	0.99%	0.08%	0.32%	0.56%		
	Live measurement results for CSSR, SDCCH and TCH congestion- 3 Day Data-August												
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
CSSR	≥ 95%	99.42%	98.13%	95.46%	98.78%	NS	99.71%	97.85%	99.57%	98.63%	99.48%		
SDCCH/Paging channel congestion	≤1%	0.07%	0.06%	0.51%	0.63%	NS	0.11%	NA	0.06%	0.08%	0.26%		
TCH congestion	≤ 2%	0.07%	0.36%	1.92%	0.75%	NS	0.25%	0.35%	0.08%	0.30%	0.52%		
		Drive t	est results for C	SSR (Average of	drive tests) and	d blocked calls- Dri	ive Test Data-Augu	st					
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total number of call attempts		303	1622	1526	1233	NS	356	1265	1341	1506	1583		
Total number of successful calls established		302	1517	1435	1231	NS	351	1260	1332	1503	1583		
CSSR	≥ 95%	99.67%	93.53%	94.04%	99.84%	NS	98.60%	99.60%	99.33%	99.80%	100.00%		
%age blocked calls		0.33%	6.47%	5.96%	0.16%	NS	1.40%	0.40%	0.67%	0.20%	0.00%		



				3. Connection	n Maintenance ((Retainability)					
		Audit Res	ults for Call drop	rate and for nu	mber of cells h	aving more than 39	% TCH-PMR data-Au	ıgust			
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of calls established		48710144	320194128	122266684	599694560	NS	49631260	26386872	82463802	201762970	371496063
Total number of calls dropped		317358	1786372	1070879	3390468	NS	75548	176270	348766	2007746	3179645
Call drop rate	≤2%	0.65%	0.56%	0.88%	0.57%	NS	0.15%	0.67%	0.42%	1.00%	0.86%
Total number of cells in the network		5967	33508	20721	36254	NS	8082	5547	13873	13776	35845
Total number of cells having more than 3% TCH		173	549	594	771	NS	35	145	233	496	969
Worst affected cells having more than 3% TCH	≤ 3%	2.90%	1.64%	2.87%	2.13%	NS	0.44%	2.62%	1.68%	3.60%	2.70%
Live measurement results for Call drop rate and for number of cells having more than 3% TCH- 3 Day data-August											
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of calls established		56072523	28811585	9050077	55870347	NS	4725746	2645777	7890294	18770395	35934701
Total number of calls dropped		283534	180414	123460	336585	NS	7009	20865	34680	188966	276981
Call drop rate	≤ 2%	0.51%	0.63%	1.36%	0.60%	NS	0.15%	0.79%	0.44%	1.01%	0.77%
Total number of cells in the network		5967	33428	20721	36218	NS	8121	5522	13891	13691	35845
Total number of cells having more than 3% TCH		218	555	599	886	NS	40	164	253	532	951
Worst affected cells having more than 3% TCH	≤ 3%	3.65%	1.66%	2.89%	2.45%	NS	0.50%	2.96%	1.82%	3.89%	2.65%
		Dr	ive test results f	ior Call drop rate	e (Average of dr	rive tests) - Drive T	est Data-August				
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of calls established		302	1517	1443	1231	NS	351	1260	1333	1505	1583
Total number of calls dropped		1	0	45	3	NS	3	6	4	2	0
Call drop rate	≤2%	0.33%	0.00%	3.12%	0.24%	NS	0.85%	0.48%	0.30%	0.13%	0.00%



					4. Voice quality	1						
			A	udit Results fo	Voice quality -	PMR Data-August						
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of sample calls		7963925987	118323233479	94033229	70738011478	NS	6635789961	920293297	12427069055	37239888434	65621794805	
Total number of calls with good voice quality		7652103146	114240650350	91881575	69715810954	NS	6568632236	8367832997	12116188295	36244564336	63582516386	
%age calls with good voice quality	≥ 95%	96.08%	96.55%	97.71%	98.55%	NS	98.99%	99.89%	97.50%	97.33%	96.89%	
Live measurement results for Voice quality-3 Day data-August												
Voice quality	Benchmark Aircel(DWL) Airtel BSNL Idea Reliance CDMA Reliance GSM TATA CDMA TATA GSM Telenor Vodafone											
Total number of sample calls		823281258	10999117049	9050077	6760198071	NS	660100757	95743924	1203322213	3680961536	5842817625	
Total number of calls with good voice quality		794417467	10596575026	8828714	6657371144	NS	654474693	1139188280	1173044306	3585711844	5666026484	
%age calls with good voice quality	≥ 95%	96.49%	96.34%	97.55%	98.48%	NS	99.15%	99.92%	97.48%	97.41%	96.97%	
			Drive test resu	ilts for Voice qu	ality (Average o	of drive tests) - DT	data-August					
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone	
Total number of sample calls		37133	897753	100828	308301	NS	189709	NA	2550569	188682	432191	
Total number of calls with good voice quality		36435	885208	90785	300520	NS	182984	NA	2486459	184414	422185	
%age calls with good voice quality	≥ 95%	98.12%	98.60%	90.04%	97.48%	NS	96.46%	98.25%	97.49%	97.74%	97.68%	



				5	5. POI Congestio	n					
			Αι	udit Results for I	POI Congestion	PMR data-August	:				
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of working POIs		78	500	68	952	NS	43	392	192	33	211
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		20744	301282	98574	1147903	NS	33439	66961	101459	1148710	1396109
Traffic served for all POIs (B)- in erlangs		12469	162260	50741	288689	NS	14550	24816	47062	80948	242683
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%
			Live Mea	surement Resu	ts for POI Cong	estion- 3 Day data-	August				
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of working POIs		78	500	68	952	NS	43	392	192	33	211
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		20560	30475	97644	1138231	NS	33987	66961	101459	192792	1396109
Traffic served for all POIs (B)- in erlangs		5748	155273	49999	282067	NS	14267	24313	47691	76994	242683
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%

18 ANNEXURE – SEPTEMBER-2G

				1.	Network Availabili	ty					
			Audit	Results for Net	work Availability- F	MR data-September					
	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Number of BTSs in the licensed service area		1974	10969	7048	12130	NS	2677	1860	4658	4536	11410
Sum of downtime of BTSs in a month (in hours)		806	2751	96916	7444	NS	3278	511	40744	5651	7451
BTSs accumulated downtime (not available for service)	≤2%	0.06%	0.03%	1.91%	0.09%	NS	0.17%	0.04%	1.21%	0.17%	0.09%
Number of BTSs having accumulated downtime >24 hours		2	0	117	23	NS	29	0	0	33	26
Worst affected BTSs due to downtime	≤2%	0.10%	0.00%	1.66%	0.19%	NS	1.08%	0.00%	0.00%	0.73%	0.23%
			Live Measuren	nent Results for	Network Availabili	ty- 3 Day live data-Se	ptember				
	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Number of BTSs in the licensed service area		1974	10967	7048	12073	NS	2694	1860	4690	4531	11278
Sum of downtime of BTSs in a month (in hours)		263	11536	9057	424	NS	481	22	2825	339	621
BTSs accumulated downtime (not available for service)	≤2%	0.19%	1.46%	1.78%	0.05%	NS	0.25%	0.02%	0.84%	0.10%	0.08%
Number of BTSs having accumulated downtime >24 hours		0	0	7	0	NS	0	0	0	1	0
Worst affected BTSs due to downtime	≤2%	0.00%	0.00%	0.10%	0.00%	NS	0.00%	0.00%	0.00%	0.02%	0.00%



				2. Connectio	n Establishment (A	ccessibility)							
			Audit Resul	ts for CSSR, SDC	CH and TCH conges	tion- PMR data-Septe	mber						
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
CSSR	≥ 95%	99.25%	98.26%	96.22%	98.69%	NS	99.46%	98.30%	99.59%	98.60%	99.55%		
SDCCH/Paging channel congestion	≤1%	0.07%	0.07%	0.51%	0.59%	NS	0.07%	NA	0.05%	0.18%	0.28%		
TCH congestion	≤2%	0.12%	0.30%	1.59%	0.76%	NS	0.29%	0.82%	0.08%	0.23%	0.45%		
	Live measurement results for CSSR, SDCCH and TCH congestion- 3 Day Data-September												
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
CSSR	≥ 95%	99.55%	98.31%	95.46%	98.99%	NS	99.73%	98.10%	99.57%	98.71%	99.33%		
SDCCH/Paging channel congestion	≤1%	0.07%	0.06%	0.51%	0.43%	NS	0.05%	NA	0.02%	0.13%	0.35%		
TCH congestion	≤2%	0.04%	0.36%	1.92%	0.58%	NS	0.26%	1.21%	0.02%	0.20%	0.67%		
		Drive test r	esults for CSSR	(Average of thre	ee drive tests) and	blocked calls- Drive T	est Data-Septembo	er					
CSSR	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone		
Total number of call attempts		30	3677	3836	3964	NS	3020	2126	2577	2026	3805		
Total number of successful calls established		30	3677	3645	3963	NS	2999	2123	2568	2011	3805		
CSSR	≥ 95%	100.00%	100.00%	95.02%	99.97%	NS	99.30%	99.86%	99.65%	99.26%	100.00%		
%age blocked calls		0.00%	0.00%	4.98%	0.03%	NS	0.70%	0.14%	0.35%	0.74%	0.00%		

				3. Connectio	on Maintenance (Re	etainability)					
		Audit Resu	lts for Call drop	rate and for nur	nber of cells having	g more than 3% TCH-P	MR data-Septemb	er			
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of calls established		46377675	295658465	102448438	585090766	NS	52207607	28216168	78576017	205012609	399525016
Total number of calls dropped		316256	1498315	1216917	3484034	NS	84497	126441	321070	1980404	3158444
Call drop rate	≤ 2%	0.68%	0.51%	1.19%	0.60%	NS	0.16%	0.45%	0.41%	0.97%	0.79%
Total number of cells in the network		5970	33500	20721	36406	NS	8031	5561	13793	13915	0
Total number of cells having more than 3% TCH		172	537	596	852	NS	47	148	225	506	952
Worst affected cells having more than 3% TCH	≤3%	2.88%	1.60%	2.87%	2.34%	NS	0.59%	2.66%	1.63%	3.64%	NA
	Liv	ve measuremen	t results for Call	drop rate and f	or number of cells	having more than 3%	TCH- 3 Day data-Se	ptember			
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of calls established		61476763	30975181	9049927	59722776	NS	4955727	2802599	7753209	19221552	41121050
Total number of calls dropped		339359	159099	123411	322755	NS	7902	12900	27392	183081	327433
Call drop rate	≤ 2%	0.55%	0.51%	1.36%	0.54%	NS	0.16%	0.46%	0.35%	0.95%	0.80%
Total number of cells in the network		5952	33482	20721	36377	NS	8082	5564	13791	13793	0
Total number of cells having more than 3% TCH		164	501	600	687	NS	54	133	212	530	950
Worst affected cells having more than 3% TCH	≤3%	2.75%	1.50%	2.89%	1.89%	NS	0.66%	2.38%	1.54%	3.84%	NA
		Dri	ve test results fo	or Call drop rate	(Average of drive t	ests) - Drive Test Data	a-September				
Call drop rate	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of calls established		30	3677	3638	3964	NS	2999	2123	2566	2043	3805
Total number of calls dropped		0	0	102	4	NS	13	6	12	0	0
Call drop rate	≤2%	0.00%	0.00%	2.80%	0.10%	NS	0.43%	0.28%	0.47%	0.00%	0.00%



					4. Voice quality						
			Au	dit Results for V	Voice quality -PMR	Data-September					
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of sample calls		7608613955	110252954135	102448438	67608777769	NS	6562377834	838303871.80	12055083414	33561539482	62904609222
Total number of calls with good voice quality		7311550625	106450038189	99904171	66658186472	NS	6482282155	11732972062	11754425915	32669527598	60981265960
%age calls with good voice quality	≥ 95%	96.10%	96.55%	97.52%	98.59%	NS	98.78%	99.93%	97.51%	97.34%	96.94%
Live measurement results for Voice quality-3 Day data-September											
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of sample calls		8534247490	10979170297	9049735	6473094370	NS	652836779	84843332	1105630392	3284490003	6295137043
Total number of calls with good voice quality		8237273405	10617178484	8828501	6387390997	NS	645090157	1159711697	1079461738	3200314089	6109756030
%age calls with good voice quality	≥ 95%	96.52%	96.70%	97.56%	98.68%	NS	98.81%	99.93%	97.63%	97.44%	97.06%
			Drive test resul	ts for Voice qua	lity (Average of dri	ve tests) - DT data-Se	ptember				
Voice quality	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of sample calls		3632	2300948	205829	1027754	NS	1118552	NA	4963904	254060	609412
Total number of calls with good voice quality		3611	2255227	180603	995472	NS	1078629	NA	4839843	246681	592723
%age calls with good voice quality	≥ 95%	99.42%	98.01%	87.74%	96.86%	NS	96.43%	98.49%	97.50%	97.10%	97.26%



					5. POI Congestion						
			Au	dit Results for P	OI Congestion- PM	R data-September					
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
Total number of working POIs		78	500	69	946	NS	135	392	192	31	209
No. of POIs not meeting benchmark		0	0	0	2	NS	0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		21140	299746	99346	1114258	NS	44636	66961	102070	471319	234554711
Traffic served for all POIs (B)- in erlangs		12109	162577	51555	293386	NS	16015	26067	49354	78001	4885516
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%
			Live Meas	urement Result	s for POI Congestio	n- 3 Day data-Septen	nber				
POI congestion	Benchmark	Aircel(DWL)	Airtel	BSNL	Idea	Reliance CDMA	Reliance GSM	TATA CDMA	TATA GSM	Telenor	Vodafone
NDR		78	500	69	946	NS	130	392	192	31	209
No. of POIs not meeting benchmark		0	0	0	0	NS	0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		20766	298502	99602	1169382	NS	43341	66961	101987	653053	234554711
Traffic served for all POIs (B)- in erlangs		5709	159567	47330	283866	NS	15694	26313	45036	76943	4885516
POI congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	NS	0.00%	0.00%	0.00%	0.00%	0.00%



19 ANNEXURE – JULY -3G

	PERFORMAN	CE REPORTS - PA	ARAMETER WISE	-Month 1							
		1. Network A	vailability								
Audit Results for Network Availability- PMR data-July											
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G					
(Number of Node Bs in the network in the licensed service area		6073	2752	8169	3081	6481					
Sum of downtime (i.e. total outage time) of Node Bs		3559	40321	6444	49	10388					
Node Bs downtime (not available for service)	≤ 2%	0.08%	1.97%	0.11%	0.00%	0.22%					
Number of Node Bs having accumulated downtime of >24 hours in a month		0	49	15	0	30					
Worst affected Node Bs due to downtime	≤ 2%	0.00%	1.78%	0.18%	0.00%	0.46%					
Live M	leasurement Re	esults for Netwo	rk Availability-	3 Day live data-July	/						
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G					
(Number of Node Bs in the network in the licensed service area		6154	2734	8169	3084	6481					
Sum of downtime (i.e. total outage time) of Node Bs		10140	3855	500	5	1242					
Node Bs downtime (not available for service)	≤ 2%	0.22%	0.19%	0.01%	0.00%	0.03%					
Number of Node Bs having accumulated downtime of >24 hours in a month		0	1	1	0	6					
Worst affected Node Bs due to downtime	≤ 2%	0.00%	0.04%	0.01%	0.00%	0.09%					



	2. Conn	ection Establish	ment (Accessib	ility)							
Audit Results fo	r CSSR, RRC Con	gestion and Circ	uit Switched RA	B Congestion- PM	R data-July						
	Benchmark	Airtel 3G	BSNL 3G	ldea 3G	TATA 3G	Vodafone 3G					
CSSR	≥ 95%	99.72%	96.28%	99.62%	99.61%	99.80%					
RRC Congestion	≤1%	0.01%	0.76%	0.37%	0.11%	0.25%					
Circuit Switched RAB Congestion	≤ 2%	0.06%	1.71%	0.13%	0.55%	0.05%					
Live measurement resu	ilts for CSSR, RR	C Congestion ar	nd Circuit Switch	ed RAB Congestio	n- 3 Day Data-July						
Benchmark Airtel 3G BSNL 3G Idea 3G TATA 3G Vodafone 3G											
CSSR	≥ 95%	99.64%	96.82%	99.60%	99.60%	99.76%					
RRC Congestion	≤1%	0.15%	0.90%	0.48%	0.10%	0.27%					
Circuit Switched RAB Congestion	≤ 2%	0.07%	1.90%	0.16%	0.26%	0.06%					
Drive test resu	Its for CSSR (Av	erage of drive te	ests) and blocke	d calls- Drive Test	Data-July						
CSSR	Benchmark	Airtel 3G	BSNL 3G	ldea 3G	TATA 3G	Vodafone 3G					
Total number of RRC attempts (A)		NP	1465	1672	786	1241					
Total number of RRC established (B)		NP	1410	1662	783	1240					
Call setup success rate (B/A*100)	≥ 95%	NP	96.25%	99.40%	99.62%	99.92%					
%age blocked calls		NP	3.75%	0.60%	0.38%	0.08%					

	3. Connection Maintenance (Retainability)											
Audit Results for Call drop rate a	Audit Results for Call drop rate and Worst affected cells having more than 3% Circuit switched voice drop rate -PMR data-July											
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G						
Total calls successfully established (A) (Number of voice RAB normally released)		47927891	23538119	178692955	29463933	34562345						
Total calls dropped after establishment (B) (Number of voice RAB abnormally released)		216788	302353	612592	125995	298701						
Call drop rate (B/A*100)	≤ 2%	0.45%	1.28%	0.34%	0.43%	0.86%						
Total no. of cells in the licensed service area (B)		18095	8274	30549	9165	20132						
No. of affected cells having CSV call drop rate >3% during (CBBH) in a month (A)		206	231	660	224	374						
Worst affected cells having more than 3% Circuit switched voice drop rate (A/B*100)	≤ 3%	1.14%	2.79%	2.16%	2.45%	1.86%						

Live measurement results for Call drop rate and Worst affected cells having more than 3% Circuit switched voice drop rate - 3 Day data-July

	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total calls successfully established (A) (Number of voice RAB normally released)		5849987	2259860	16871407	2798185	9045711
Total calls dropped after establishment (B) (Number of voice RAB abnormally released)		27191	26647	57154	12266	19463
Call drop rate (B/A*100)	≤ 2%	0.46%	1.18%	0.34%	0.44%	0.22%
Total no. of cells in the licensed service area (B)		18340	8262	30917	9165	20132
No. of affected cells having CSV call drop rate >3% during (CBBH) in a month (A)		194	236	609	250	374
Worst affected cells having more than 3% Circuit switched voice drop rate (A/B*100)	≤ 3%	1.06%	2.85%	1.97%	2.73%	1.86%

Drive test results for Call drop rate (Average of drive tests) - Drive Test Data-July										
Call drop rate	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
Total calls successfully established (A) (Number of voice RAB normally released)		NP	1407	1663	783	1240				
Total calls dropped after establishment (B) (Number of voice RAB abnormally released)		NP	53	7	4	1				
Call drop rate (B/A*100)	≤2%	NP	3.77%	0.42%	0.51%	0.08%				



		4. Voice o	quality								
	Audit Re	sults for Voice o	uality -PMR Da	ta-July							
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G					
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	24022779	283028475587	86084413000	62750873964					
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	23538119	278887884568	85835233154	62091552876					
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	98.90%	97.98%	98.54%	99.71%	99.20%					
Live measurement results for Voice quality-3 Day data-July											
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G					
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	2319660	26769365031	8479142000	20916957988					
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	2274705	26354183775	8453910210	20697184292					
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	99.25%	98.06%	98.45%	99.70%	98.95%					
Drive t	est results for \	/oice quality (A	verage of drive	tests) - DT data-July	1						
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G					
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NP	185621	NA	2589205	1982713					
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NP	181299	NA	2543286	1923310					
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	NP	97.67%	97.21%	98.23%	97.00%					

		5. POI Con	gestion			
	Audit Res	ults for POI Con	gestion- PMR da	ata-July		
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	952	192	211
No. of POIs not meeting benchmark		0	0	0	0	0
Total Capacity of all POIs (A) - in erlangs		304033	98779	1156419	62454	6527109
Traffic served for all POIs (B)- in erlangs		157476	49714	276463	44621	143982
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%
L	ive Measureme	nt Results for P	OI Congestion- 3	B Day data-July		
POI congestion	Benchmark	Airtel 3G	BSNL 3G	ldea 3G	TATA 3G	Vodafone 3G
Total number of working POIs		500	68	954	192	211
No. of POIs not meeting benchmark		o	o	0	0	0
Total Capacity of all POIs (A) - in erlangs		304001	98244	1158231	58475	6527109
Traffic served for all POIs (B)- in erlangs		156996	49641	282067	25167	143982
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%



20 ANNEXURE – AUGUST-3G

		1. Network Av	ailability			
	Audit Results fo	or Network Avai	lability- PMR da	ita-August		
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
(Number of Node Bs in the network in the licensed service area		6378	2752	8369	3083	6481
Sum of downtime (i.e. total outage time) of Node Bs		2677	40111	6435	68	6168
Node Bs downtime (not available for service)	≤ 2%	0.06%	1.96%	0.10%	0.00%	0.13%
Number of Node Bs having accumulated downtime of >24 hours in a month		0	51	19	0	33
Worst affected Node Bs due to downtime	≤ 2%	0.00%	1.85%	0.23%	0.00%	0.51%
Live Mea	asurement Resul	Its for Network	Availability- 3 D	ay live data-Augus	t	
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
(Number of Node Bs in the network in the licensed service area		6104	2752	8169	3083	6481
Sum of downtime (i.e. total outage time) of Node Bs		301	3878	500	9	789
Node Bs downtime (not available for service)	≤ 2%	0.07%	1.96%	0.09%	0.00%	0.17%
Number of Node Bs having accumulated downtime of >24 hours in a month		o	2	1	0	12
Worst affected Node Bs due to downtime	≤ 2%	0.00%	0.07%	0.01%	0.00%	0.19%



	2. Conne	ction Establishn	nent (Accessibil	ity)						
Audit Results for C	SSR, RRC Conges	tion and Circuit	Switched RAB C	Congestion- PMR d	ata-August					
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
CSSR	≥ 95%	99.68%	96.29%	99.67%	99.45%	99.45%				
RRC Congestion	≤1%	0.06%	0.65%	0.28%	0.19%	0.30%				
Circuit Switched RAB Congestion	≤ 2%	0.10%	1.71%	0.10%	0.23%	0.08%				
Live measurement results	for CSSR, RRC C	ongestion and (Circuit Switched	RAB Congestion-	3 Day Data-August					
Benchmark Airtel 3G BSNL 3G Idea 3G TATA 3G Vodafone 3G										
CSSR	≥ 95%	99.64%	95.82%	99.60%	99.49%	99.67%				
RRC Congestion	≤1%	0.23%	0.88%	0.48%	0.18%	0.35%				
Circuit Switched RAB Congestion	≤ 2%	0.07%	1.71%	0.16%	0.58%	0.04%				
Drive test results	for CSSR (Avera	ge of drive tests	and blocked c	alls- Drive Test Dat	ta-August					
CSSR	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
Total number of RRC attempts (A)		1429	456	362	751	1580				
Total number of RRC established (B)		1333	383	360	751	1580				
Call setup success rate (B/A*100)	≥ 95%	93.28%	83.99%	99.45%	100.00%	100.00%				
%age blocked calls		6.72%	16.01%	0.55%	0.00%	0.00%				



3. Connection Maintenance (Retainability)									
Audit Results for Call drop rate and Worst affected cells having more than 3% Circuit switched voice drop rate -PMR data-August									
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total calls successfully established (A) (Number of voice RAB normally released)		49448978	23322421	182641904	30038085	102312756			
Total calls dropped after establishment (B) (Number of voice RAB abnormally released)		215986	260731	574211	125728	223567			
Call drop rate (B/A*100)	≤ 2%	0.44%	1.12%	0.31%	0.42%	0.22%			
Total no. of cells in the licensed service area (B)		19055	8274	31287	9169	20925			
No. of affected cells having CSV call drop rate >3% during (CBBH) in a month (A)		194	232	583	219	358			
Worst affected cells having more than 3% Circuit switched voice drop rate (A/B*100)	≤ 3%	1.02%	2.81%	1.86%	2.39%	1.71%			
Live measurement results for Call drop rate	e and Worst affe	ected cells havin	ng more than 3%	Circuit switched	voice drop rate - 3 Da	y data-August			
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total calls successfully established (A) (Number of voice RAB normally released)		4174638	2326253	16871407	2858060	8045711			
Total calls dropped after establishment (B) (Number of voice RAB abnormally released)		19031	31578	57154	12179	26753			
Call drop rate (B/A*100)	≤ 2%	0.46%	1.36%	0.34%	0.43%	0.33%			
Total no. of cells in the licensed service area (B)		18180	8274	30917	9172	20925			
No. of affected cells having CSV call drop rate >3% during (CBBH) in a month (A)		195	232	609	239	361			
Worst affected cells having more than 3% Circuit switched voice drop rate (A/B*100)	≤ 3%	1.07%	2.80%	1.97%	2.61%	1.73%			
Drive test res	ults for Call dro	p rate (Average	of drive tests) -	Drive Test Data-A	ugust				
Call drop rate	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total calls successfully established (A) (Number of voice RAB normally released)		1335	383	360	749	1580			
Total calls dropped after establishment (B) (Number of voice RAB abnormally released)		38	24	0	4	0			
Call drop rate (B/A*100)	≤2%	2.85%	6.27%	0.00%	0.53%	0.00%			



		4. Voice qu	uality							
Audit Results for Voice quality -PMR Data-August										
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	24265044	287318632411	88876103000	65782398713				
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	23322421	283013175879	88616696251	64782312345				
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	98.84%	96.12%	98.50%	99.71%	98.48%				
Liv	Live measurement results for Voice quality-3 Day data-August									
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	2369209	26769365031	8479142000	2436385138				
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	2326253	26354183775	8453910210	2399344902				
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	98.80%	98.80%	98.45%	99.70%	98.45%				
Drive test	t results for Voi	ce quality (Aver	age of drive tes	ts) - DT data-Augus	it					
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		221157	145647	2630470	2630470	744138				
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		217317	142433	2580831	2580831	717606				
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	98.26%	97.79%	97.59%	98.11%	96.43%				

5. POI Congestion									
Audit Results for POI Congestion- PMR data-August									
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total number of working POIs		500	68	952	192	211			
No. of POIs not meeting benchmark		o	o	0	0	0			
Total Capacity of all POIs (A) - in erlangs		301282	98574	1147903	101459	1396109			
Traffic served for all POIs (B)- in erlangs		162260	50741	288689	47062	242683			
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%			
Live	Measurement I	Results for POI (Congestion- 3 Da	ay data-August					
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total number of working POIs		500	68	952	192	211			
No. of POIs not meeting benchmark		0	0	0	0	0			
Total Capacity of all POIs (A) - in erlangs		30475	97644	1148231	58475	1396109			
Traffic served for all POIs (B)- in erlangs		155273	49999	282067	25167	242683			
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%			

21 ANNEXURE – SEPTEMBER-3G



		1. Network A	vailability							
Audit Results for Network Availability- PMR data-September										
	Benchmark	Airtel 3G	BSNL 3G	ldea 3G	TATA 3G	Vodafone 3G				
(Number of Node Bs in the network in the licensed service area		<mark>667</mark> 0	2752	8483	3085	6481				
Sum of downtime (i.e. total outage time) of Node Bs		2451	37531	6239	56	4829				
Node Bs downtime (not available for service)	≤2%	0.05%	1.89%	0.10%	0.00%	0.10%				
Number of Node Bs having accumulated downtime of >24 hours in a month		0	47	17	0	22				
Worst affected Node Bs due to downtime	≤2%	0.00%	1.71%	0.20%	0.00%	0.34%				
Live Meas	urement Result	s for Network A	vailability- 3 Da	y live data-Septemb	per					
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
(Number of Node Bs in the network in the licensed service area		6455	2752	8369	3083	6481				
Sum of downtime (i.e. total outage time) of Node Bs		184	3896	300	4	821				
Node Bs downtime (not available for service)	≤ 2%	0.04%	1.97%	0.05%	0.00%	0.18%				
Number of Node Bs having accumulated downtime of >24 hours in a month		0	3	0	0	5				
Worst affected Node Bs due to downtime	≤ 2%	0.00%	0.11%	0.00%	0.00%	0.08%				



2. Connection Establishment (Accessibility)									
Audit Results for CSSR, RRC Congestion and Circuit Switched RAB Congestion- PMR data-September									
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
CSSR	≥ 95%	99.71%	95.97%	99.67%	99.63%	99.83%			
RRC Congestion	≤1%	0.02%	0.78%	0.75%	0.10%	0.16%			
Circuit Switched RAB Congestion	≤ 2%	0.05%	1.68%	0.13%	0.44%	0.05%			
Live measurement results for CSSR, RRC Congestion and Circuit Switched RAB Congestion- 3 Day Data-September									
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
CSSR	≥ 95%	99.66%	95.40%	99.70%	99.79%	99.85%			
RRC Congestion	≤1%	0.10%	0.75%	0.53%	0.03%	0.02%			
Circuit Switched RAB Congestion	≤ 2%	0.13%	1.64%	0.08%	0.43%	0.02%			
Drive test results f	or CSSR (Averag	e of drive tests)	and blocked ca	lls- Drive Test Data-	September				
CSSR	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total number of RRC attempts (A)		2153	4493	3574	763	2987			
Total number of RRC established (B)		2153	4273	3569	763	2987			
Call setup success rate (B/A*100)	≥ 95%	100.00%	95.10%	99.86%	100.00%	100.00%			
%age blocked calls		0.00%	4.90%	0.14%	0.00%	0.00%			



	3. Connection Maintenance (Retainability)								
Audit Results for Call drop rate and Worst affected cells having more than 3% Circuit switched voice drop rate -PMR data-September									
	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total calls successfully established (A) (Number of voice RAB normally released)		57489370	23227224	180617998	28727003	92029122			
Total calls dropped after establishment (B) (Number of voice RAB abnormally released)		227560	280768	645198	114904	194109			
Call drop rate (B/A*100)	≤ 2%	0.40%	1.21%	0.36%	0.40%	0.21%			
Total no. of cells in the licensed service area (B)		19929	8274	32871	9181	18689			
No. of affected cells having CSV call drop rate >3% during (CBBH) in a month (A)		180	233	816	211	366			
Worst affected cells having more than 3% Circuit switched voice drop rate (A/B*100)	≤ 3%	0.91%	2.81%	2.48%	2.30%	1.96%			

Live measurement results for Call drop rate and Worst affected cells having more than 3% Circuit switched voice drop rate - 3 Day data-September

	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total calls successfully established (A) (Number of voice RAB normally released)		8381194	2400517	18756219	2879413	9244119
Total calls dropped after establishment (B) (Number of voice RAB abnormally released)		33611	32656	63831	10476	20661
Call drop rate (B/A*100)	≤ 2%	0.40%	1.36%	0.34%	0.36%	0.22%
Total no. of cells in the licensed service area (B)		19288	8274	32448	9169	18689
No. of affected cells having CSV call drop rate >3% during (CBBH) in a month (A)		190	234	743	205	323
Worst affected cells having more than 3% Circuit switched voice drop rate (A/B*100)	≤ 3%	0.99%	2.82%	2.29%	2.24%	1.73%
Drive test resu	Its for Call drop	rate (Average o	of drive tests) - D	Drive Test Data-Sept	ember	
Call drop rate	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G
Total calls successfully established (A) (Number of voice RAB normally released)		2153	4270	3582	762	2987
Total calls dropped after establishment (B) (Number of voice RAR abnormally released)		o	118	4	6	0



2.76%

0.11%

0.79%

0.00%

0.00%

≤ 2%

(Number of voice RAB abnormally released)

Call drop rate (B/A*100)

4. Voice quality										
Audit Results for Voice quality -PMR Data-September										
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	23719134	287089351951	84507090000	214786782314				
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	23227224	282801187179	84263032889	212491572117				
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	98.82%	97.93%	98.51%	99.71%	98.93%				
Live	Live measurement results for Voice quality-3 Day data-September									
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	2400094	29480960603	8219484500	22116180172				
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		NA	2361342	29047173974	8196774831	21878986142				
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	99.54%	98.39%	98.53%	99.72%	98.93%				
Drive test i	esults for Voice	e quality (Averag	ge of drive tests) - DT data-Septemb	er					
Voice quality	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G				
Total Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		6259891	214292	NA	1585291	540355				
Faulty Transport Blocks InUplink downlink After Selection Combining Speech-10Sec		5856561	203796	NA	1552006	523785				
%Circuit Switch Voice Quality (CSV quality) (B/A*100)	≥ 95%	93.56%	95.10%	96.50%	97.90%	96.93%				

5. POI Congestion									
Audit Results for POI Congestion- PMR data-September									
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total number of working POIs		500	69	946	192	209			
No. of POIs not meeting benchmark		0	0	2	0	0			
Total Capacity of all POIs (A) - in erlangs		299746	99346	1114258	101512	234554711			
Traffic served for all POIs (B)- in erlangs		162577	51555	293386	49354	4885516			
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%			
Live	Aeasurement R	esults for POI Co	ongestion- 3 Day	data-September					
POI congestion	Benchmark	Airtel 3G	BSNL 3G	Idea 3G	TATA 3G	Vodafone 3G			
Total number of working POIs		500	69	949	192	209			
No. of POIs not meeting benchmark		0	0	0	0	0			
Total Capacity of all POIs (A) - in erlangs		298502	99585	1169382	101987	234554711			
Traffic served for all POIs (B)- in erlangs		159567	48334	283866	45036	4885516			
POI congestion	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%			

22 ABBREVIATIONS

Following terms/abbreviations have been used in this report. This section provides meaning of the abbreviations used in the report.

- 1. TRAI Telecom Regulatory Authority of India
- 2. QoS Quality of Service
- 3. JAS'16 Refers to the quarter of July, August and September 2016
- 4. IMRB Refers to IMRB International, the audit agency for this report
- 5. SSA Secondary Switching Area
- 6. NOC Network Operation Center
- 7. OMC Operations and Maintenance Center
- 8. MSC Mobile Switching Center
- 9. PMR Performance Monitoring Reports
- 10. TCBH Time Consistent Busy Hour
- 11. CBBH Cell Bouncing Busy Hour
- 12. BTS Base Transceiver Station
- 13. CSSR Call Setup Success Rate
- 14. TCH Traffic Channel
- 15. SDCCH Standalone Dedicated Control Channel
- 16. CDR Call Drop Rate
- 17. FER Frame Error Rate
- 18. SIM Subscriber Identity Module
- 19. GSM Global System for Mobile
- 20. CDMA Code Division Multiple Access
- 21. NA Not Applicable
- 22. NC Non Compliance
- 23. POI Point of Interconnection
- 24. IVR Interactive Voice Response
- 25. STD Standard Trunk Dialing
- 26. ISD International Subscriber Dialing




KANTAR IMRB

SCO 47, 5th Floor, Old Judicial Complex, Sector 15 Part 1, Gurgaon, Haryana – 122001

)+91 (124) 4217300

<u>■</u>www.imrbint.com

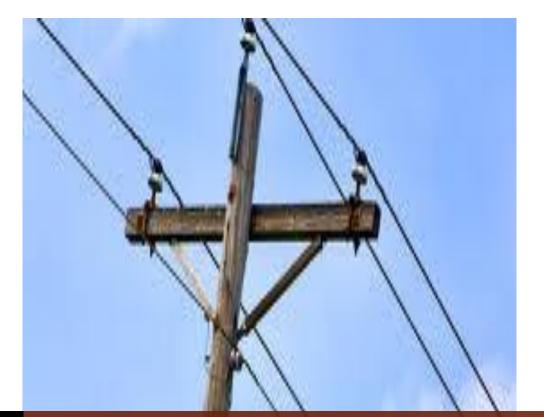

West Zone

TRAI AUDIT WIRELINE REPORT – MAHARASHTRA & GOA CIRCLE - AUDIT OF JAS QUARTER, 2016



Prepared By -



Prepared For-



Telecom Regulatory Authority of India (15/150 9001-2008 Certified Organisation)

TABLE OF CONTENTS

1	Intro	duction5	
	1.1	About TRAI	
	1.2	Objectives5	
	1.3	Coverage	
	1.4	Audit Process	
	1.5	Framework Used7	
	1.5.1	PMR Reports - Significance and Methodology7	
	1.5.2	Live Calling - Significance and Methodology10	
	1.5.3	Audit Methodology13	
	1.5.4	Measurement Methodology15	
	1.6	Sampling Methodology16	
	1.7	Colour Code to read the report16	
2	Exec	utive Summary17	
	2.1	PMR (Performance Monitoring Report) Data – JAS'1617	
	2.1.1	Fault Incidence / Clearance Statistics17	
	2.1.2	POI (Point of Interconnection) Congestion17	
	2.1.3	Metering and Billing Credibility18	
	2.1.4	Resolution of Billing Complaints18	
	2.1.5	Period of Applying Credit/ Waiver18	
	2.1.6	Closure within 7 days18	
	2.1.7	Refund of deposit within 60 days from closure	
	2.1.8	Response time to customer for assistance18	
	2.2	3 Day Live Measurement	
	2.2.1	POI (Point of Interconnection) Congestion19	
	2.3	Live Calling	
	2.3.1	Faults Repair/ Clearance19	
	2.3.2	Resolution of billing complaints19	



2.3.3	3 Response time to customer for assistance	19
2.3.4	4 Level 1 Services	20
3 Crit	tical Findings - JAS'16	21
	ameter Explanation and Detailed Findings - Comparison Between PMR and Live Calling/ ement Data	23
4.1	Fault Incidence/ Clearance Related Services	23
4.1.1	Parameter Explanation	23
4.1.2	2 Detailed Findings - Fault Incidence	25
4.1.3	3 Detailed Findings - Fault repair by next day (Urban)	25
4.1.4	4 Findings - Fault repair within five working days (Urban)	26
4.1.5	5 Detailed Findings - Mean time to repair	26
4.2	Metering and billing credibility	27
4.2.1	1 Parameter Explanation	27
4.3	Response Time to Customer	32
4.3.	1 Parameter Explanation	32
4.3.	2 Calls Getting Connected and Answered	33
4.3.3	3 Call Answered by Operator within 90 Seconds	34
4.4	Customer Care Promptness	35
4.4.	1 Parameter Explanation	35
4.4.	2 Findings - Closure Request Attended in 7 days	35
4.5	Time taken to refund deposit after closure	36
4.5.	1 Parameter Explanation	36
4.5.	2 Findings - Refund of deposit after closure within 60 days	36
5 Anr	nexure – JAS'16	37
5.1	Fault Incidence / Clearance Statistic	37
5.2	POI Congestion	38
5.3	Metering and Billing credibility	38
5.4	RESPONSE TIME TO CUSTOMER FOR ASSISTANCE	39
5.5	Time taken for refund of deposits after closure	39
5.6	Live Calling for Level 1 Services	39
3	TRAI ENCLOSE CONTRACTOR CONT	

5.7	Exchange capacity and Subscribers	39
5.7.1	detailed Live Calls Made for Level 1 Services	40



1 INTRODUCTION

1.1 About TRAI

TRAI's mission is to create and nurture conditions for growth of telecommunications in the country in a manner and at a pace that will enable India to play a leading role in the emerging global information society. One of the main objectives of TRAI is to provide a fair and transparent policy environment which promotes a level playing field and facilitates fair competition.

In pursuance of above objective, TRAI has been issuing regulations, order and directives to deal with the issues or complaints raised by the operators as well as the consumers. These regulations, order and directives have helped to nurture the growth of multi operator multi service - an open competitive market from a government owned monopoly. Also, the directions, orders and regulations issued cover a wide range of subjects including tariff, interconnection and quality of service as well as governance of the Authority.

TRAI initiated a regulation - The Standards of Quality of Service of Basic Telephone Service (Wire line) and Cellular Mobile Telephone Service Regulations, 2009 (7 of 2009) dated 20thSeptember, 2009, the "Standards of Quality of Service for Wireless Data Services Regulations, 2012 dated 4th September 2012, and the "Quality of Service of Broadband Service Regulations", 2006 (11 of 2006) dated 6th July, 2006 that provide the benchmarks for the parameters on customer perception of service to be achieved by service provider.

In order to assess the above regulations, TRAI has commissioned a third party agency to conduct the audit of the service providers and check the performance of the operators on the various benchmarks set by Telecom Regulatory Authority of India (TRAI).

1.2 OBJECTIVES

The primary objective of the Audit module is to -

 Audit and Assess the Quality of Services being rendered by Basic (Wireline), Cellular Mobile (Wireless), and Broadband service against the parameters notified by TRAI. (The parameters of Quality of Services (QoS) have been specified by in the respective regulations published by TRAI).



1.3 COVERAGE

The wireline audit was conducted in MAHARASHTRA & GOA circle.



1.4 AUDIT PROCESS

As per TRAI guidelines, the Wireline Audit for a circle is conducted for one quarter once every year.


- The operators have been assimilated as per TRAI guidelines given in QoS tender document 2015 and latest list of licensees provided by TRAI.
- IMRB auditors contacted the following wireline operators to conduct the audit in MAHARASHTRA & GOA for the JAS 2016 quarter and conducted the audit for all operators.

Name of Operator
BHARTI AIRTEL
BSNL
RTL
TTL
VODAFONE

• The PMR was generated from the raw data pertaining to July, August and September 2016 (JAS'16), which was collected from the operator during the audit conducted in the month of September 2016.



• Live calling and 3 day live measurement activity was carried out during the month of September 2016. The data considered for live calling was for the month prior to the month in which the live calling activity was being conducted. For example, data of August 2016 was considered for live calling activity conducted in September 2016.

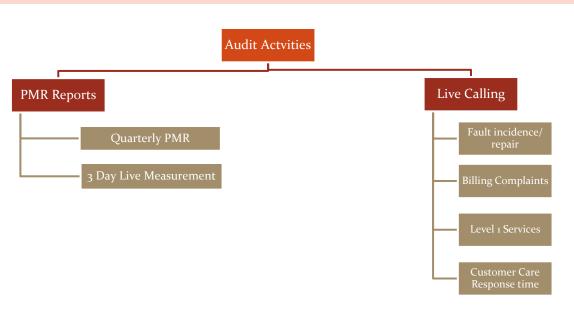


1.5 FRAMEWORK USED

1.5.1 PMR REPORTS - SIGNIFICANCE AND METHODOLOGY

The significance of PMR or Performance Monitoring Reports is to assess the various Quality of Service (QoS) parameters involved in the Basic (Wireline) telephone services, which indicate the overall health of service for an operator. The operators submit these PMR reports to TRAI time on time as per instructions from TRAI.

To verify the QoS performance of the operators, TRAI has appointed IMRB as their auditor in West Zone to conduct QoS audit of operators. The steps involved in the audit have been given below.



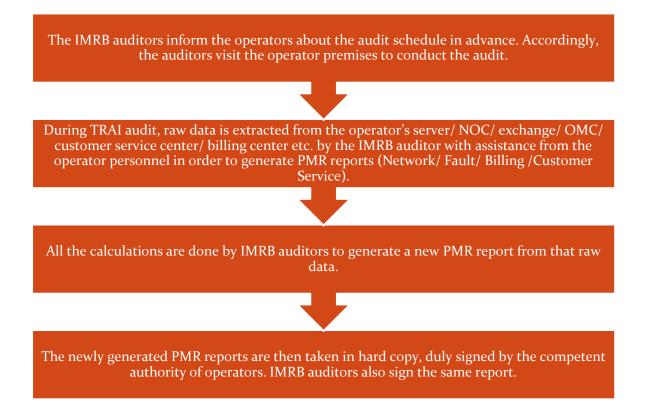

The raw data extracted is then used to generate PMR reports in the following formats.

- ♦ Quarterly PMR
- 🏷 3 Day Live Measurement Data

Let us understand these formats in detail.

1.5.1.1 QUARTERLY PMR REPORT – PARAMETERS REVIEWED

The main purpose of quarterly PMR report is to verify the following key QoS parameters on quarterly basis as per the methodology stated above in section 1.4.

- Fault incidence/clearance related statistic
- Mean Time to Repair (MTTR)
- POI (Point of Interconnection) Congestion
- Metering and billing credibility
- Resolution of billing complaints
- Customer care promptness
- Time taken to refund of deposits after closure



1.5.1.2 3 DAY LIVE MEASUREMENT – METHODOLOGY AND PARAMETERS REVIEWED

The main purpose of 3 day live measurement is to evaluate the following parameters on intraday basis. The auditors visit the sample exchanges (in case of BSNL) and main exchanges (in case of other operators) to collect the 3 day live data for the following parameters


• POI (Point of Interconnection) Congestion

While the quarterly PMR report provides an overall view of the performance of QoS parameters, the 3 day live data helps looking at intraday performance on the above given parameters. All the calculations are then done on the basis of that raw data of 3 days.

1.5.1.3 TCBH – SIGNIFICANCE AND SELECTION METHODOLOGY

As per QoS regulations 2009 (7 of 2009), Time Consistent Busy Hour" or "TCBH" means the one hour period starting at the same time each day for which the average traffic of the resource group concerned is greatest over the days under consideration and such Time Consistent Busy Hour shall be established on the basis of analysis of traffic data for a period of ninety days.

Step by step procedure to identify TCBH for an operator:

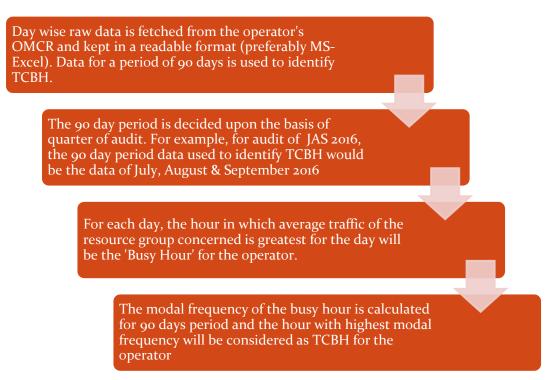




1.5.2 LIVE CALLING - SIGNIFICANCE AND METHODOLOGY

The main purpose of live calling is to verify the performance of following parameters by doing test calls to the subscribers/ specific numbers.

- Fault clearance
- Resolution of billing complaints
- Response time to the customer for assistance
- Level 1 services

The process of conducting live calling has been stated below.

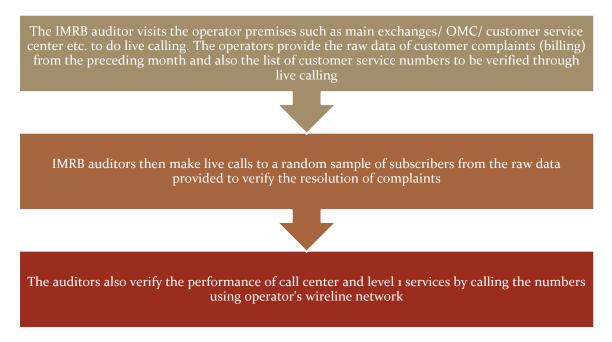

Let us now discuss the methodology of live calling for each parameter in detail.

1.5.2.1 FAULT CLEARANCE

Live calling for fault clearance is done to verify the following.

- Fault repair by next working day for both Urban and Rural Exchanges
- Fault repair within 5 working days Urban Exchanges
- Fault repair within 7 working days Rural Exchanges
- Auditors request the operator to provide the database of all the subscribers who reported Faults in one month prior to IMRB auditor visit
- Calls are made to up to 10% or 100 complainants, whichever is less, per service provider. If there are more than 1 SDCAs selected for the sample, 10% or 30 complainants per sample SDCA by randomly selecting from the list provided by operator.



Auditors check and record whether the fault was corrected within the timeframes as mentioned in the benchmark

Benchmark:

- Fault repair by next working day (Urban Exchanges): =>85%
- Fault repair by next working day (Rural Exchanges): =>75%
- Fault repair within 5 working days (Urban Exchanges): =100%
- Fault repair within 7 working days (Rural Exchanges): =100%

1.5.2.2 RESOLUTION OF BILLING COMPLAINTS

Live calling is done to verify Resolution of billing complaints within stipulated time. The process for this parameter is stated below.

- Auditors request the operator provided the database of all the subscribers who reported billing complaints in one month prior to IMRB auditor visit. In case of BSNL, data for the complaints from the subscribers belonging to the sample exchanges is requested specifically
- A sample of 10% or 100 complainants, whichever is less, is selected randomly from the list provided by operator
- Solution Calls are made by auditors to the sample of subscribers to check and record whether the complaint was resolved within the timeframes as mentioned in the benchmark.

Benchmark:

98% complaints resolved within 4 weeks, 100% complaints resolved within 6 weeks

1.5.2.3 RESPONSE TIME TO CUSTOMER FOR ASSISTANCE

Live calling is done to verify response time for customer assistance is done to verify the performance of call center in terms of

- ✤ Calls getting connected and answered:
- Solution by operator / voice to voice) within 90 seconds: In 95% of the cases or more

The process for this parameter is stated below.

Overall sample size is 100 calls per service provider per circle at different points of time, evenly distributed across the selected exchanges – 50 calls between 1000 HRS to 1300 HRS and 50 calls between 1500 HRS to 1700 HRS.



- Solution Time to answer the call by the operator was assessed from the time interviewer pressed the requisite button for being assisted by the operator.
- All the supplementary services that have any kind of human intervention are to be covered here. It also includes the IVR assisted services.

1.5.2.4 LEVEL 1 SERVICE

Level 1 is used for accessing special services like emergency services, supplementary services, inquiry and operator-assisted services. Level 1 Services include services such as police, fire, ambulance (Emergency services). Test calls were made from operator network to test the accessibility and efficiency of Level 1 services on an operator's network.

A minimum of 300 test calls were made per service provider in the quarter. In case of BSNL, calls are equally distributed among SDCAs (Short Distance Charging Area) visited for the purpose of live calling.

In JAS'16, IMRB has conducted the live calling to the list of Level 1 services provided by TRAI as per the NNP (National Numbering Plan).

1.5.2.4.1 PROCESS TO TEST LEVEL 1 SERVICES

- On visiting the operator's premises (Exchange/Central Server etc.), auditors ask the operator authorized personnel to provide a list of Level 1 services being active in their service. The list should contain a description of the numbers along with dialing code.
- Operators might provide a long list of L1 services. To identify emergency L1 service numbers, auditors check if there is any number that starts with code '10' in that list. If auditors find any emergency number in addition to the below list, that number is also tested during live calling.
- On receiving the list, auditors verify it if the below given list of numbers are active in the service provider's network.
- If there are any other additional numbers provided by the operator, auditors also do live calling on those numbers along with below list.
- If any of these numbers is not active, then we would write the same in our report, auditors write in the report.
- Post verifying the list, auditors do live calling by equally distributing the calls among the various numbers and update the results in the live calling sheet.



L1 Code	Description	L1 Code	Description
100	Police	1090	Call Alart (Crime Branch)
101	Fire	1091	Women Helpline
102	Ambulance	1097	National AIDS Helpline to NACO
104	Health Information Helpline	1099	Central Accident and Trauma Services (CATS)
108	Emergency and Disaster Management Helpline	10580	Educationa & Vocational Guidance and Counselling
138	All India Helpine for Passangers	10589	Mother and Child Tracking (MCTH)
149	Public Road Transport Utility Service	10740	Central Pollution Control Board
181	Chief Minister Helpline	10741	Pollution Control Board
182	Indian Railway Security Helpline	1511	Police Related Service for all Metro Railway Project
1033	Road Accident Management Service	1512	Prevention of Crime in Railway
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'	1514	National Career Service(NCS)
1056	Emergency Medical Services	15100	Free Legal Service Helpline
106X	State of the Art Hospitals	155304	Municipal Corporations
1063	Public Grievance Cell DoT Hq	155214	Labour Helpline
1064	Anti Corruption Helpline	1903	Sashastra Seema Bal (SSB)
1070	Relief Commission for Natural Calamities	1909	National Do Not Call Registry
1071	Air Accident Helpline	1912	Complaint of Electricity
1072	Rail Accident Helpline	1916	Drinking Water Supply
1073	Road Accident Helpline	1950	Election Commission of India
1077	Control Room for District Collector		

1.5.3 AUDIT METHODOLOGY

As per audit tender, following table explains the audit methodology for Basic (Wireline) services. Here, a YES signifies that the mentioned parameter gets audited by the given audit method (PMR/ Live Measurement/ Live Calling).

Sl. No.	Parameters	PMR	Live measurement	Live calling
1	Fault incidence/clearance related statistic	YES		
1.1	- Total number of faults registered per month	YES		
1.2	- Fault repair by next working day (Urban and Rural)	YES		YES
1.3.1	- Fault repair within 5 working days (Urban)	YES		YES
1.3.2	- Fault repair within 7 working days (Rural)	YES		YES
1.4	Mean Time to Repair (MTTR)	YES		
4	POI Congestion	YES	YES	
5	Metering and billing credibility - postpaid	YES		YES
5.1	Metering and billing credibility – prepaid	YES		YES
6	Customer service promptness	YES		



6.1	- Processing closure request	YES	
7	Response time to customer	YES	
7.1	- While call is getting connected and answered	YES	YES
7.2	- While call is answered by operator (voice to voice)	YES	YES
8	Level 1 Services		YES
9	Time taken to refund of deposits after closure	YES	

The audit methodology for each parameter has been explained along with the findings of same.

BHARTI AIRTEL	BSNL	RTL	Tata	Vodafone
16:00 - 17:00	16:00 - 17:00	18:00 - 19:00	17:00 - 18:00	18:00 - 19:00

1.5.4 MEASUREMENT METHODOLOGY

As per audit tender, following table explains the measurement methodology in terms of time period consideration for various parameters involved in audit of Basic (Wireline) services.

Sl. No.	Parameters	Averaged over a period
1	Fault incidence	One Quarter
1.1	- Total number of faults registered per month	One Quarter
1.2	- Fault repair by next working day (Urban and Rural)	One Quarter
1.3.1	- Fault repair within 5 working days (Urban)	One Quarter
1.3.2	- Fault repair within 7 working days (Rural)	One Quarter
1.4	- Mean Time to Repair (MTTR)	One Quarter
4	POI Congestion	One Month
5	Metering and billing credibility – postpaid	One Billing Cycle
5.1	Metering and billing credibility - prepaid	One Quarter
6	Customer care promptness	One Quarter
6.1	- Processing closure request	One Quarter
7	Response time to customer	One Quarter
7.1	- While call is getting connected and answered	One Quarter
7.2	- While call is answered by operator (voice to voice) within 90 seconds	One Quarter
8	Time taken to refund of deposits after closure	One Quarter



1.6 SAMPLING METHODOLOGY

- As per the sampling methodology prescribed by TRAI, all exchanges over 10% of SDCA or 10
 SDCA whichever is more in a licensed service area should be selected for the purpose of audit, live calling and live measurement.
- Apart from BSNL, for other operators all the exchanges present in the circle have been covered for all operators during the audit.

List of SDCA selected from different SSA of MAHARASHTRA & GOA for BSNL below SSA:-

Total SSA-30Total SDCA-315Selected SDCA (10%) -32

SSA	SDCA	SSA	SDCA
AHMEDNAGAR	ANR	NASHIK	Nashik
AKOLA	Akola	OSMANABAD	Osmanabad
			Parbhani
AMRAVATI	Amravati	PARBHANI	Group
AURANGABAD	AGD	PUNE	Chinchwad
BHANDARA	Bhandara	RAIGAD	Alibag
BEED	Beed	RATNAGIRI	Ratnagiri
CHANDRAPUR	Chandrapur	SATARA	Satara
DHULE	Dhule	SINDHUDURG	Kankavali
GADCHIROLI	Gadchiroli	SOLAPUR	SPR
GOA	Panaji	WARDHA	Wardha
JALGAON	Jalgaon	YAVATMAL	Yavatmal
KALYAN	Thane	BULDANA	Buldana
KOLHAPUR	Kolhapur	JALNA	Jalna
LATUR	Latur	SANGLI	Miraj
NAGPUR	Nagpur	PUNE	Khadakwasala
NANDED	Nanded	PUNE	Pune

1.7 COLOUR CODE TO READ THE REPORT

Not Meeting the benchmark



2 EXECUTIVE SUMMARY

The objective assessment of Quality of Service (QoS) carried out by IMRB gives an insight into the overall performance of various operators in the MAHARASHTRA & GOA circle, with a parameter wise performance evaluation as compared to TRAI benchmark.

2.1 PMR (PERFORMANCE MONITORING REPORT) DATA – JAS'16

Parameters	Benchmarks	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone
Faults incidences (No. of faults/100 Subs./month) - averaged for the quarter	≤7	1.35%	5.20%	0.09%	1.20%	0.37%
% of faults repaired by next working day	≥ 85% (Urban)	91.40%	98.89%	100.00%	95.33%	100.00%
% of faults repaired within 5 days	100% (Urban)	100.00%	100.00%	100.00%	100.00%	100.00%
Percentage of faults repaired by next working day during the quarter	≥ 75% (Rural)	NA	89.06%	NA	NA	NA
Percentage of faults repaired within 7 days during the quarter	100% (Rural)	NA	98.44%	NA	NA	NA
Faults pending for> 3days and ≤7 days	Rent rebate of 7 days	100.00%	NA	NA	NA	NA
Faults pending for > 7 days and ≤15 days	Rent rebate of 15 days	NA	NA	NA	NA	NA
Faults pending for > 15 days	Rent rebate of 1 month	NA	NA	NA	NA	NA
Mean Time to Repair (MTTR)	≤ 10 Hrs	6.15	7.20	4.80	4.00	1.25
No. of POIs with congestion > 0.5%	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%
Metering and billing credibility - Number of bills disputed during the quarter	≤0.1%	0.01%	0.03%	0.03%	0.00%	0.00%
Resolution of billing complaints within 4 weeks	≥98%	100.00%	100.00%	100.00%	NA	NA
Percentage complaints resolved within 6 weeks of date of receipt	100%	100.00%	100.00%	100.00%	NA	NA
Period of applying credit / waiver within 1 week	100%	100.00%	100.00%	100.00%	NA	NA
Closure within 7 days	100%	100.00%	100.00%	100.00%	100.00%	100.00%
Refund of deposits within 60 days of closure of service	100%	100.00%	100.00%	100.00%	100.00%	100.00%
Response time to customer for assistance	Benchmarks	BHARTI AIRTEL	BSNL	RTL	Πι	Vodafone
% age calls getting connected and answered	≥ 95%	100.00%	NP	98.83%	99.10%	NA
Percentage of calls answered by the operators (voice to voice) within 90 seconds	≥ 95%	100.00%	NP	98.46%	99.16%	NA

NP: Not Participated

NA: Parameters not applicable for the operators.

2.1.1 FAULT INCIDENCE / CLEARANCE STATISTICS

All Operators met the benchmark for fault repairs within next working days in urban and rural area, except BSNL for rural areas

All operators met the benchmark for rent rebate parameters. Rent rebate not applicable as all faults were repaired within stipulated time.

2.1.2 POI (POINT OF INTERCONNECTION) CONGESTION

All operators met the benchmark with o% POIs with congestion.

2.1.3 METERING AND BILLING CREDIBILITY

All operators met the benchmark for metering and billing credibility of number of bill disputed during the quarter.

NA: TTL and Vodafone did not have any billing disputes.

2.1.4 RESOLUTION OF BILLING COMPLAINTS

All operators met the benchmark for resolution of billing complaints within 4 weeks and within 6 weeks.

2.1.5 PERIOD OF APPLYING CREDIT/ WAIVER

All operators met the benchmark for the parameter.

2.1.6 CLOSURE WITHIN 7 DAYS

All operators met the benchmark for the parameter.

2.1.7 REFUND OF DEPOSIT WITHIN 60 DAYS FROM CLOSURE

All operators met the benchmark for the parameter refund of deposit within 60 days from closure.

2.1.8 RESPONSE TIME TO CUSTOMER FOR ASSISTANCE

All operators met the TRAI benchmark in terms of number of IVR calls being connected and answered.

All operators met the benchmark of 95% of voice to voice calls answered within stipulated time of 90 seconds.

NA: - Vodafone don't have customer care center, since they have PRI connection and due this customer directly contact their respective person in their office.

NP: Not Provided, BSNL did not participate in the Audit for JAS, 2016.

Let us now review the various parameters involved during live measurement.



2.2 3 DAY LIVE MEASUREMENT

NP: Not Participated, Airtel and Vodafone did not participate in the Audit for JAS, 2016.

Parameters	Benchmarks	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone
POI Congestion	≤0.5%	0.00%	0.00%	0.00%	0.00%	0.00%

2.2.1 POI (POINT OF INTERCONNECTION) CONGESTION

All operators met the benchmark with o% POIs with congestion.

2.3 LIVE CALLING

Parameters	Benchmarks	BHARTI AIRTEL	BSNL	RTL	ΤΤΙ	Vodafone			
Fault Repair/ Clearance									
% of faults repaired by next working day	≥ 85% (Urban)	88.00%	75.00%	94.00%	98.00%	NP			
Percentage cases where faults were repaired by next working day	≥ 75% (Rural)	NA	82.00%	NA	NA	NA			
% of faults repaired within 5 days	100% (Urban)	100.00%	98.00%	100.00%	100.00%	NP			
Percentage cases where faults were repaired within 7 days	100% (Rural)	NA	96.00%	NA	NA	NA			
	Resolution	of billing complai	ints						
Resolution of billing complaints within 4 weeks	≥ 98%	100.00%	100.00%	NA	NA	NA			
Percentage complaints resolved within 6 weeks of date of receipt	100%	100.00%	100.00%	NA	NA	NA			
	Response time t	to customer for a	ssistance						
% age calls getting connected and answered	≥ 95%	100.00%	100.00%	100.00%	100.00%	100.00%			
% age call answered by operator in 90 seconds	≥ 95%	99.00%	95.00%	97.00%	98.00%	100.00%			
Level 1 Services									
% age calls made to Level 1 services getting answered	≥ 90%	92.00%	93.33%	91.67%	90.00%	91.00%			

NA- Not Applicable

2.3.1 FAULTS REPAIR/ CLEARANCE

During live calling, BSNL failed to meet benchmark for fault repair by next day in urban as well as rural area.

2.3.2 RESOLUTION OF BILLING COMPLAINTS

During live calling, it was observed all operators met the benchmark of resolving complaints within 4 weeks and within 6 weeks.

2.3.3 RESPONSE TIME TO CUSTOMER FOR ASSISTANCE

During live calling, it was observed that all operators met the benchmark of 95% IVR calls getting connected and answered.

All operators met the benchmark of 95% calls getting answered (voice to voice) within 90 seconds.



2.3.4 LEVEL 1 SERVICES

All operators met the benchmark for Level 1 services. The category 1 (restricted) services were tested from different SDCAs.

It has been observed that a number of Category-I (i.e. mandatory) services were not being operated by the operators.

Detailed Level 1 Calling is given in section 5.6.1



3 CRITICAL FINDINGS - JAS'16

Fault Incidence / Clearance Statistics

All Operators met the benchmark for fault repairs within next working days in urban and rural area, except BSNL for rural areas

All operators met the benchmark for rent rebate parameters. Rent rebate not applicable as all faults were repaired within stipulated time.

Metering and Billing Credibility

All operators met the benchmark for metering and billing credibility of number of bill disputed during the quarter.

NA: TTL and Vodafone did not have any billing disputes.

Closure within 7 days

All operators met the benchmark for the parameter.

Refund of deposit within 60 days from closure

All operators met the benchmark for the parameter refund of deposit within 60 days from closure.

Response time to customer for assistance

All operators met the TRAI benchmark in terms of number of IVR calls being connected and answered.

All operators met the benchmark of 95% of voice to voice calls answered within stipulated time of 90 seconds.

NA: - Vodafone don't have customer care center, since they have PRI connection and due this customer directly contact their respective person in their office.

NP: BSNL did not provided data during Audit for JAS, 2016.

Let us now review the various parameters involved during live measurement.

Live Calling

Faults Repair/ Clearance

During live calling, BSNL failed to meet benchmark for fault repair by next day in urban as well as rural area.

Resolution of billing complaints

During live calling, it was observed all operators met the benchmark of resolving complaints within 4 weeks and within 6 weeks.

Response time to customer for assistance

During live calling, it was observed that all operators met the benchmark of 95% IVR calls getting connected and answered.



All operators met the benchmark of 95% calls getting answered (voice to voice) within 90 seconds.

Level 1 Services

All operators met the benchmark for Level 1 services. The category 1 (restricted) services were tested from different SDCAs.



4 PARAMETER EXPLANATION AND DETAILED FINDINGS -COMPARISON BETWEEN PMR AND LIVE CALLING/ MEASUREMENT DATA

4.1 FAULT INCIDENCE/ CLEARANCE RELATED SERVICES

4.1.1 PARAMETER EXPLANATION

4.1.1.1 DEFINITION

Fault Incidence: This parameter quantifies the number of faults registered per 100 subscribers/ per month for a wireline service provider in a quarter.

Fault Clearance/Repair: This parameter quantifies the number of faults repaired within a stipulated period of time (within a day, within 5 days – urban, within 7 days – rural) in the quarter

Mean Time to Repair (MTTR): It is the average of total time taken to repair for all faults reported in a quarter

4.1.1.2 AUDIT PROCEDURE

IMRB Auditors to verify and collect data pertaining to number of fault received and also number of faults cleared at the service provider's level in the following time frames:-

- Solution Number of faults cleared within 24 hours (Urban)
- Number of cleared in more than 1 day but less than 5 days (Urban)
- Number of cleared in more than 5 days but less than 7 days (Urban)
- ♦ Number of cleared in more than 7 days but less than 15 days (Urban)
- ♥ Number of cleared in more than 15 days (Urban)

The mean time to repair (in hours) is also calculated by averaging the total time of repair for each customer.

Live calling: -

- ✤ Live calling was done to verify the following
 - Fault repair by next working day for both Urban Exchanges
 - Fault repair within 5 working days Urban Exchanges
- Auditors ensured that the operator provided a list of all the subscribers who reported Faults in one month prior to IMRB auditor visit
- Calls are made to up to 10% or 100 complainants, whichever is less, per service provider or in case of BSNL, if there are more than 1 SDCAs selected for the sample, 10% or 30 complainants per sample SDCA by randomly selecting from the list provided by operator.



Solutions checked and recorded whether the fault was corrected within the timeframes as mentioned in the benchmark

4.1.1.3 COMPUTATIONAL METHODOLOGY

The calculation methodology (given below) as per QoS regulations 2009 (7 of 2009) was followed for calculating fault related parameters.

Fault Incidence:

Fault incidences - No. of faults/100 subscriber/month =

Total number of faults in the Quarter (3 months)	100
X -	
Total No. of DELs at the end of the Quarter	3

Here, DEL or Direct Exchange Line would be the subscribers of wireline services.


MTTR (Mean Time to Repair):

4.1.1.4 BENCHMARK


- ♥ Total number of faults registered per month: <=5 complaints per 100 subscribers
- ✤ Fault repair:
 - Fault repair by next working day (Urban Exchanges): =>85%
 - Fault repair within 5 working days (Urban Exchanges): =100%
- ✤ Mean Time to Repair: 10 hours



4.1.2 DETAILED FINDINGS - FAULT INCIDENCE

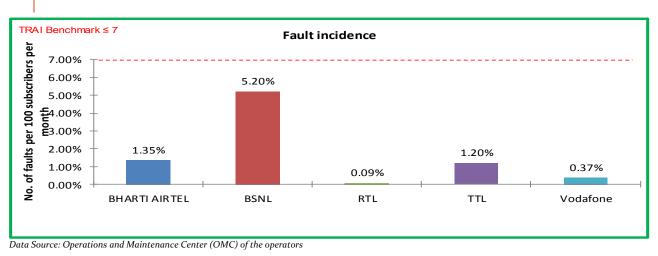

All operators met the benchmark for fault incidence

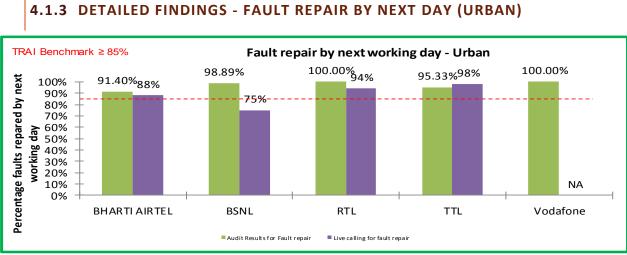


Data Source: Operations and Maintenance Center (OMC) of the operators

NA: Not applicable, there was not fault found during the audit

BSNL failed to meet the benchmark of fault repair by next day during live calling.




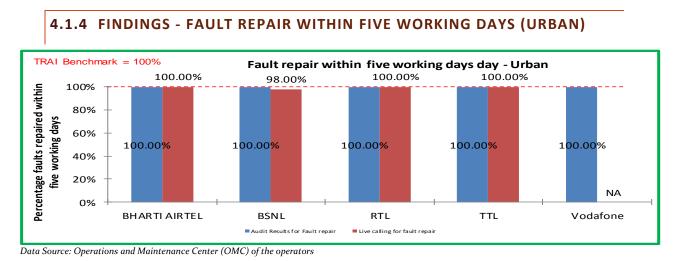

NA: Not applicable, there was not fault found during the audit

All operators met the benchmark of fault repair within five working days in urban areas. During live calling the performance of all the operators was good except BSNL.

4.1.5 DETAILED FINDINGS - MEAN TIME TO REPAIR

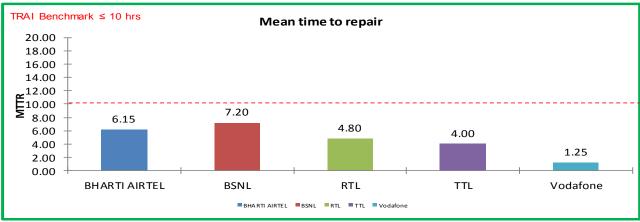

Data Source: Operations and Maintenance Center (OMC) of the operators

All operators met the benchmark for MTTR.



4.2 METERING AND BILLING CREDIBILITY

4.2.1 PARAMETER EXPLANATION

All the complaints related to billing as per clause 3.7.2 of QoS regulation of 20th September, 2009 were covered. The types of billing complaints covered are listed below.

- ♥ Payments made and not credited to the subscriber account
- 🗞 Payment made on time but late payment charge levied wrongly
- ✤ Double charges
- ♦ Charging for toll free services
- billed as STD/ISD or vice versa
- ✤ Calls made disputed
- Section Credit agreed to be given in resolution of complaint, but not accounted in the bill
- ♦ Charging for services provided without consent
- ♦ Charging not as per tariff plans
- ♦ Overcharging or undercharging

In addition to the above, any billing complaint which leads to billing error, waiver, refund, credit, or any adjustment is also considered as a valid billing complaint for calculating the number of disputed bills.

4.2.1.1 AUDIT PROCEDURE

IMRB Auditors to verify and collect data pertaining to -

- Solution Number of Billing complaints received at the service provider's level
- ✤ Last billing cycle stated should be such that due date for payment of bills must be beyond the date when this form is filled.
- Include all types of bills generated for customers. This could include online as well as other forms of bills presentation including printed bills
- Billing complaint is any of written complaint/ personal visit/ telephonic complaint related to: Excess metering/ wrong tariff scheme charged, Payment made in time but charged penalty/ not reflected in next bill, Last payment not reflected in bill, Adjustment/ waiver not done, Anything else related to bills, Toll free numbers charged etc.
- Billing complaints resolution database, with opening and closing date of complaint to identify the time taken to resolve a complaint



Live calling:

- Auditors request the operator provided the database of all the subscribers who reported billing complaints in one month prior to IMRB auditor visit. In case of BSNL, data for the complaints from the subscribers belonging to the sample exchanges is requested specifically
- A sample of 10% or 100 complainants, whichever is less, is selected randomly from the list provided by operator
- Solution Calls are made by auditors to the sample of subscribers to check and record whether the complaint was resolved within the timeframes as mentioned in the benchmark.

Benchmarks:

✤ 98% complaints resolved within 4 weeks, 100% complaints resolved within 6 weeks

4.2.1.2 COMPUTATIONAL METHODOLOGY – METERING AND BILLING CREDIBILITY

The calculation methodology (given below) as per QoS regulations 2009 (7 of 2009) was followed to calculate incidence of billing complaints.


Billing complaints (%) = total number of disputed bills X 100 total number of bills issued during one billing cycle.

- *Operator to include all types of bills generated for customers. This would include printed bills, online bills and any other forms of bills generated
- **Billing complaints here shall include only dispute related issues (including those that August arise because of a lack of awareness at the subscribers' end). It does not include any provisional issues (such as delayed dispatch of billing statements, etc.) in which the operator has opened a ticket internally.

TRAI Benchmark: < 0.1%



4.2.1.3 METERING AND BILLING CREDIBILITY – AUDIT FINDINGS

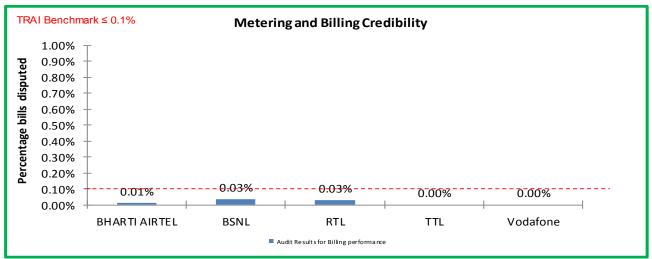

Data Source: Billing Center of the operators

All operators met the benchmark for the parameter.

4.2.1.4 COMPUTATIONAL METHODOLOGY – RESOLUTION OF BILLING COMPLAINTS

Solution of Percentage resolution of billing complaints

The calculation methodology (given below) as per QoS regulations 2009 (7 of 2009) and TRAI guidelines (Received on Sep 08, 2015) was followed to calculate resolution of billing complaints.

Resolution of billing complaints within 4 weeks:

%age of billing complaints (for post-paid customers)/ charging, credit & validity (for pre-paid customers) resolved within 4 weeks =

Resolution of billing complaints within 6 weeks:

during the quarter




%age of billing complaints (for post-paid customers)/ charging, credit & validity (for pre-paid customers) resolved within 6 weeks =

number of billing complaints for post-paid customers/charging, credit/ validity complaints for pre-paid customers resolved within 6 weeks during the quarter X 100

number of billing/charging, credit / validity complaints received during the quarter

- **Billing complaints here shall include only dispute related issues (including those that August arise because of a lack of awareness at the subscribers' end). It does not include any provisional issues (such as delayed dispatch of billing statements, etc.) in which the operator has opened a ticket internally. Complaints raised by the consumers to operator are only considered as part of the calculation.
- The complaints that get marked as invalid by the operator are not considered for calculation as those complaints cannot be considered as resolved by the operator.
- *** Date of resolution in this case would refer to the date when a communication has taken place from the operator's end to inform the complainant about the final resolution of the issue / dispute.

Benchmark: 98% complaints resolved within 4 weeks, 100% within 6 weeks.

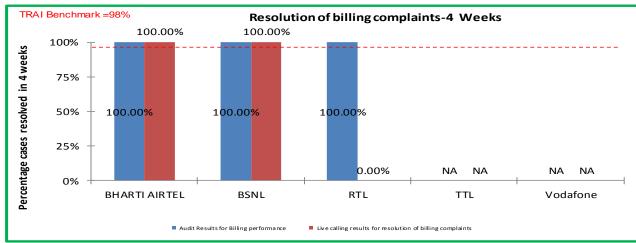


4.2.1.5 RESOLUTION OF BILLING COMPLAINTS – AUDIT FINDINGS



There was no complaint for TTL and Vodafone during the audit period.



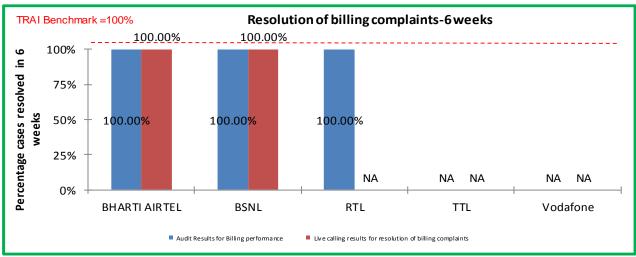

NA: Not Applicable

There was no complaint for TTL and Vodafone during the audit period.

As per audit conducted, all operators met the benchmark for resolution of billing complaints within 4 weeks and within 6 weeks.


4.2.1.6 COMPUTATION METHODOLOFY - PERIOD OF APPLYING CREDIT WAIVER

This parameter measures whether all refunds in the form of credit/ waiver/ adjustment are made within 7 days from the date of resolution of complaint.

- **Computational Methodology:**
 - Period of applying credit waiver = (number of cases where credit waiver is applied within 7 days/ total number of cases eligible for credit waiver) * 100
- **TRAI Benchmark:**
 - Period of applying credit waiver within 7 days: 100%
- ➔ Audit Procedure:
 - ♦ Operator to provide details of:-
 - Dates of applying credit waiver to all the eligible cases.
 - Dates of lodging the request for applying credit waiver for all eligible cases



4.2.1.7 PERIOD OF APPLYING CREDIT WAIVER – AUDIT FINDINGS

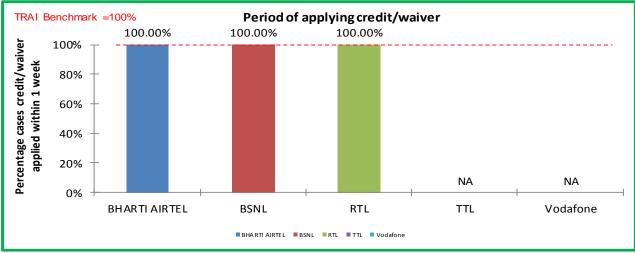



All operators met the benchmark for the parameter.

4.3 RESPONSE TIME TO CUSTOMER

4.3.1 PARAMETER EXPLANATION

Following two sub-parameters are covered for this parameter:

- Accessibility of Call Centre: The percentage of calls getting connected and answered by the call center. Not more than 5% calls shall encounter busy signal, no reply or any other failure in getting connected to the IVR.
- % age of calls answered by operators (voice to voice) within stipulated time: Not more than 5% calls shall encounter busy signal, no reply or any other failure in getting connected to the call center executive.

4.3.1.1 AUDIT PROCEDURE

- Solution We well as to a customer care executive.
- All the supplementary services that have any kind of human intervention are to be covered here. It also includes the IVR assisted services.

Live calling:




- Overall sample size was 100 calls per service provider per circle at different points of time,
 evenly distributed across the selected exchanges 50 calls between 1000 HRS to 1300 HRS and
 50 calls between 1500 HRS to 1700 HRS.
- Solution Time to answer the call by the operator was assessed from the time interviewer pressed the requisite button for being assisted by the operator.
- All the supplementary services that have any kind of human intervention are to be covered here. It also includes the IVR assisted services.

4.3.1.2 COMPUTATIONAL METHODOLOGY

Percentage of calls answered in a specified time = (Total no. of calls answered within that specified time / Total no. of calls dialed for a particular service)*100

4.3.1.3 BENCHMARK

- ♥ % age of calls getting connected and answered: In 95% of the cases or more.
- % age of calls answered by operator / voice to voice) within 90 seconds: In 95% of the cases or more

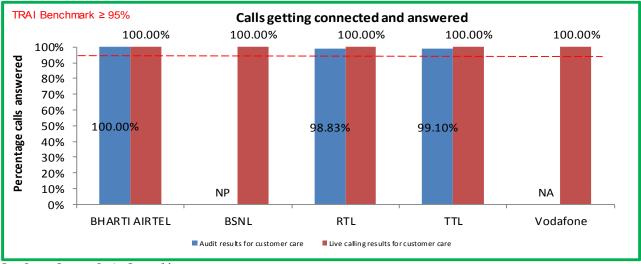

4.3.2 CALLS GETTING CONNECTED AND ANSWERED


Data Source: Customer Service Center of the operators

NP: Not Participated, BSNL did not participate in the Audit for JAS, 2016.

NA: Not Applicable, Vodafone don't have customer care center, customer directly contact their respective person

All operators met the TRAI benchmark in terms of number of IVR calls being connected and answered. However, during live calling, performance all operators met the benchmark level.



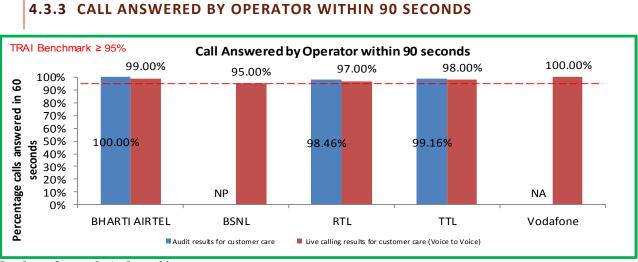

Data Source: Customer Service Center of the operators

NP: Not Participated, BSNL did not participate in the Audit for JAS, 2016.

NA : Not applicable, Vodafone don't have customer care center, customer directly contact their respective person

The benchmark of 95% of voice to voice calls answered within stipulated time of 90 seconds was met by all operators.



4.4 CUSTOMER CARE PROMPTNESS

4.4.1 PARAMETER EXPLANATION

4.4.1.1 AUDIT PROCEDURE


IMRB Auditors collected and verified data pertaining to -

Processing of closure request (Following key points were taken care of while verifying the data)

- Solution The operator includes all Requests for volunteer Permanent Closure and External (shifts to other exchanges) Shift requests received at their exchange.
- by DNP (due to Non payment) cases are excluded.
- ♦ All holidays are excluded for calculating 7 days.
- Solution Closure requests attended in the previous months are excluded
- 🗞 The period for closure starts from the time of submission of application by the subscriber.

4.4.1.2 BENCHMARK

 \clubsuit Processing of closure requests within 7 days = 100%

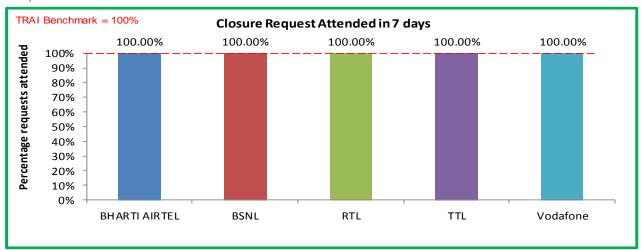

4.4.2 FINDINGS - CLOSURE REQUEST ATTENDED IN 7 DAYS

Data Source: Customer Service Center of the operators

All operators met the benchmark.



4.5 TIME TAKEN TO REFUND DEPOSIT AFTER CLOSURE

4.5.1 PARAMETER EXPLANATION

4.5.1.1 AUDIT PROCEDURE

IMRB Auditors verified and collected data pertaining to -


- Solution Cases requiring refund of deposits after closure are to be included.
- Solution Time taken starts from the date on which the closure is made by the service provider and ends at the date on which refund is received by the customer

4.5.1.2 COMPUTATIONAL METHODOLOGY

Percentage of cases where refund has been made within stipulated time = (Total no. of cases where refund was made within stipulated time/ Total no. of cases requiring refunds)*100

4.5.1.3 BENCHMARK

 \checkmark Time taken to refund = 100% within 60 days

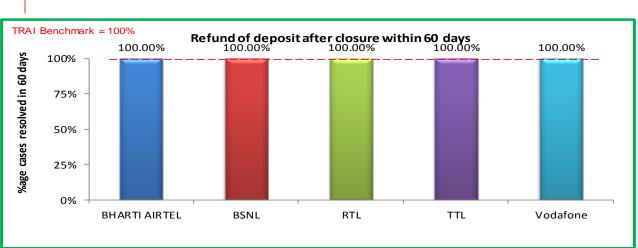

4.5.2 FINDINGS - REFUND OF DEPOSIT AFTER CLOSURE WITHIN 60 DAYS

Data Source: Customer Service Center of the operators

All operators met the TRAI benchmark for refund of deposit.



ANNEXURE – JAS'16 5

5.1 FAULT INCIDENCE / CLEARANCE STATISTIC

	Audit Res	ults for Fault rep	air			
Fault incidences	Benchmark	BHARTI AIRTEL	BSNL	RTL	Π	Vodafone
Faults incidences (Urban)	≤ 7	1.35%	5.20%	0.09%	1.20%	0.37%
Fault repair (Urban areas)	Benchmark	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone
Total No. of faults registered during the quarter		25	4239	209	1563	0
No. of faults repaired by next working day during the quarter		23	4192	209	1490	o
Percentage of faults repaired by next working day during the quarter	≥ 85%	91.40%	98.89%	100.00%	95.33%	100.00%
No. of faults repaired within 5 days during the quarter		25	4239	209	1563	0
Percentage of faults repaired within 5 days during the quarter	100%	100.00%	100.00%	100.00%	100.00%	100.00%
Fault repair (Rural & Hilly areas)	Benchmark	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone
Total No. of faults registered during the quarter		NA	320	NA	NA	NA
No. of faults repaired by next working day during the quarter		NA	285	NA	NA	NA
Percentage of faults repaired by next working day during the quarter	≥75%	NA	89.06%	NA	NA	NA
No. of faults repaired within 7 days during the quarter		NA	315	NA	NA	NA
Percentage of faults repaired within 7 days during the quarter	100%	NA	98.44%	NA	NA	NA

Benchmark	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone
100%	100.00%	NA	NA	NA	NA
100%	NA	NA	NA	NA	NA
100%	NA	NA	NA	NA	NA
Benchmark	BHARTI AIRTEL	BSNL	RTL	TTL	Vodafone
≤ 10 Hrs	6.15	7.20	4.80	4.00	1.25
	100% 100% 100% Benchmark	100% 100.00% 100% NA 100% NA Benchmark BHARTI AIRTEL ≤ 10 Hrs 6.15	100% 100.00% NA 100% NA NA 100% NA NA 100% NA NA Benchmark BHARTI AIRTEL BSNL ≤ 10 Hrs 6.15 7.20	100% 100.00% NA NA 100% NA NA NA 100% NA NA NA 100% NA NA NA Benchmark BHARTI AIRTEL BSNL RTL	100% 100.00% NA NA NA 100% NA NA NA NA Benchmark BHARTI AIRTEL BSNL RTL TTL ≤ 10 Hrs 6.15 7.20 4.80 4.00

Data Source: Operations and Maintenance Center (OMC) of the operators

	Live call	ing for fault repai	ir			
Urban area	Benchmark	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone
Total Number of calls made		25	100	50	100	NP
Number of cases where faults were repaired by next working day		22	75	47	98	NP
Percentage cases where faults were repaired by next working day	≥ 85%	88%	75%	94%	98%	NP
Number of cases where faults were repaired within 5 days		25	98	50	100	NP
Percentage cases where faults were repaired within 5 days	100%	100.00%	98.00%	100.00%	100.00%	NP
Fault Repair (Rural & Hilly areas)	Benchmark	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone
Total Number of calls made		NA	50	NA	NA	NA
Number of cases where fauls were repaired by next working day		NA	41	NA	NA	NA
Percentage cases where faults were repaired by next working day	≥75%	NA	82.00%	NA	NA	NA
Number of cases where faults were repaired within 7 days		NA	48	NA	NA	NA
Percentage cases where faults were repaired within 7 days	100%	NA	96.00%	NA	NA	NA

Data Source: Live calls made by auditors from operator's network

NA: Operators does not have network presence in rural and hilly areas.



5.2 POI CONGESTION

POI Congestion								
Audit Results for POI Congestion - Consolidated								
POI congestion	Benchmark	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone		
Traffic failed on all POI's (Average of 3 months)	≤ 0.5%	0.00%	0.00%	0.00%	0.00%	0.00%		
	Live measureme	nt results for POI	congestion					
POI congestion	Benchmark	BHARTI AIRTEL	BSNL	RTL	Πι	Vodafone		
Traffic failed on all POI's	≤0.5%	0.00%	0.00%	0.00%	0.00%	0.00%		

Data Source: Network Operations Center (NOC) of the operators

5.3 METERING AND BILLING CREDIBILITY

Audit Results for Billing performance									
Billing Performance	Benchmark	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone			
	Bi	lling diputes							
Total bills generated during the quarter		228859	67451	28947	4567	266			
Total number of bills disputed		24	23	8	0	0			
Percentage bills disputed (Average of 3 billing cycles)	≤ 0.1%	0.01%	0.03%	0.03%	0.00%	0.00%			
Resolution of billing complaints									
Total number of billing/charging complaints		109	23	8	NA	NA			
Total complaints resolved in 4 weeks from date of receipt		109	23	8	NA	NA			
Percentage complaints resolved within 4 weeks of date of receipt	≥ 98%	100.00%	100.00%	100.00%	NA	NA			
Total complaints resolved in 6 weeks from date of receipt		109	23	8	NA	NA			
Percentage complaints resolved within 6 weeks of date of receipt	100%	100.00%	100.00%	100.00%	NA	NA			
	Period of ap	plying credit / w	aiver						
No. of complaints resolved in favour of the customer during the quarter		24	23	8	NA	NA			
No. of complaints disposed on account of not considered as valid complaints		24	23	8	NA	NA			
Percentage cases in which credit/waiver was received within 1 week	100%	100.00%	100.00%	100.00%	NA	NA			

Data Source: Billing Center of the operators

Live calling results for resolution of billing complaints								
Resolution of billing complaints	Benchmark	BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone		
Total Number of calls made		109	20	NA	NA	NA		
Number of cases resolved in 4 weeks		109	20	NA	NA	NA		
Percentage cases resolved in 4 weeks	≥ 98%	100.00%	100.00%	NA	NA	NA		
Total complaints resolved in 6 weeks from date of receipt		109	20	NA	NA	NA		
Percentage complaints resolved within 6 weeks of date of receipt	100%	100.00%	100.00%	NA	NA	NA		

Data Source: Billing Center of the operators



5.4 RESPONSE TIME TO CUSTOMER FOR ASSISTANCE

Audit results for customer care								
Customer Care Assessment	Benchmark	BHARTI AIRTEL	BSNL	RTL	Πι	Vodafone		
Total no. of call attempts to call centre / customer care nos.		114499	NP	36980	4539	NA		
No. of calls connected and answered successfully to call centre / customer care nos.		114499	NP	36548	4498	NA		
Percentage of calls getting connected and answered electronically	≥ 95%	100.00%	NP	98.83%	99.10%	NA		
Au	dit results for cu	ustomer care (voi	ce to voice)					
Total no. of call attempts to call centre / customer care (voice to voice)		14707	NP	36980	4539	NA		
No. of calls connected and answered successfully to call centre / customer care nos.		14707	NP	36409	4501	NA		
Percentage of calls answered by the operators (voice to voice) within 90 seconds (Avg of 3 months)	≥ 95%	100.00%	NP	98.46%	99.16%	NA		

Live calling results for customer care								
Customer Care Assessment	Benchmark	BHARTI AIRTEL	BSNL	RTL	Πι	Vodafone		
Total Number of calls made		100	100	100	100	100		
Total Number of calls getting connected and answered		100	100	100	100	100		
Percentage calls getting connected and answered	≥ 95%	100.00%	100.00%	100.00%	100.00%	100.00%		
Live	alling results for	customer care (Voice to Voice)					
Customer Care Assessment	Benchmark	BHARTI AIRTEL	BSNL	RTL	Πι	Vodafone		
Total Number of calls received		100	100	100	100	100		
Total Number of calls answered within 90 seconds		99	95	97	98	100		
Percentage calls answered within 90 seconds	≥ 95%	99.00%	95.00%	97.00%	98.00%	100.00%		
Data Source: Customer Service Center of the operators								

Data Source: Customer Service Center of the operators

5.5 TIME TAKEN FOR REFUND OF DEPOSITS AFTER CLOSURE

Audit results for refund of deposits								
Refund Benchmark BHARTI AIRTEL BSNL RTL TTL Vodafone								
Total number of cases requiring refund of deposits		3	173	10	45	1		
Total number of cases where refund was made within 60 days		3	173	10	45	1		
Percentage cases in which refund was receive within 60 days	100%	100.00%	100.00%	100.00%	100.00%	100.00%		

Data Source: Billing Center of the operators

5.6 LIVE CALLING FOR LEVEL 1 SERVICES

Live calling for level 1 services								
Level 1 services Benchmark BHARTI AIRTEL BSNL RTL TTL Vodafone								
Total no. of calls made		300	300	300	300	300		
Calls answered		276	280	275	270	273		
Percentage of Calls answered	≥ 90%	92.00%	93.33%	91.67%	90.00%	91.00%		

Data Source: Live calling conducted by auditors from operator's network

5.7 EXCHANGE CAPACITY AND SUBSCRIBERS

Exchange capacity and Subscribers							
Exchange Capacity & Subscribers		BHARTI AIRTEL	BSNL	RTL	ΠL	Vodafone	
Equipped Capacity of the exchange (in erlangs)		NP	350000	140000	NP	12390	
Total number of customers served		NP	272232	80953	NP	85	



5.7.1 DETAILED LIVE CALLS MADE FOR LEVEL 1 SERVICES

	Airtel				
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		30	28
101	Fire	Y		30	28
102	Ambulance	Y		30	29
104	Health Information Helpline	Y		30	27
108	Emergency and Disaster Management Helpline	Y		30	28
138	All India Helpine for Passangers		N		
149	Public Road Transport Utility Service		N		
181	Chief Minister Helpline	Y		30	25
182	Indian Railway Security Helpline		N		
1033	Road Accident Management Service		N		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		N		
1056	Emergency Medical Services		N		
106X	State of the Art Hospitals		N		
1063	Public Grievance Cell DoT Hq		N		
1064	Anti Corruption Helpline	Y		30	28
1070	Relief Commission for Natural Calamities		N		
1071	Air Accident Helpline		N		
1072	Rail Accident Helpline	Y		30	28
1073	Road Accident Helpline		N		
1077	Control Room for District Collector	Y		30	26
1090	Call Alart (Crime Branch)		N		
1091	Women Helpline	Y		30	29
1097	National AIDS Helpline to NACO		N		
1099	Central Accident and Trauma Services (CATS)		N		
10580	Educationa & Vocational Guidance and Counselling		N		
10589	Mother and Child Tracking (MCTH)		Ν		
10740	Central Pollution Control Board		N		
10741	Pollution Control Board		Ν		
1511	Police Related Service for all Metro Railway Project		N		
1512	Prevention of Crime in Railway		Ν		
1514	National Career Service(NCS)		Ν		
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations		Ν		



155214	Labour Helpline		Ν				
1903	Sashastra Seema Bal (SSB)		N				
1909	National Do Not Call Registry		N				
1912	Complaint of Electricity		N				
1916	Drinking Water Supply	,	Ν				
1950	Election Commission of India		N				
	BSNL						
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected		
100	Police	Y		27	26		
101	Fire	Y		28	27		
102	Ambulance	Y		27	26		
104	Health Information Helpline		Ν				
108	Emergency and Disaster Management Helpline	Y		27	23		
138	All India Helpine for Passangers		Ν				
149	Public Road Transport Utility Service		Ν				
181	Chief Minister Helpline		Ν				
182	Indian Railway Security Helpline		Ν				
1033	Road Accident Management Service	Y		27	25		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		Ν				
1056	Emergency Medical Services		N				
106X	State of the Art Hospitals		Ν				
1063	Public Grievance Cell DoT Hq		Ν				
1064	Anti Corruption Helpline		Ν				
1070	Relief Commission for Natural Calamities	Y		27	25		
1071	Air Accident Helpline		Ν				
1072	Rail Accident Helpline		Ν				
1073	Road Accident Helpline		N				
1077	Control Room for District Collector		Ν				
1090	Call Alart (Crime Branch)		Ν				
1091	Women Helpline	Y		27	26		
1097	National AIDS Helpline to NACO		Ν				
1099	Central Accident and Trauma Services (CATS)		Ν				
10580	Educationa & Vocational Guidance and Counselling		Ν				
10589	Mother and Child Tracking (MCTH)		Ν				
10740	Central Pollution Control Board	Y		27	25		
10741	Pollution Control Board		Ν				
1511	Police Related Service for all Metro Railway Project		Ν				
1512	Prevention of Crime in Railway	Y		28	26		



1514	National Career Service(NCS)		N		1 1			
15100	Free Legal Service Helpline		N					
155304	Municipal Corporations		N					
155214	Labour Helpline		N					
1903	Sashastra Seema Bal (SSB)		N					
1909	National Do Not Call Registry	Y		27	26			
1912	Complaint of Electricity		N					
1916	Drinking Water Supply		N					
1950	Election Commission of India	Y		28	25			
	RCL							
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected			
100	Police	Y		25	23			
101	Fire	Y		25	22			
102	Ambulance	Y		25	24			
104	Health Information Helpline		Ν					
108	Emergency and Disaster Management Helpline		Ν					
138	All India Helpine for Passangers	Y		25	20			
149	Public Road Transport Utility Service		Ν					
181	Chief Minister Helpline		Ν					
182	Indian Railway Security Helpline	Y		25	21			
1033	Road Accident Management Service		Ν					
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		Ν					
1056	Emergency Medical Services		Ν					
106X	State of the Art Hospitals		Ν					
1063	Public Grievance Cell DoT Hq		Ν					
1064	Anti Corruption Helpline		Ν					
1070	Relief Commission for Natural Calamities	Y		25	22			
1071	Air Accident Helpline		Ν					
1072	Rail Accident Helpline		Ν					
1073	Road Accident Helpline		Ν					
1077	Control Room for District Collector		Ν					
1090	Call Alart (Crime Branch)		Ν					
1091	Women Helpline	Y		25	23			
1097	National AIDS Helpline to NACO		Ν					
1099	Central Accident and Trauma Services (CATS)		Ν					
10580	Educationa & Vocational Guidance and Counselling		Ν					
10589	Mother and Child Tracking (MCTH)		Ν					
10740	Central Pollution Control Board	Y		25	20			
10741	Pollution Control Board		Ν					



1511	Police Related Service for all Metro Railway Project		Ν		19
1512	Prevention of Crime in Railway	Ý		25	20
1514	National Career Service(NCS)	-	N		
15100	Free Legal Service Helpline	Y		25	22
155304	Municipal Corporations	Ý		25	19
155214	Labour Helpline	-	N		
1903	Sashastra Seema Bal (SSB)		N		
1909	National Do Not Call Registry		N		
1912	Complaint of Electricity	Y		25	20
1916	Drinking Water Supply	-	N		
1950	Election Commission of India		N		
	TTL				
					0.1
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		27	25
101	Fire	Y		28	25
102	Ambulance	Y		28	26
104	Health Information Helpline		Ν		
108	Emergency and Disaster Management Helpline		Ν		
138	All India Helpine for Passangers	Y		28	24
149	Public Road Transport Utility Service		Ν		
181	Chief Minister Helpline		Ν		
182	Indian Railway Security Helpline	Y		27	25
1033	Road Accident Management Service		Ν		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		Ν		
1056	Emergency Medical Services		Ν		
106X	State of the Art Hospitals		Ν		
1063	Public Grievance Cell DoT Hq		Ν		
1064	Anti Corruption Helpline		Ν		
1070	Relief Commission for Natural Calamities	Y		27	25
1071	Air Accident Helpline		Ν		
1072	Rail Accident Helpline		Ν		
1073	Road Accident Helpline	Y		27	23
1077	Control Room for District Collector		Ν		
1090	Call Alart (Crime Branch)		Ν		
1091	Women Helpline	Y		27	25
1097	National AIDS Helpline to NACO		Ν		
1099	Central Accident and Trauma Services (CATS)		Ν		
10580	Educationa & Vocational Guidance and Counselling		Ν		



10589	Mother and Child Tracking (MCTH)	l	N		
10740	Central Pollution Control Board	Y		27	24
10741	Pollution Control Board		N		
1511	Police Related Service for all Metro Railway Project		Ν		
1512	Prevention of Crime in Railway	Y		27	24
1514	National Career Service(NCS)		Ν		
15100	Free Legal Service Helpline		Ν		
155304	Municipal Corporations		Ν		
155214	Labour Helpline		Ν		
1903	Sashastra Seema Bal (SSB)		Ν		
1909	National Do Not Call Registry		Ν		
1912	Complaint of Electricity	Y		27	24
1916	Drinking Water Supply		Ν		
1950	Election Commission of India		Ν		
	Vodafone				
Level 1 Number	Type of Service	Working	Not Working	Calls Made	Calls Connected
100	Police	Y		30	28
101	Fire	Y		30	27
102	Ambulance	Y		30	29
104	Health Information Helpline		N		
108	Emergency and Disaster Management Helpline		N		
138	All India Helpine for Passangers	Y		30	26
149	Public Road Transport Utility Service		N		
181	Chief Minister Helpline		N		
182	Indian Railway Security Helpline	Y		30	28
1033	Road Accident Management Service		N		
1037	Public Grievance Cell DoT Hq as 'Telecom Consumer Grievance Redressal Helpline'		N		
1056	Emergency Medical Services		Ν		
106X	State of the Art Hospitals		Ν		
1063	Public Grievance Cell DoT Hq		Ν		
1064	Anti Corruption Helpline		Ν		
					27
1070	Relief Commission for Natural Calamities	Y		30	21
1070 1071	Relief Commission for Natural Calamities Air Accident Helpline	Y	N	30	21
		Y	N N	30	21
1071	Air Accident Helpline	Y		30	
1071 1072	Air Accident Helpline Rail Accident Helpline	Y Y	N	30	28
1071 1072 1073	Air Accident Helpline Rail Accident Helpline Road Accident Helpline		N		
1071 1072 1073 1077	Air Accident Helpline Rail Accident Helpline Road Accident Helpline Control Room for District Collector		N N		



1099	Central Accident and Trauma Services (CATS)		N		
10580	Educationa & Vocational Guidance and Counselling		N		
10589	Mother and Child Tracking (MCTH)		N		
10740	Central Pollution Control Board		N		
10741	Pollution Control Board		N		
1511	Police Related Service for all Metro Railway Project		N		
1512	Prevention of Crime in Railway		N		
1514	National Career Service(NCS)		N		
15100	Free Legal Service Helpline		N		
155304	Municipal Corporations		N		
155214	Labour Helpline		N		
1903	Sashastra Seema Bal (SSB)		N		
1909	National Do Not Call Registry	Y		30	26
1912	Complaint of Electricity		N		
1916	Drinking Water Supply	Y		30	27
1950	Election Commission of India		N		

KANTAR IMRB

SCO 47, 5th Floor, Old Judicial Complex, Sector 15 Part 1, Gurgaon, Haryana – 122001

)+91 (124) 4217300

<u>■</u>www.imrbint.com