



**TELECOM REGULATORY AUTHORITY OF INDIA**

*Independent Drive Test Report*

*Kolkata LSA*

*November<sup>1</sup> 2024*

## Contents

1. Introduction .....	3
2. Executive Summary (LSA).....	3
2.1 Drive test details .....	3
2.2 Drive test routes .....	4
2.3 Summary of areas covered .....	4
2.4 Telecom service providers detected frequency bands .....	5
3. QoS performance analysis-LSA level.....	7
3.1 Overview.....	7
3.2 Voice performance .....	7
3.3 Data performance.....	11
4. Detailed QoS performance analysis .....	13
4.1 Overview.....	13
4.2 City .....	13
4.2.1 Drive test route.....	13
4.2.2 Areas covered .....	14
4.2.3 Voice performance.....	14
4.2.4 Data performance.....	26
4.3 Hotspots .....	28
4.3.1 Locations.....	28
4.3.2 Hotspot covered .....	28
4.3.3 Voice performance.....	29
4.3.4 Data performance.....	30
4.4 Walk Test .....	33
4.4.1 Walk-Test location map.....	33
4.4.2 Walk test covered.....	33
4.4.3 Voice performance.....	34
4.4.4 Data performance .....	36
5. Voice & Data Key findings.....	38
5.1 Overall Voice.....	38
5.2 Overall Data .....	38
5.3 Operator wise Key Findings .....	39
6. Annexure .....	42
6.1 Route wise coverage map .....	42
6.1.1 City .....	42
7. Appendix .....	49

7.1 Appendix-I .....	49
7.1.1 Drive test setup .....	49
7.1.2 Drive test Methodology .....	51
7.2 Appendix-II .....	53
7.2.1 Network Performance Parameters for Voice calls .....	53
7.2.2 Network Performance Parameters Data tests .....	54

## 1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interest of the consumers of telecommunications service.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

## 2. Executive Summary (LSA)

### 2.1 Drive test details


This report covers the findings of the IDT undertaken in Kolkata License Service Area (LSA) during the month November, 2024 under the supervision of TRAI Regional Office (RO), Kolkata. Details of route/ area covered during the IDT is as given below:

Sl. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Kolkata	City	185	05-Nov-2024	06-Nov-2024
2	Kolkata	City (Inter-operator calling)	79	09-Nov-2024	09-Nov-2024
3	Kolkata	Hotspot	5 Locations	07-Nov-2024	07-Nov-2024
4	Kolkata	Walk test	1.34	08-Nov-2024	08-Nov-2024

**Table-1:** Drive test summary

## 2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, inter-operator call test, hotspots and walk test as per the legends shown on the map.

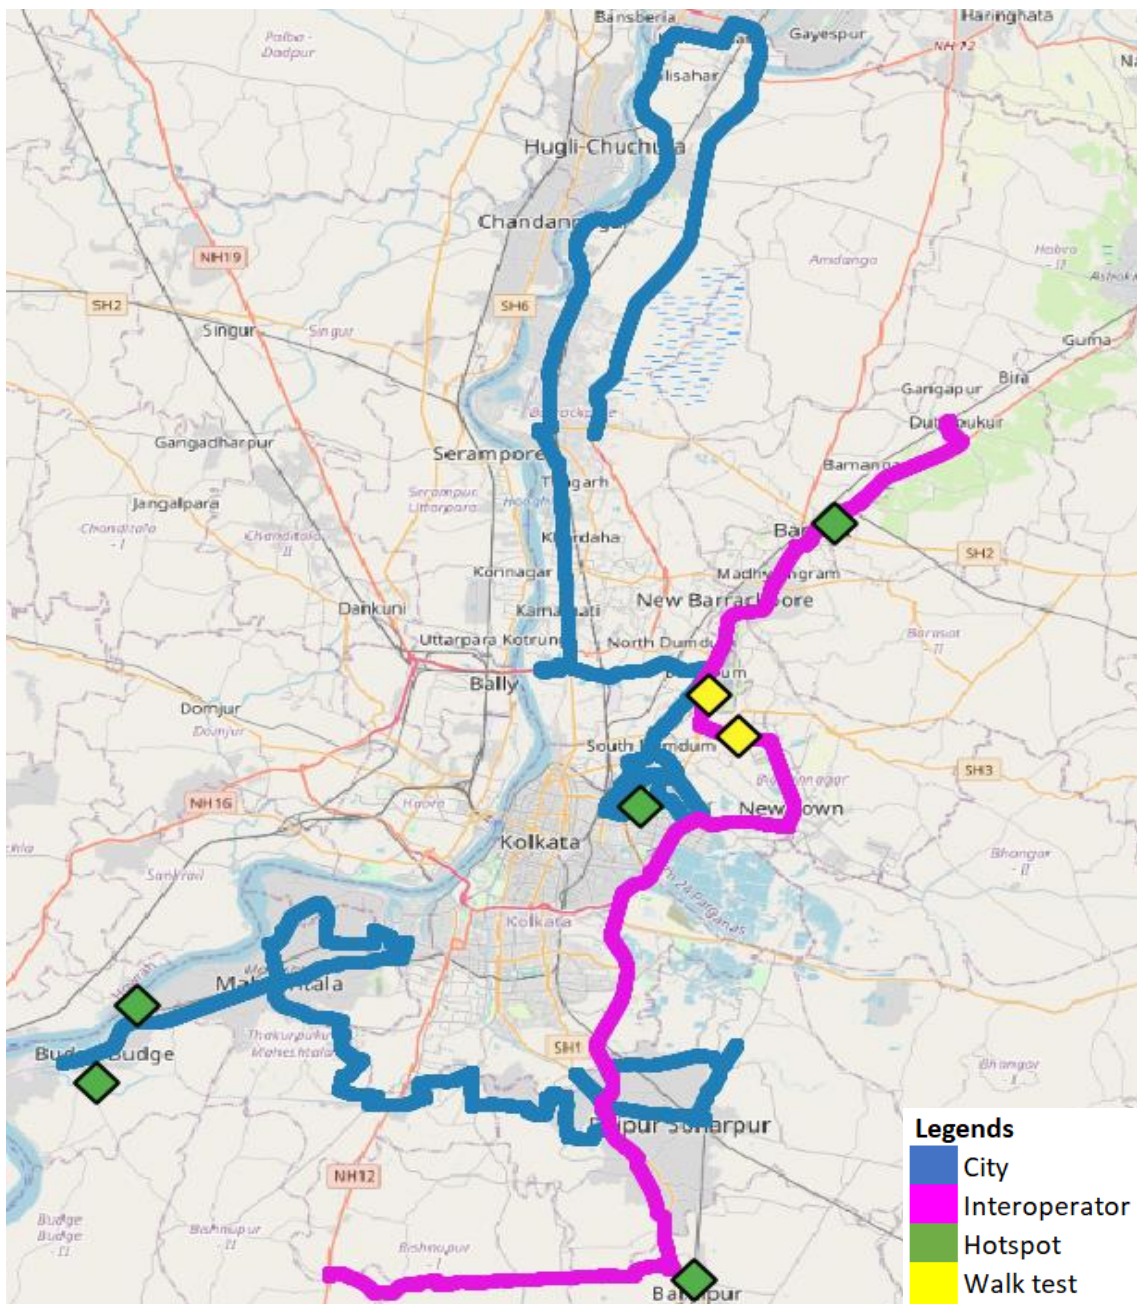

**Figure-1:** Drive test routes

## 2.3 Summary of areas covered

- a) City-** Nearby Budge Budge, Maheshtala, kalua, kamalgazi, panchpota, Lake town, Bidhannagar, Dum Dum, Baranagar, Barrackpore trunk road, Kalyani- Barrackpur expressway etc. (Under North and South 24 Parganas Districts).

**b) Hotspot-**

1. Budge Budge Ferry Ghat
2. Budge Budge Institute of Technology
3. Barasat Government Medical College & Hospital
4. Baruipur Junction
5. City Centre, Salt Lake

**c) Walk test-**

1. City Centre, New town
2. Kolkata Airport

**2.4 Telecom service providers detected frequency bands**

Technologies covered during the IDT and frequency bands in use are summarised in below table

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	900
2	Bharti Airtel Ltd.	4G	900,1800,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	2100,700
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900
10	Vodafone Idea Ltd.	4G	900,1800,2100,2500

**Table-2:** Telecom service provider (TSP) covered in IDT

# QoS Performance Analysis- Kolkata LSA

### 3. QoS performance analysis-LSA level

#### 3.1 Overview


This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the LSA during November-2024 covering city, walk test and hotspots. (Refer Table 1)

#### 3.2 Voice performance

**(a) Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	304	314	302
Call Setup Success Rate %	100.00	98.73	99.67
Drop Call Rate%	0.00	0.97	0.33
Call Setup Time-Average (Second)	3.05	2.51	4.40
Handover Success Rate %	98.86	98.26	99.28

**Table-3:** Summary of voice call performance in 3G/2G network mode only

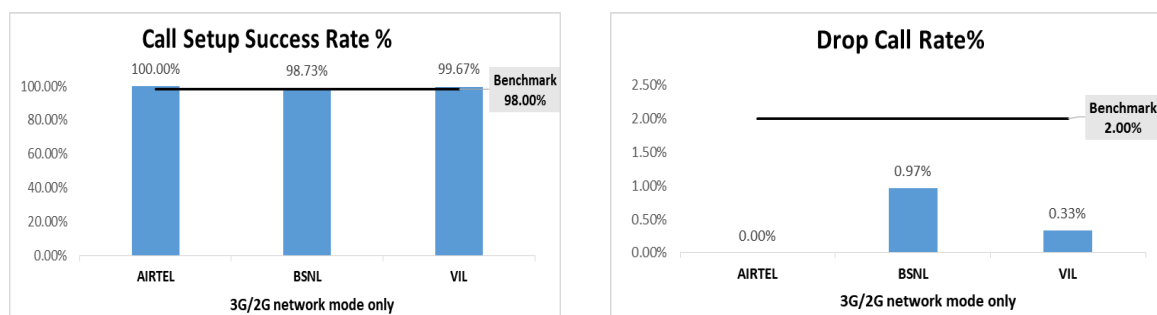

**Figure-2:** Call setup success rate and drop call rate performance

Number of unique cell id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	127	NA
2G	553	389	511

**Table-4:** Technology wise number of network cell id's latched during drive test

Note-


- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.



**(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)**

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	396	390	397	390
Call Setup Success Rate %	100.00	99.23	100.00	100.00
Drop Call Rate%	0.00	2.07	0.25	0.00
Call Setup Time-Average (Second)	0.73	4.00	0.56	0.85
Handover Success Rate %	100.00	98.02	99.96	99.93

**Table-5:** Summary of voice call performance in network auto-selection mode

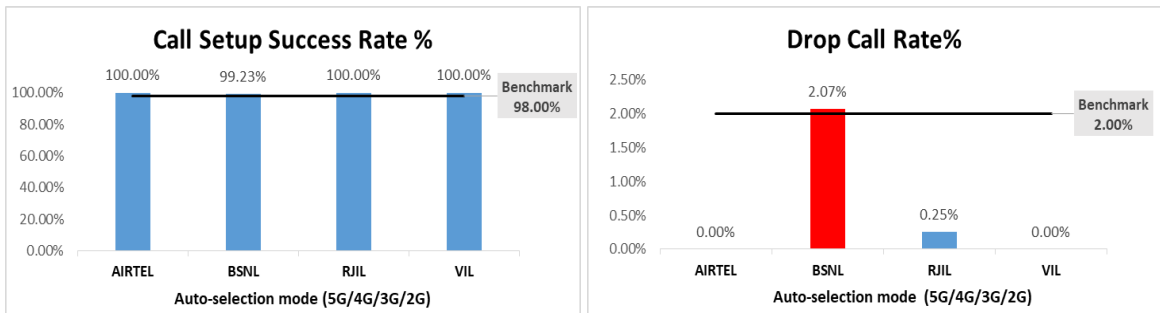

**Figure-3:** Performance for call setup success rate and drop call rate

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	306	319	303	308
Number of silence call for >4 Sec	1	NA	1	10
Silence Call Rate %	0.33	NA	0.33	3.25
Number of silence instances for >4 Sec	1	NA	1	10
Number of silence instances for >3 Sec	1	NA	3	32
Number of silence instances for >2 sec	7	NA	5	124
RTP Jitter (4G & 5G) in ms	4.09	NA	15.10	15.96
Packet loss Rate Downlink %	0.31	NA	0.40	2.57
Packet loss Rate Uplink %	0.34	NA	0.59	2.92

**Table-6:** Summary of silence instances & packet loss rate for mobile to mobile call

Note-
<ul style="list-style-type: none"> <li>NA- Due to unavailability of packet switched (VoLTE &amp; 5G) network in BSNL silence instances are not captured.</li> <li>The call setup success rates for mobile-to-mobile calls have been recorded as follows: Airtel at 99.67%, BSNL at 92.73%, RJIL at 91.54%, and VIL at 99.68%.</li> </ul>

Number of unique cell id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	454	NA
4G	859	215	1382	745
3G	NA	56	NA	NA
2G	0	421	NA	0

**Table-7:** Technology wise number of network cell id's latched during drive test

Note-


- NA- Service provider doesn't provide services in respective technology.
- 0- No calls were found in respective technology.

### (c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS score values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
<b>Total Number of MOS Samples for calls in table-6</b>	2739	2419	2603	2742
<b>Speech Quality (Average MOS Score)</b>	4.03	2.91	3.89	4.28
<b>Number of samples with MOS &gt;=4 to &lt;5 (Excellent)</b>	2300	0	1681	2206
<b>Number of samples with MOS &gt;=3 to &lt;4 (Good)</b>	397	1466	832	325
<b>Number of samples with MOS &gt;=2 to &lt;3 (Fair)</b>	30	663	50	54
<b>Number of samples with MOS &gt;=1 to &lt;2 (Poor)</b>	12	290	40	157
<b>%age of samples with MOS &gt;=4 to &lt;5 (Excellent)</b>	83.97%	0.00%	64.58%	80.45%
<b>%age of samples with MOS &gt;=3 to &lt;4 (Good)</b>	14.49%	60.60%	31.96%	11.85%
<b>%age of samples with MOS &gt;=2 to &lt;3 (Fair)</b>	1.10%	27.41%	1.92%	1.97%
<b>%age of samples with MOS &gt;=1 to &lt;2 (Poor)</b>	0.44%	11.99%	1.54%	5.73%

**Table-8:** Summary of speech quality (MOS) samples

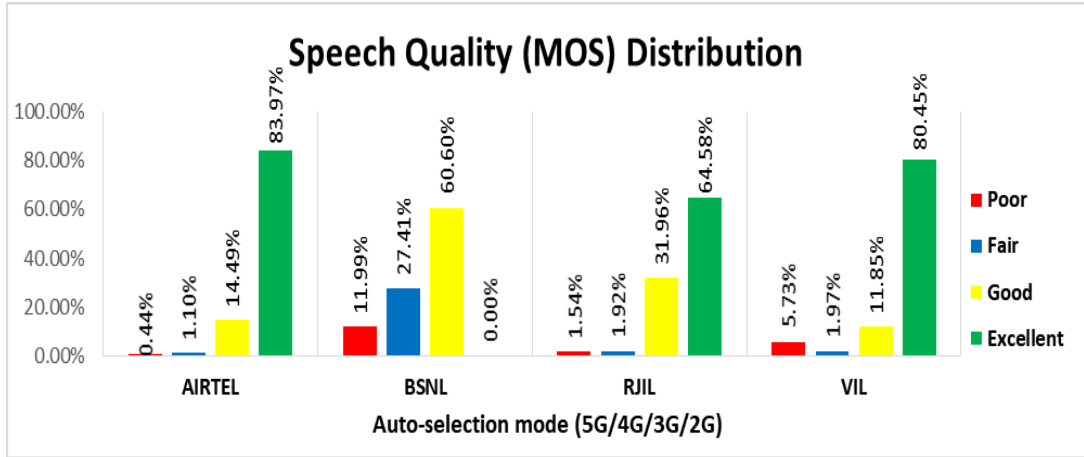

**Figure- 4:** Distribution of samples in MOS score range

**(d) Inter-service provider voice call performance:** To check the performance of inter-service provider call setup success rate, total 184 to 224 inter operator calls were attempted. The Call setup success rate and call setup time observation is as below.

Call setup success rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	100.00
BSNL	100.00	NA	100.00	100.00
RJIL	100.00	100.00	NA	97.32
VIL	99.54	96.88	100.00	NA

**Table-9:** Call setup success rate across service providers

Note-
<ul style="list-style-type: none"> <li>NA- Only Inter-operator calls were measured during test.</li> </ul>

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	5.67	0.88	2.17
BSNL	4.51	NA	4.47	4.43
RJIL	1.62	5.02	NA	1.91
VIL	1.82	5.53	2.17	NA

**Table-10:** Call setup time across service providers


Note-
<ul style="list-style-type: none"> <li>NA- Only inter-operator calls were measured during test</li> </ul>

### 3.3 Data performance

#### (a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	210.84	1.95	309.07	28.92
	80th Percentile	319.72	3.18	482.79	40.16
	20th Percentile	61.02	0.02	110.36	13.90
Upload Throughput (Mbits/s)	Average	47.87	1.68	35.14	11.27
	80th Percentile	77.64	2.29	59.77	18.41
	20th Percentile	18.26	0.88	6.35	3.62
Latency (ms)	Average	22.01	195.20	21.87	36.01

**Table-11:** Summary of data performance in network auto-selection mode

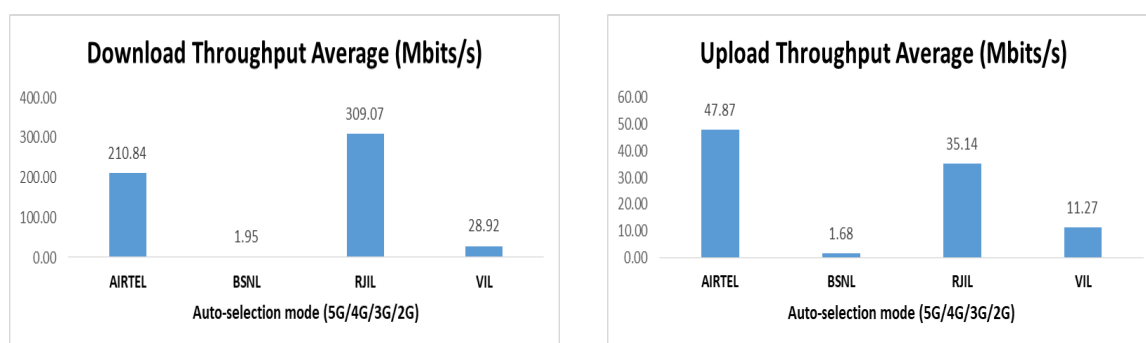

**Figure- 5:** Download and upload throughput

Number of unique cell id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode 5G/4G/3G/2G			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	869	NA
4G	843	139	145	775
3G	NA	84	NA	NA
2G	0	15	NA	1

**Table-12:** Technology wise number of network cell id's latched during drive test

Note-

- NA- Service provider doesn't provide services in respective technology.

# Detailed QoS Performance Analysis

## 4. Detailed QoS performance analysis


### 4.1 Overview

This section covers analysis on performance of various categories of drives like City, Hotspots & Walk test for all Telecom service providers, the results of drive tests conducted is shown individually for respective areas/locations.

### 4.2 City

Drive test has been conducted from 5<sup>th</sup> November 2024 to 6<sup>th</sup> November 2024 in Kolkata. (Refer Table-1)

#### 4.2.1 Drive test route

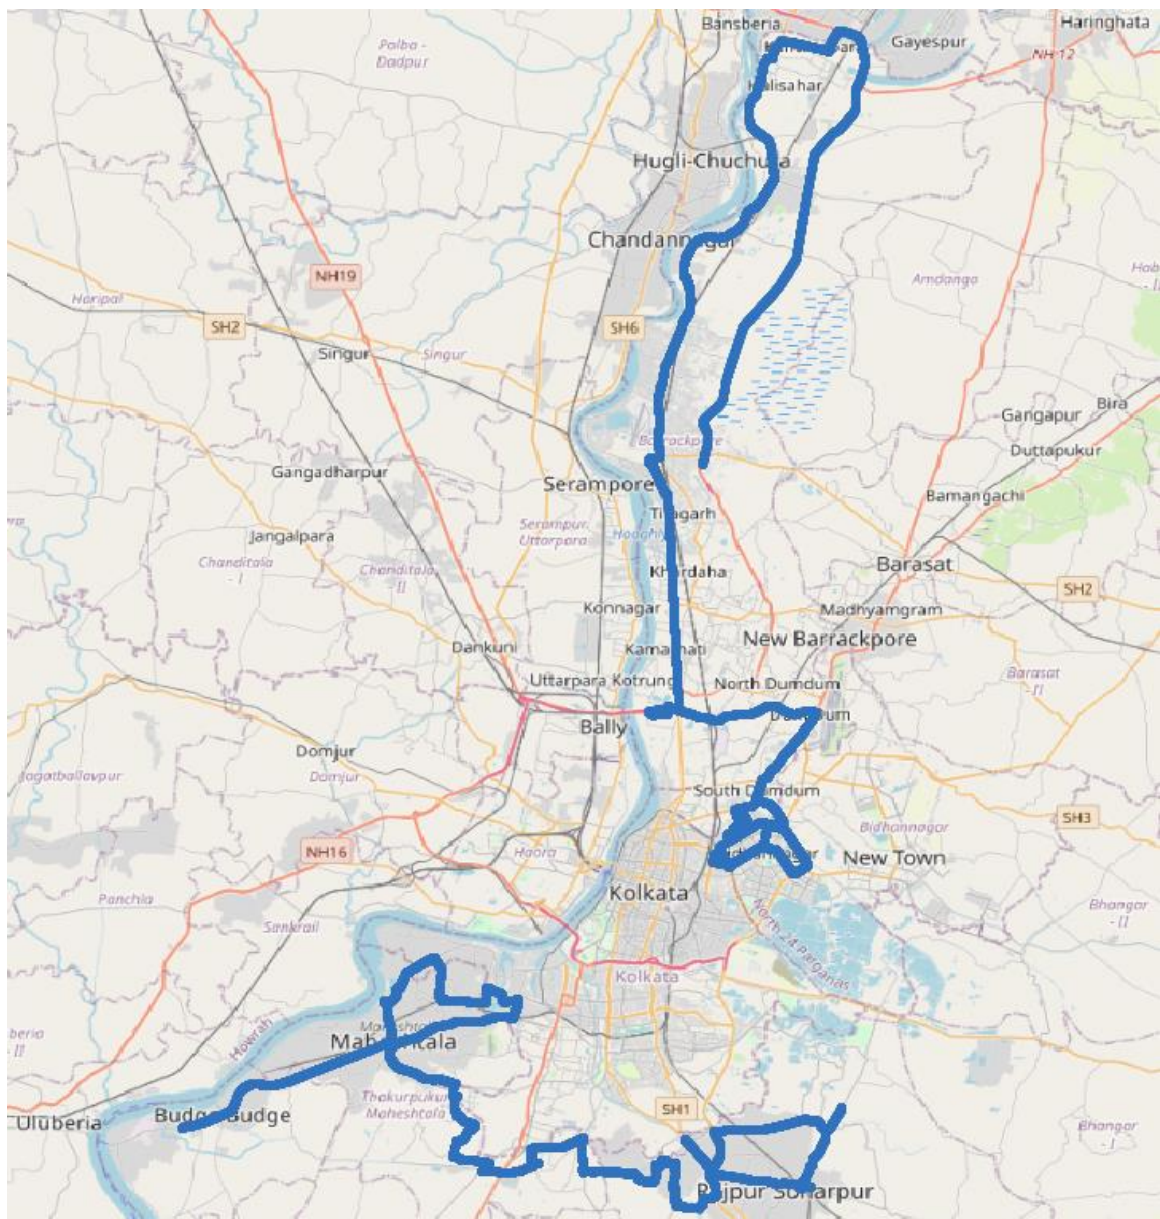

**Figure- 6:** Drive test routes

## 4.2.2 Areas covered


Nearby Budge Budge, Maheshtala, Kalua, Kamalgazi, Panchpota, Lake town, Bidhannagar, Dum Dum, Baranagar, Barrackpore trunk road, Kalyani-Barrackpur expressway etc. (Under North and South 24 Parganas Districts).

## 4.2.3 Voice performance


**(a) Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
<b>Call Attempts</b>	304	314	302
<b>Call Setup Success Rate %</b>	100.00	98.73	99.67
<b>Drop Call Rate%</b>	0.00	0.97	0.33
<b>Call Setup Time-Average (Second)</b>	3.05	2.51	4.40
<b>Handover Success Rate %</b>	98.86	98.26	99.28

**Table-13:** Summary of voice call performance in 3G/2G network mode only

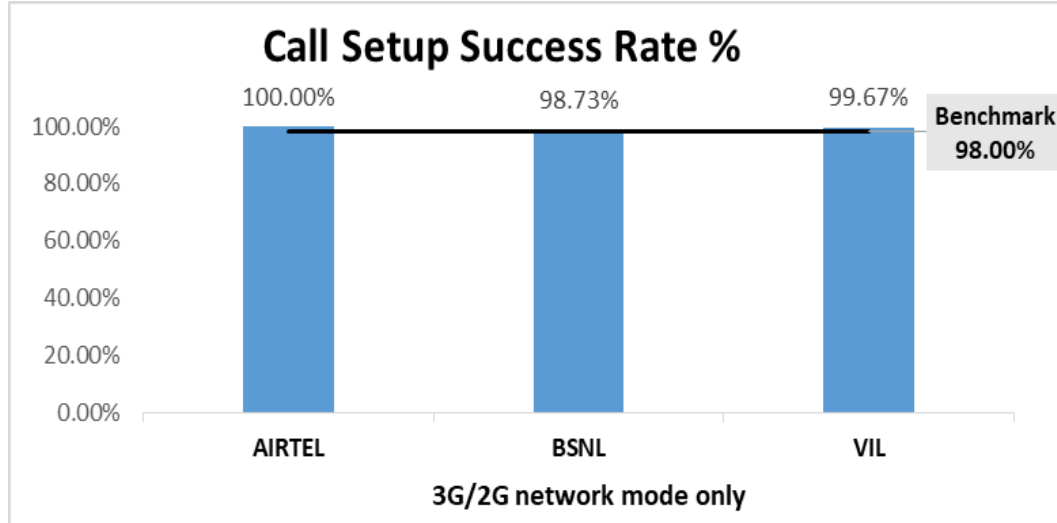

**Figure-7:** Performance for call setup success rate

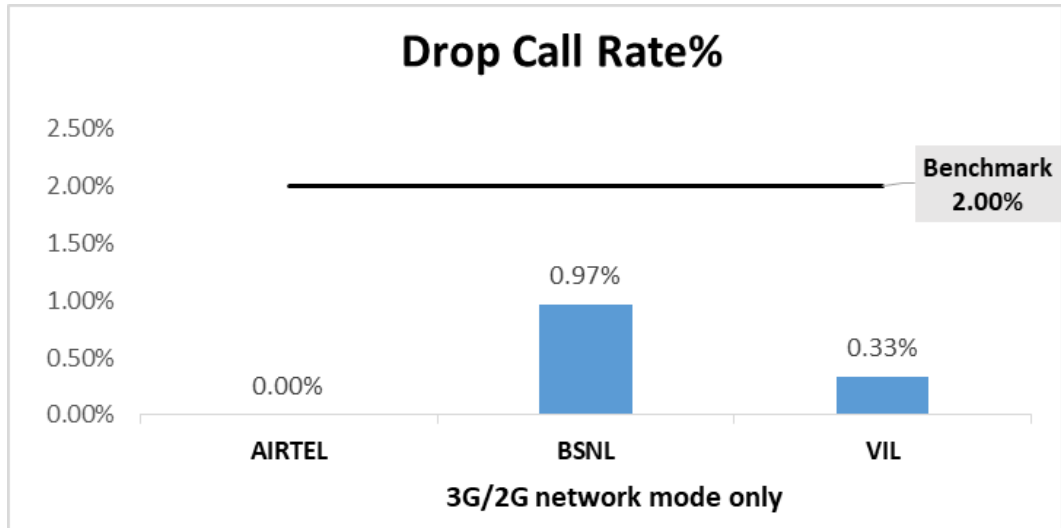

**Figure-8:** Performance for drop call rate

**(b) Network Technology:** This section represent time spent on various network technologies.


Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	9.30%	NA
2G	99.99%	90.70%	99.92%
No service	0.01%	0.00%	0.08%

**Table-14:** Time spent on technology during drive test 3G/2G network mode only


Note-

- No service- Limited service and not latched on any available technology.



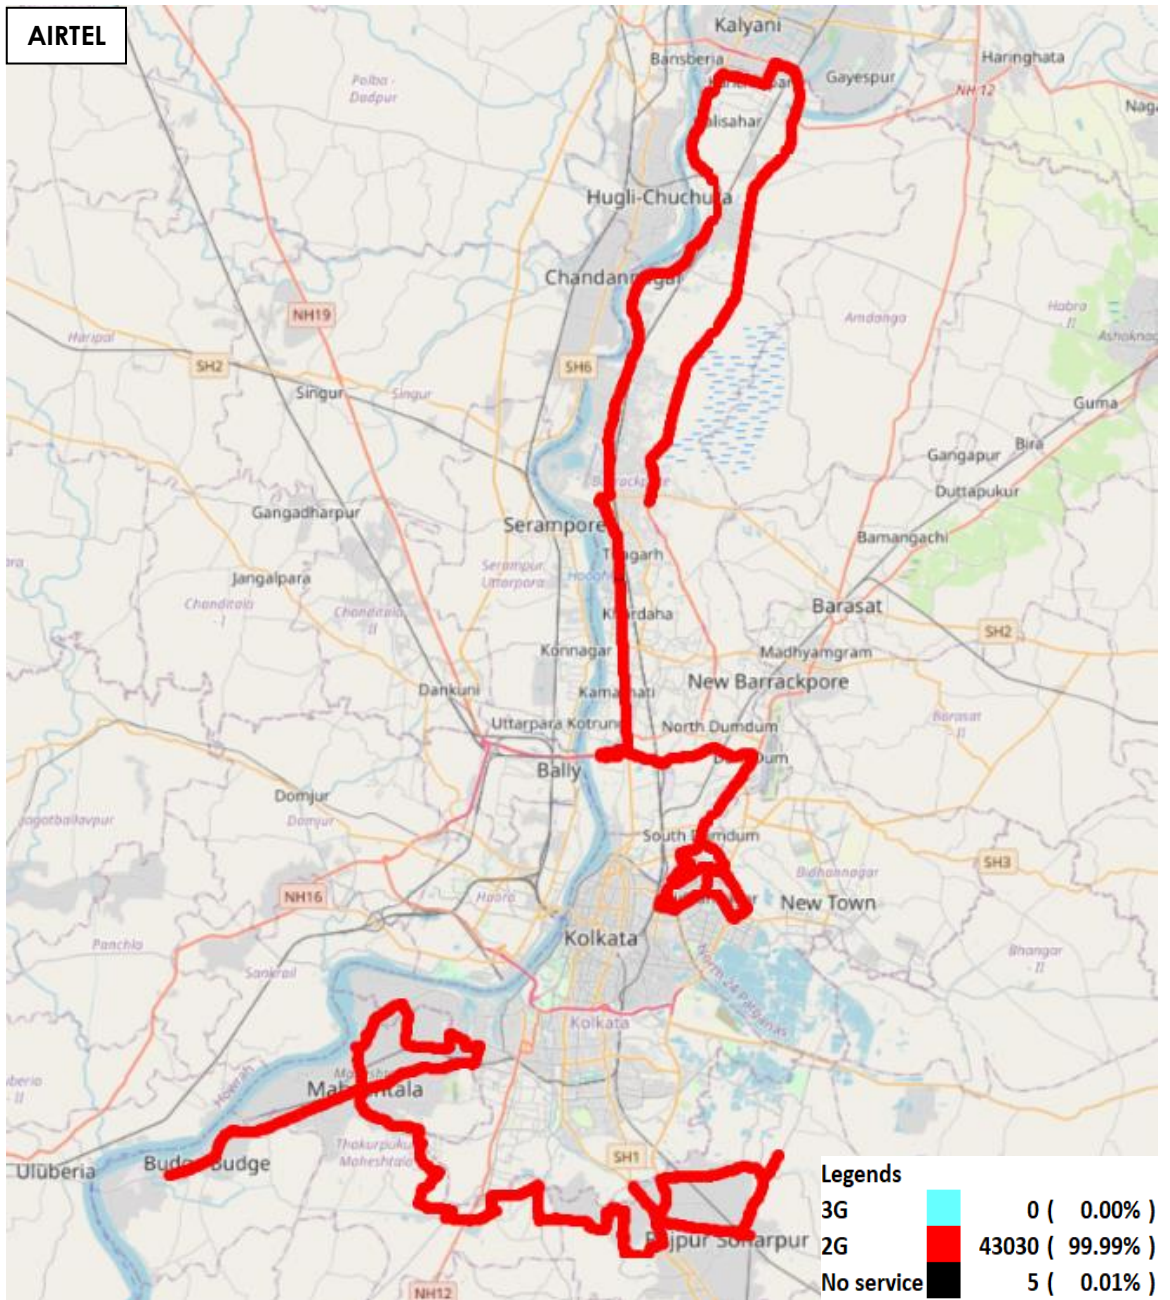

**Figure-9:** Serving technology plots 3G/2G network mode - AIRTEL

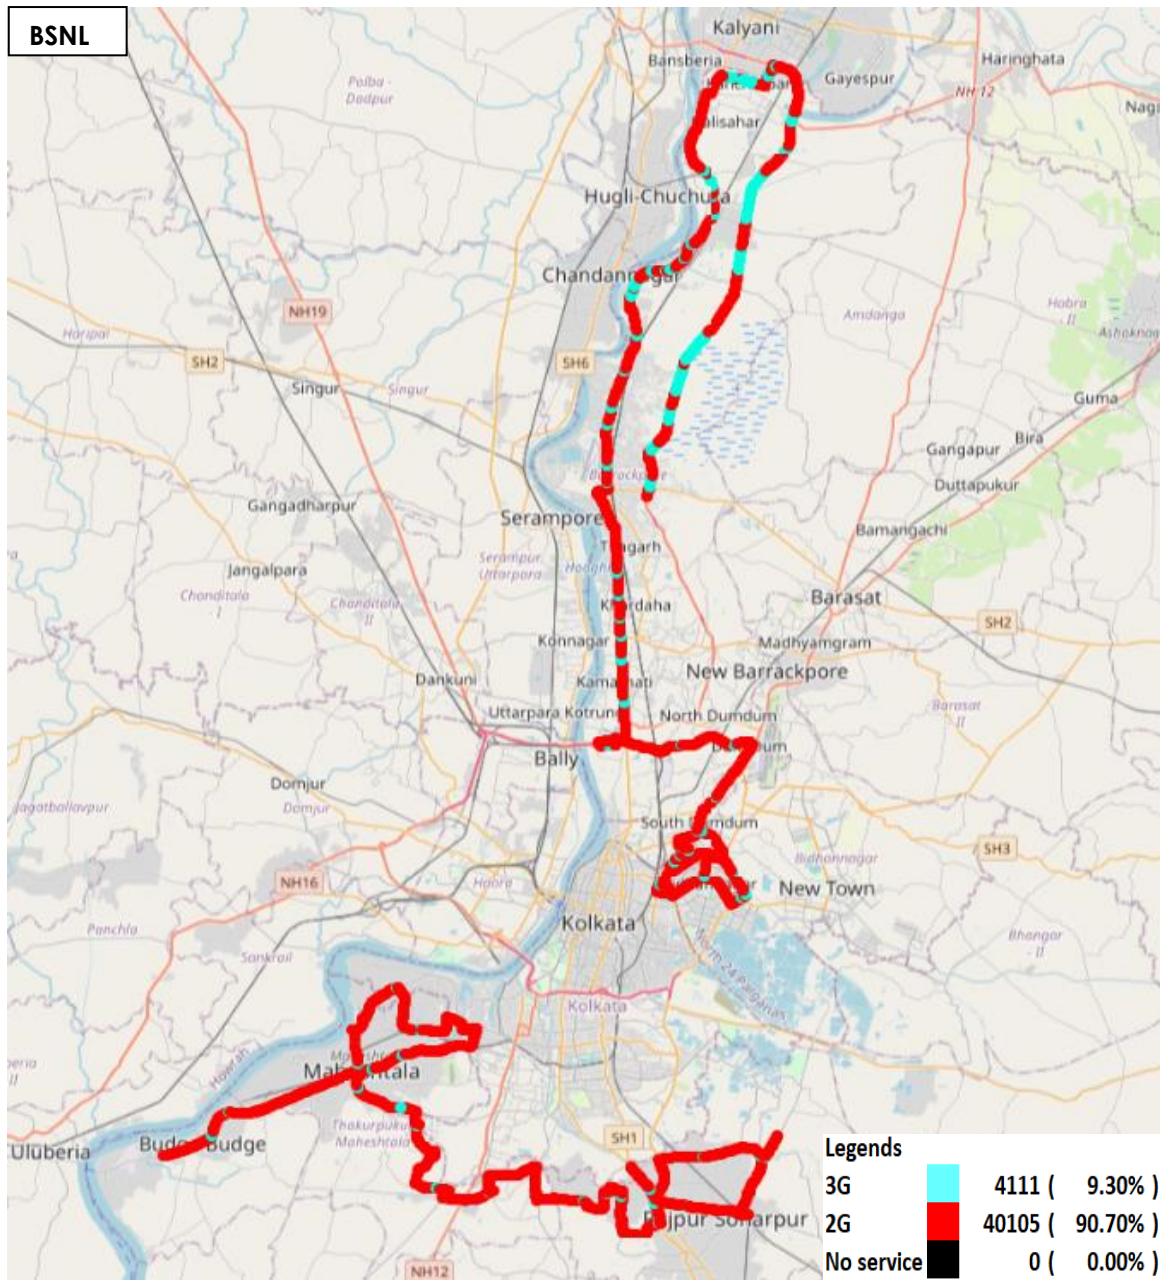

**Figure-10:** Serving technology plots 3G/2G network mode - BSNL


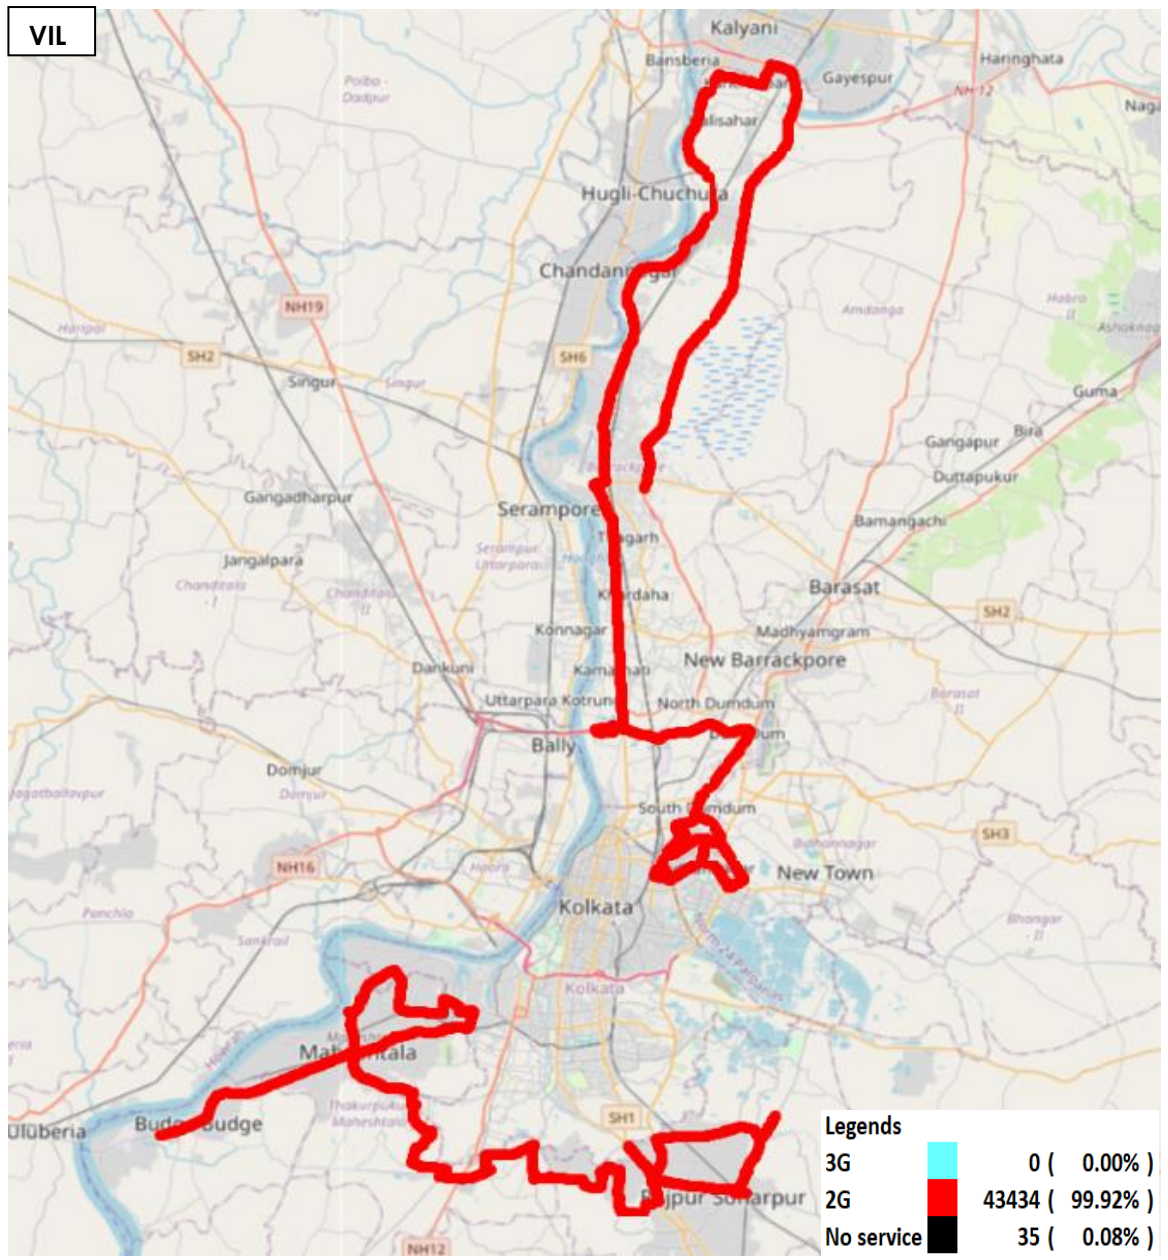


Figure-11: Serving technology plots 3G/2G network mode –VIL

**(C) Network Signal Strength distribution:** The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 31, 32 & 33 for map view)

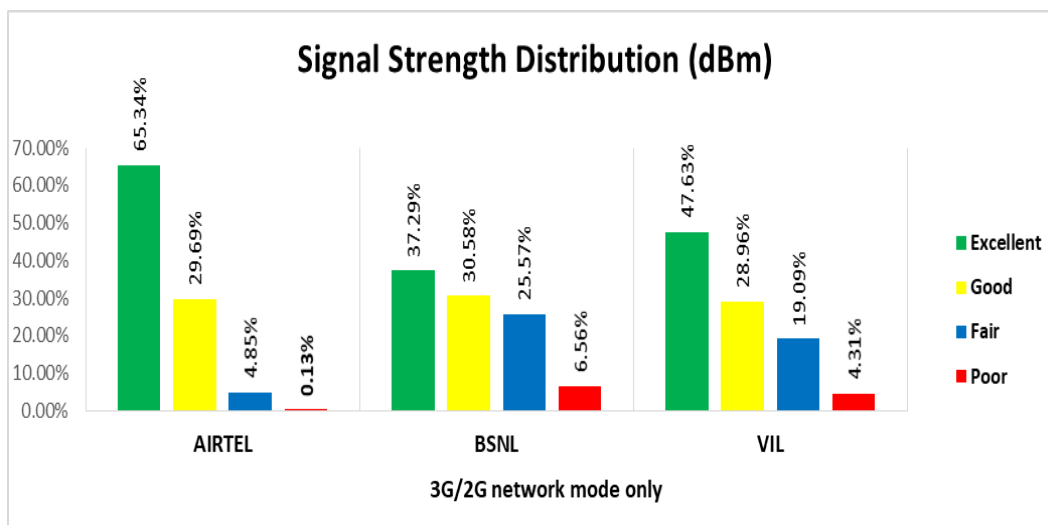

**Figure-12:** Signal strength distribution 3G/2G network mode only


**Observations:**

- Airtel has 65% of samples falling in excellent signal strength category.
- BSNL has 37% of samples falling in excellent signal strength category.
- VIL has 48% of samples falling in excellent signal strength category.


**(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)**

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	318	313	319	313
Call Setup Success Rate %	100.00	99.04	100.00	100.00
Drop Call Rate%	0.00	2.26	0.31	0.00
Call Setup Time Average (Second)	0.74	4.02	0.56	0.84
Handover Success Rate %	100.00	97.89	99.96	99.93

**Table-15:** Summary of voice call performance in network auto-selection mode

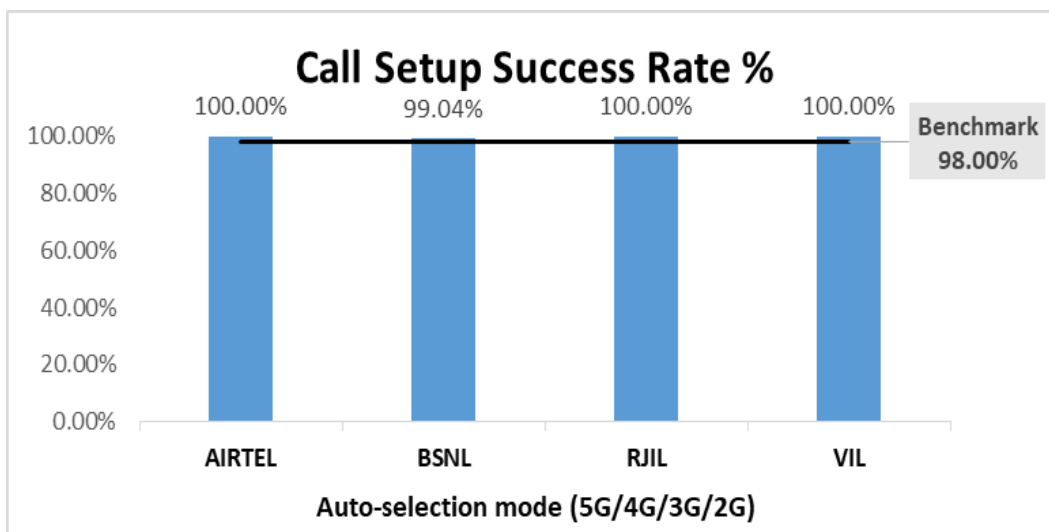

**Figure-13:** Performance for call setup success rate

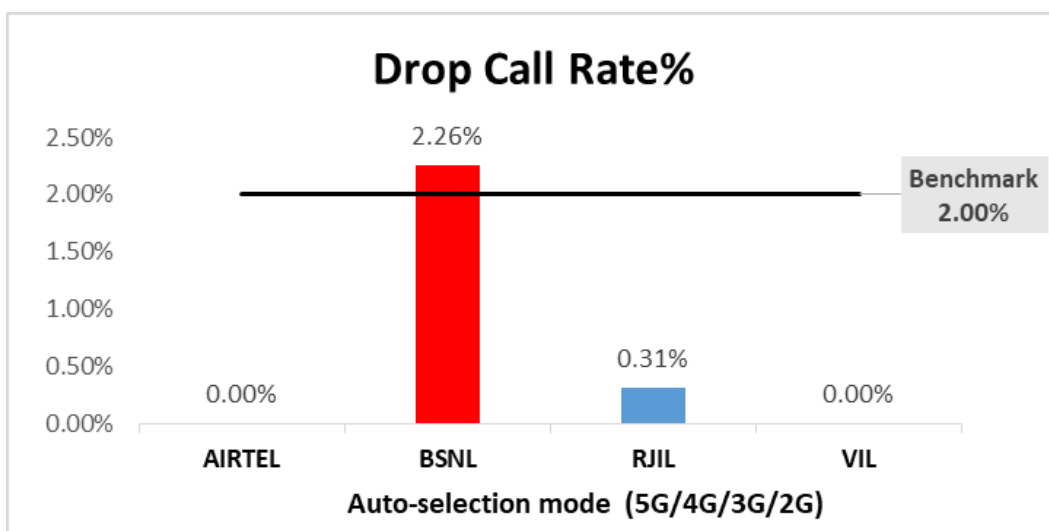

**Figure-14:** Performance for drop call rate

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
<b>Call Established (within service provider Network)</b>	306	319	303	308
<b>Number of silence call for &gt;4 Sec</b>	1	NA	1	10
<b>Silence Call Rate %</b>	0.33	NA	0.33	3.25
<b>Number of silence instances for &gt;4 Sec</b>	1	NA	1	10
<b>Number of silence instances for &gt;3 Sec</b>	1	NA	3	32
<b>Number of silence instances for &gt;2 sec</b>	7	NA	5	124
<b>RTP Jitter (4G &amp; 5G) in ms</b>	4.09	NA	15.10	15.96
<b>Packet loss Rate Downlink %</b>	0.31	NA	0.40	2.57
<b>Packet loss Rate Uplink %</b>	0.34	NA	0.59	2.92

**Table-16:** Summary of silence instances & packet loss rate for mobile to mobile call


## Note-

- Due to unavailability of packet switched (VoLTE & 5G) network in BSNL silence instances are not captured.
- The call setup success rates for mobile-to-mobile calls have been recorded as follows: Airtel at 99.67%, BSNL at 92.73%, RJIL at 91.54%, and VIL at 99.68%.

**(e)Mean Opinion Score (MOS) performance for speech quality:**

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS score values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	2739	2419	2603	2742
Speech Quality (Average MOS Score)	4.03	2.91	3.89	4.28
Number of samples with MOS $\geq 4$ to $< 5$ (Excellent)	2300	0	1681	2206
Number of samples with MOS $\geq 3$ to $< 4$ (Good)	397	1466	832	325
Number of samples with MOS $\geq 2$ to $< 3$ (Fair)	30	663	50	54
Number of samples with MOS $\geq 1$ to $< 2$ (Poor)	12	290	40	157
%age of samples with MOS $\geq 4$ to $< 5$ (Excellent)	83.97%	0.00%	64.58%	80.45%
%age of samples with MOS $\geq 3$ to $< 4$ (Good)	14.49%	60.60%	31.96%	11.85%
%age of samples with MOS $\geq 2$ to $< 3$ (Fair)	1.10%	27.41%	1.92%	1.97%
%age of samples with MOS $\geq 1$ to $< 2$ (Poor)	0.44%	11.99%	1.54%	5.73%

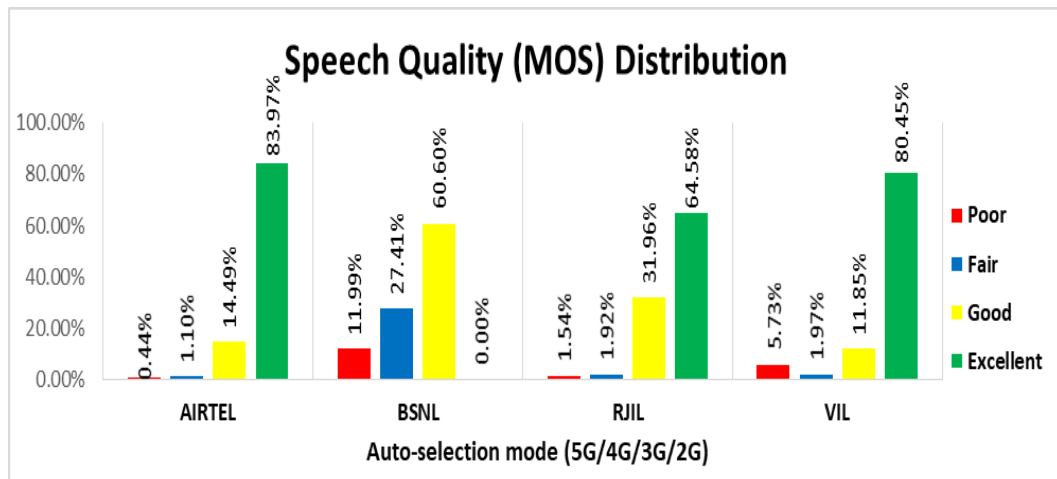**Table-17:** Summary of speech quality (MOS) samples**Figure-15:** Distribution of samples in MOS score range


**(f) Network Technology:** This section represent time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	12.60%	NA	15.11%	NA
4G	87.40%	10.98%	84.89%	100.00%
3G	NA	4.67%	NA	NA
2G	0.00%	84.05%	NA	0.00%
No service	0.00%	0.30%	0.00%	0.00%


**Table-18:** Time spent on technology during drive test

Note-

- No service- Limited service and not latched on any available technology.

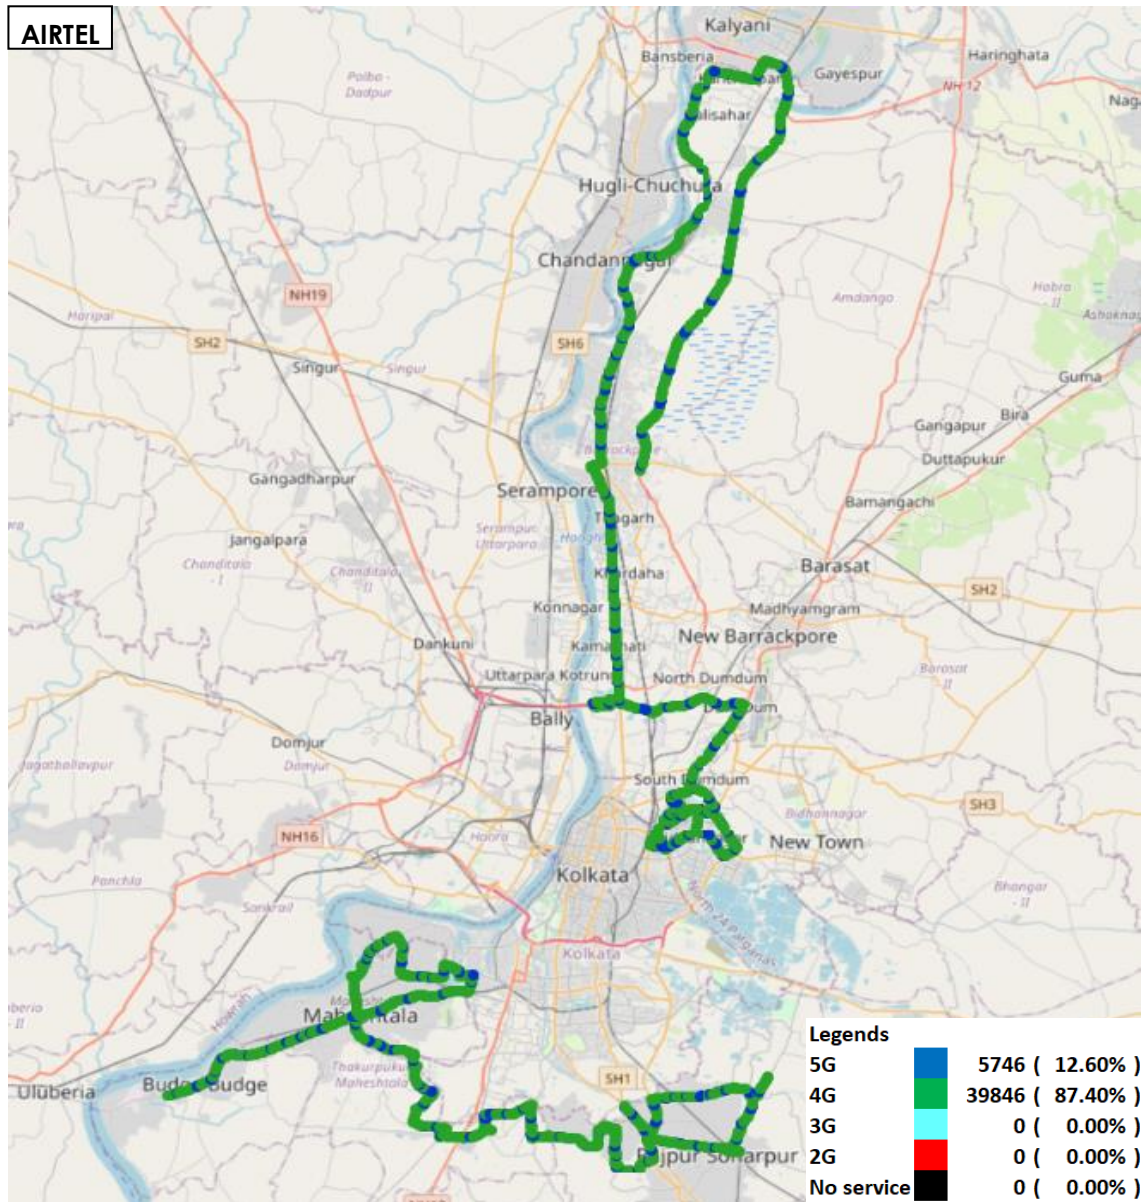


**Figure-16:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) -AIRTEL

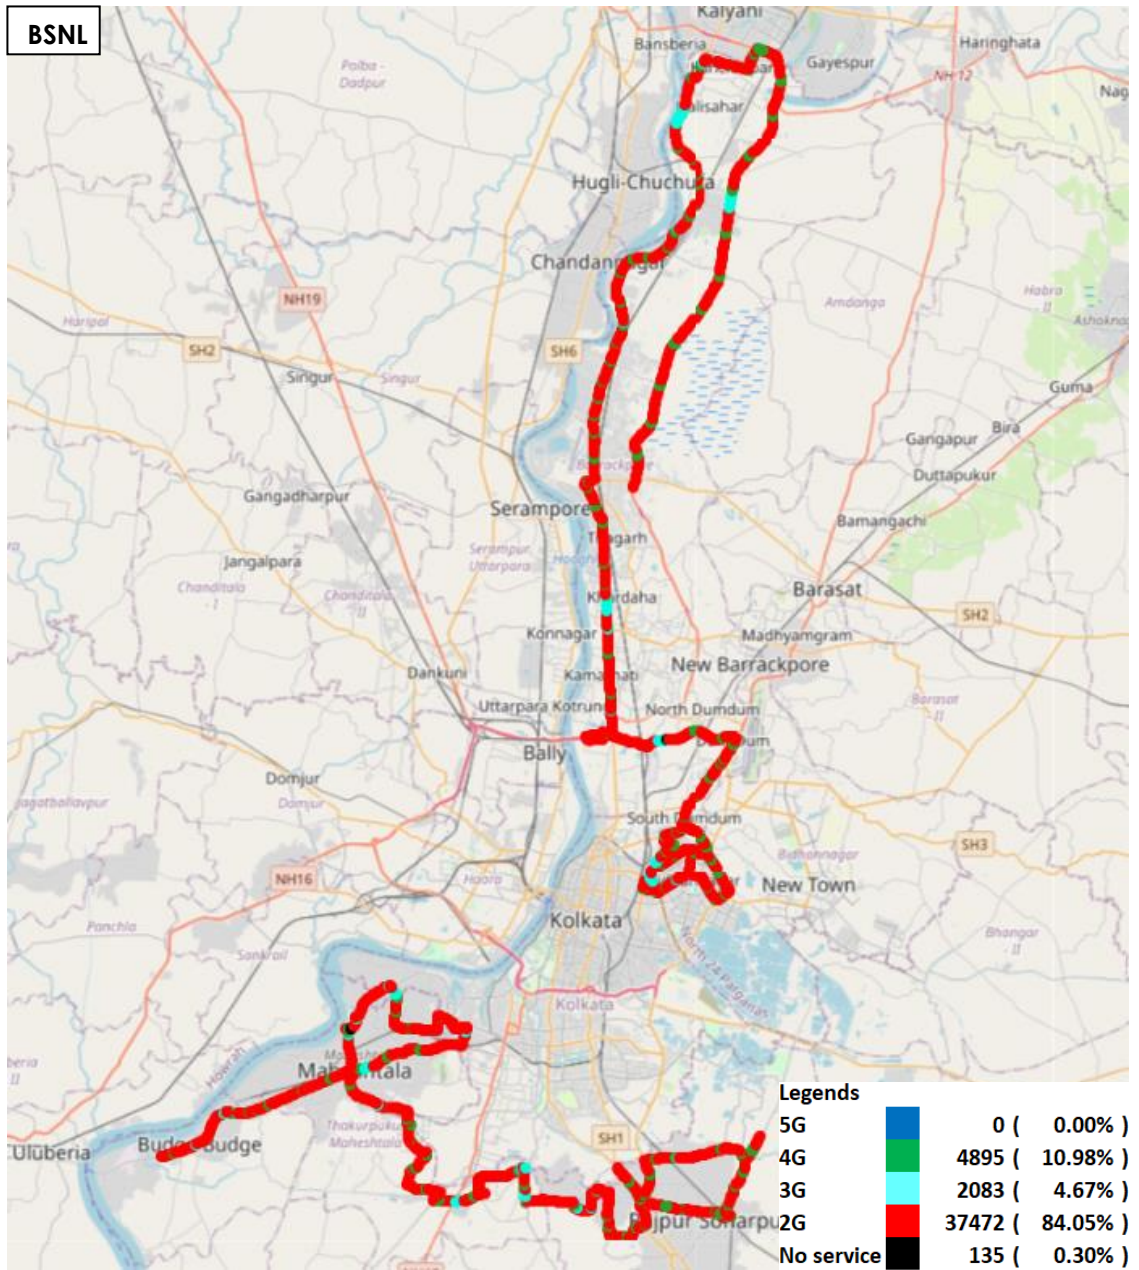


**Figure-17:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) -BSNL



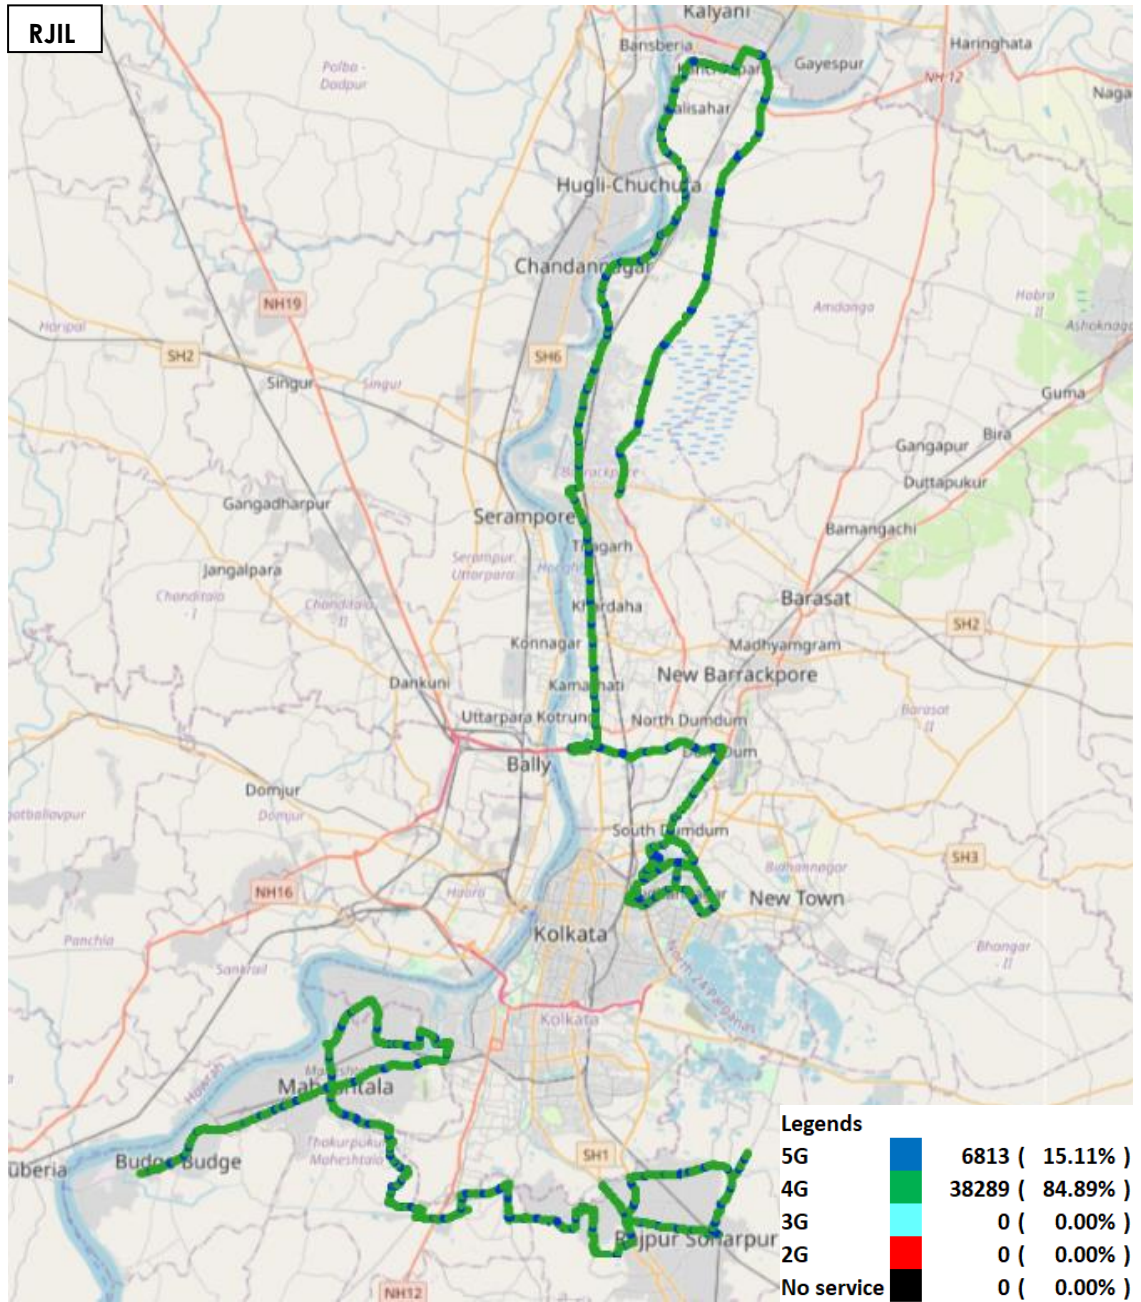


**Figure-18:** Serving technology plots in auto-selection mode (5G/4G/3G/2G)- RJIL

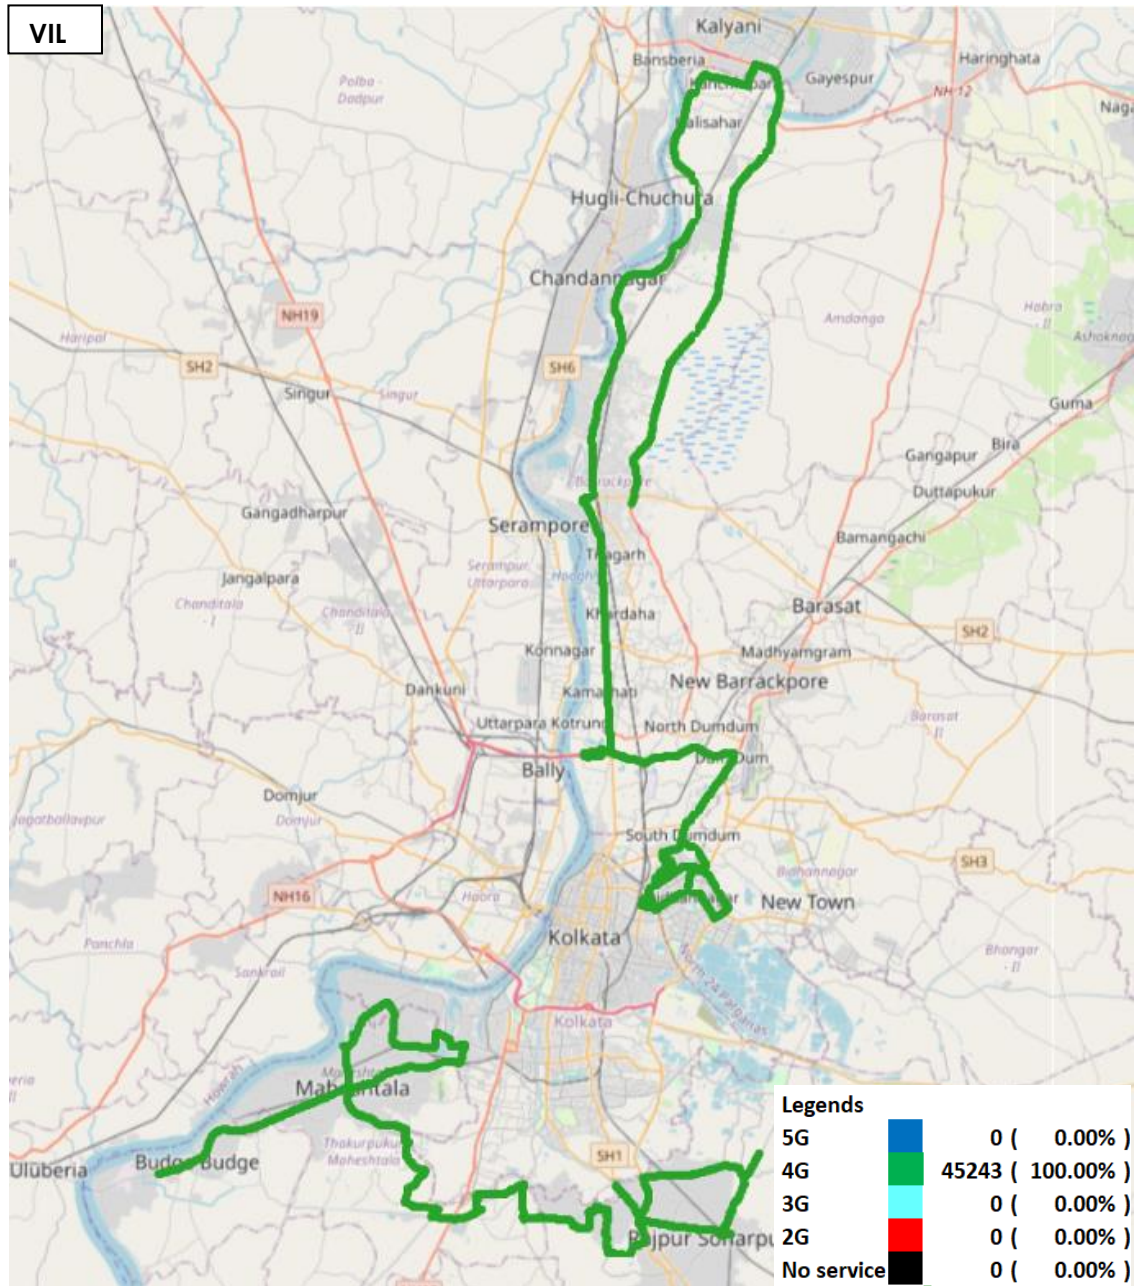

**Figure-19:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) - VIL

**(g) Network Signal Strength distribution:** The following chart provide signal strength distribution for auto-selection mode (5G/4G/3G/2G). (Refer figure-34, 35, 36 & 37 for map view)

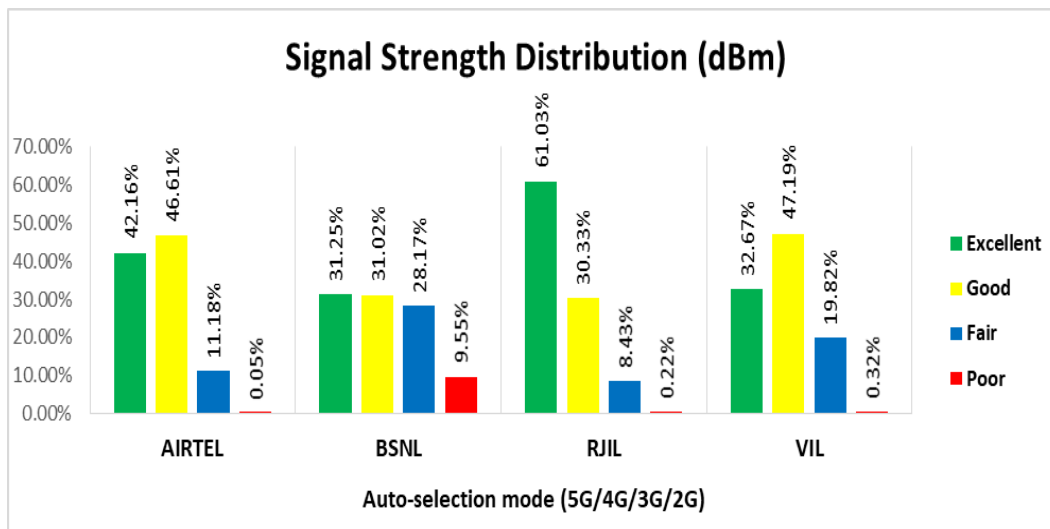

**Figure-20:** Signal strength distribution auto-selection mode 5G/4G/3G/2G

#### Observations:


- Airtel has 42% samples falling in excellent signal strength category.
- BSNL has 31% samples falling in excellent signal strength category.
- RJIL has 61% samples falling in excellent signal strength category.
- VIL has 33% samples falling in excellent signal strength category.

## 4.2.4 Data performance


### (a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode(5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	228.49	2.24	338.79	29.90
	80th Percentile	334.30	3.58	503.87	40.88
	20th Percentile	100.44	0.02	173.66	14.58
Upload Throughput (Mbits/s)	Average	50.04	1.81	37.36	11.10
	80th Percentile	81.81	2.36	61.79	18.22
	20th Percentile	20.41	0.95	8.04	3.51
Latency (ms)	Average	26.89	283.72	22.87	35.57

**Table-19:** Summary of Data performance in network auto-selection mode

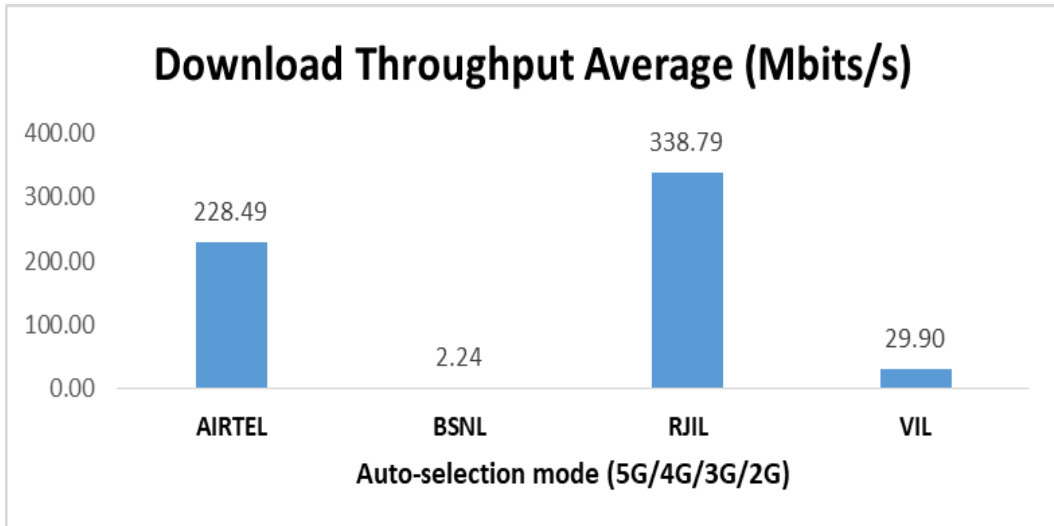

**Figure- 21:** Download throughput

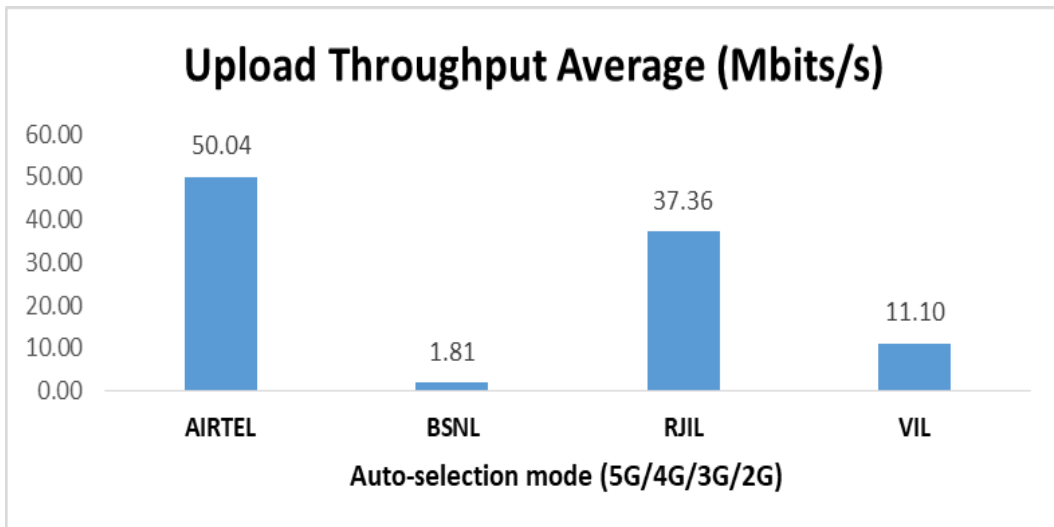


**Figure- 22:** Upload throughput

## 4.3 Hotspots

Hotspot testing has been done on 7<sup>th</sup> November 2024. Five locations has been tested in the city.

### 4.3.1 Locations

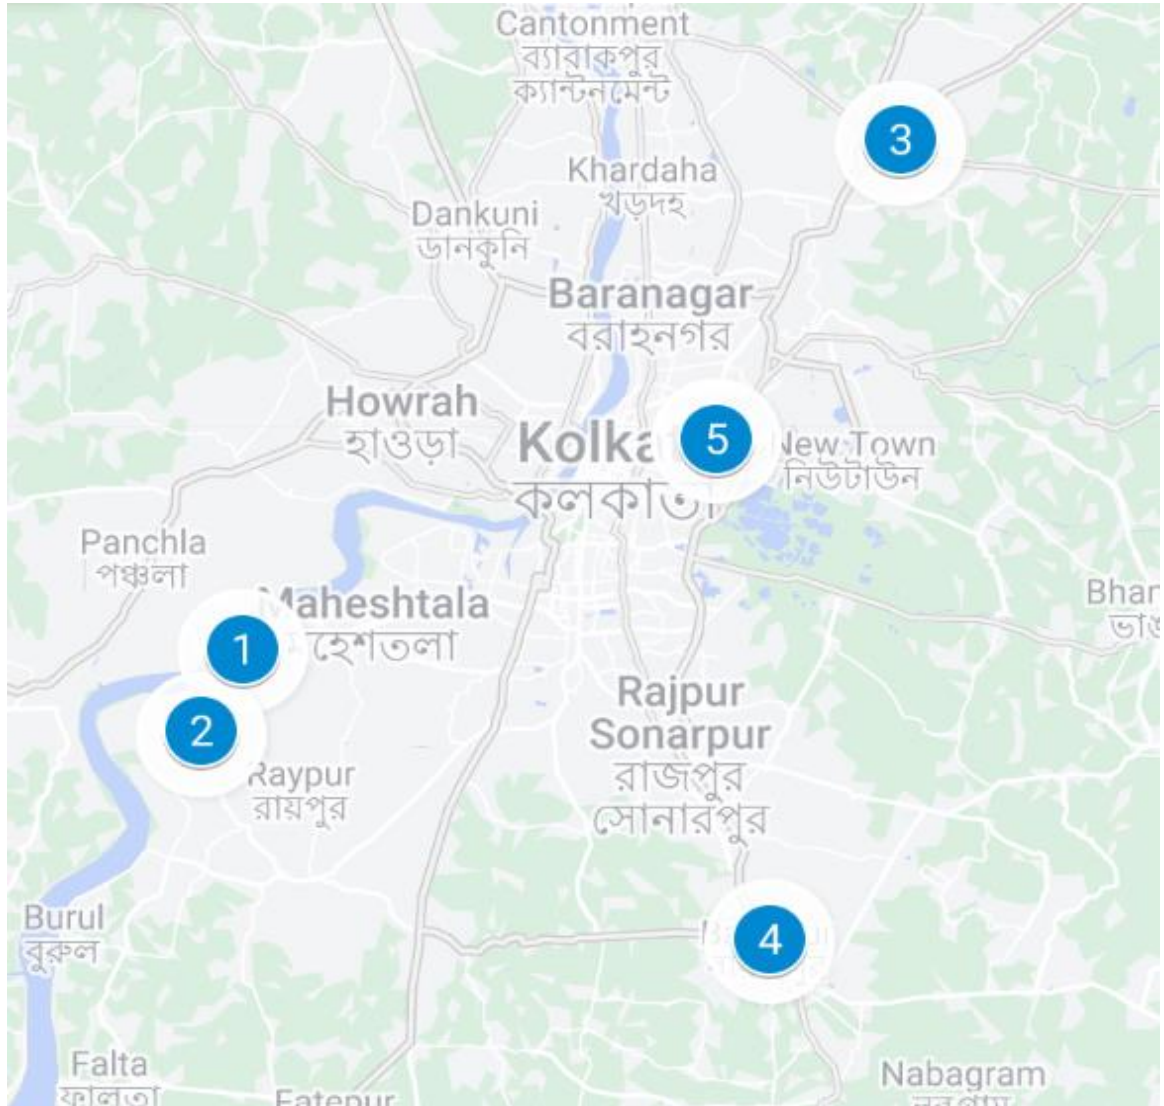

**Figure- 23:** Hotspot locations

### 4.3.2 Hotspot covered

1. Budge Budge Ferry Ghat
2. Budge Budge Institute of Technology
3. Barasat Government Medical College & Hospital
4. Baruipur Junction
5. City Centre, Salt Lake

### 4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	50	50	50	50
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate%	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	0.70	3.66	0.54	0.96

**Table-20:** Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Budge Budge Ferry Ghat				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate%	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	0.76	3.74	0.54	0.94

**Table-21:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G)

Budge Budge Institute of Technology				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate%	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	0.71	3.84	0.53	0.89

**Table-22:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G)

Barasat Government Medical College & Hospital				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate%	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	0.67	4.84	0.53	1.59

**Table-23:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G)

Baruipur Junction				
Parameters	Service Provider			
	Auto Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate%	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	0.71	3.48	0.56	0.79

**Table-24:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G)

City Centre Salt Lake				
Parameters	Service Provider			
	Auto Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate%	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	0.66	2.40	0.52	0.74

**Table-25:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G)

#### 4.3.4 Data performance

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	122.37	0.03	189.88	22.40
Download Throughput 80th Percentile (Mbit/s)	239.16	0.03	397.39	35.15
Download Throughput 20th Percentile (Mbit/s)	28.63	0.03	11.19	8.77
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	43.03	1.24	31.91	7.91
Upload Throughput 80th Percentile (Mbit/s)	48.32	0.96	61.75	12.89
Upload Throughput 20th Percentile (Mbit/s)	22.87	0.12	3.18	2.69
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.47	-	4.28	4.58
Youtube Initial Buffer Delay (Second)	0.77	-	0.91	1.58
Latency (ms)	9.54	25.25	19.20	37.75
Jitter (ms)	7.91	19.57	11.62	5.82
Packet Loss Rate %	0.54	1.82	0.22	0.70

**Table-26:** Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G)

Note- ``BSNL web browsing and YouTube are failed at all hotspots.

<b>Budge Budge Ferry Ghat</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-selection mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	26.28	0.03	5.13	5.12
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	21.03	0.11	2.06	3.91
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	3.52	-	7.55	5.19
<b>Youtube Initial Buffer Delay (Second)</b>	0.74	-	1.78	1.85
<b>Latency (ms)</b>	15.88	30.56	18.27	32.6
<b>Jitter (ms)</b>	26.16	25.32	15.26	4.71
<b>Packet Loss Rate %</b>	2.40	3.00	0.50	0.40

**Table-27:** Summary of Data performance of in network auto-selection mode (5G/4G/3G/2G)

<b>Budge Budge Institute of Technology</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-selection mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	143.68	0.03	92.72	29.78
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	40.45	4.04	7.74	1.97
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	3.56	-	3.81	4.51
<b>Youtube Initial Buffer Delay (Second)</b>	0.89	-	0.78	3.48
<b>Latency (ms)</b>	6.23	8.92	19.34	48.03
<b>Jitter (ms)</b>	1.02	2.25	7.02	7.38
<b>Packet Loss Rate %</b>	0.00	0.00	0.00	1.60

**Table-28:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

<b>Barasat Government Medical College &amp; Hospital</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	97.40	0.03	93.46	15.66
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	30.66	0.96	4.23	10.16
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	3.59	-	3.61	4.78
<b>Youtube Initial Buffer Delay (Second)</b>	0.66	-	0.91	0.92
<b>Latency (ms)</b>	9.23	22.74	19.6	33.56
<b>Jitter (ms)</b>	3.28	8.27	8.83	3.31
<b>Packet Loss Rate %</b>	0.00	0.30	0.10	0.40

**Table-29:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).



<b>Baruipur Junction</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average(Mbits/s)</b>	38.42	0.03	515.7	22.52
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	31.51	0.96	94.83	5.50
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	3.58	-	3.55	4.31
<b>Youtube Initial Buffer Delay (Second)</b>	0.88	-	0.63	0.93
<b>Latency (ms)</b>	9.10	20.99	18.34	41.50
<b>Jitter (ms)</b>	7.68	7.29	18.18	6.67
<b>Packet Loss Rate %</b>	0.30	0.80	0.30	0.60

**Table-30:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).


<b>City Centre Salt Lake</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average(Mbits/s)</b>	306.05	0.03	242.39	38.94
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	91.51	0.12	50.71	17.99
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	3.09	-	3.55	4.11
<b>Youtube Initial Buffer Delay (Second)</b>	0.67	-	0.61	0.73
<b>Latency (ms)</b>	7.25	43.05	20.45	33.08
<b>Jitter (ms)</b>	1.39	54.69	8.83	7.05
<b>Packet Loss Rate %</b>	0.00	5.00	0.20	0.50

**Table-31:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

## 4.4 Walk Test

Drive test has been conducted on 8<sup>th</sup> November 2024 covering two walk test.  
(Refer Table-1)

### 4.4.1 Walk-Test location map

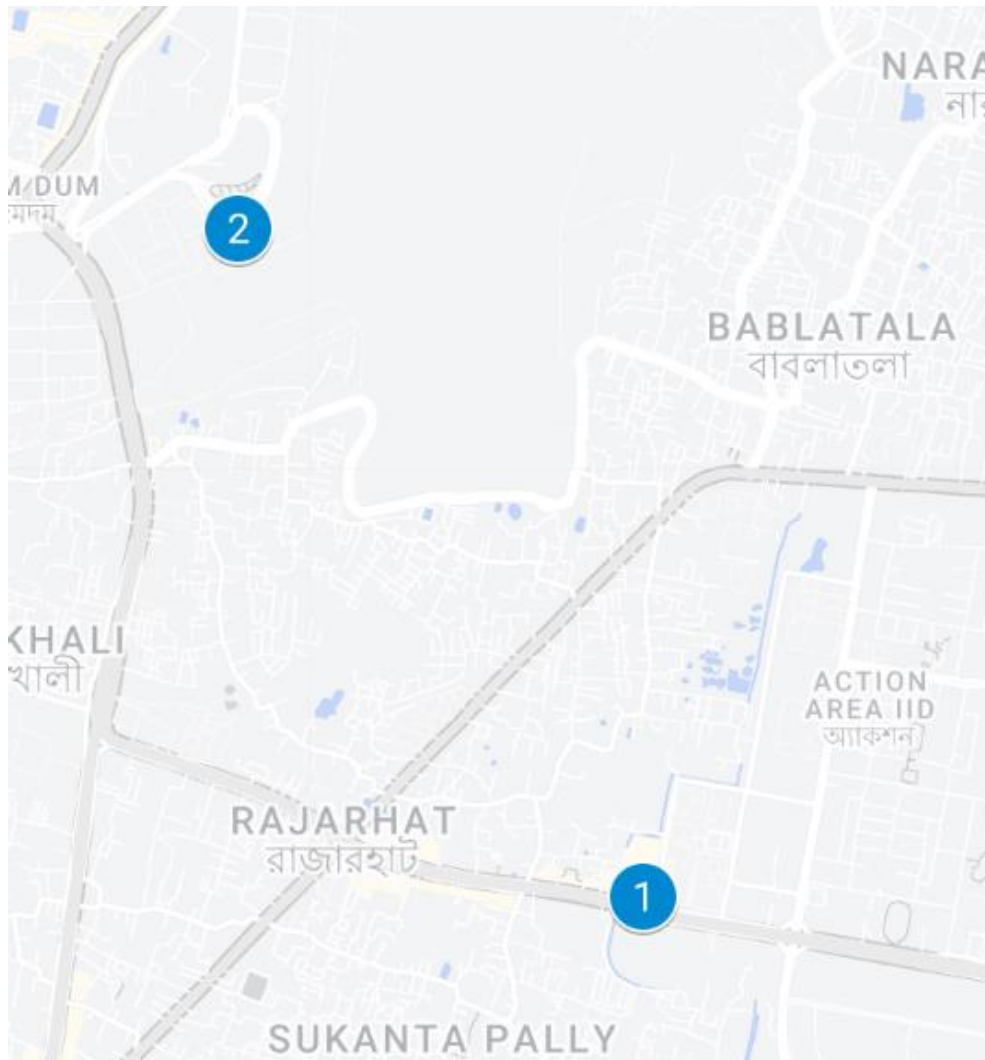

**Figure- 24:** Walk test locations

### 4.4.2 Walk test covered

- City Centre, New town
- Kolkata Airport


### 4.4.3 Voice performance

#### i) City Centre, New Town

##### a) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

City Centre, New town				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	13	13	13	12
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate%	0.00	7.69	0.00	0.00
Call Setup Time-Average (Second)	0.70	4.50	0.52	0.75
Handover Success Rate %	100.00	100.00	100.00	100.00

**Table-32:** Summary of voice call performance in network auto-selection mode

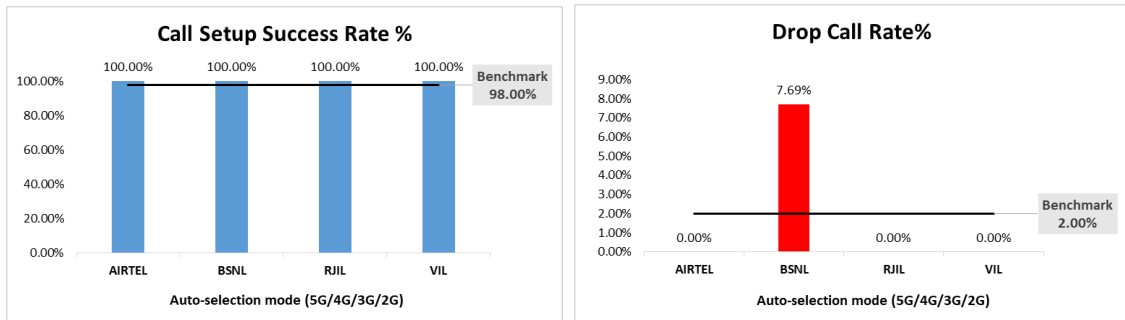

**Figure-25:** Performance for call setup success rate and drop call rate

**b) Network Technology:** This section represent time spent on various network technologies.


City Centre, New town				
Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	4.75%	NA	7.58%	NA
4G	95.25%	6.82%	92.42%	100.00%
3G	NA	5.00%	NA	NA
2G	0.00%	83.50%	NA	0.00%
No service	0.00%	4.69%	0.00%	0.00%

**Table-33:** Time spent on technology during Walk test

Note-

- No service- Limited service and not latched on any available technology.

**(c) Network Signal Strength distribution:** The following chart provide signal strength distribution for auto-selection mode (5G/4G/3G/2G).

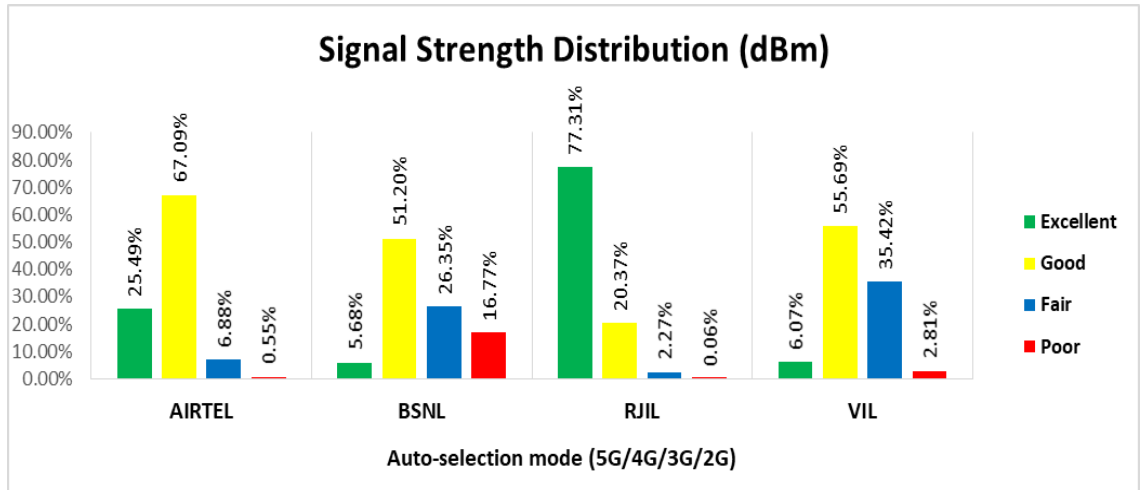


**Figure-26:** Signal strength distribution auto-selection mode 5G/4G/3G/2G

## ii) Kolkata Airport

### a) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Kolkata Airport				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
<b>Call Attempts</b>	15	14	15	15
<b>Call Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Drop Call Rate%</b>	0.00	0.00	0.00	0.00
<b>Call Setup Time-Average (Second)</b>	0.73	4.42	0.59	0.75
<b>Handover Success Rate %</b>	100.00	100.00	100.00	100.00

**Table-34:** Summary of voice call performance in network auto-selection mode

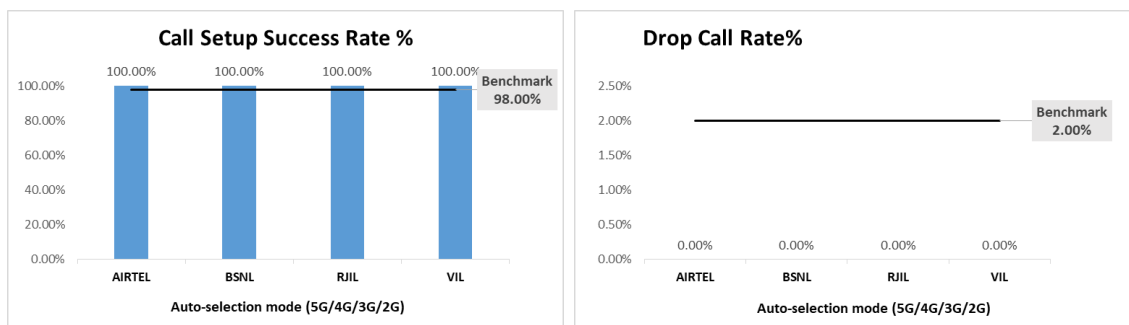

**Figure-27:** Performance for call setup success rate and drop call rate

**b) Network Technology:** This section represent time spent on various network technologies.

Kolkata Airport				
Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
<b>5G</b>	3.32%	NA	15.08%	NA


<b>4G</b>	96.68%	12.54%	84.92%	100.00%
<b>3G</b>	NA	7.14%	NA	NA
<b>2G</b>	0.00%	78.63%	NA	0.00%
<b>No service</b>	0.00%	1.69%	0.00%	0.00%

**Table-35:** Time spent on technology during Walk test

Note-

- No service- Limited service and not latched on any available technology.

**(c) Network Signal Strength distribution:** The following chart provide signal strength distribution for auto-selection mode (5G/4G/3G/2G)

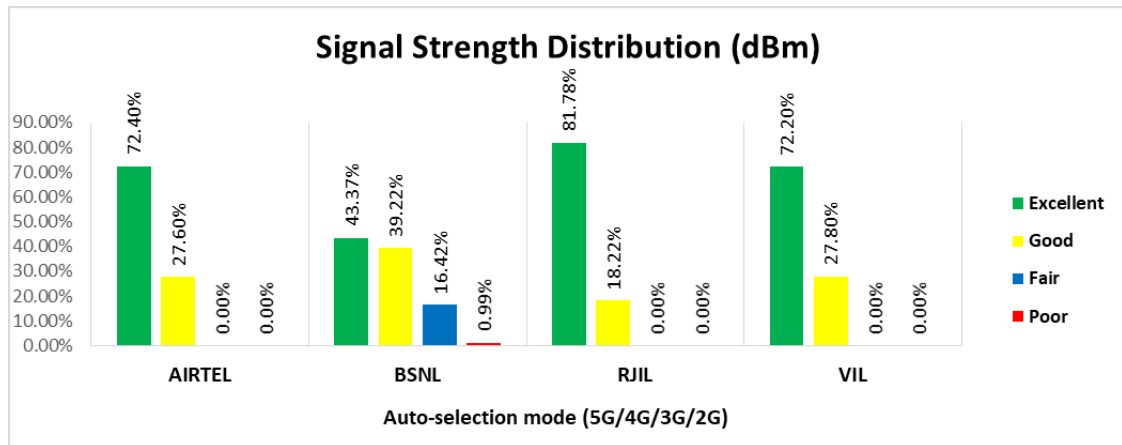

**Figure-28:** Signal strength distribution auto-selection mode 5G/4G/3G/2G


#### 4.4.4 Data performance

##### i) City Centre, New Town

##### (a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

City Centre, New town				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
<b>Download Throughput Average(Mbits/s)</b>	52.53	0.02	209.19	21.83
<b>Download Throughput 80th Percentile</b>	76.31	0.04	302.67	35.65
<b>Download Throughput 20th Percentile</b>	26.58	0.00	55.08	6.93
<b>Download Session Setup Success Rate %</b>	100.00	70.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	14.65	0.65	26.73	9.39
<b>Upload Throughput 80th Percentile</b>	32.56	0.96	44.48	17.36
<b>Upload Throughput 20th Percentile</b>	3.35	0.05	9.03	3.80
<b>Upload Session Setup Success Rate %</b>	100.00	83.33	100.00	100.00
<b>Latency (ms)</b>	27.95	101.28	20.16	34.65

**Table-36:** Summary of Data performance in network auto-selection mode

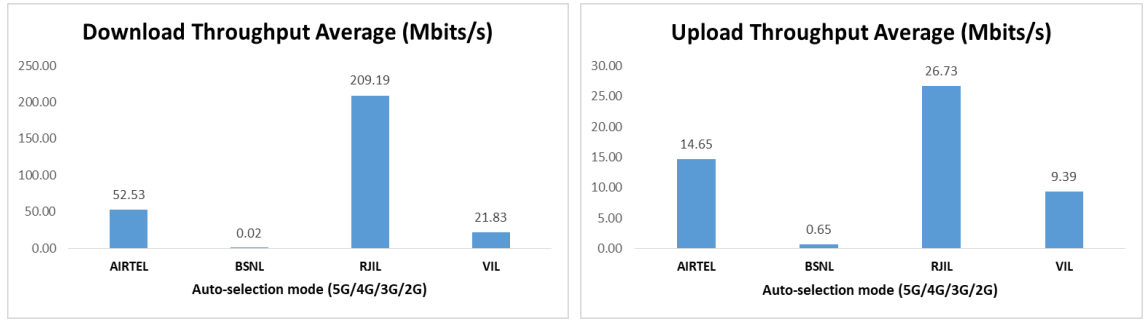


**Figure- 29:** Download and Upload throughput

## ii) Kolkata Airport

### (a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Kolkata Airport				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average(Mbits/s)	90.47	0.02	3.13	24.17
Download Throughput 80th Percentile	127.67	0.03	3.82	31.27
Download Throughput 20th Percentile	52.63	0.01	2.05	15.22
Download Session Setup Success Rate %	100.00	86.67	100.00	100.00
Upload Throughput Average (Mbits/s)	36.54	0.44	6.01	17.62
Upload Throughput 80th Percentile	54.34	0.96	8.58	26.61
Upload Throughput 20th Percentile	15.20	0.10	4.07	11.32
Upload Session Setup Success Rate %	100.00	86.21	100.00	100.00
Latency (ms)	17.53	102.29	32.25	31.51

**Table-37:** Summary of Data performance in network auto-selection mode

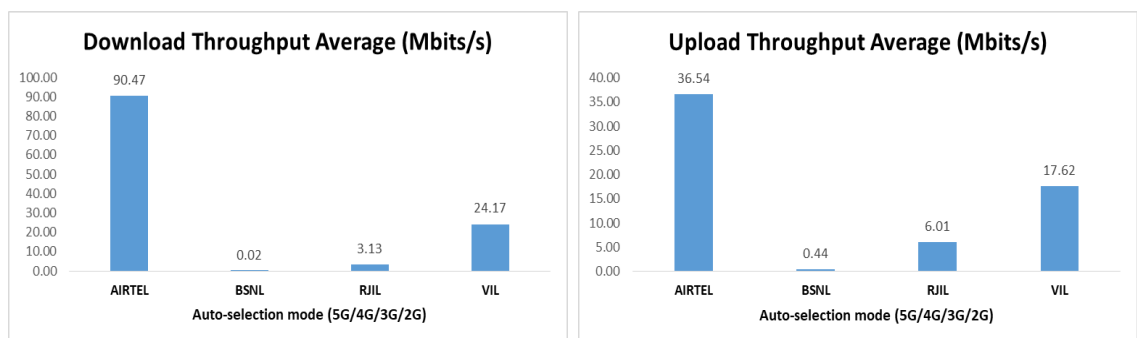

**Figure- 30:** Download and Upload throughput

## 5. Voice & Data Key findings

### 5.1 Overall Voice

#### 1. Call setup success rate:

- a) Airtel, BSNL, RJIL and VIL have 100.00%, 99.23%, 100.00% and 100.00% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- b) Airtel and BSNL have 100% call setup success rate while calling on peer service provider's network, while remaining service providers have block call rate for inter-operator calls. (refer table-9)

#### 2. Call Setup time:

Owing to circuit switched network (3G/2G), BSNL has taken comparatively longer time (4.00 second) to establish the voice call, whereas Airtel, RJIL and VIL call setup time is 0.73, 0.56 & 0.85 second respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

#### 3. Call Silence/Mute Rate:

In packet switched network (4G/5G), Airtel, RJIL and VIL have 0.33%, 0.33% and 3.25% silence call rate respectively. Further VIL has >2.0% RTP packet loss rate in downlink & uplink. (refer table-6)

#### 4. Call Drop Rate:

- a) Overall BSNL's call drop rate (2.07%) is higher (QoS benchmark of 2%), while Airtel, RJIL and VIL have 0.00%, 0.25% and 0.00% drop call rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- b) At hotspots all service providers have 0.00% call drop rate. (refer table-20)
- c) Except BSNL (7.69%) all operators are meeting QoS Benchmark for drop call rate in walk test (City Centre, New town). (refer table-32)

### 5.2 Overall Data

#### 1. Data download and upload performance (Dynamic i.e. while moving) :

- a) BSNL (1.95 Mbps) and VIL (28.92 Mbps) being on 3G & 4G as top technology respectively, have comparatively lower data speeds. While Airtel and Jio have average download speed of 210.84 Mbps and 309.07 Mbps respectively.
- b) BSNL (1.68 Mbps) and VIL (11.27 Mbps) being on 3G & 4G as top technology respectively, have comparatively lower data speeds. While Airtel and Jio have average upload speed of 47.87 Mbps and 35.14 Mbps respectively.

#### 2. Data download and upload performance (static i.e. while stationary):

- a) At hotspots, RJIL has better 5G QoS performance comparatively, with average download of 189.88 Mbps.
- b) Airtel has better 5G QoS performance comparatively, with average upload of 43.03 Mbps.

#### 3. Data session setup success rate (static i.e. while stationary):

- a) All service provider have 100% download and upload session setup success rate.

## 5.3 Operator wise Key Findings

### 1. Airtel:

#### Voice

- 100.0% call setup success rate observed in 3G/2G network mode. Call drop rate (0.00%) performance is well within benchmark of 2%. (refer Table-3 and Table- 13)
- 100.00% call setup success rate and 0.00% drop call rate observed for auto-selection mode (5G/4G/3G/2G) for LSA. (refer Table-5)
- 100.00% call setup success rate and 0.00% drop call rate observed for auto-selection mode (5G/4G/3G/2G) for city drive.(refer Table-15)

#### Data

- Airtel has 210.84 Mbps average download throughput & 47.87 Mbps average upload throughput across measured routes for LSA (refer Table-11)
- Airtel has 228.49 Mbps average download throughput & 50.04 Mbps average upload throughput across measured routes for city drive (refer Table- 19)
- Budge Budge Ferry, Barasat Government Medical College & Hospital, Baruipur Junction hotspots have less download speeds (less than 100 Mbps) out of total 5 hotspots. (refer Table- 27, 29 and 30)
- Airtel has 52.53 Mbps average download throughput & 14.65 Mbps average upload throughput measured in City centre, New town walk test (refer Table-36)
- Airtel has 90.47 Mbps average download throughput & 36.54 Mbps average upload throughput measured in Kolkata Airport walk test (refer Table- 37)

### 2. BSNL:

#### Voice

- BSNL 3G/2G network mode is experiencing a drop call rate of 0.97%, significantly well within benchmark of 2%. (refer Table- 3 and 13)
- BSNL auto-selection mode (5G/4G/3G/2G) is experiencing a drop call rate of 2.07%, slightly higher than the acceptable benchmark of 2% in LSA. (refer Table-5)
- 2.26% drop call rate observed for auto-selection mode (5G/4G/3G/2G) for city drive which has not meet the benchmark. (refer Table- 15)
- 7.69% drop call rate have been observed at City centre, New town which is higher than benchmark. (refer Table- 32)



**Data**

- BSNL has 1.95 Mbps average download throughput & 1.68 Mbps average upload throughput across measured routes for LSA (refer Table-11)
- BSNL has 2.24 Mbps average download throughput & 1.81 Mbps average upload throughput across measured routes for city drive (refer Table-19)
- All hotspots have less download speeds (less than 5 Mbps). (refer Table- 27, 28, 29, 30 and 31)
- Budge Budge Ferry, Barasat Government Medical College & Hospital, Baruipur Junction and City Centre Salt Lake hotspots have less upload speed (less than 2 Mbps) out of total 5 hotspots. (refer Table-27, 29, 30 and 31)
- BSNL has 0.02 Mbps average download throughput & 0.65 Mbps average upload throughput measured at City centre, New town walk test (refer Table-36)
- BSNL has 0.02 Mbps average download throughput & 0.44 Mbps average upload throughput measured at Kolkata Airport walk test (refer Table- 37)

**3. RJIL:****Voice**

- 100% call setup success rate and 0.25% drop call rate observed for auto-selection mode for LSA.(refer Table-5)
- 100% call setup success rate and 0.31% drop call rate observed for auto-selection mode for city drive .(refer Table-15)

**Data**

- RJIL has 309.07 Mbps average download throughput & 35.14 Mbps average upload throughput across measured routes in LSA. (refer Table-11)
- RJIL has 338.79 Mbps average download throughput & 37.36 Mbps average upload throughput across measured routes in city drive. (refer Table-19)
- Budge Budge Ferry, Budge Budge Institute of Technology, Barasat Government Medical College & Hospital hotspot have less download speed (less than 100 Mbps) out of total 5 hotspots. (refer Table- 27,28 & 29)
- Budge Budge Ferry, Budge Budge Institute of Technology, Barasat Government Medical College & Hospital hotspot have less upload speed (less than 10 Mbps) out of total 5 hotspots. (refer Table- 27,28 & 29)
- RJIL has 3.13 Mbps average download throughput & 6.01 Mbps average upload throughput measured at Kolkata Airport walk test (refer Table- 37)

#### **4. VIL:**

##### **Voice**

- VIL has 99.67% call setup success rate on 3G/2G network mode, while drop call rate is 0.33%. (refer Table-3 and refer Table-13)
- 100% call setup success rate and 0.00% drop call rate observed for auto-selection mode for city drive.(refer Table-15)


##### **Data**

- VIL has 28.92 Mbps average download throughput & 11.27 Mbps average upload throughput across measured routes in LSA. (refer Table-11)
- VIL has 29.90 Mbps average download throughput & 11.10 Mbps average upload throughput across measured routes in city drive. (refer Table-19)
- Budge Budge Ferry Ghat hotspot has less download speeds (less than 15 Mbps) out of total 5 hotspots. (refer Table- 27 )
- Budge Budge Ferry Ghat and Budge Budge Institute of Technology hotspots have less upload speed (less than 5 Mbps) out of total 5 hotspots. (refer Table- 27 and 28)
- VIL has 21.83 Mbps average download throughput & 9.39 Mbps average upload throughput measured at City centre, New town walk test (refer Table- 36)
- VIL has 24.17 Mbps average download throughput & 17.62 Mbps average upload throughput measured in Kolkata Airport walk test (refer Table- 37)


## 6. Annexure

### 6.1 Route wise coverage map


#### 6.1.1 City

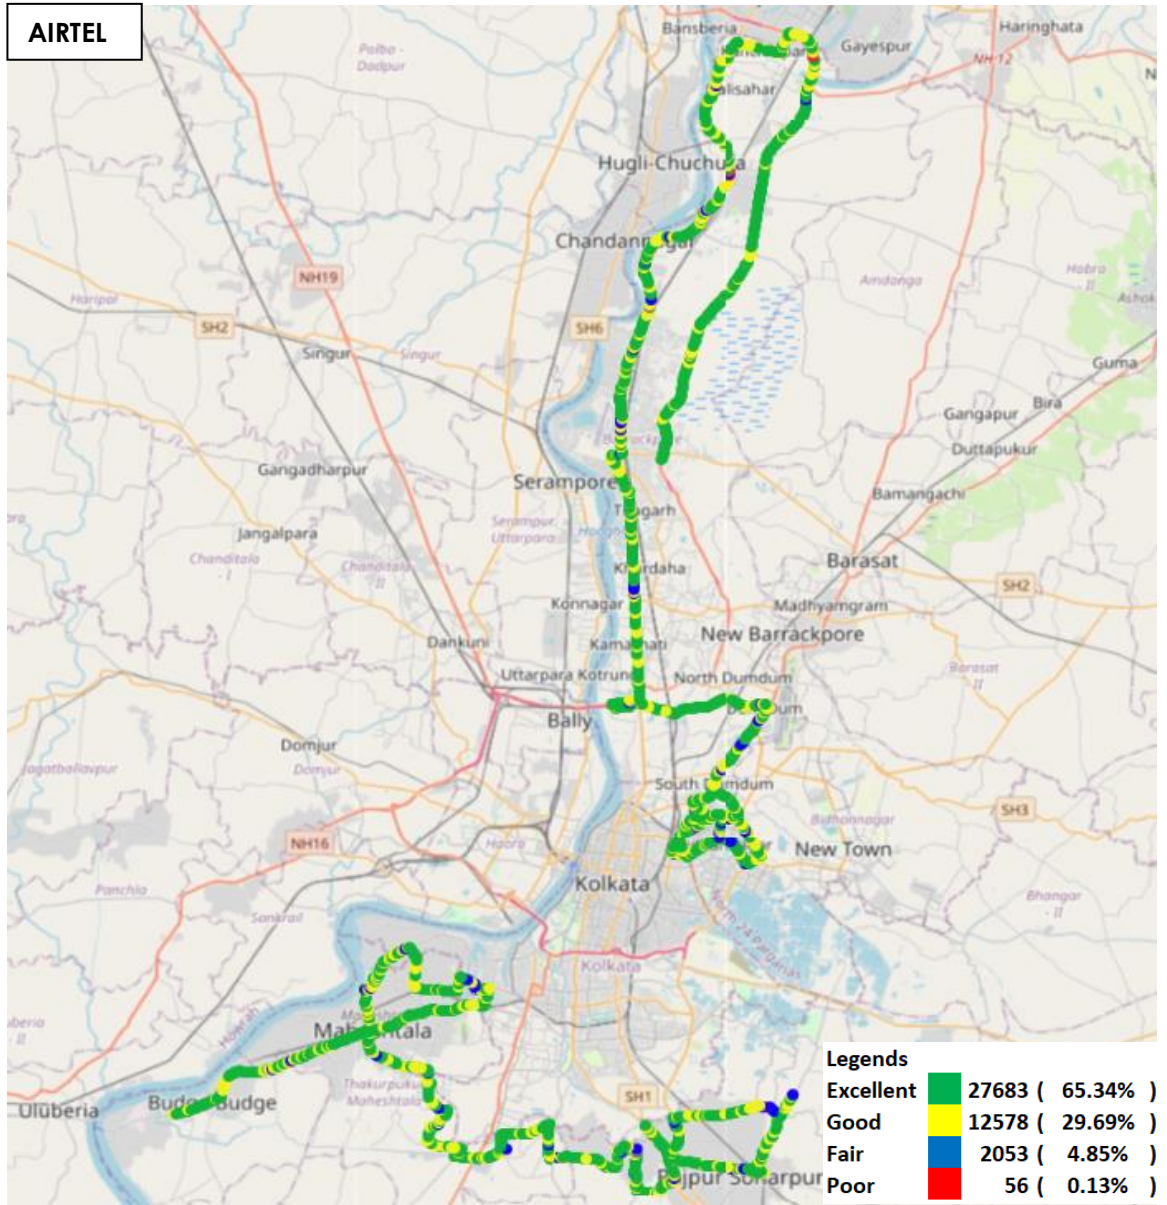


**Figure-31:** Signal strength 3G/2G network mode – AIRTEL

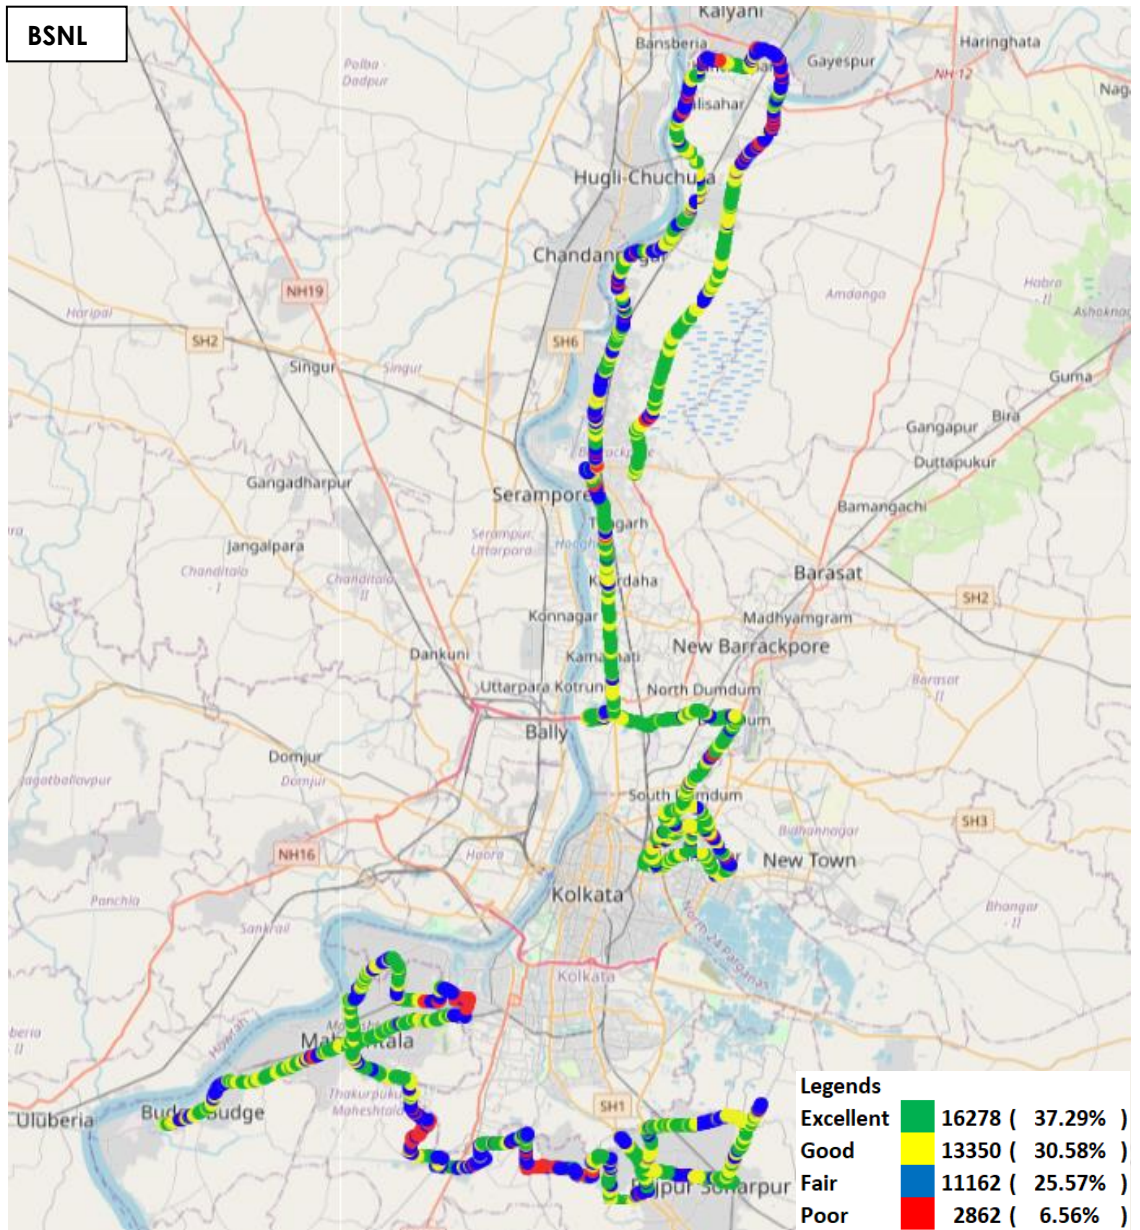


**Figure-32:** Signal strength 3G/2G network mode – BSNL

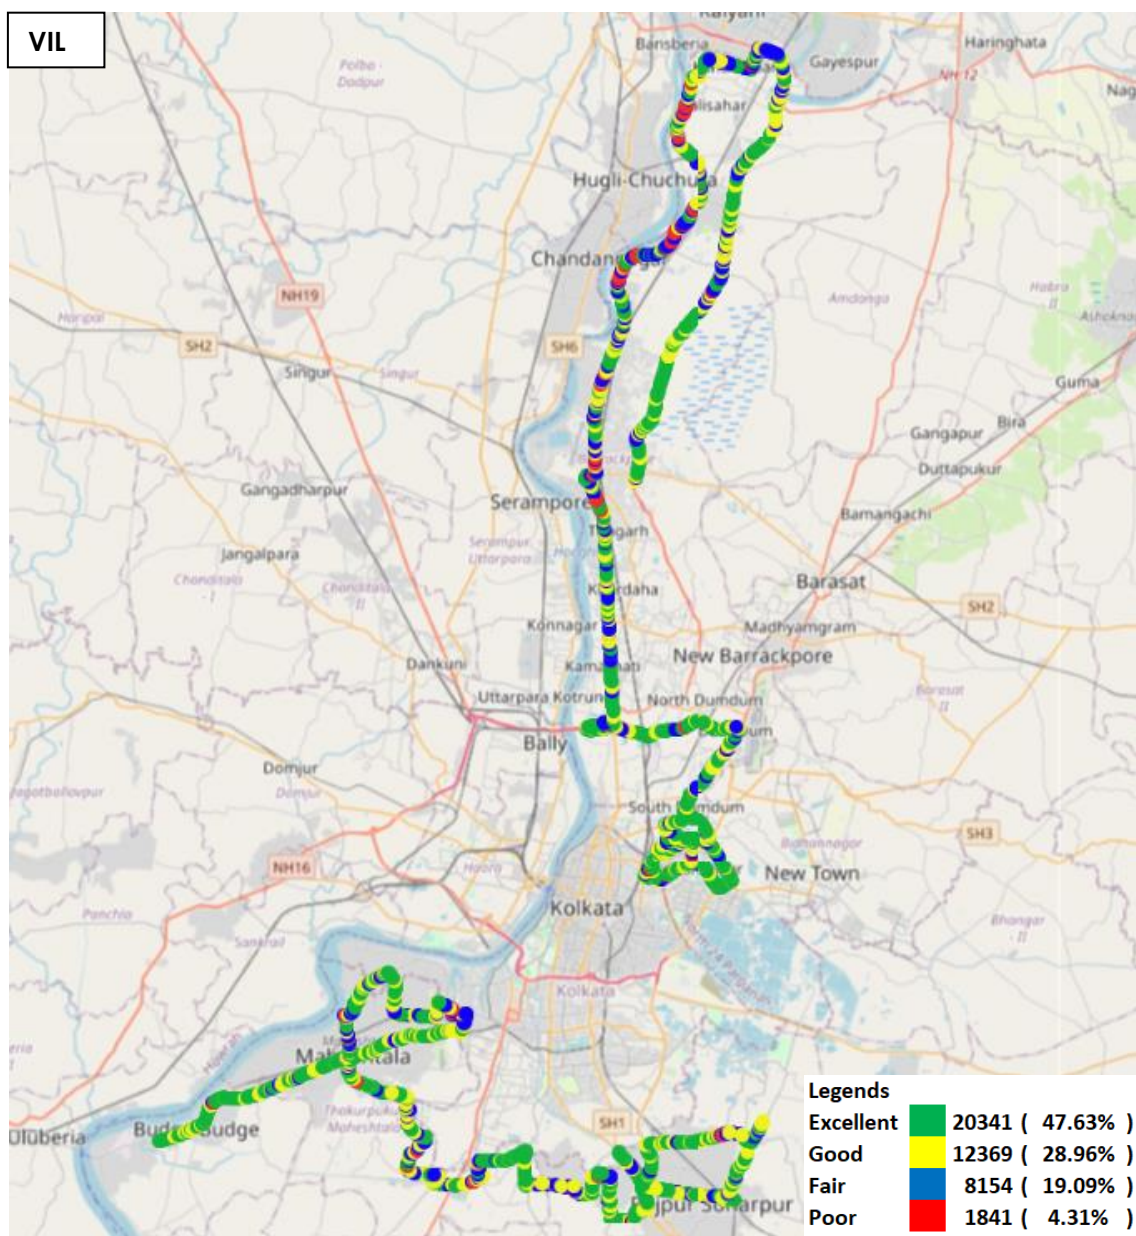


**Figure-33:** Signal strength 3G/2G network mode - VIL

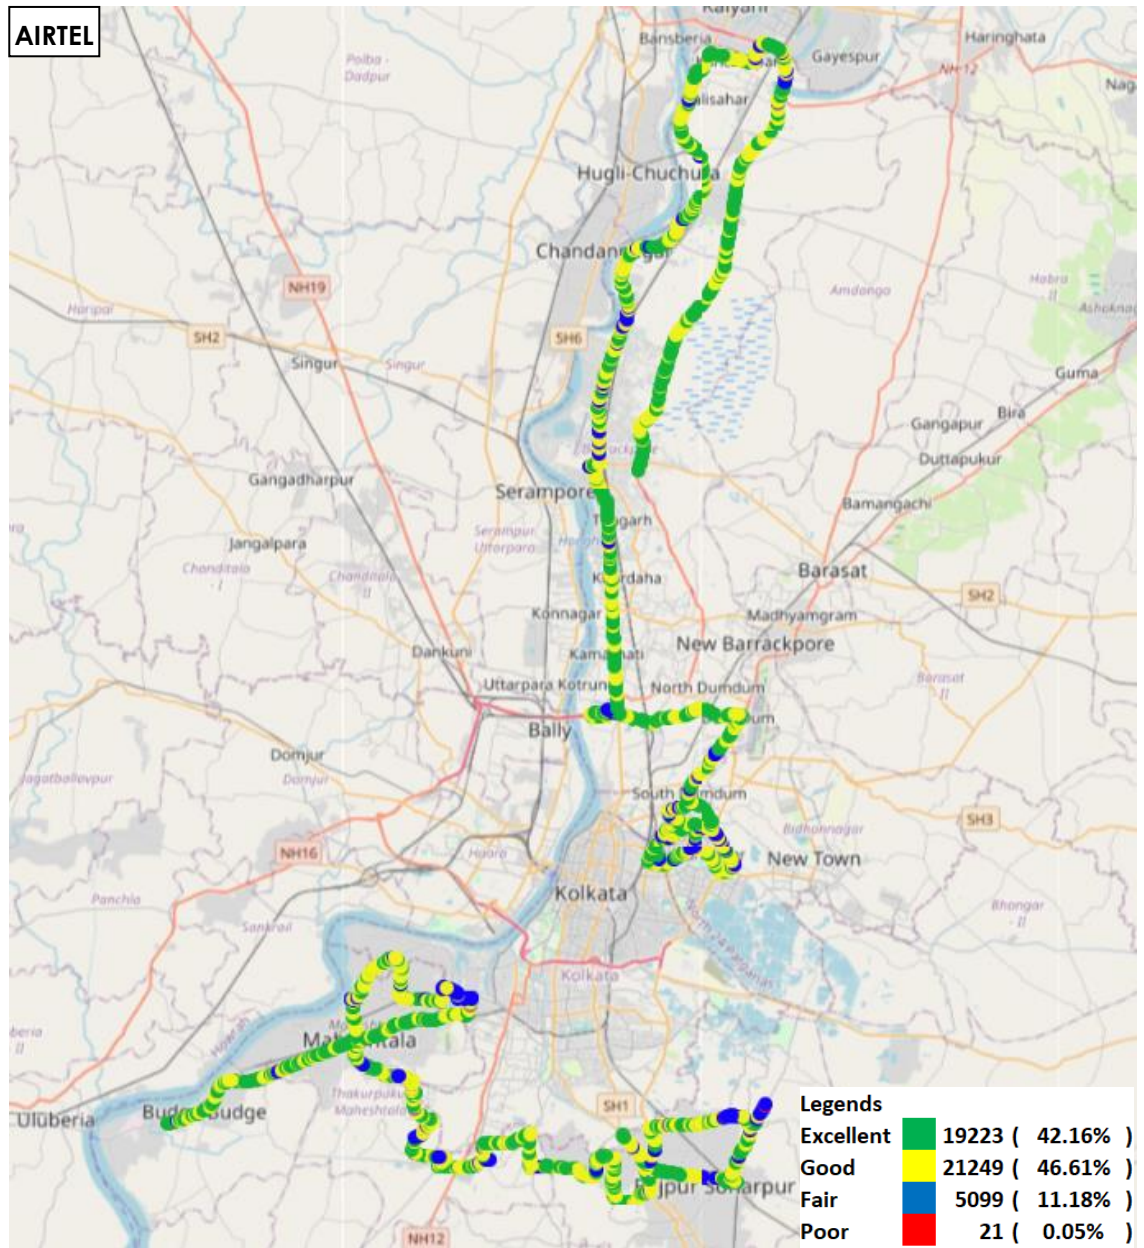

**Figure-34:** Signal strength auto-selection mode 5G/4G/3G/2G - Airtel

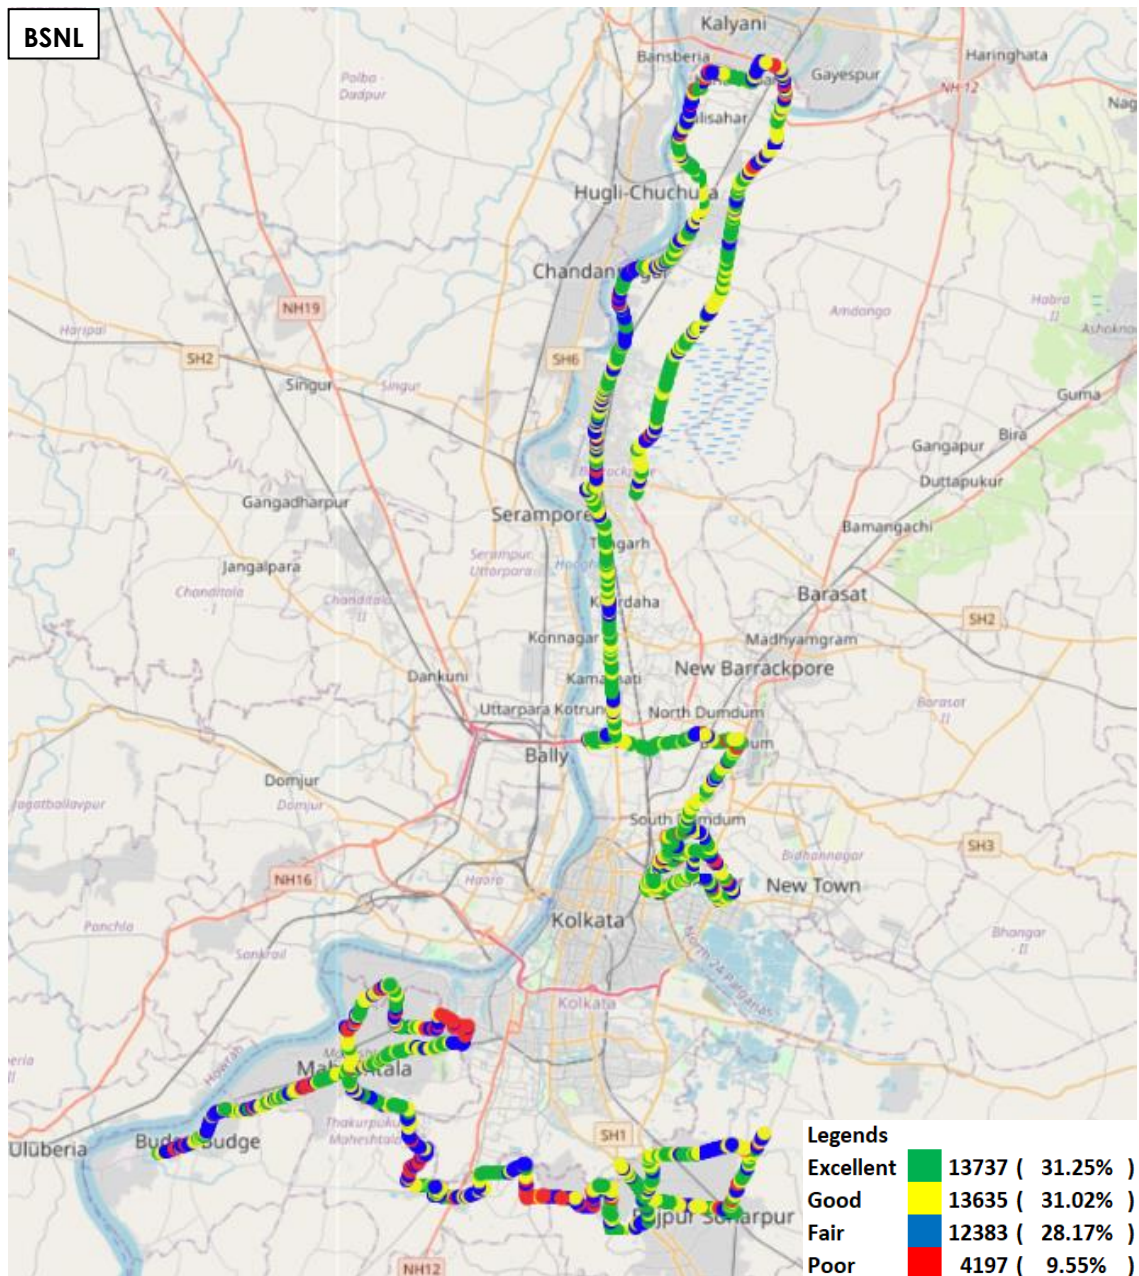


**Figure-35:** Signal strength auto-selection mode 5G/4G/3G/2G - BSNL

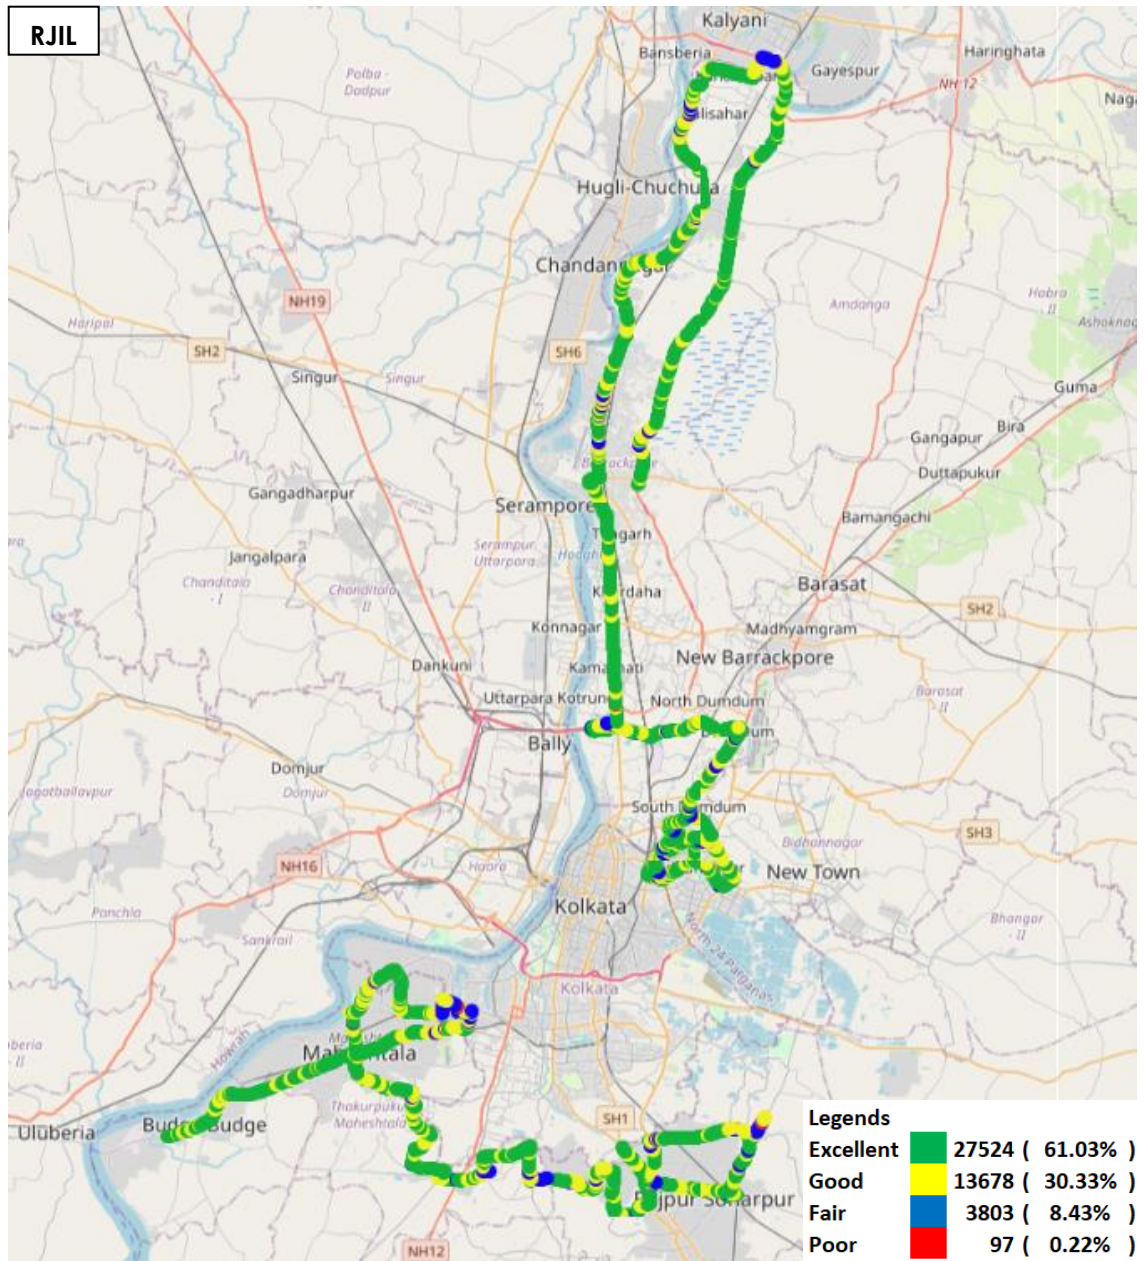

**Figure-36:** Signal strength auto-selection mode 5G/4G/3G/2G – RJIL



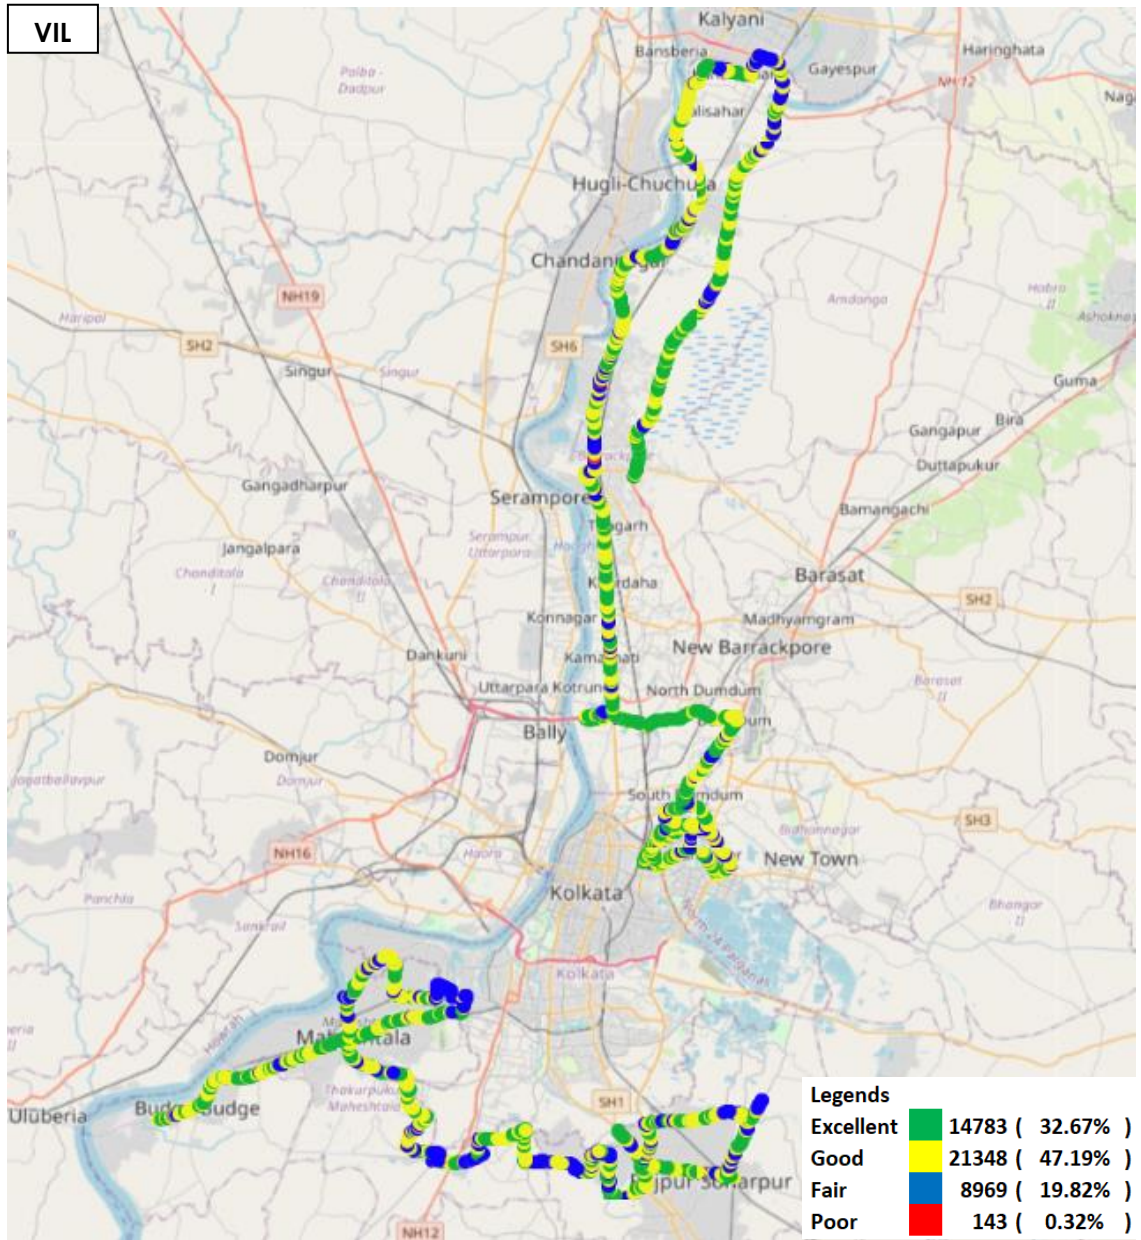

**Figure-37:** Signal strength auto-selection mode 5G/4G/3G/2G - VIL

## 7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

### 7.1 Appendix-I

#### 7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	<ul style="list-style-type: none"> <li>• 3G/2G auto mode- switch Call</li> <li>• 5G/4G/3G/2G auto mode- switch Call</li> <li>• 5G/4G MOS Call</li> </ul>	30 Sec
Call Duration		120 Sec
Wait/ Guard Time		15 Sec

**Table-38:** Voice test detail


Note-
<ul style="list-style-type: none"> <li>• There is 15 sec wait time after locking and before starting first call in 3G/2G call.</li> <li>• 10 calls to be made at each Hotspot location.</li> <li>• Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.</li> <li>• Speech quality (MOS) has been measured only in city drive &amp; highway by making Mobile to Mobile call.</li> <li>• 120 Sec call were made for city drive, hotspot and walk test.</li> <li>• 180 Sec calls were made only in highway &amp; railway route drive.</li> <li>• 5G/4G/3G/2G auto mode MOS call were made in BSNL as BSNL don't have VoLTE &amp; VoNR network availability.</li> </ul>

Data Test		
Test Type	Technology	Detail
HTTP/FTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
HTTP/FTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)

Web Browsing		3 popular websites ( <a href="http://www.amazon.in">www.amazon.in</a> , <a href="http://www.facebook.com">www.facebook.com</a> , <a href="http://paytm.com">paytm.com</a> )
Latency		20 sec timeout (only at Hotspot)
		25 count- Dynamic 1000 count- Hotspot Payload- 512 bytes in all drive


**Table-39:** Data test detail**Note-**

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- Ping test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Download and upload testing has been done on FTP server for Airtel, BSNL & RJIL. (Airtel, BSNL & RJIL not provided HTTP server)
- VIL download and upload testing is done on HTTP Server.

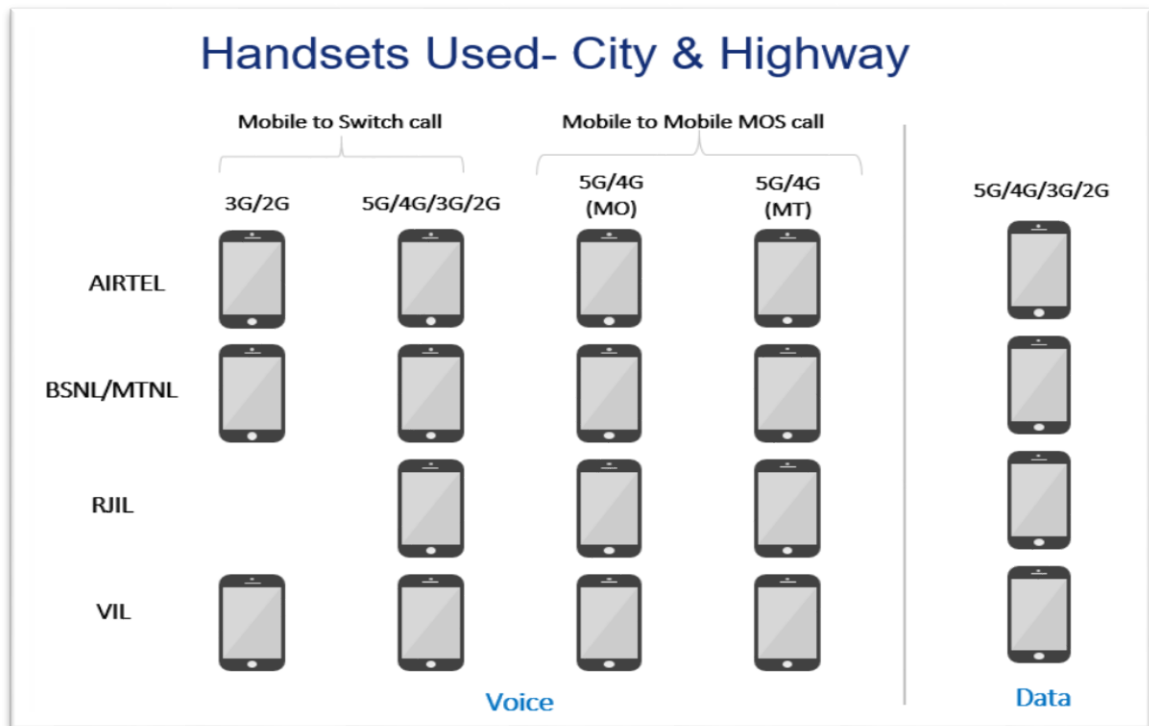**Figure-38:** Number of handsets used in city & highway drive

MO: Mobile originating


MT: Mobile terminating

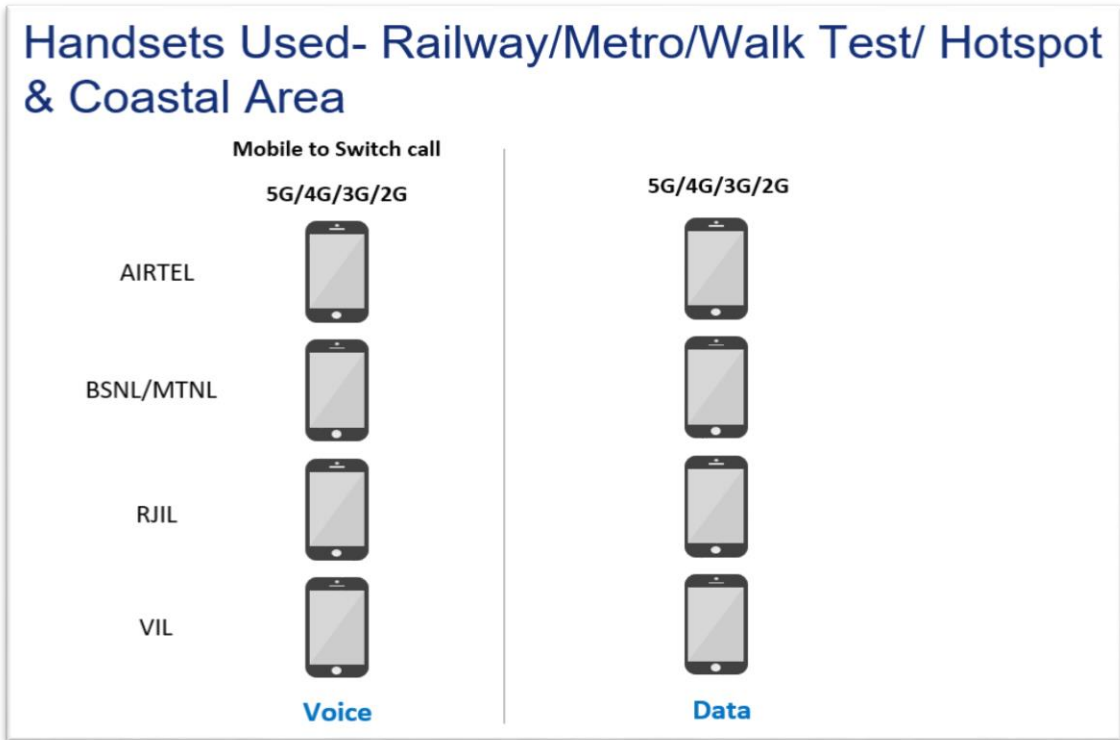

**Figure-39:** Number of handsets used in railway/metro/walktest/hotspot & coastal area

### 7.1.2 Drive test Methodology

#### (a) Dynamic voice testing (on the move)

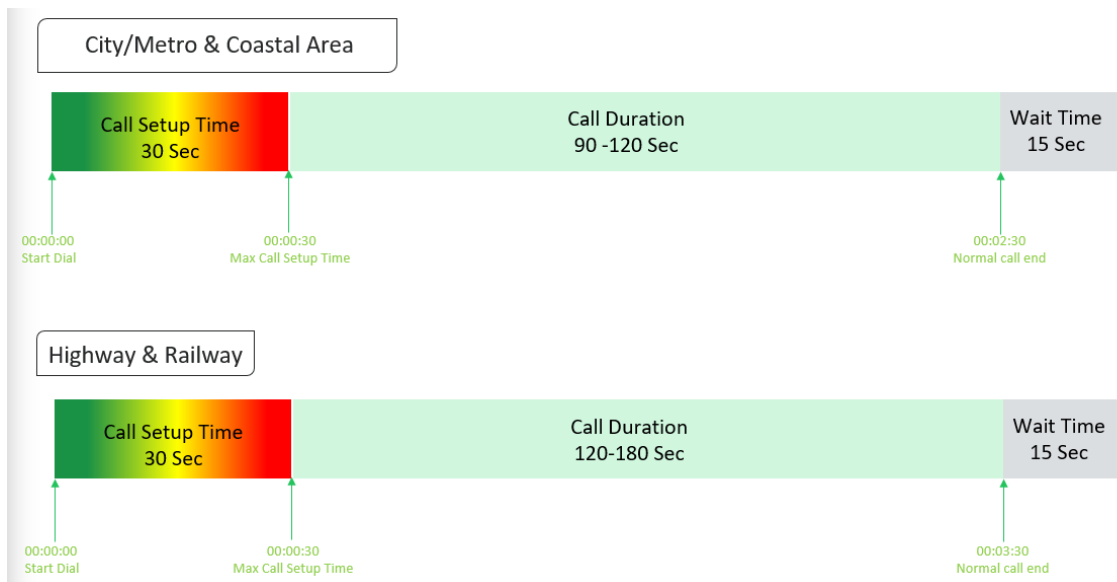

**Figure-40:** Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.

- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.


### (b) Hotspot voice testing



**Figure-41:** Voice test script for walktest/hotspot


- 10 calls are made at each Hotspot location.
- Minimum 10 Calls are made during the walk test. Call count will be increased based on walk test distance.

### (c) Dynamic Data (internet) test

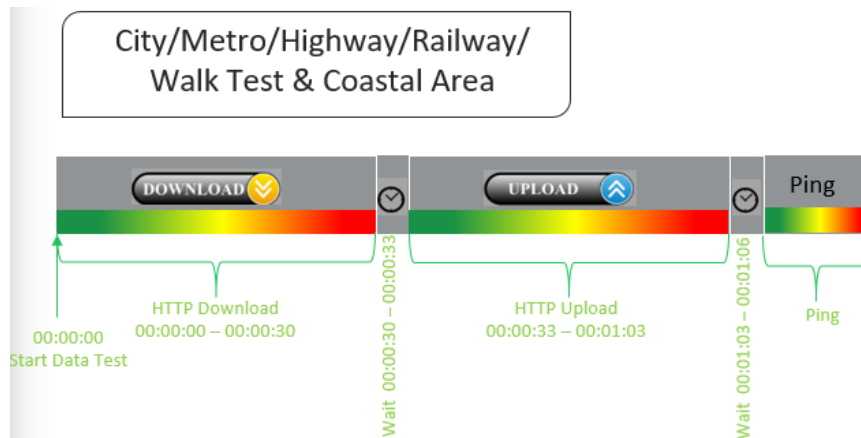

**Figure-42:** Data test script used in city/metro/railway/highway/walk test & coastal area

### (d) Static Data(internet) testing

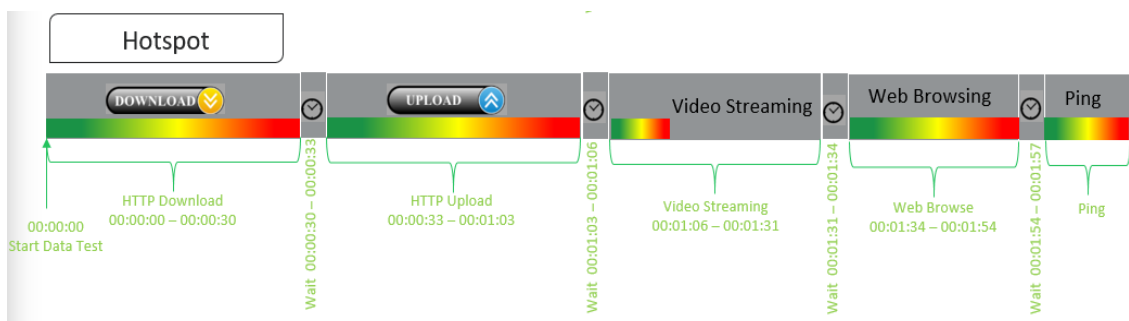

**Figure-43:** Data test script used at hotspot

- 5 Data iteration done at each hotspot location.
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- Only 1 ping iteration (with 1000 Count) done at hotspot location.

## 7.2 Appendix-II

### 7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
<b>Call Setup Success Rate</b>	<p>(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup:</p> <ol style="list-style-type: none"> <li>Call attempt is made</li> <li>The signaling channel is allocated</li> <li>The call is routed to the outwards path of the terminating network</li> <li>An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement.</li> </ol> <p>CSSR = (Total Call Established/ Total Call Attempt) *100</p> <p>As per QoS Regulation 2024 benchmark value is <b>&gt;=98%</b></p>
<b>Call Drop Rate</b>	<p>Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network</p> <p>Call Drop Rate = (Total Call Drop/Total Call Established) *100</p> <p>As per QoS Regulation 2024 benchmark value is <b>&lt;=2%</b></p>
<b>Call Setup Time</b>	<p>Time taken from call initiate to call alerting/ringing.</p> <p>Call Setup Time = T2- T1</p> <p>T2- Ringing (VoLTE/VoNR) &amp; Alerting (for WCDMA &amp; GSM), T1- Invite (VoLTE/VoNR) &amp; CM Service Request (for WCDMA &amp; GSM)</p>
<b>Voice Quality (MOS)</b>	<p>Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as;</p> <p>Excellent: MOS <math>\geq 4</math> and <math>&lt; 5</math>            Good : MOS <math>\geq 3</math> and <math>&lt; 4</math>            Fair : MOS <math>\geq 2</math> and <math>&lt; 3</math>            Poor : MOS <math>\geq 1</math> and <math>&lt; 2</math></p>
<b>Handover Success Rate</b>	<p>Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100</p> <p>Handover type which are considered- 2G Inter &amp; Intra cell, 3G Soft &amp; IRAT, 4G Inter &amp; Intra frequency &amp; SRVCC, 5G Inter &amp; Intra frequency &amp; 5G to 4G handovers.</p>
<b>Silence Call -</b>	<p>A call which has <math>\geq 4</math> sec continuous RTP gap is considered as a Silence Call.</p> <p>Silence call rate = (count of silence call / Total calls established) *100</p> <p>If a call observes multiple silence count <math>\geq 4</math> sec in a particular established call it has been taken as one silent event.</p>

<b>Jitter</b>	<p>The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If <math>S_i</math> is the RTP timestamp from packet <math>i</math>, and <math>R_i</math> is the time of arrival in RTP timestamps units for packet <math>i</math>, then for two packets <math>i</math> and <math>j</math> the inter-arrival jitter <math>D</math> can be expressed as:</p> $D(i,j) = (R_j - R_i) - (S_j - S_i)$ <p>The interarrival jitter is calculated continuously as each data packet <math>i</math> is received from source <math>SSRC_n</math>, using this difference <math>D</math> for that packet and the previous packet <math>i-1</math> in order of arrival (not necessarily in sequence), according to the formula</p> $J(i) = J(i-1) + ( D(i-1,i)  - J(i-1))/16 \text{ or } 8$																																		
<b>Downlink Packet Drop Rate</b>	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
<b>Uplink Packet Drop Rate</b>	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
<b>Signal Strength</b>	<p>Signal strength is the signal power level received by the wireless user.</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Parameter Name</th> <th rowspan="2">Technology</th> <th colspan="4">Signal Strength (dBm)</th> </tr> <tr> <th style="background-color: #28A745;">Excellent</th> <th style="background-color: #FFC107;">Good</th> <th style="background-color: #FFC107;">Fair</th> <th style="background-color: #DC3545;">Poor</th> </tr> </thead> <tbody> <tr> <td>Rx Level</td> <td>GSM</td> <td>0 to <math>\geq</math> -65</td> <td>&lt;-65 to <math>\geq</math>-75</td> <td>&lt;-75 to <math>\geq</math>-85</td> <td>&lt;-85 to min</td> </tr> <tr> <td>RSCP</td> <td>WCDMA</td> <td>0 to <math>\geq</math> -70</td> <td>&lt;-70 to <math>\geq</math>-80</td> <td>&lt;-80 to <math>\geq</math>-90</td> <td>&lt;-90 to min</td> </tr> <tr> <td>RSRP</td> <td>LTE</td> <td>0 to <math>\geq</math> -80</td> <td>&lt;-80 to <math>\geq</math>-95</td> <td>&lt;-95 to <math>\geq</math>-110</td> <td>&lt;-110 to min</td> </tr> <tr> <td>SS_RSRP</td> <td>NR</td> <td>0 to <math>\geq</math> -80</td> <td>&lt;-80 to <math>\geq</math>-95</td> <td>&lt;-95 to <math>\geq</math>-110</td> <td>&lt;-110 to min</td> </tr> </tbody> </table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to $\geq$ -65	<-65 to $\geq$ -75	<-75 to $\geq$ -85	<-85 to min	RSCP	WCDMA	0 to $\geq$ -70	<-70 to $\geq$ -80	<-80 to $\geq$ -90	<-90 to min	RSRP	LTE	0 to $\geq$ -80	<-80 to $\geq$ -95	<-95 to $\geq$ -110	<-110 to min	SS_RSRP	NR	0 to $\geq$ -80	<-80 to $\geq$ -95	<-95 to $\geq$ -110	<-110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to $\geq$ -65	<-65 to $\geq$ -75	<-75 to $\geq$ -85	<-85 to min																														
RSCP	WCDMA	0 to $\geq$ -70	<-70 to $\geq$ -80	<-80 to $\geq$ -90	<-90 to min																														
RSRP	LTE	0 to $\geq$ -80	<-80 to $\geq$ -95	<-95 to $\geq$ -110	<-110 to min																														
SS_RSRP	NR	0 to $\geq$ -80	<-80 to $\geq$ -95	<-95 to $\geq$ -110	<-110 to min																														

**Table-40:** Network performance parameter and definition voice

## 7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
<b>Download Speed (Mbps)</b>	<p>The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.</p> <p>Download Speed = Total bytes transferred during download / Total time for transfer</p> <ul style="list-style-type: none"> <li>80th percentile (upper range) &amp; 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data</li> </ul>
<b>Upload Speed (Mbps)</b>	<p>The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server.</p> <p>Upload Speed = Total bytes transferred during upload / Total time for transfer.</p> <ul style="list-style-type: none"> <li>80th percentile (upper range) &amp; 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.</li> </ul>

<b>Download Session Setup Success Rate</b>	(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.
<b>Upload Session Setup Success Rate</b>	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
<b>Web Page Download Time</b>	Web browsing test is used to measure performance in terms of opening a web/HTTP page.  Time taken to open the web page successfully is considered as web browsing delay/web page download time.
<b>Video Streaming Delay</b>	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
<b>Latency</b>	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency we just do half of the round-trip time.
<b>Jitter</b>	Measure of variation in time in arrival of packets from a source to destination  The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL  $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
<b>Packet Loss Rate</b>	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100  * Packet delay (using ping) >90 ms considered as packet loss and included in packet loss rate.  * Packet loss rate is calculated based on ICMP

**Table-41:** Network performance parameter and definition Data