



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

Rajasthan LSA

January 2026

Contents

1. Introduction	3
2. Executive Summary (LSA)	3
2.1 Drive test details	3
2.2 Drive test routes	4
2.3 Summary of areas covered	4
2.4 Telecom service providers detected frequency bands	5
2.5 Performance against key QoS parameters	6
3. QoS performance analysis-LSA level	7
3.1 Overview	8
3.2 Voice performance	8
3.3 Data performance	11
4. Detailed QoS performance analysis	13
4.1 Overview	13
4.2 City	13
4.2.1 Drive test route	13
4.2.2 Areas covered	13
4.2.3 Voice performance	14
4.2.4 Data performance	22
4.3 Hotspots	26
4.3.1 Locations	26
4.3.2 Hotspot covered	26
4.3.3 Voice performance	26
4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)	29
4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)	33
4.4 Walk Test	36
4.4.1 Walk test locations	36
4.4.2 Walk Test Covered	36
4.4.3 Voice Performance	36
4.4.4 Data Performance	36
4.5 Highway	37
4.5.1 Drive test route	37
4.5.2 Routes Covered	37
4.5.3 Voice performance	37
4.5.4 Data performance	46

5. Voice & Data Key findings	50
5.1 Overall Voice.....	50
5.2 Overall Data	50
5.3 Operator wise Key Findings	51
6. Annexure	55
6.1 Route wise coverage map	55
6.1.1 City	55
6.1.2 Highway.....	60
7. Appendix	66
7.1 Appendix-I	66
7.1.1 Drive test setup	66
7.1.2 Drive test Methodology	68
7.2 Appendix-II	70
7.2.1 Network Performance Parameters for Voice calls	70
7.2.2 Network Performance Parameters Data tests	71

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in Rajasthan License Service Area (LSA) during the month of January-2026 under the supervision of TRAI Regional Office (RO) Jaipur. Details of route/area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Bikaner City, Nokha & Shri Dungargarh towns & connecting route	City	293.8	13-Jan-2026	16-Jan-2026
2	Bikaner City	Inter Operator Calling	1 Location	16-Jan-2026	16-Jan-2026
3	Bikaner City, Nokha & Shri Dungargarh towns	Hotspot	11 Locations	13-Jan-2026	15-Jan-2026
4	Bikaner City (Rampuriah Haveli to Seth Bhandashah Jain Temple-Heritage Walk route)	Walk test	1.2	15-Jan-2026	15-Jan-2026
5	Deshnok to Norangdesar	Highway	41.1	13-Jan-2026	13-Jan-2026

Table-1: Drive test summary.

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator call test, hotspots, walk test and highway as per the legends shown on the map.

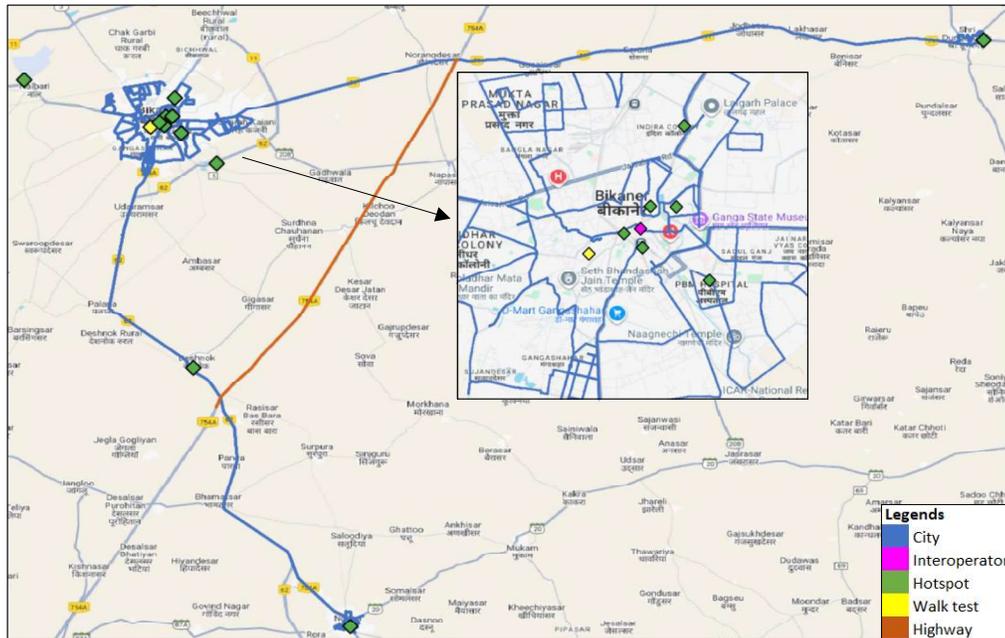


Figure-1: Drive test routes

2.3 Summary of areas covered

a) City-Nokha, Bikasar, Budhro ki dhani, Rasisar, Palana, Udairamsagar, Gangashar, Sarah Kajani, Mukta Prasad Nagar, Norangdesar, Seruna, Jodhasar, Shri Dungargarh etc.

b) Hotspot

1. Bikaner Airport
2. Bikaner Bus Stand
3. Bikaner Civil Court
4. Bikaner Railway Station
5. Junagadh Fort Bikaner
6. Kote Gate Bikaner
7. National Research Centre on Camel Bikaner
8. Nokha Bus Stand Nokha
9. Shri Karni Mata Mandir Deshnok
10. SP Medical College Bikaner
11. Shri Dungargarh Bus Stand

c) Walk Test

Bikaner City (Rampuriahaveli to Seth Bhandashah Jain Temple-Heritage Walk route)

d) Highway- Deshnok to Norangdesar passing through Rasisar, Kesar Desar Gangaguran, Kesar Desar Boran, Kilchoo Deodan, Kalyansar Agoona etc.

2.4 Telecom service providers detected frequency bands


Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	900
2	Bharti Airtel Ltd.	4G	900,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,850,2500
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900
10	Vodafone Idea Ltd.	4G	900,1800,2100,2500

Table-2: Telecom service provider (TSP) covered in IDT

2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), CST: Call Setup Time (in seconds), DCR: Drop Call Rate (in %) & MOS: Mean Opinion Score.

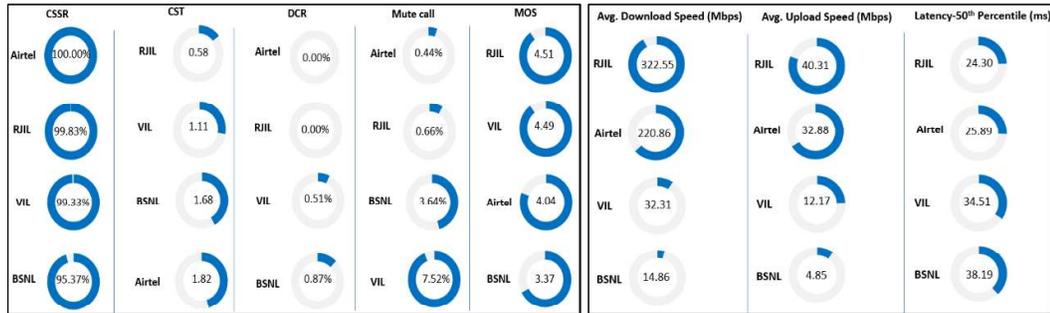

Summary-Voice services

Call Setup Success Rate: Airtel, BSNL, RJIL and VIL have 100.00%, 95.37%, 99.83% and 99.33% call setup success rate respectively in Auto-selection mode (5G/4G/3G/2G).

Call Setup Time: Airtel, BSNL, RJIL and VIL have call setup time of 1.82, 1.68, 0.58 and 1.11 seconds respectively in Auto-selection mode (5G/4G/3G/2G).

Drop Call Rate: Airtel, BSNL, RJIL and VIL have drop call rate of 0.00%, 0.87%, 0.00% and 0.51% respectively in Auto-selection mode (5G/4G/3G/2G).

Call Silence/Mute Rate: Airtel, BSNL, RJIL and VIL have silence call rate of 0.44%, 3.64%, 0.66% and 7.52% respectively in packet switched network (4G/5G).

Mean Opinion Score (MOS): Airtel, BSNL, RJIL and VIL have average MOS of 4.04, 3.37, 4.51 and 4.49 respectively.

Summary-Data services

Data Download performance (Overall):

Average download speed of Airtel (5G/4G/2G) is 220.86 Mbps, BSNL (4G/3G/2G) is 14.86 Mbps, RJIL (5G/4G) is 322.55 Mbps and VIL (4G/2G) is 32.31 Mbps.

Data Upload performance (Overall):

Average upload speed of Airtel (5G/4G/2G) is 32.88 Mbps, BSNL (4G/3G/2G) is 4.85 Mbps, RJIL (5G/4G) is 40.31 Mbps and VIL (4G/2G) is 12.17 Mbps.

Latency (Overall): Airtel, BSNL, RJIL and VIL 50th percentile latency is 25.89 ms, 38.19 ms, 24.30 ms & 34.51 ms respectively.

Data performance - Hotspots (in Mbps):

Airtel- 4G D/L: 42.17	4G U/L: 13.41
5G D/L: 212.46	5G U/L: 42.57
BSNL- 4G D/L: 17.85	4G U/L: 10.52
RJIL- 4G D/L: 54.68	4G U/L: 21.46
5G D/L: 249.84	5G U/L: 28.49
VIL- 4G D/L: 20.39	4G U/L: 13.04

Note- "D/L" Download speed, "U/L" Upload speed

- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 1.98%, 8.50%, 0.51% & 3.88% of the **City IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 55 to 58** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 5.57%, 15.21%, 3.93% & 12.96% of the **City IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 59 to 62** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 21.52%, 30.41%, 23.08% & 53.34% of the **Highway IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 66 to 69** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 52.43%, 39.71%, 55.70% & 69.16% of the **Highway IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 70 to 73** as per the **Section 6.1** under Para-6 (Annexure)}

QoS Performance Analysis- Rajasthan LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the Rajasthan LSA during the month of January-2026 covering city drive, hotspots, walk test and highway. (Refer Table 1)

3.2 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	448	458	452
Call Setup Success Rate %	99.78	98.47	99.56
Drop Call Rate %	0.22	0.89	0.44
Call Setup Time-Average (Second)	3.50	2.77	3.52
Handover Success Rate %	97.97	99.97	99.54

Table-3: Summary of voice call performance in 3G/2G network mode only.

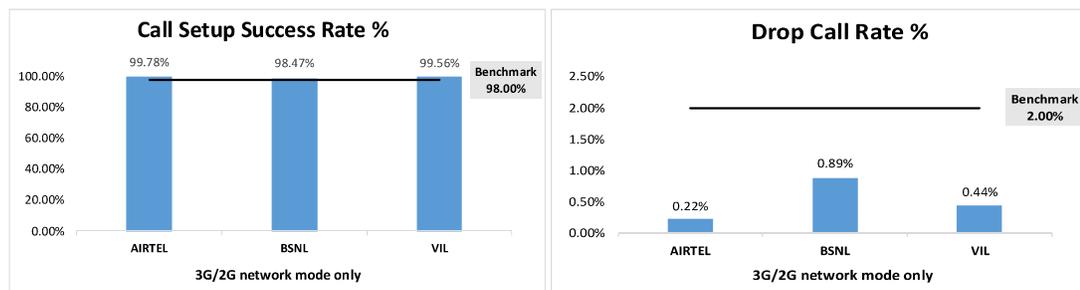


Figure-2: Call setup success rate and drop call rate performance.

Technology	Number of unique cell Id's covered in Voice test- Technology wise		
	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	52	NA
2G	421	56	267

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	590	605	594	594
Call Setup Success Rate %	100.00	95.37	99.83	99.33
Drop Call Rate %	0.00	0.87	0.00	0.51
Call Setup Time-Average (Second)	1.82	1.68	0.58	1.11
Handover Success Rate %	100.00	99.77	99.94	100.00

Table-5: Summary of voice call performance in network auto-selection mode.

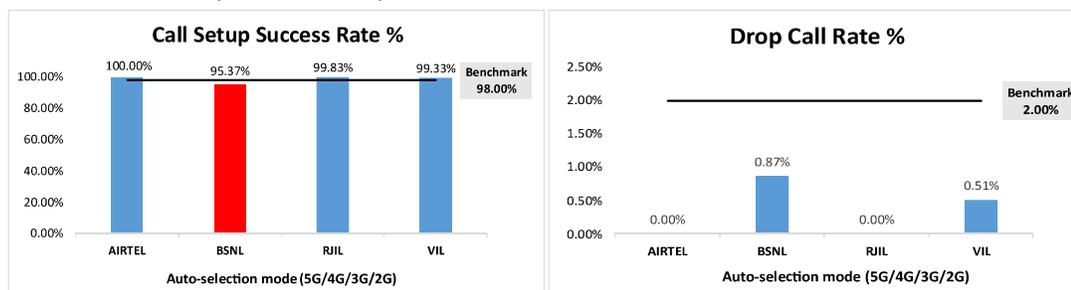


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	454	412	455	452
Number of silences call for >4 Sec	2	15	3	34
Silence Call Rate %	0.44	3.64	0.66	7.52
Number of silence instances for >4 Sec	2	24	4	41
Number of silence instances for >3 Sec	2	39	7	48
Number of silence instances for >2 sec	6	65	12	80
RTP Jitter (4G & 5G) in ms	3.30	7.05	17.48	16.54
Packet loss Rate Downlink %	0.18	3.34	0.76	1.33
Packet loss Rate Uplink %	0.35	2.89	0.76	2.34

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	527	0
4G	685	291	565	632
3G	NA	20	NA	NA
2G	0	44	NA	14

Table-7: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	2714	2312	2703	2668
Speech Quality (Average MOS)	4.04	3.37	4.51	4.49
Number of samples with MOS >=4 to <5 (Excellent)	2351	1024	2410	2353
Number of samples with MOS >=3 to <4 (Good)	320	466	189	209
Number of samples with MOS >=2 to <3 (Fair)	27	575	44	43
Number of samples with MOS >=1 to <2 (Poor)	16	247	60	63
%age of samples with MOS >=4 to <5 (Excellent)	86.62%	44.29%	89.16%	88.19%
%age of samples with MOS >=3 to <4 (Good)	11.79%	20.16%	6.99%	7.83%
%age of samples with MOS >=2 to <3 (Fair)	0.99%	24.87%	1.63%	1.61%
%age of samples with MOS >=1 to <2 (Poor)	0.59%	10.68%	2.22%	2.36%

Table-8: Summary of speech quality (MOS) samples.

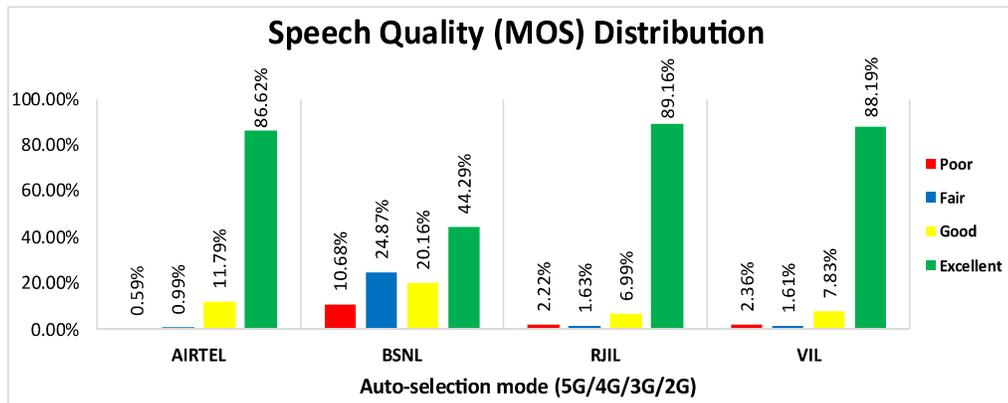


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service providers call setup success rate, total 12 to 15 inter operator calls were attempted at one location which is Bikaner Railway Station. The call setup success rate and call setup time observation is as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	100.00
BSNL	93.33	NA	100.00	100.00
RJIL	92.86	93.33	NA	100.00
VIL	100.00	100.00	100.00	NA

Table-9: Call setup success rate across service providers

Note-

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	2.49	1.29	2.89
BSNL	3.12	NA	1.64	1.92
RJIL	1.53	1.77	NA	1.70
VIL	1.96	1.61	1.81	NA

Table-10: Call setup time across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	220.86	14.86	322.55	32.31
	80th Percentile	303.01	23.41	473.75	48.33
	20th Percentile	112.31	4.98	158.31	11.56
Upload Throughput (Mbits/s)	Average	32.88	4.85	40.31	12.17
	80th Percentile	53.83	7.83	69.67	19.09
	20th Percentile	11.05	1.41	12.20	3.43
Latency (ms)	50th Percentile	25.89	38.19	24.30	34.51

Table-11: Summary of data performance in network auto-selection mode.

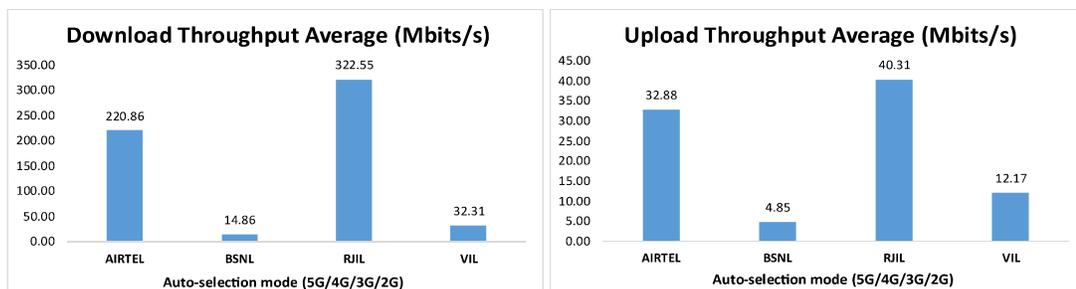


Figure- 5: Download and Upload throughput

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	564	0
4G	727	272	128	639
3G	NA	31	NA	NA
2G	2	22	NA	14

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots, walk test and highway for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

4.2 City

Drive test has been conducted on 13th, 15th and 16th January 2026 in Bikaner City, Nokha & Shri Dungargarh towns & connecting route. (Refer Table-1)

4.2.1 Drive test route

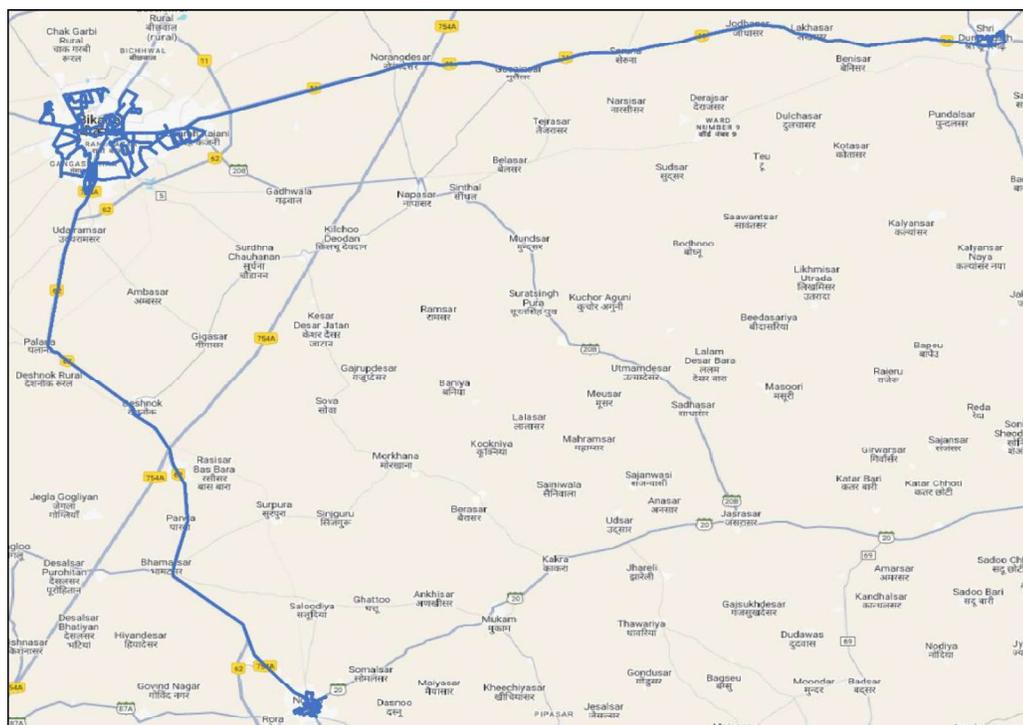


Figure- 6: Drive test routes

4.2.2 Areas covered

Nokha, Bikasar, Budhro ki dhani, Rasisar, Palana, Udairamsagar, Gangashar, Sarah Kajani, Mukta Prasad Nagar, Norangdesar, Seruna, Jodhasar, Shri Dungargarh etc.

4.2.3 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	426	435	429
Call Setup Success Rate %	99.77	98.39	99.53
Drop Call Rate %	0.24	0.93	0.23
Call Setup Time-Average (Second)	3.49	2.75	3.43
Handover Success Rate %	97.94	99.97	99.52

Table-13: Summary of voice call performance in 3G/2G network mode only.

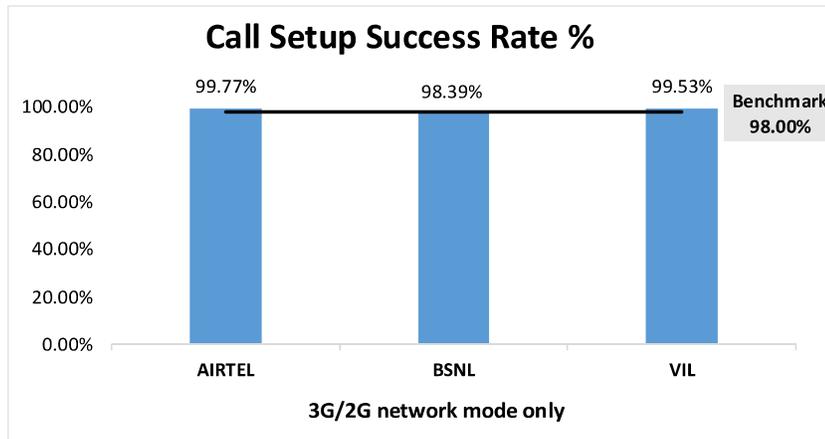


Figure-7: Performance for call setup success rate.

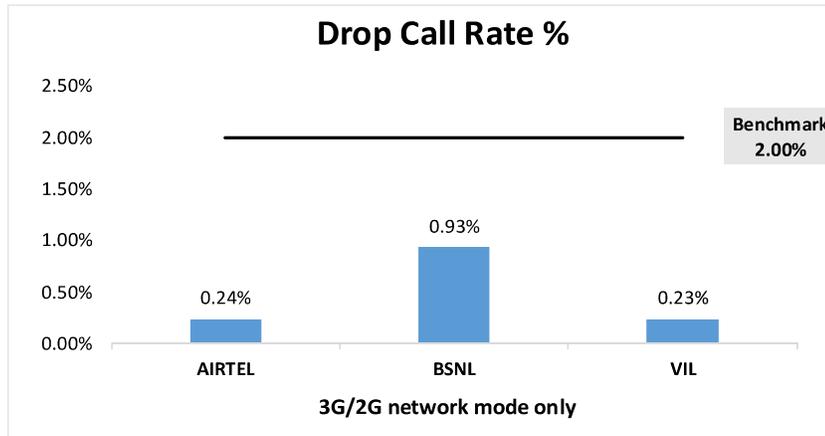


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	71.23%	NA
2G	99.99%	28.25%	99.97%
Limited Service	0.01%	0.52%	0.03%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.

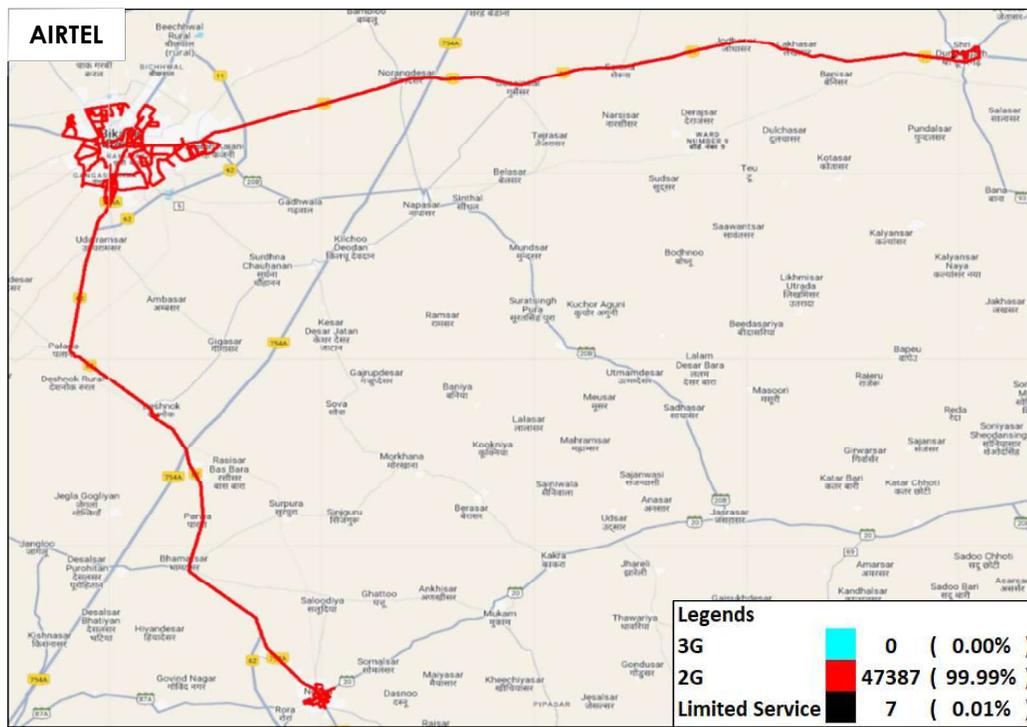


Figure-9: Serving technology plots 3G/2G network mode - AIRTEL

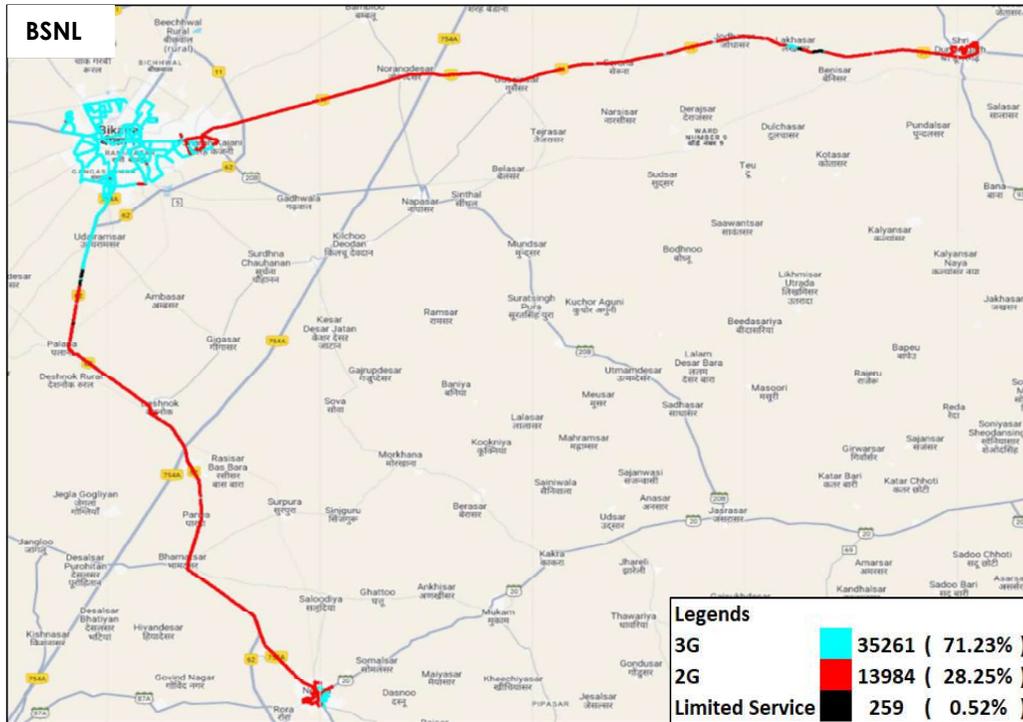


Figure-10: Serving technology plots 3G/2G network mode - BSNL.

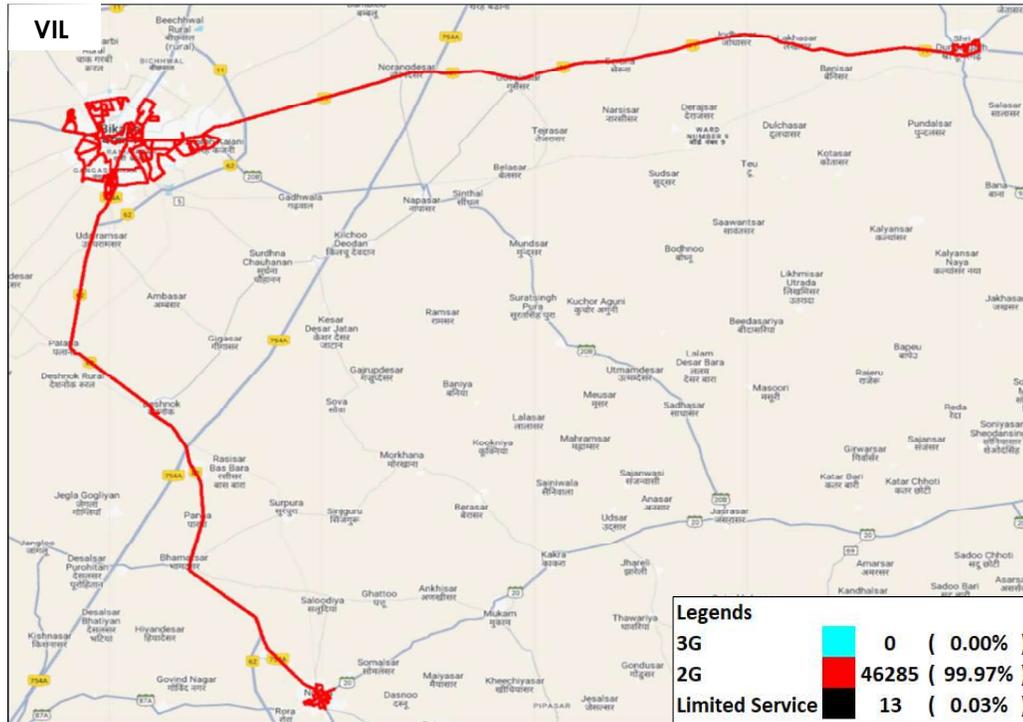


Figure-11: Serving technology plots 3G/2G network mode - VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 52, 53 & 54 for map view)

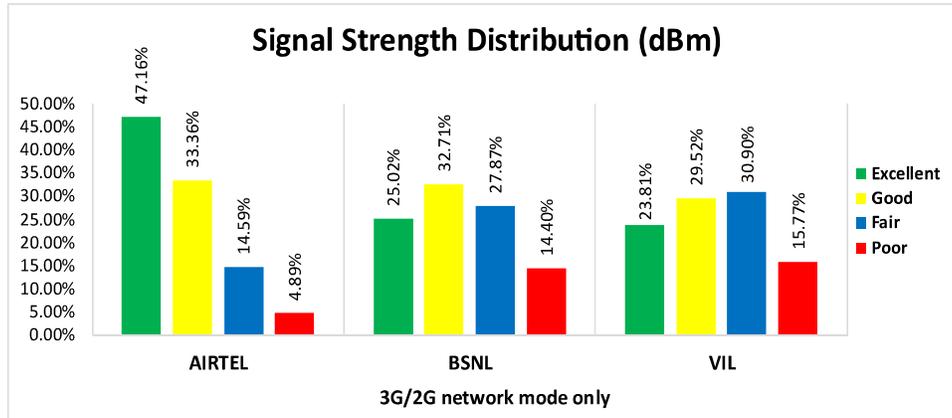


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 47% of samples falling in the excellent signal strength category.
- BSNL has 25% of samples falling in the excellent signal strength category.
- VIL has 24% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	444	456	448	447
Call Setup Success Rate %	100.00	95.61	99.78	99.55
Drop Call Rate %	0.00	0.92	0.00	0.45
Call Setup Time Average (Second)	1.82	1.71	0.57	1.10
Handover Success Rate %	100.00	99.75	100.00	100.00

Table-15: Summary of voice call performance in network auto-selection mode.

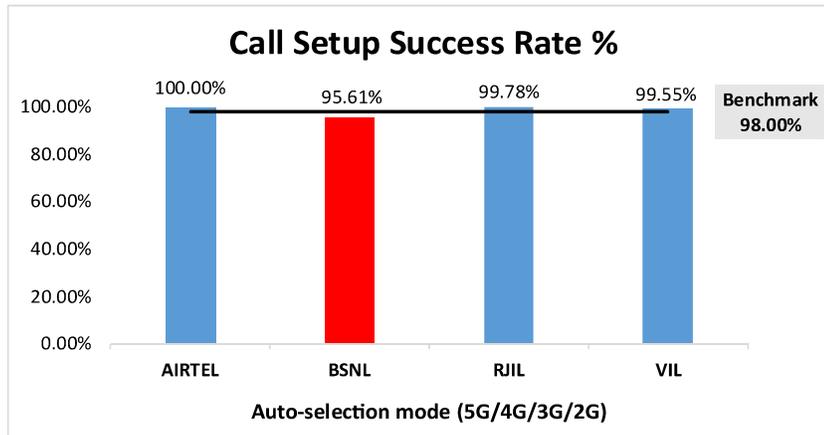


Figure-13: Performance for call setup success rate.

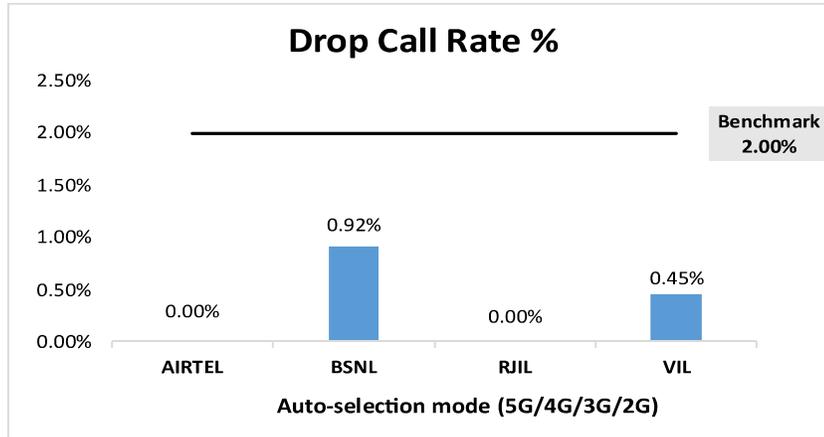


Figure-14: Performance for drop call rate.

Parameter	Service Provider Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	432	396	433	431
Number of silences call for >4 Sec	2	14	1	29
Silence Call Rate %	0.46	3.54	0.23	6.73
Number of silence instances for >4 Sec	2	23	1	33
Number of silence instances for >3 Sec	2	38	1	36
Number of silence instances for >2 sec	4	61	2	58
RTP Jitter (4G & 5G) in ms	3.14	7.03	17.39	16.69
Packet loss Rate Downlink %	0.12	3.22	0.38	0.97
Packet loss Rate Uplink %	0.27	2.63	0.36	1.82

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	2580	2239	2581	2547
Speech Quality (Average MOS)	4.05	3.38	4.55	4.53
Number of samples with MOS >=4 to <5 (Excellent)	2263	1004	2338	2284
Number of samples with MOS >=3 to <4 (Good)	286	456	175	196
Number of samples with MOS >=2 to <3 (Fair)	23	541	37	29
Number of samples with MOS >=1 to <2 (Poor)	8	238	31	38
%age of samples with MOS >=4 to <5 (Excellent)	87.71%	44.84%	90.59%	89.67%
%age of samples with MOS >=3 to <4 (Good)	11.09%	20.37%	6.78%	7.70%
%age of samples with MOS >=2 to <3 (Fair)	0.89%	24.16%	1.43%	1.14%
%age of samples with MOS >=1 to <2 (Poor)	0.31%	10.63%	1.20%	1.49%

Table-17: Summary of speech quality (MOS) samples.

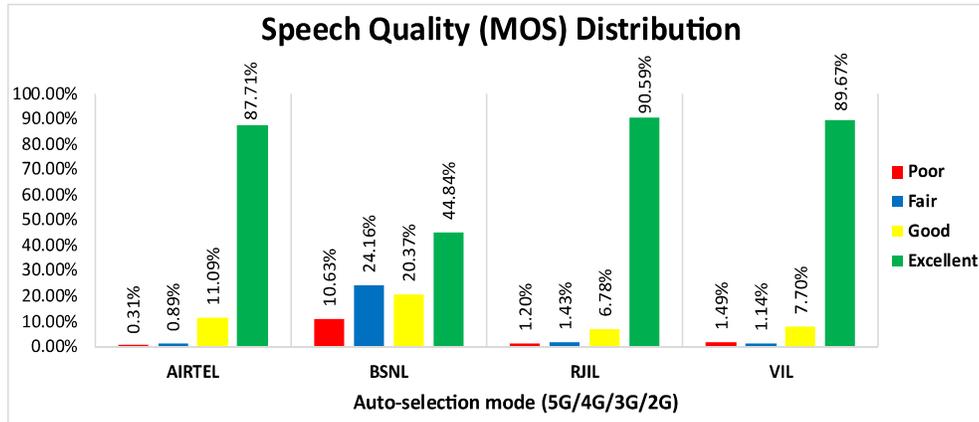


Figure-15: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	2.87%	NA	73.18%	NA
4G	97.13%	82.03%	26.82%	97.42%
3G	NA	7.67%	NA	NA
2G	0.00%	9.51%	NA	2.58%
Limited Service	0.00%	0.79%	0.00%	0.00%

Table-18: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice .

Note-

- NA- Service provider doesn't provide services in respective technology.

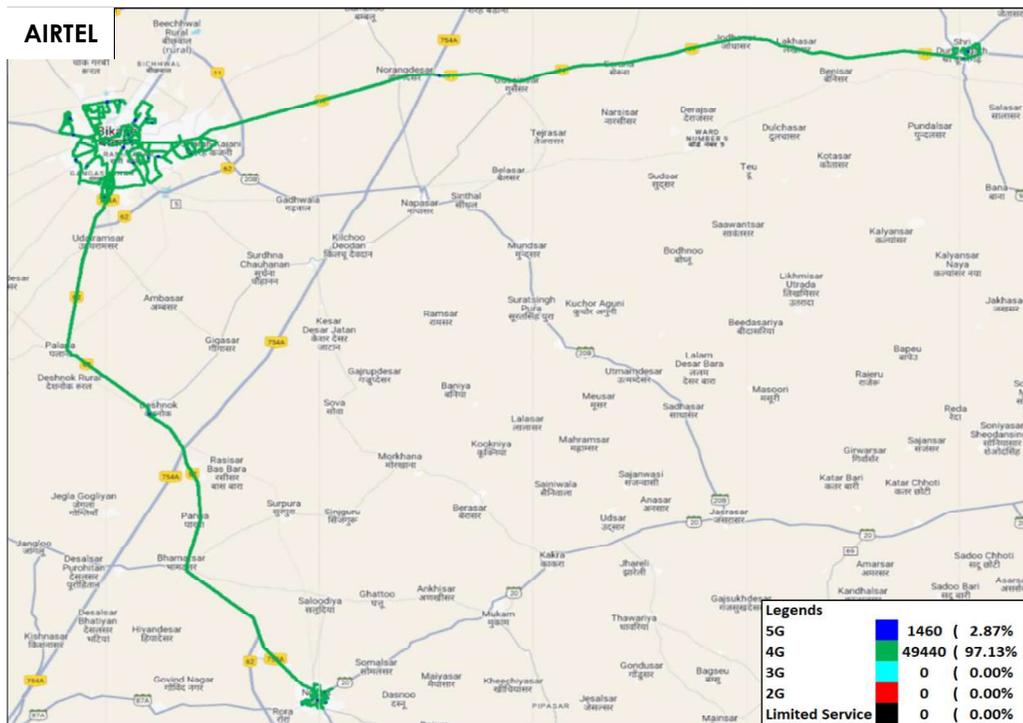


Figure-16: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

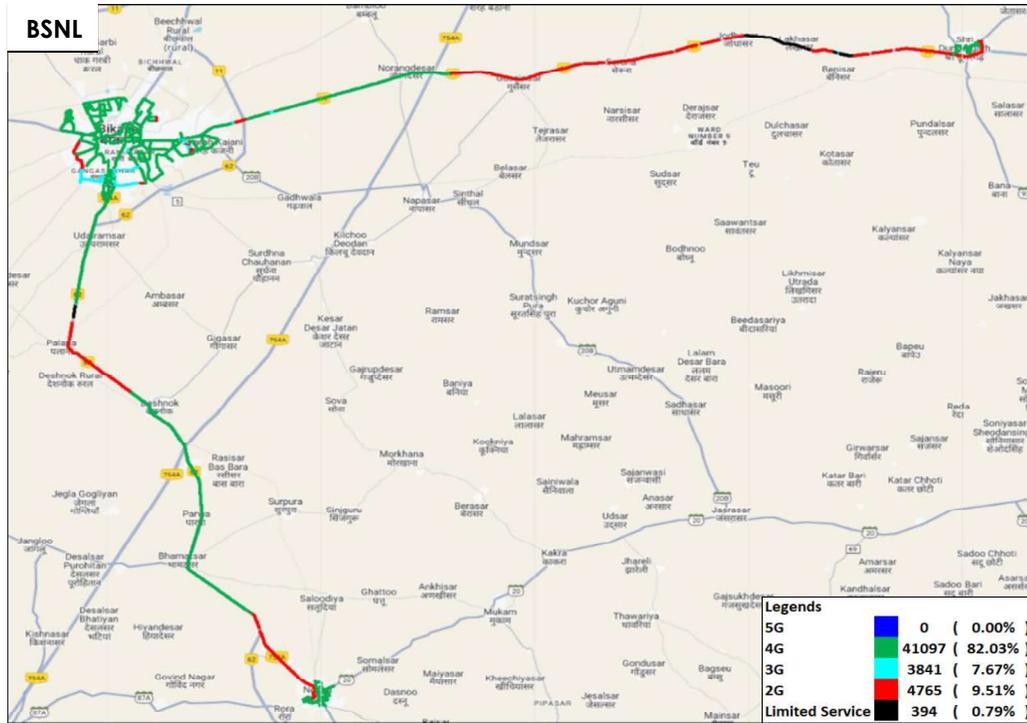


Figure-17: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

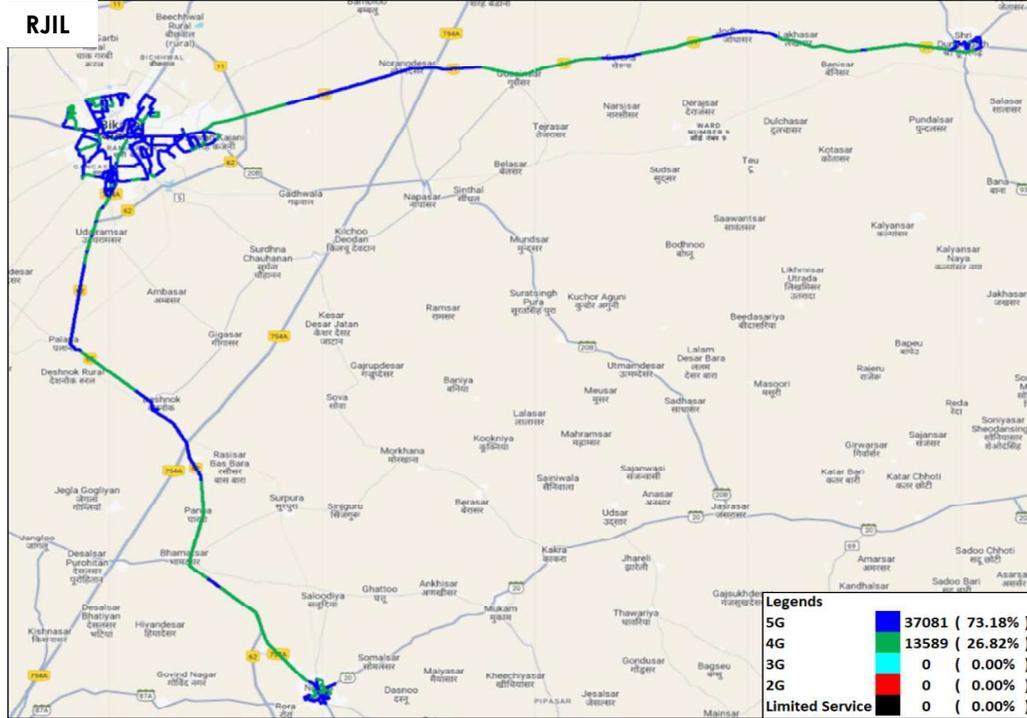


Figure-18: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

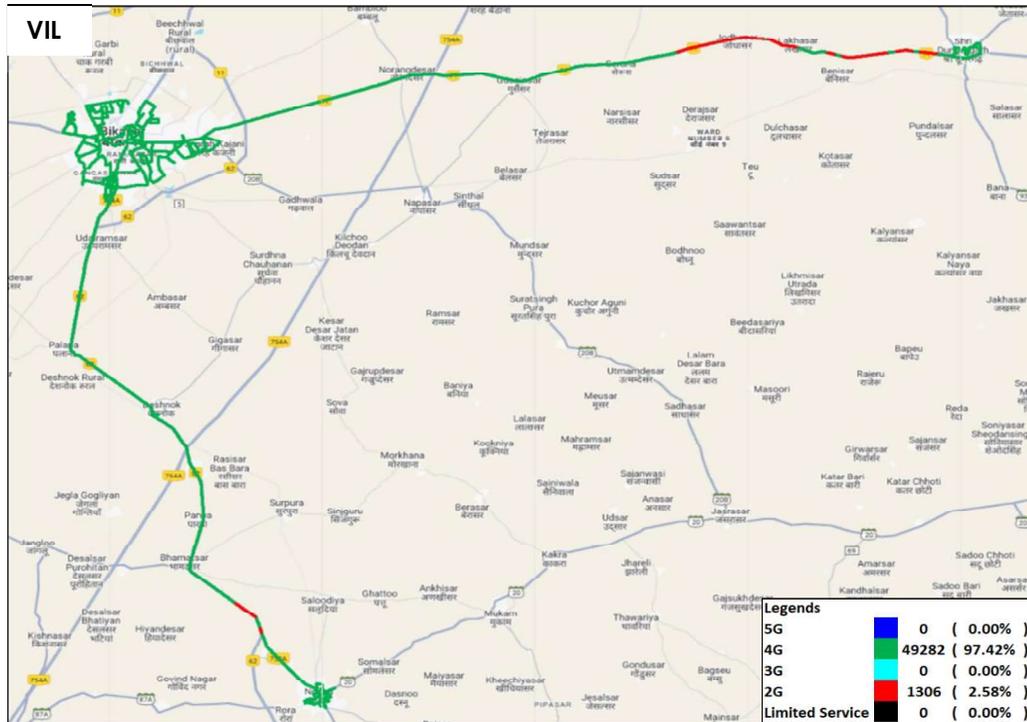


Figure-19: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G). (Refer figure-55, 56, 57 & 58 for map view)

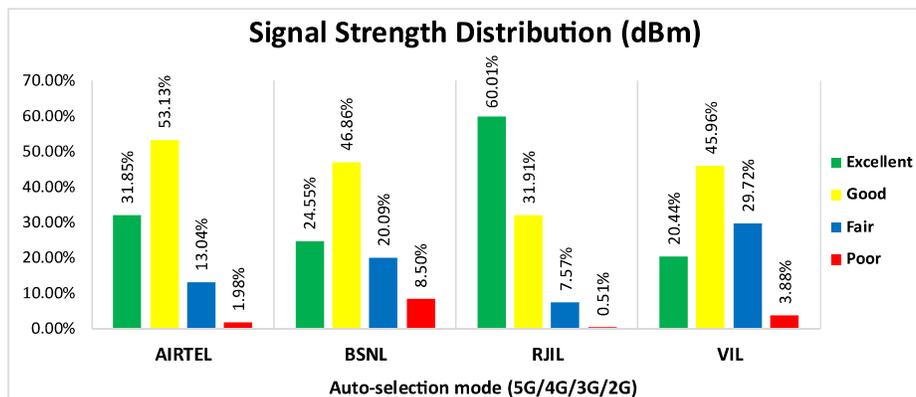


Figure-20: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 32% of samples falling in the excellent signal strength category.
- BSNL has 25% of samples falling in the excellent signal strength category.
- RJIL has 60% of samples falling in the excellent signal strength category.
- VIL has 20% of samples falling in the excellent signal strength category.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	225.02	14.41	337.31	33.96
	80th Percentile	298.25	24.11	480.74	50.65
	20th Percentile	119.46	4.26	180.44	13.23
Upload Throughput (Mbits/s)	Average	33.60	4.33	42.24	12.61
	80th Percentile	55.39	7.25	70.45	19.77
	20th Percentile	12.29	1.39	15.23	3.93
Latency (ms)	50th Percentile	25.17	39.96	24.12	33.64

Table-19: Summary of Data performance in network auto-selection mode.

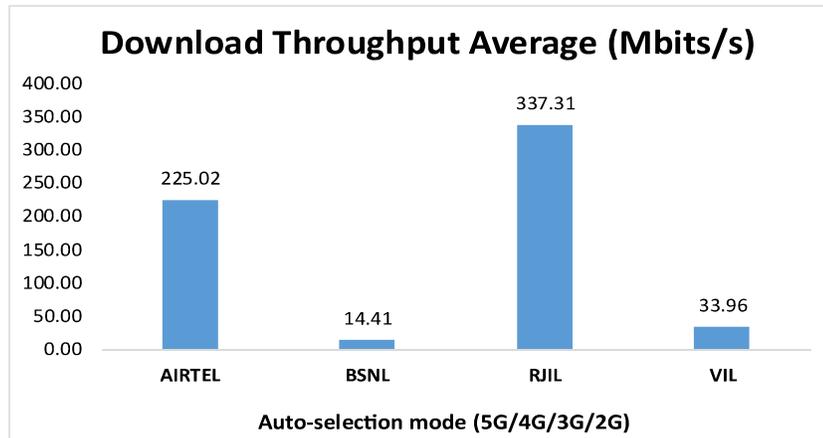


Figure- 21: Download throughput

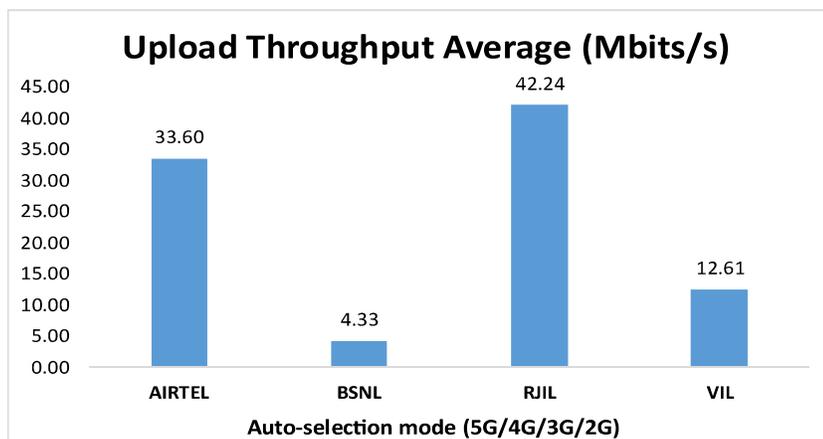


Figure- 22: Upload throughput

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	81.47%	NA	97.71%	NA
4G	18.38%	72.89%	2.29%	98.43%
3G	NA	21.04%	NA	NA
2G	0.01%	2.67%	NA	1.13%
Limited Service	0.13%	3.40%	0.00%	0.44%

Table-20: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

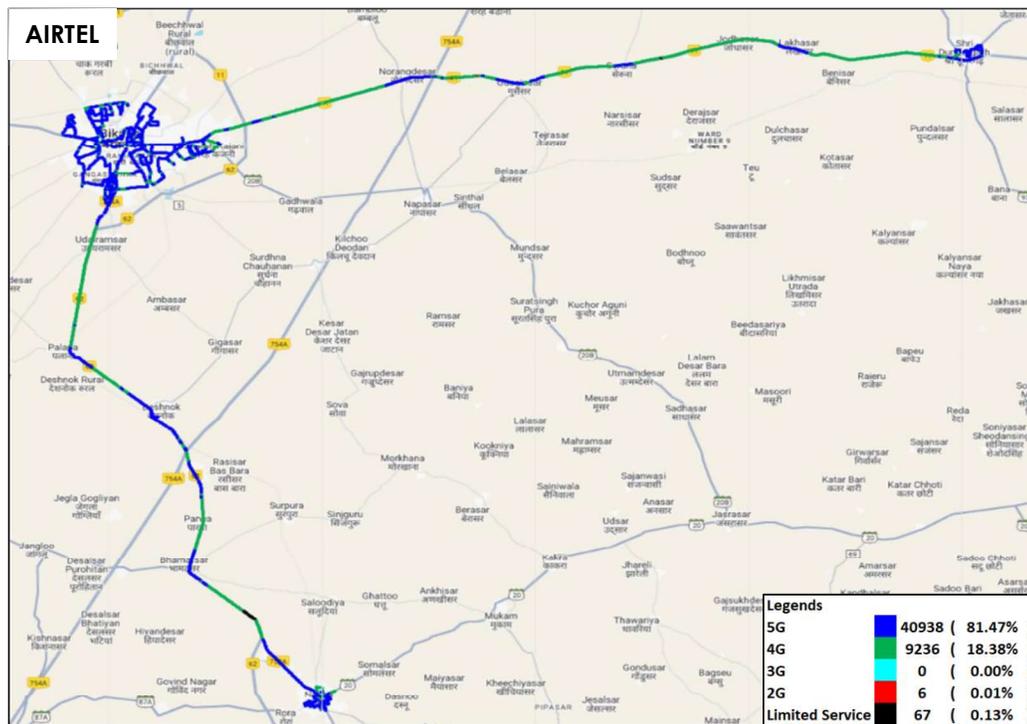


Figure-23: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data -AIRTEL.

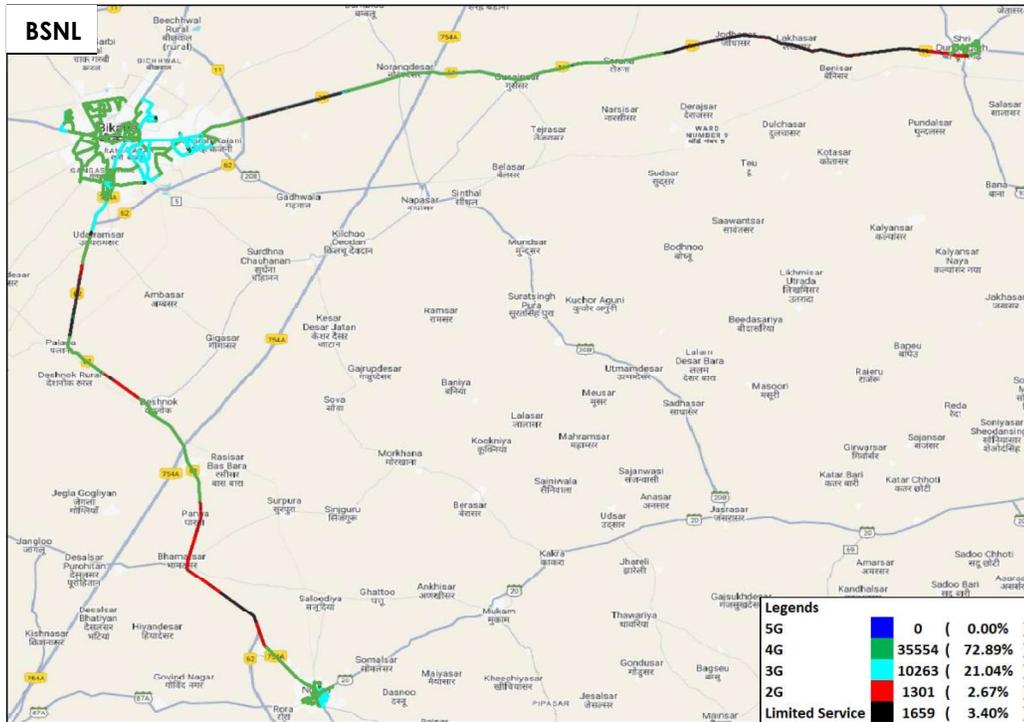


Figure-24: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data-BSNL.

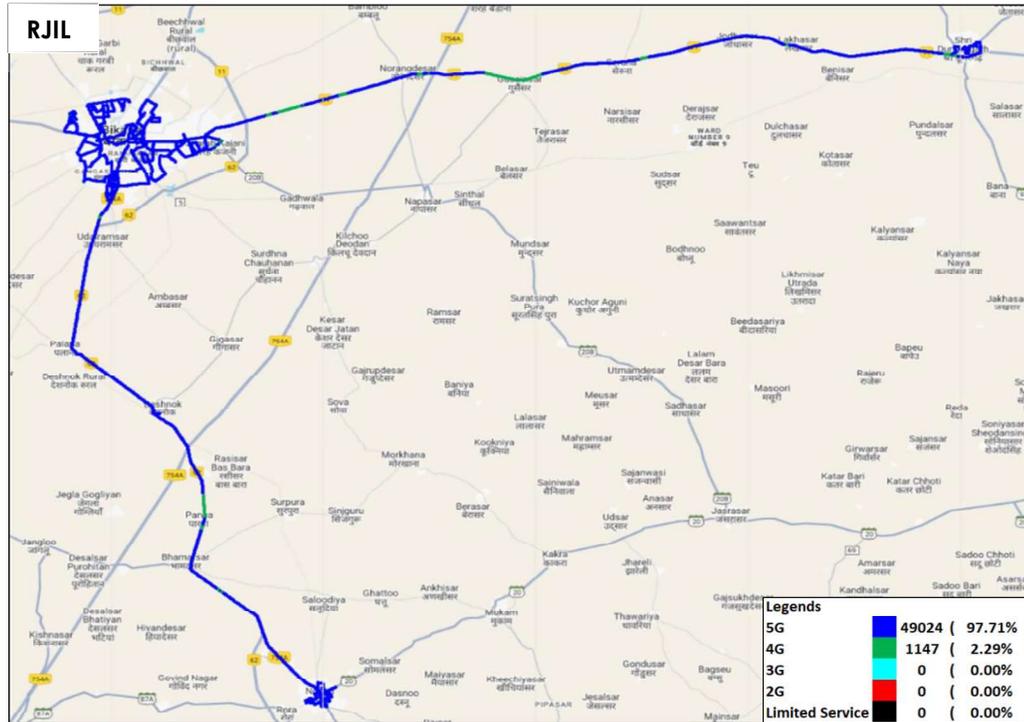


Figure-25: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data- RJIL.

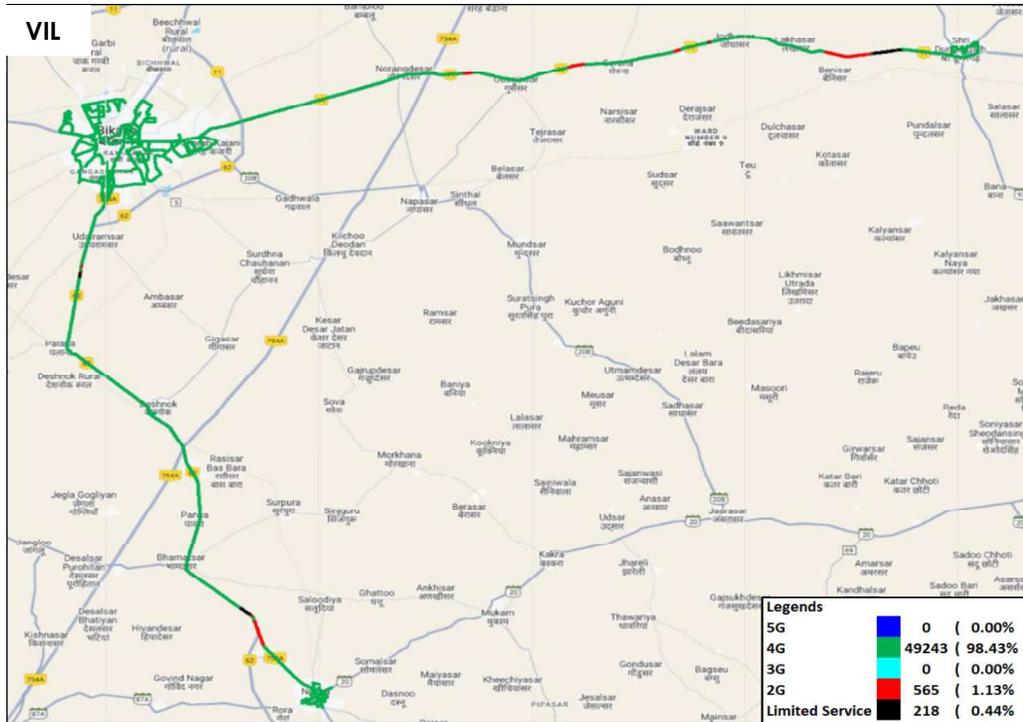


Figure-26: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data– VIL

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G). (Refer figure-59, 60, 61 & 62 for map view)

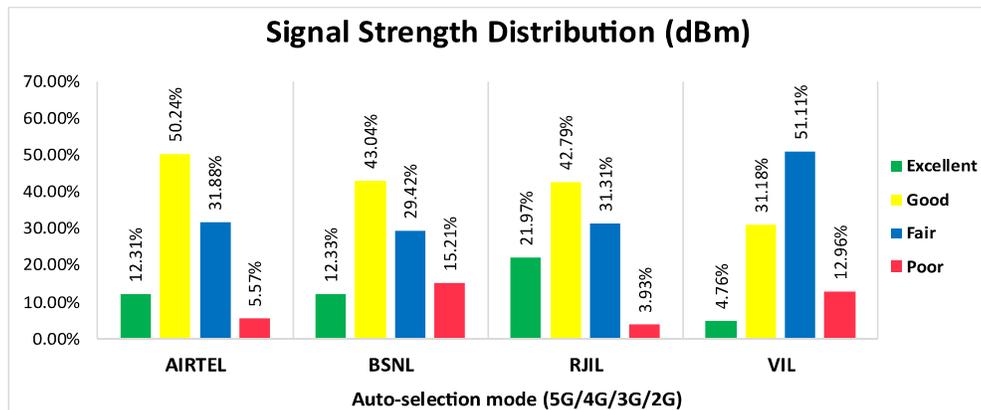


Figure-27: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 12% of samples falling in the excellent signal strength category.
- BSNL has 12% of samples falling in the excellent signal strength category.
- RJIL has 22% of samples falling in the excellent signal strength category.
- VIL has 5% of samples falling in the excellent signal strength category.

4.3 Hotspots

Hotspot testing has been conducted from 13th to 15th January 2026. Eleven locations have been tested in Bikaner City, Nokha & Shri Dungargarh towns. (Refer Table-1)

4.3.1 Locations

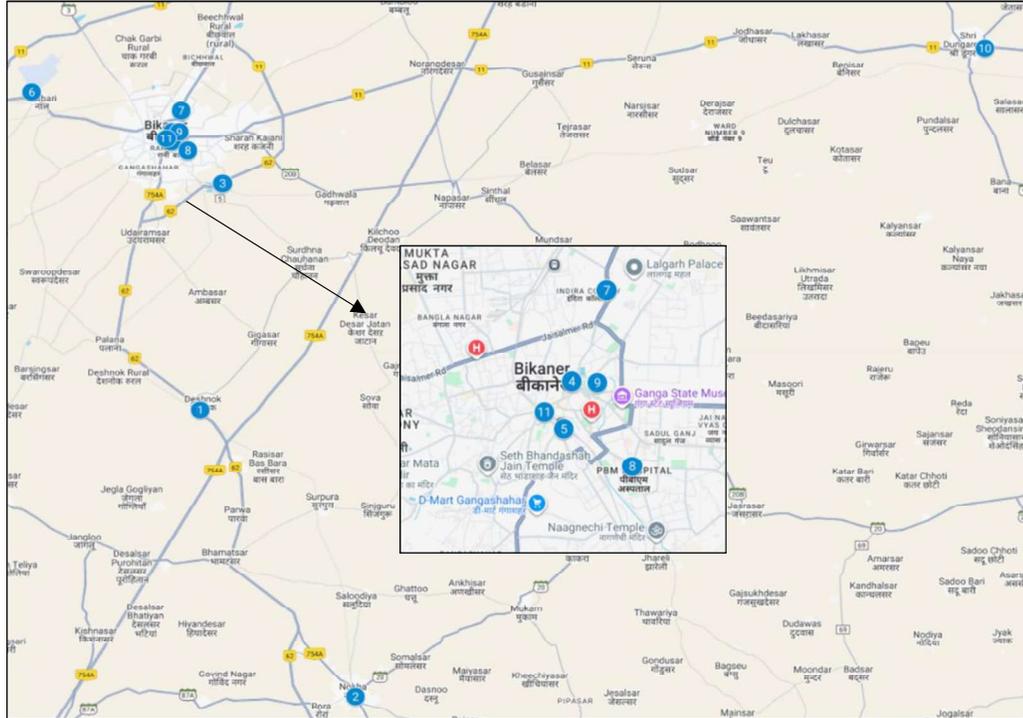


Figure- 28: Hotspot locations

4.3.2 Hotspot covered

1. Bikaner Airport
2. Bikaner Bus Stand
3. Bikaner Civil Court
4. Bikaner Railway Station
5. Junagadh Fort Bikaner
6. Kote Gate Bikaner
7. National Research Centre on Camel Bikaner
8. Nokha Bus Stand Nokha
9. Shri Karni Mata Mandir Deshnoh
10. SP Medical College Bikaner
11. Shri Dungargarh Bus Stand

4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	110	110	110	110
Call Setup Success Rate %	100.00	99.09	100.00	99.09
Drop Call Rate %	0.00	0.92	0.00	0.00
Call Setup Time-Average (Second)	1.82	1.45	0.59	1.03

Table-21: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Bikaner Airport				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	90.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.76	1.32	0.59	1.07

Table-22: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Bikaner Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.72	1.28	0.56	1.06

Table-23: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Bikaner Civil Court				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.74	1.25	0.51	1.04

Table-24: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Bikaner Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.95	1.27	0.54	1.01

Table-25: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Junagadh Fort Bikaner				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.89	1.83	0.53	0.97

Table-26: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Kote Gate Bikaner				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.79	1.41	0.51	1.01

Table-27: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

National Research Centre on Camel Bikaner				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.82	1.31	1.21	1.01

Table-28: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Nokha Bus Stand Nokha				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.95	1.32	0.47	1.18

Table-29: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Shri Karni Mata Mandir Deshnok				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.97	1.42	0.55	0.99

Table-30: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

SP Medical College Bikaner				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	11.11	0.00	0.00
Call Setup Time-Average (Second)	1.72	2.30	0.52	1.01

Table-31: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Shri Dungargarh Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.69	1.28	0.48	1.00

Table-32: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	225.16	17.88	254.40	24.42
Download Throughput 80th Percentile (Mbit/s)	310.96	20.32	381.06	38.69
Download Throughput 20th Percentile (Mbit/s)	94.57	8.54	118.23	5.82
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	34.37	8.55	33.27	10.38
Upload Throughput 80th Percentile (Mbit/s)	52.77	15.53	77.77	12.14
Upload Throughput 20th Percentile (Mbit/s)	11.18	2.46	3.79	2.20
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.35	5.48	4.35	5.79
Youtube Initial Buffer Delay (Second)	0.99	1.86	0.92	1.33
Latency (ms) - 50th Percentile	26.44	36.86	24.59	36.15
Jitter (ms)	9.30	10.96	4.99	11.15
Packet Loss Rate%	15.87	21.49	0.65	2.68
Packet Loss Rate- 90th percentile	84.68	98.38	0.56	7.08

Table-33: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Bikaner Airport				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	136.06	5.72	52.24	15.18
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.11	1.22	5.28	3.82
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.89	15.63	5.73	5.80
Youtube Initial Buffer Delay (Second)	7.37	-	2.56	1.19
Latency (ms) - 50th Percentile	26.30	39.93	29.69	36.53
Jitter (ms)	13.91	62.77	5.17	18.25
Packet Loss Rate%	45.40	54.90	0.00	6.60

Table-34: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

Bikaner Bus Stand				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	258.84	7.62	503.68	57.62
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	52.78	3.69	73.16	38.62
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.92	3.59	3.41	5.64
Youtube Initial Buffer Delay (Second)	0.65	4.36	0.58	0.68
Latency (ms) - 50th Percentile	37.00	37.85	23.78	29.18
Jitter (ms)	17.80	4.48	3.01	4.62
Packet Loss Rate%	0.80	0.40	0.10	0.20

Table-35: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Bikaner Civil Court				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	132.74	16.24	114.43	25.17
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	13.56	2.75	3.28	2.77
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.99	4.78	5.89	6.43
Youtube Initial Buffer Delay (Second)	0.64	2.92	1.86	2.09
Latency (ms) – 50th Percentile	22.81	34.89	26.66	44.20
Jitter (ms)	3.65	2.04	11.09	6.63
Packet Loss Rate%	22.90	23.20	0.20	0.40

Table-36: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Bikaner Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	113.69	9.24	357.55	32.36
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	35.33	3.01	83.34	5.94
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	5.04	2.62	4.12	3.68
Youtube Initial Buffer Delay (Second)	0.72	1.35	0.89	2.26
Latency (ms) - 50th Percentile	38.77	38.17	23.41	37.84
Jitter (ms)	15.23	4.42	3.80	5.87
Packet Loss Rate%	1.10	0.50	0.00	0.10

Table-37: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Junagadh Fort Bikaner				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	272.18	18.98	350.03	4.95
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	36.06	5.05	36.84	4.24
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.94	4.77	3.69	2.41
Youtube Initial Buffer Delay (Second)	0.60	1.11	0.51	1.48
Latency (ms)- 50th Percentile	20.67	38.77	26.17	38.35
Jitter (ms)	10.48	2.49	6.20	5.32
Packet Loss Rate%	0.20	1.30	0.10	0.10

Table-38: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Kote Gate Bikaner				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	194.45	14.02	355.08	39.52
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	19.52	10.30	82.83	6.73
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.98	4.85	2.05	5.91
Youtube Initial Buffer Delay (Second)	0.61	0.98	0.59	0.79
Latency (ms) - 50th Percentile	28.31	33.84	25.01	35.64
Jitter (ms)	10.63	2.39	2.93	5.03
Packet Loss Rate%	0.50	42.20	0.00	0.00

Table-39: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

National Research Centre on Camel Bikaner				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	48.05	41.06	102.54	1.93
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.76	23.52	2.72	1.31
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.89	7.07	6.40	13.76
Youtube Initial Buffer Delay (Second)	2.71	0.95	1.26	4.55
Latency (ms)- 50th Percentile	-	-	25.00	37.41
Jitter (ms)	-	-	8.26	15.98
Packet Loss Rate%	50.50	50.80	5.50	1.10

Table-40: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Ping tests were failed.

Nokha Bus Stand Nokha				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	247.55	12.63	150.95	48.93
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	78.82	9.11	8.96	28.56
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.24	5.92	4.49	5.31
Youtube Initial Buffer Delay (Second)	0.59	2.08	0.60	0.70
Latency (ms) - 50th Percentile	26.59	39.16	24.74	32.70
Jitter (ms)	2.12	5.33	3.22	10.59
Packet Loss Rate%	49.00	50.50	0.00	0.20

Table-41: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Shri Karni Mata Mandir Deshnok				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	531.91	46.42	233.29	21.01
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	45.45	20.50	9.36	9.68
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.32	6.50	3.40	5.98
Youtube Initial Buffer Delay (Second)	0.67	1.03	0.65	0.74
Latency (ms) - 50th Percentile	17.92	34.38	24.57	33.45
Jitter (ms)	2.44	1.78	4.28	3.95
Packet Loss Rate%	0.00	0.10	1.20	0.00

Table-42: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

SP Medical College Bikaner				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	387.92	8.93	327.04	6.20
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	42.52	6.34	31.54	1.39
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.26	3.75	4.10	9.02
Youtube Initial Buffer Delay (Second)	0.71	2.70	0.60	2.57
Latency (ms) - 50th Percentile	23.46	38.79	23.48	53.73
Jitter (ms)	3.44	25.52	3.20	38.39
Packet Loss Rate%	0.10	12.40	0.00	20.50

Table-43: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Shri Dungargarh Bus Stand				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	153.32	15.88	251.61	15.69
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	49.20	8.59	28.65	11.09
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.47	7.89	3.96	4.38
Youtube Initial Buffer Delay (Second)	0.63	0.85	0.64	0.91
Latency (ms) - 50th Percentile	33.83	33.82	27.15	36.77
Jitter (ms)	13.33	2.50	3.68	8.12
Packet Loss Rate%	4.10	0.10	0.00	0.30

Table-44: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	212.46	-	249.84	-
	Upload Throughput Average (Mbits/s)	42.57	-	28.49	-
4G	Download Throughput Average (Mbits/s)	42.17	17.85	54.68	20.39
	Upload Throughput Average (Mbits/s)	13.41	10.52	21.46	13.04

Table-45: Overall Summary of 5G only & 4G only data download & upload speed.

Bikaner Airport					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	167.01	-	11.74	-
	Upload Throughput Average (Mbits/s)	11.92	-	2.29	-
4G	Download Throughput Average (Mbits/s)	20.78	8.04	56.14	6.88
	Upload Throughput Average (Mbits/s)	5.87	1.54	7.11	7.99

Table-46: Overall Summary of 5G only & 4G only data download & upload speed.

Bikaner Bus Stand					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	275.86	-	504.46	-
	Upload Throughput Average (Mbits/s)	83.23	-	87.28	-
4G	Download Throughput Average (Mbits/s)	54.10	8.74	132.75	24.08
	Upload Throughput Average (Mbits/s)	21.27	2.87	24.85	21.75

Table-47: Overall Summary of 5G only & 4G only data download & upload speed.

Bikaner Civil Court					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	132.57	-	109.92	-
	Upload Throughput Average (Mbits/s)	11.47	-	4.15	-
4G	Download Throughput Average (Mbits/s)	27.27	19.23	2.32	26.31
	Upload Throughput Average (Mbits/s)	3.74	8.26	3.48	6.40

Table-48: Overall Summary of 5G only & 4G only data download & upload speed.

Bikaner Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	88.70	-	263.54	-
	Upload Throughput Average (Mbits/s)	23.20	-	26.36	-
4G	Download Throughput Average (Mbits/s)	43.55	4.97	104.35	18.96
	Upload Throughput Average (Mbits/s)	11.79	4.80	21.53	13.72

Table-49: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
---	--	--	--	--	--

Junagadh Fort Bikaner					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	302.12	-	381.71	-
	Upload Throughput Average (Mbits/s)	72.07	-	40.55	-
4G	Download Throughput Average (Mbits/s)	35.97	10.80	63.99	40.48
	Upload Throughput Average (Mbits/s)	28.01	2.53	38.75	27.94

Table-50: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Kote Gate Bikaner					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	125.45	-	413.63	-
	Upload Throughput Average (Mbits/s)	33.84	-	64.78	-
4G	Download Throughput Average (Mbits/s)	53.30	16.84	107.74	29.81
	Upload Throughput Average (Mbits/s)	22.49	11.52	60.05	4.37

Table-51: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

National Research Centre On Camel Bikaner					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	60.11	-	117.57	-
	Upload Throughput Average (Mbits/s)	8.17	-	5.27	-
4G	Download Throughput Average (Mbits/s)	13.11	40.36	4.74	1.36
	Upload Throughput Average (Mbits/s)	6.57	23.41	3.59	2.16

Table-52: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Nokha Bus Stand Nokha					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	182.07	-	166.35	-
	Upload Throughput Average (Mbits/s)	77.47	-	10.32	-
4G	Download Throughput Average (Mbits/s)	82.50	15.89	25.48	46.48
	Upload Throughput Average (Mbits/s)	14.92	11.84	15.45	29.51

Table-53: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Shri Karni Mata Mandir Deshnok					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	446.67	-	196.58	-
	Upload Throughput Average (Mbits/s)	57.83	-	10.56	-
4G	Download Throughput Average (Mbits/s)	76.46	40.15	18.68	13.26
	Upload Throughput Average (Mbits/s)	9.91	22.32	46.68	11.04

Table-54: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

SP Medical College Bikaner					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	337.57	-	355.31	-
	Upload Throughput Average (Mbits/s)	45.29	-	34.57	-
4G	Download Throughput Average (Mbits/s)	20.03	16.16	37.77	8.43
	Upload Throughput Average (Mbits/s)	15.46	12.74	7.75	4.60

Table-55: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Shri Dungargarh Bus Stand					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	223.18	-	227.41	-
	Upload Throughput Average (Mbits/s)	43.78	-	27.22	-
4G	Download Throughput Average (Mbits/s)	36.79	15.18	47.53	8.21
	Upload Throughput Average (Mbits/s)	7.43	13.85	6.81	15.76

Table-56: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

4.4 Walk Test

Walk Test has been conducted on 15th January 2026. One location has been tested in the city. (Refer Table-1)

4.4.1 Walk test locations



Figure-29: Walk Test locations.

4.4.2 Walk Test Covered

1. Bikaner City (Rampuria Haveli to Seth Bhandashah Jain Temple-Heritage Walk route)

4.4.3 Voice Performance

Bikaner City (Rampuria Haveli to Seth Bhandashah Jain Temple-Heritage Walk route)				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	13	12	12	13
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.85	1.81	0.54	1.10

Table-57: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.4.4 Data Performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Bikaner City (Rampuria Haveli to Seth Bhandashah Jain Temple-Heritage Walk route)				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	283.95	15.77	253.96	27.75
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	38.69	5.56	31.62	9.84
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	23.75	38.19	22.23	32.30

Table-58: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.5 Highway

Drive test has been conducted on 13th January 2026 covering one Highway route. (Refer Table-1)

4.5.1 Drive test route

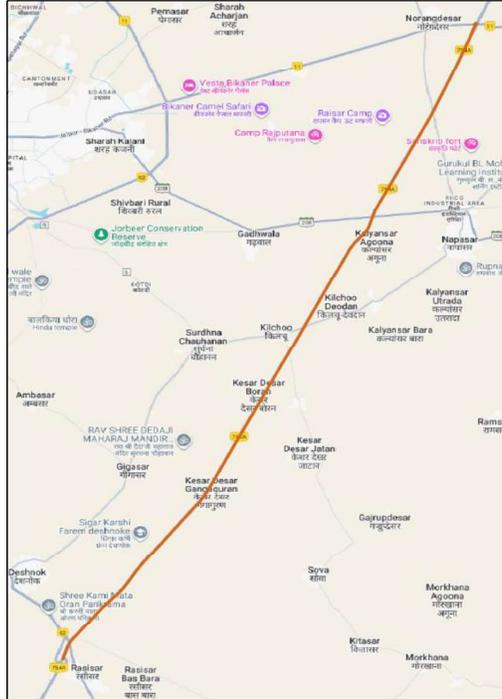


Figure-30: Drive test route Highway.

4.5.2 Routes Covered

Deshnok to Norangdesar passing through Rasisar, Kesar Desar Gangaguran, Kesar Desar Boran, Kilchoo Deodan, Kalyansar Agoona etc.

4.5.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect the experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	22	23	23
Call Setup Success Rate %	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	4.35
Call Setup Time-Average (Second)	3.76	3.21	5.21
Handover Success Rate %	100.00	100.00	100.00

Table-59: Summary of voice call performance in 3G/2G network mode only.

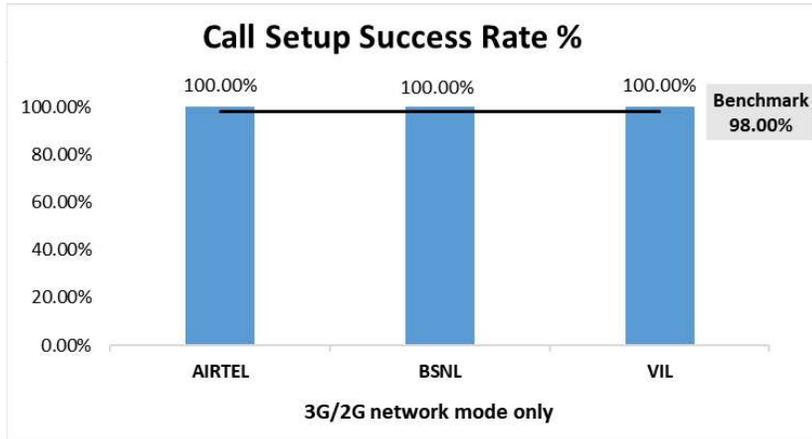


Figure-31: Performance for call setup success rate.

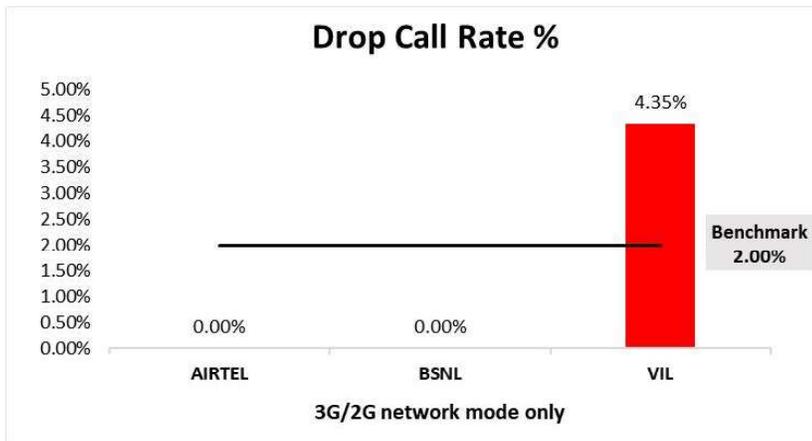


Figure-32: Performance for drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	0.00%	NA
2G	100.00%	100.00%	100.00%
Limited Service	0.00%	0.00%	0.00%

Table-60: Time spent on technology during drive test 3G/2G network mode only.

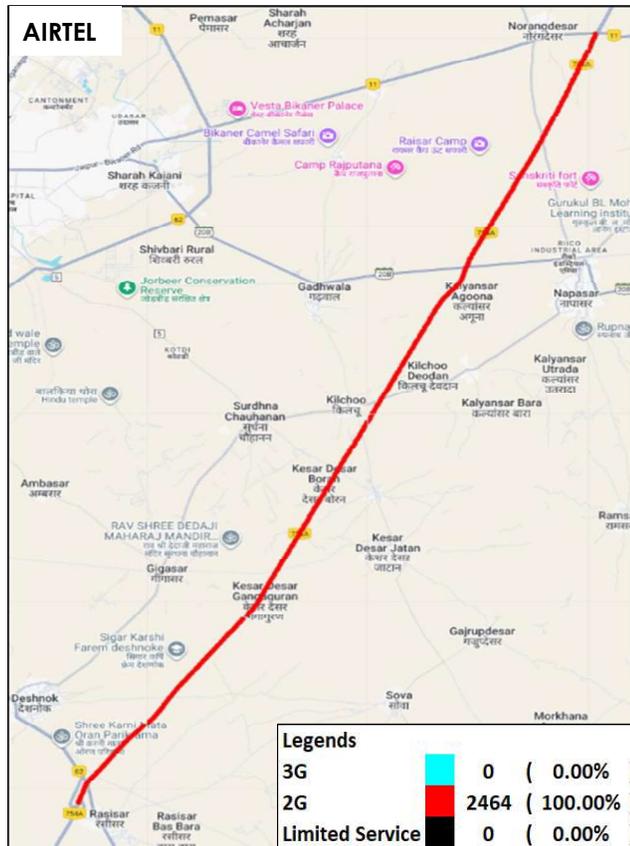


Figure-33: Serving technology plots 3G/2G network mode - AIRTEL.

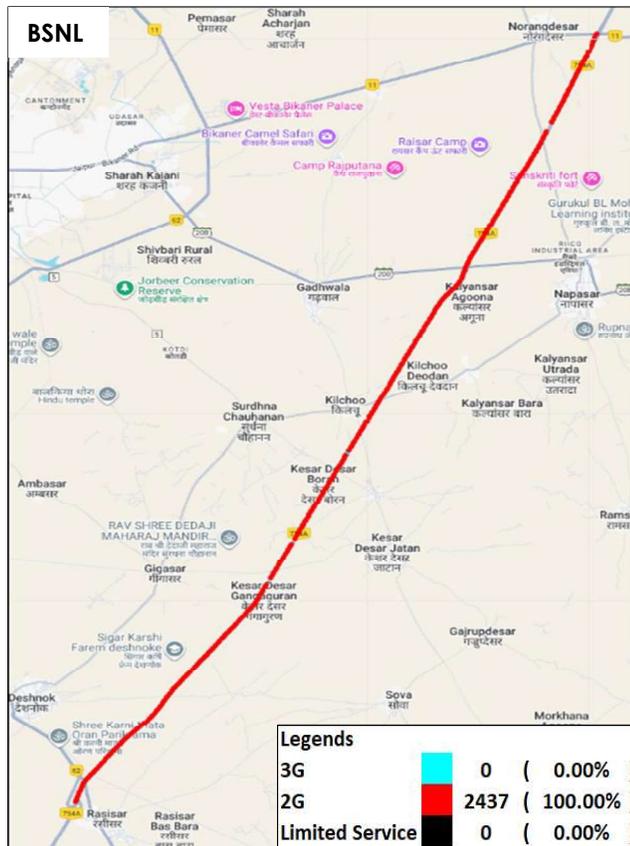


Figure-34: Serving technology plots 3G/2G network mode - BSNL.

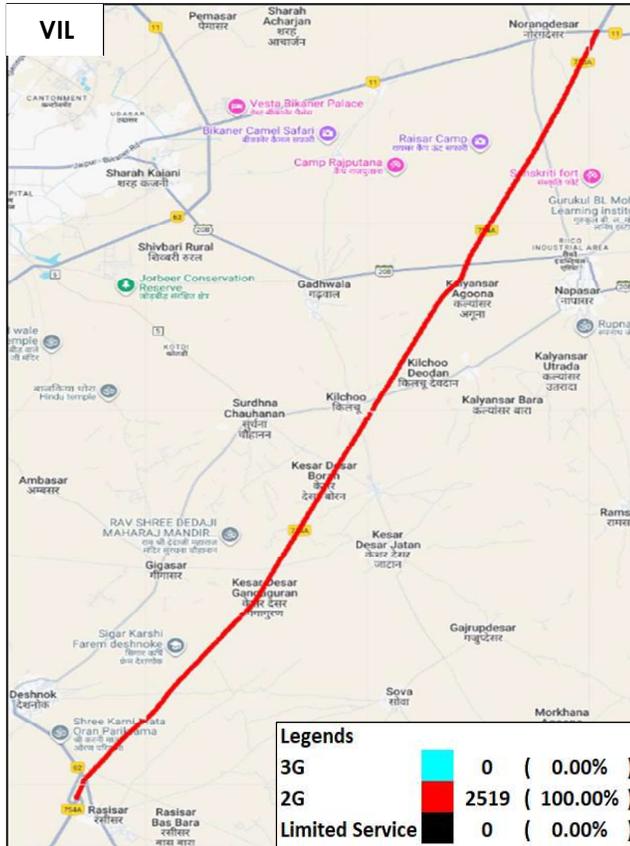


Figure 35: Serving technology plots 3G/2G network mode - VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure-63, 64 & 65 for map view)

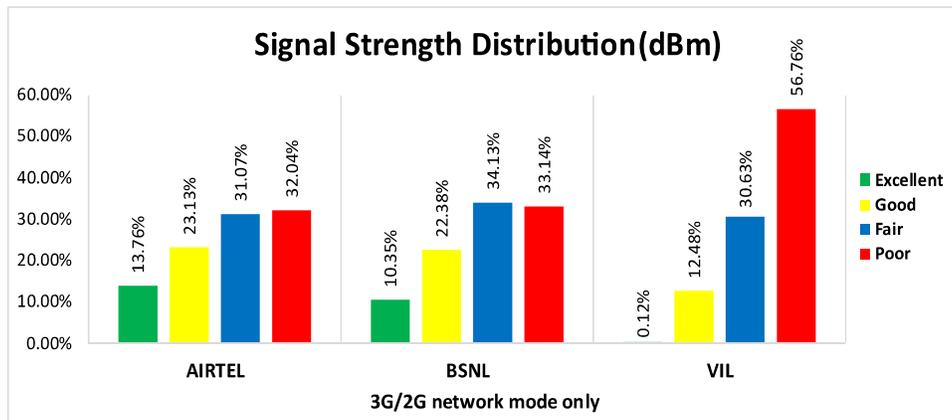


Figure-36: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 14% of samples falling in the excellent signal strength category.
- BSNL has 10% of samples falling in the excellent signal strength category.
- VIL has 0% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	23	27	24	24
Call Setup Success Rate %	100.00	74.07	100.00	95.83
Drop Call Rate %	0.00	0.00	0.00	4.35
Call Setup Time Average (Second)	1.89	2.19	0.86	1.76
Handover Success Rate %	100.00	100.00	99.62	100.00

Table-61: Summary of voice call performance in network auto-selection mode.

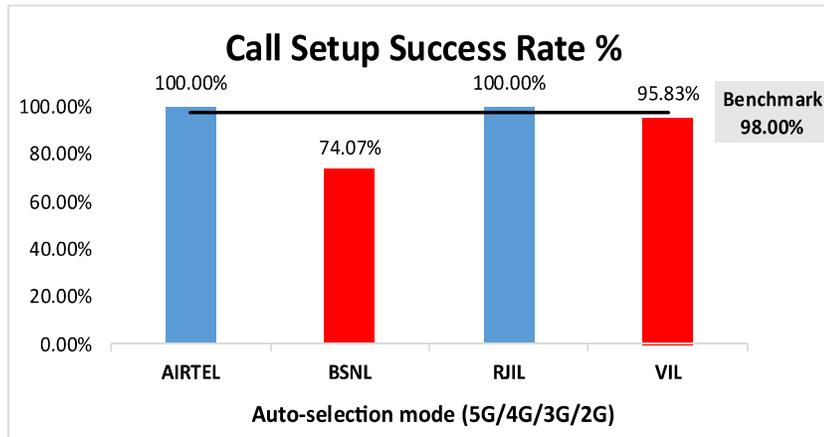


Figure-37: Performance for call setup success rate.

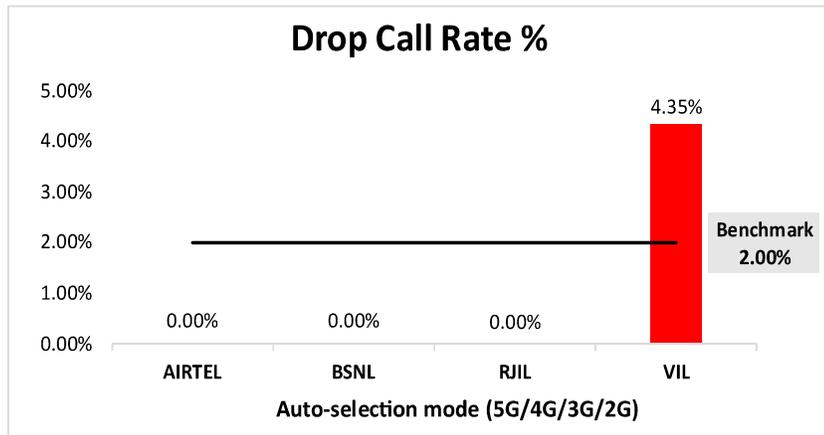


Figure-38: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	22	16	22	21
Number of silence call for >4 Sec	0	1	2	5
Silence Call Rate %	0.00	6.25	9.09	23.81
Number of silence instances for >4 Sec	0	1	3	8
Number of silence instances for >3 Sec	0	1	6	12
Number of silence instances for >2 sec	2	4	10	22
RTP Jitter (4G & 5G) in ms	6.50	8.24	19.45	13.14
Packet loss Rate Downlink %	1.30	11.12	8.26	8.60
Packet loss Rate Uplink %	1.91	9.69	8.87	13.35

Table-62: Summary of silence instances & packet loss rate for mobile to mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-62	134	73	122	121
Speech Quality (Average MOS)	3.78	3.03	3.58	3.60
Number of samples with MOS ≥ 4 to < 5 (Excellent)	88	20	72	69
Number of samples with MOS ≥ 3 to < 4 (Good)	34	10	14	13
Number of samples with MOS ≥ 2 to < 3 (Fair)	4	34	7	14
Number of samples with MOS ≥ 1 to < 2 (Poor)	8	9	29	25
%age of samples with MOS ≥ 4 to < 5 (Excellent)	65.67%	27.40%	59.02%	57.02%
%age of samples with MOS ≥ 3 to < 4 (Good)	25.37%	13.70%	11.48%	10.74%
%age of samples with MOS ≥ 2 to < 3 (Fair)	2.99%	46.58%	5.74%	11.57%
%age of samples with MOS ≥ 1 to < 2 (Poor)	5.97%	12.33%	23.77%	20.66%

Table-63: Summary of speech quality (MOS) samples.

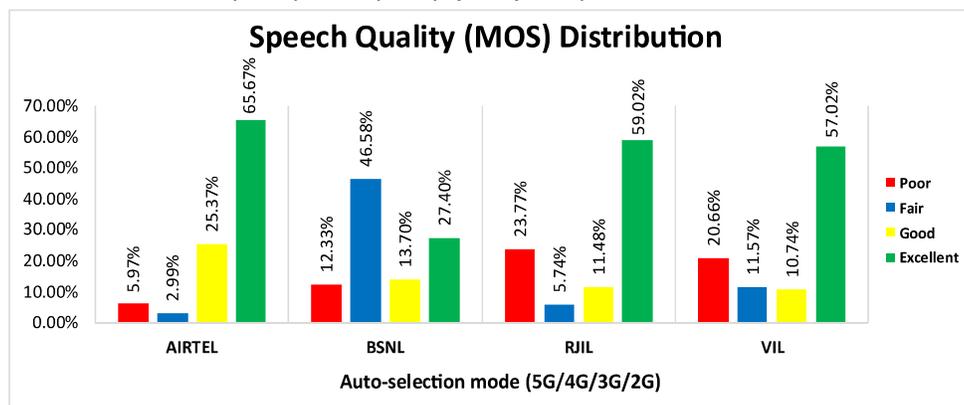


Figure-39: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	2.92%	NA	29.14%	NA
4G	97.08%	86.83%	70.86%	75.21%
3G	NA	0.00%	NA	NA
2G	0.00%	11.83%	NA	24.79%
Limited Service	0.00%	1.35%	0.00%	0.00%

Table-64:Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

Note-

- NA- Service provider doesn't provide services in respective technology.

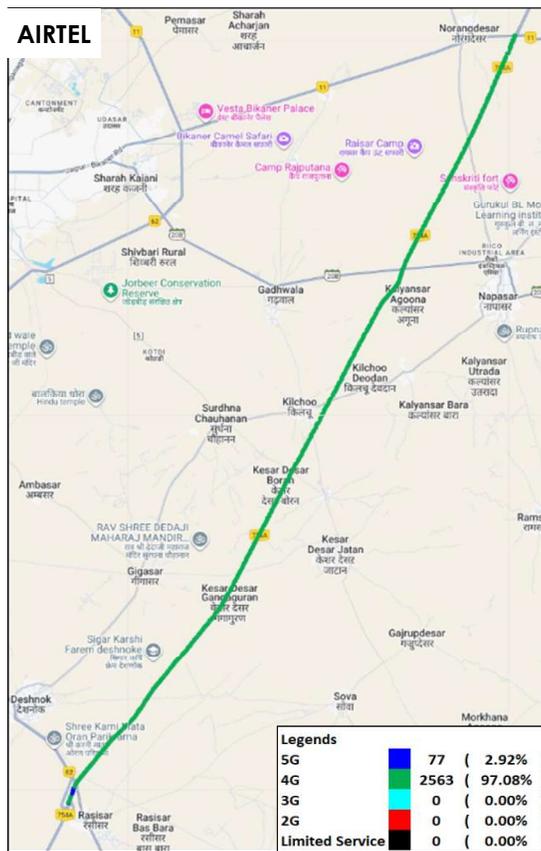


Figure-40: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL

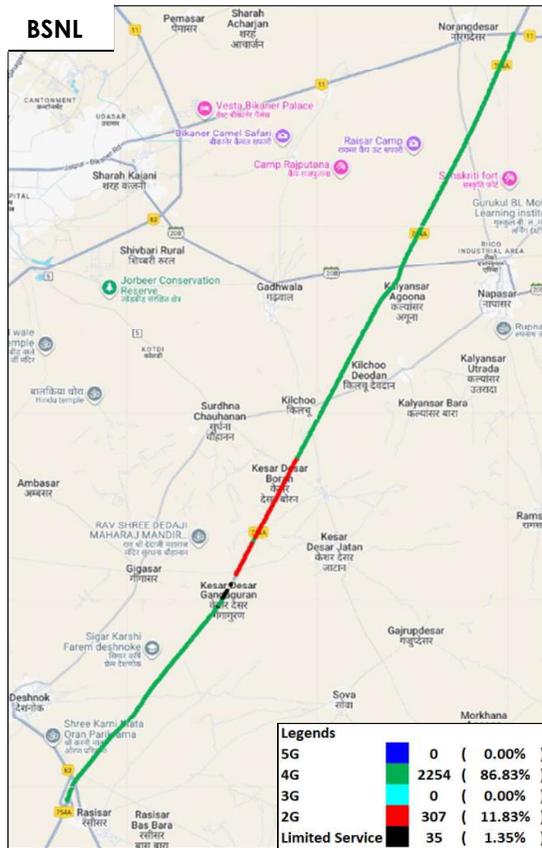


Figure-41: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

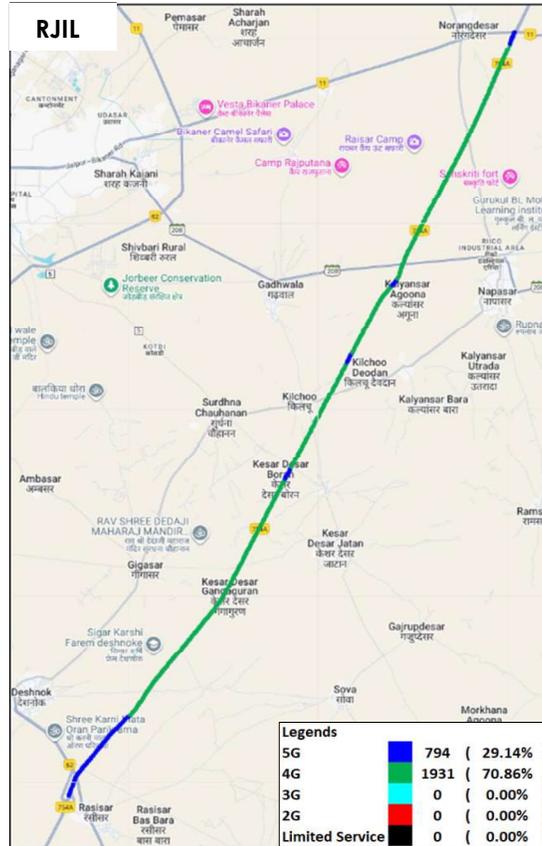


Figure-42: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.



Figure-43: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G). (Refer figure-66, 67, 68 & 69 for map view)

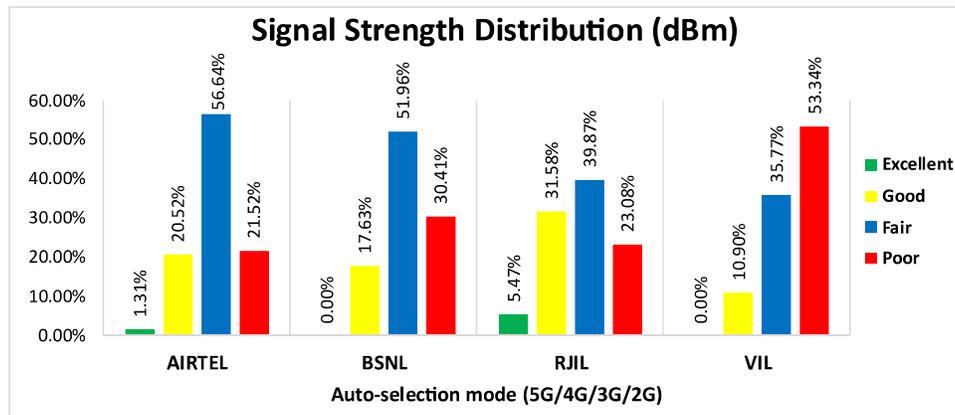


Figure-44: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 1% of samples falling in the excellent signal strength category.
- BSNL has 0% of samples falling in the excellent signal strength category.
- RJIL has 5% of samples falling in the excellent signal strength category.
- VIL has 0% of samples falling in the excellent signal strength category.

4.5.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	55.22	10.63	147.24	11.43
	80th Percentile	104.60	19.77	352.09	15.67
	20th Percentile	4.29	1.24	3.14	2.34
Upload Throughput (Mbits/s)	Average	7.27	2.63	9.83	5.71
	80th Percentile	11.54	4.22	21.56	8.40
	20th Percentile	1.98	0.97	1.24	3.70
Latency (ms)	50th Percentile	35.29	231.04	26.51	39.88

Table-65: Summary of Data performance in network auto-selection mode.

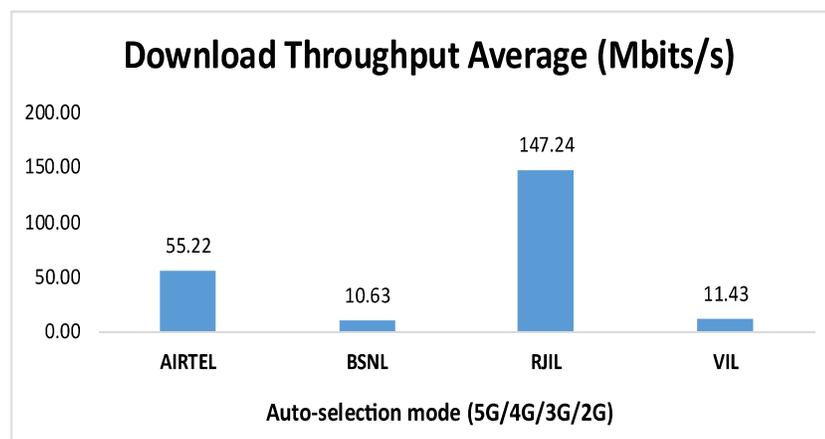


Figure 45: Download throughput.

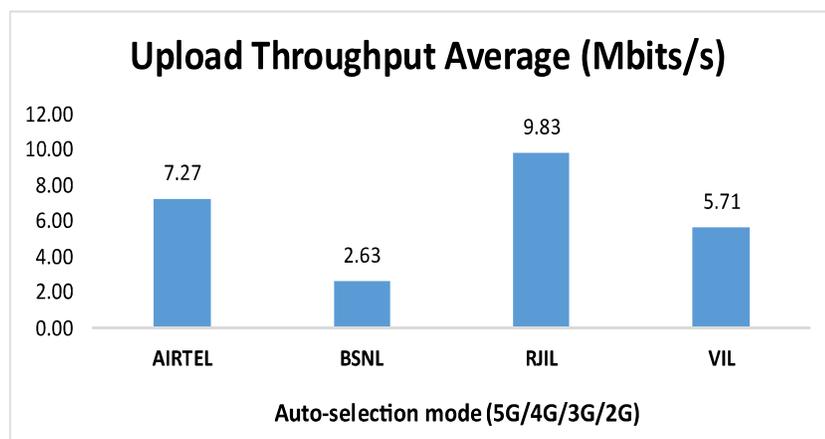


Figure-46: Upload throughput.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	33.91%	NA	28.93%	NA
4G	63.23%	44.43%	71.07%	63.79%
3G	NA	0.00%	NA	NA
2G	0.00%	16.55%	NA	22.78%
Limited Service	2.85%	39.02%	0.00%	13.43%

Table-66: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

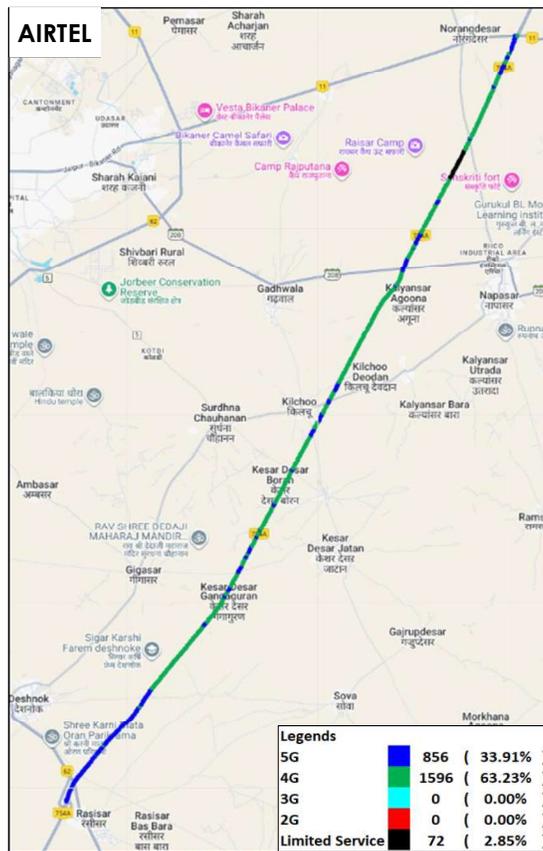


Figure-47: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - AIRTEL



Figure-48: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - BSNL.

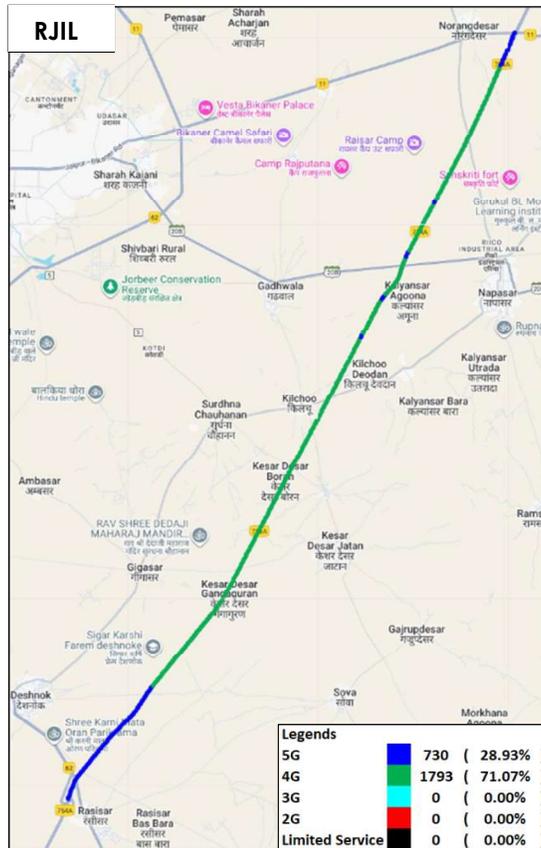


Figure-49: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

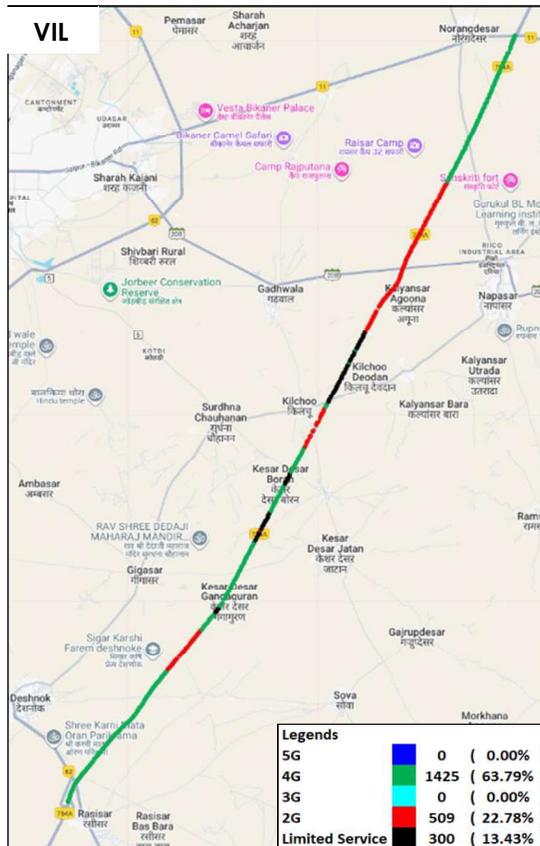


Figure-50: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - VIL.

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-70, 71, 72 & 73 for map view)

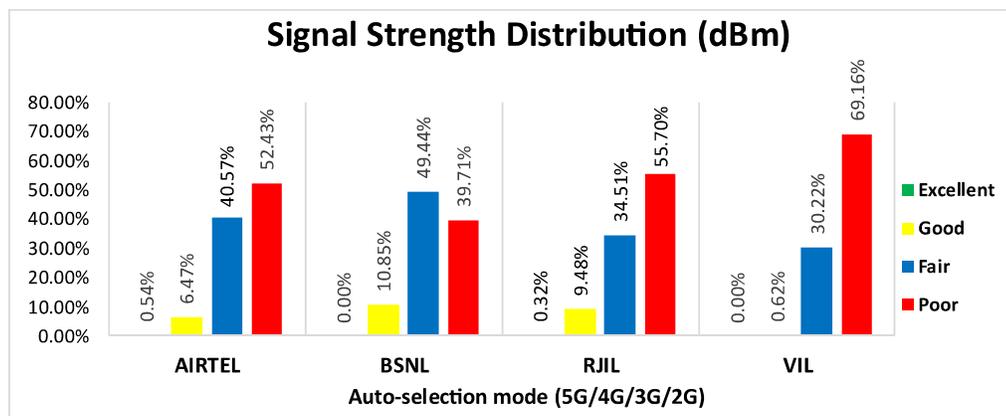


Figure-51: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 1% of samples falling in the excellent signal strength category.
- BSNL has 0% of samples falling in the excellent signal strength category.
- RJIL has 0% of samples falling in the excellent signal strength category.
- VIL has 0% of samples falling in the excellent signal strength category.

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 99.78%, 98.47% and 99.56% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 100.00%, 95.37%, 99.83% and 99.33% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) Airtel & VIL have 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)
- d) BSNL had a 100.00% call setup success when calling RJIL and VIL, whereas call blocking was observed when calling Airtel. (refer table-9)
- e) RJIL had a 100.00% call setup success when calling VIL, whereas call blocking was observed when calling Airtel and BSNL. (refer table-9)

2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 3.50, 2.77 & 3.52 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 1.82, 1.68, 0.58 & 1.11 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate:

In packet switched network (4G/5G) VIL, BSNL, RJIL & Airtel have 7.52%, 3.64%, 0.66% & 0.44% silence call rate respectively. Further BSNL has higher RTP packet loss rate in downlink (3.34%) compared to VIL (1.33%), RJIL (0.76%) & Airtel (0.18%). In uplink the RTP packet loss rate is higher for BSNL (2.89%) compared to VIL (2.34%), RJIL (0.76%) & Airtel (0.35%). (refer table-6)

4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 0.22%, 0.89% and 0.44% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 0.00%, 0.87%, 0.00% and 0.51% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 220.86 Mbps, 14.86 Mbps, 322.55 Mbps and 32.31 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 32.88 Mbps, 4.85 Mbps, 40.31 Mbps and 12.17 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 225.16 Mbps, 17.88 Mbps, 254.40 Mbps and 24.42 Mbps respectively. (refer table-33)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 34.37 Mbps, 8.55 Mbps, 33.27 Mbps and 10.38 Mbps respectively. (refer table-33)

3. Data session setup success rate (static i.e. while stationary):

- a) All operators have 100.00% download session setup success rate. (refer table-33)

- b) All operators have 100.00% upload session setup success rate. (refer table-33)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 99.78% call setup success rate and 0.22% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.77% call setup success rate and 0.24% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-57)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-59)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-61)

Data

- Airtel has 220.86 Mbps average download speed & 32.88 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 225.02 Mbps average download speed & 33.60 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- National Research Centre on Camel Bikaner has less download speed (less than 100 Mbps) out of total 11 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 40)
- Bikaner Airport, Bikaner Civil Court, Kote Gate Bikaner and National Research Centre on Camel Bikaner have less upload speed (less than 20 Mbps) out of total 11 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-34, 36, 39 & 40)
- Airtel has 55.22 Mbps average download speed & 7.27 Mbps average upload speed across the measured routes for highway drive. (refer table-65)

2. BSNL:

Voice

- 98.47% call setup success rate and 0.89% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 95.37% call setup success rate and 0.87% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 98.39% call setup success rate and 0.93% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 95.61% call setup success rate and 0.92% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-15)
- 99.09% call setup success rate and 0.92% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 57)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-59)
- 74.07% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-61)

Data

- BSNL has 14.86 Mbps average download speed & 4.85 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 14.41 Mbps average download speed & 4.33 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Bikaner Airport, Bikaner Bus Stand, Bikaner Railway Station and SP Medical College Bikaner have less download speed (less than 10 Mbps) out of total 11 hotspots locations for auto-selection mode (5G/4G/3G/2G). (refer table-34, 35, 37 & 43)
- Bikaner Airport has less upload speed (less than 2 Mbps) out of total 11 hotspots locations for auto-selection mode (5G/4G/3G/2G). (refer table- 34)
- BSNL has 10.63 Mbps average download speed & 2.63 Mbps average upload speed across the measured routes for highway drive. (refer table- 65)

3. RJIL:

Voice

- 99.83% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)

- 99.78% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-57)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 61)

Data

- RJIL has 322.55 Mbps average download speed & 40.31 Mbps average upload speed for LSA. (refer table-11)
- RJIL has 337.31 Mbps average download speed & 42.24 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Bikaner Airport has less download speed (less than 100 Mbps) out of total 11 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 34)
- Bikaner Airport, Bikaner Civil Court, National Research Centre on Camel Bikaner, Nokha Bus Stand Nokha and Shri Karni Mata Mandir Deshnok have less upload speed (less than 20 Mbps) out of total 11 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 34, 36, 40, 41 & 42)
- RJIL has 147.24 Mbps average download speed & 9.83 Mbps average upload speed across the measured routes for highway drive. (refer table- 65)

**4. VIL:
Voice**

- 99.56% call setup success rate and 0.44% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 99.33% call setup success rate and 0.51% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.53% call setup success rate and 0.23% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 99.55% call setup success rate and 0.45% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 99.09% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 57)

- 100.00% call setup success rate and 4.35% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 2.00% for drop call rate. (refer table-59)
- 95.83% call setup success rate and 4.35% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table- 61)

Data

- VIL has 32.31 Mbps average download speed & 12.17 Mbps average upload speed for LSA. (refer table-11)
- VIL has 33.96 Mbps average download speed & 12.61 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Junagadh Fort Bikaner, National Research Centre on Camel Bikaner and SP Medical College have less download speed (less than 10 Mbps) out of total 11 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 38, 40 & 43)
- National Research Centre on Camel Bikaner and SP Medical College have less upload speed (less than 2 Mbps) out of total 11 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 40 & 43)
- VIL has 11.43 Mbps average download speed & 5.71 Mbps average upload speed across the measured routes for highway drive. (refer table- 65)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

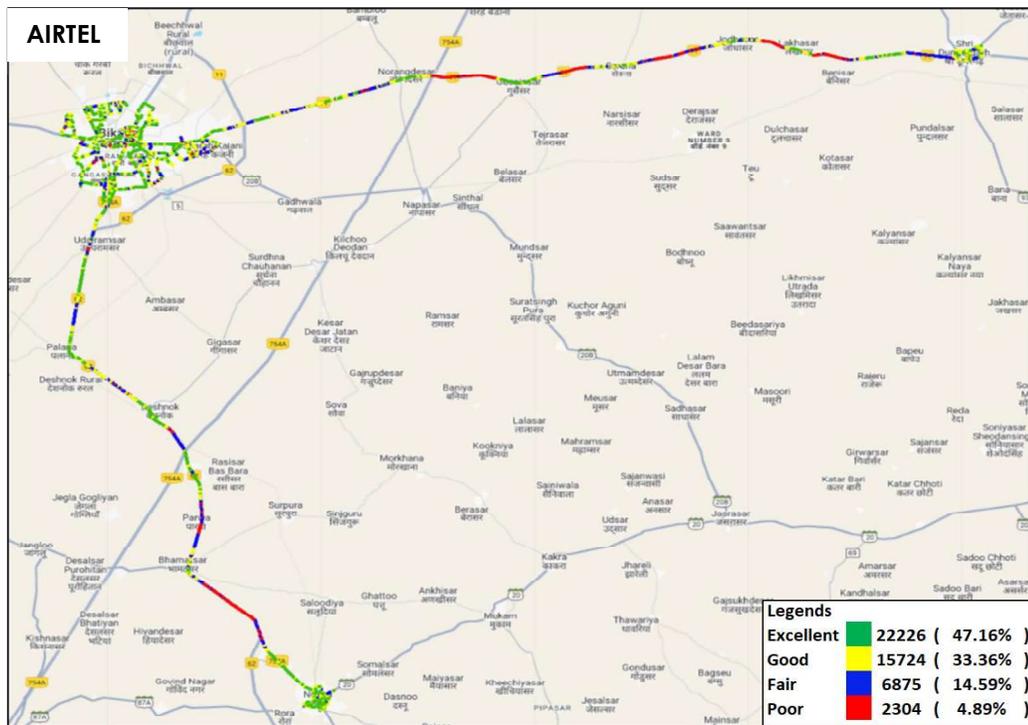


Figure-52: Signal strength 3G/2G network mode voice - AIRTEL.

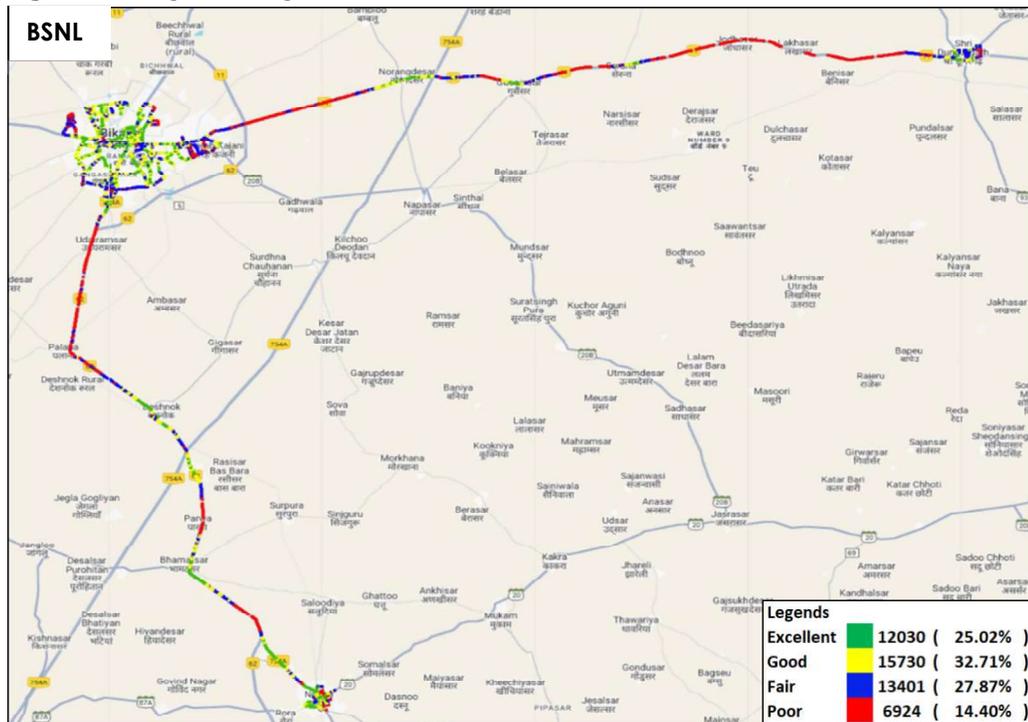


Figure-53: Signal strength 3G/2G network mode voice - BSNL.

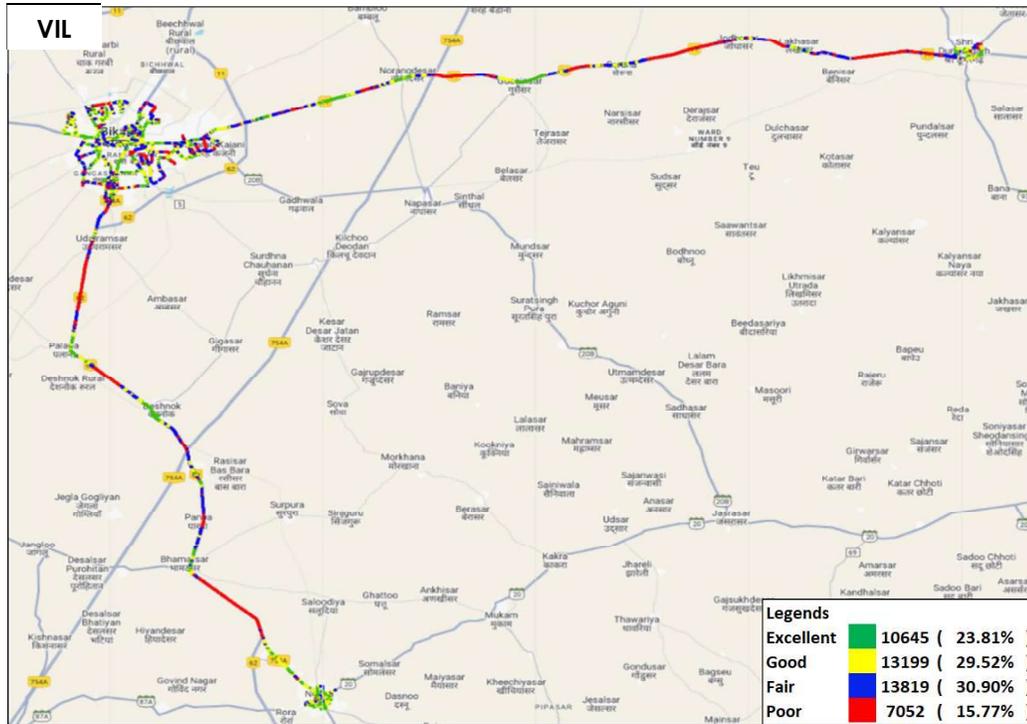


Figure-54: Signal strength 3G/2G network mode voice - VIL.

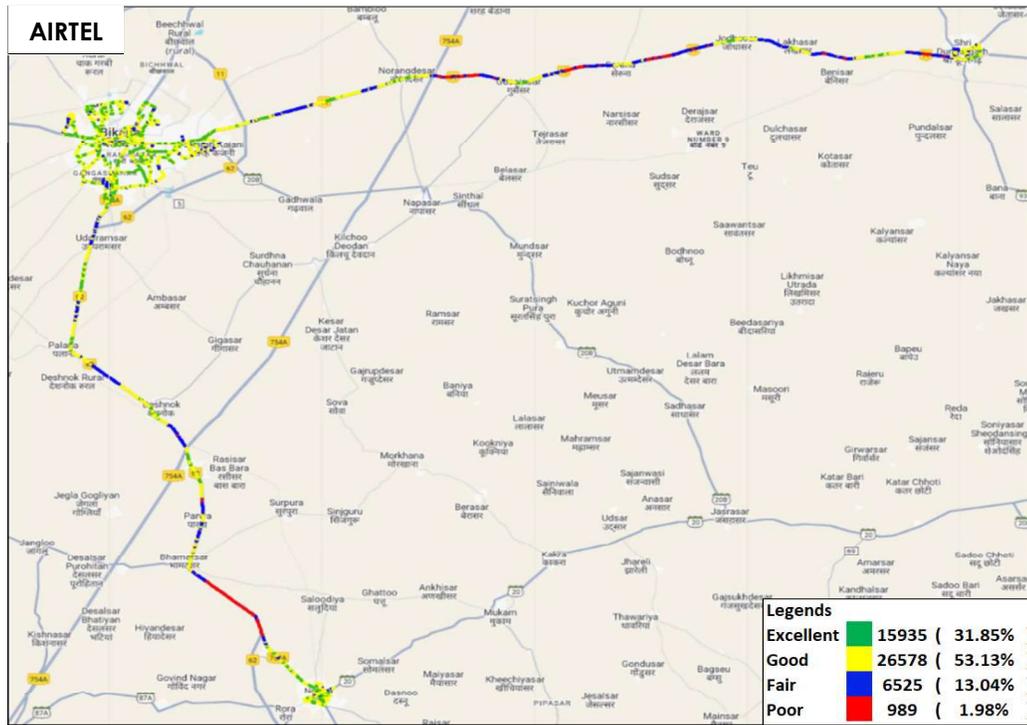


Figure-55: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

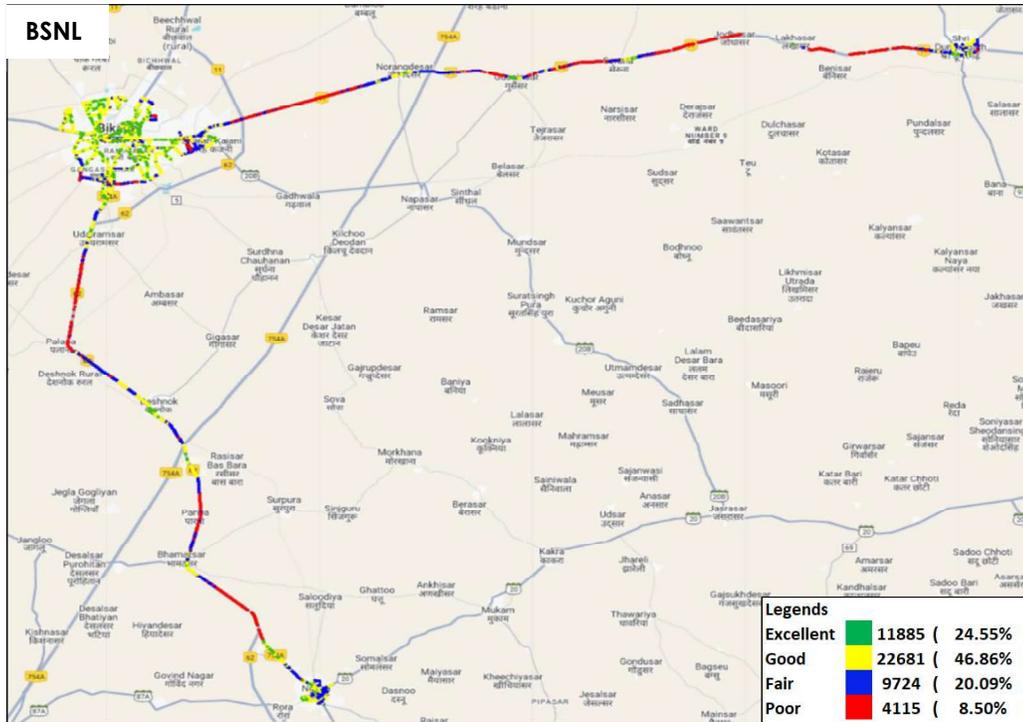


Figure-56: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

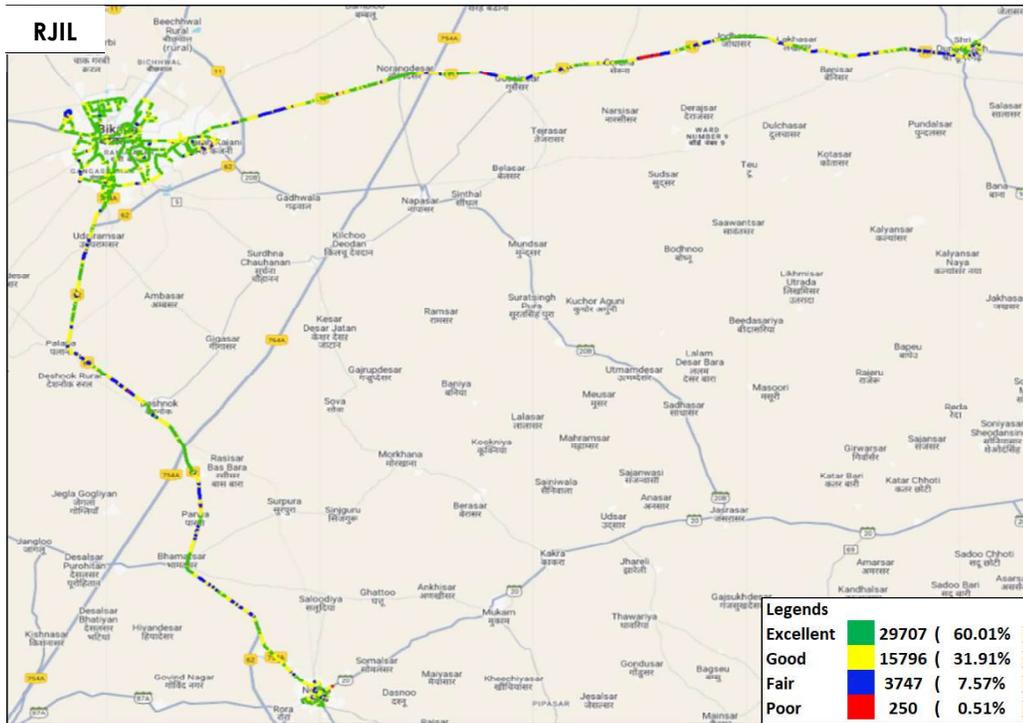


Figure-57: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

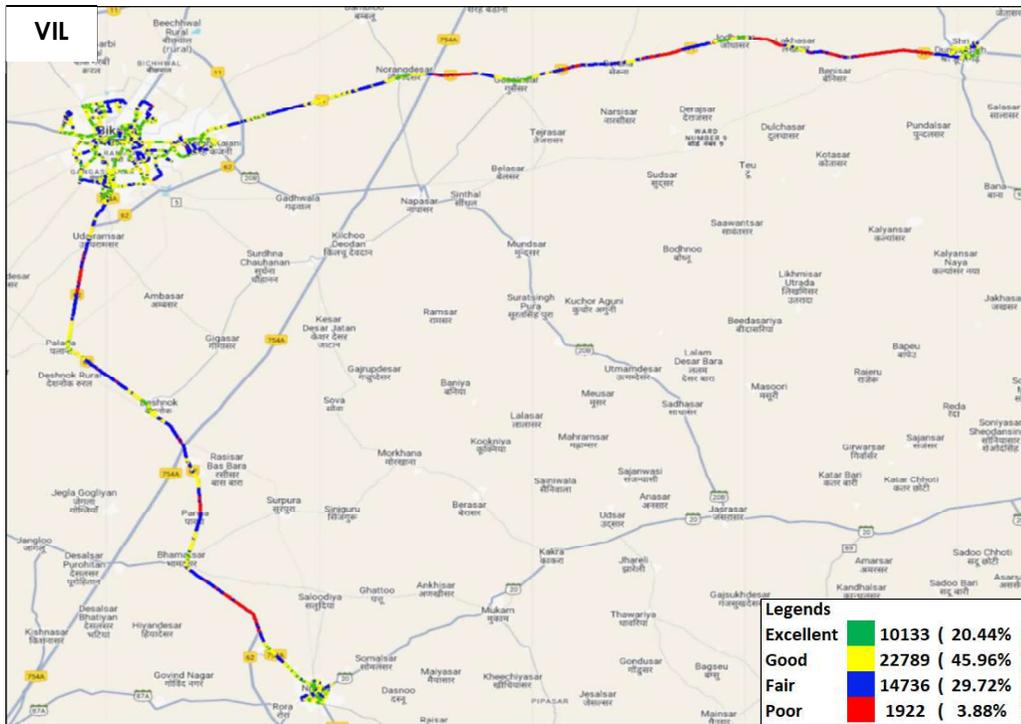


Figure-58: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

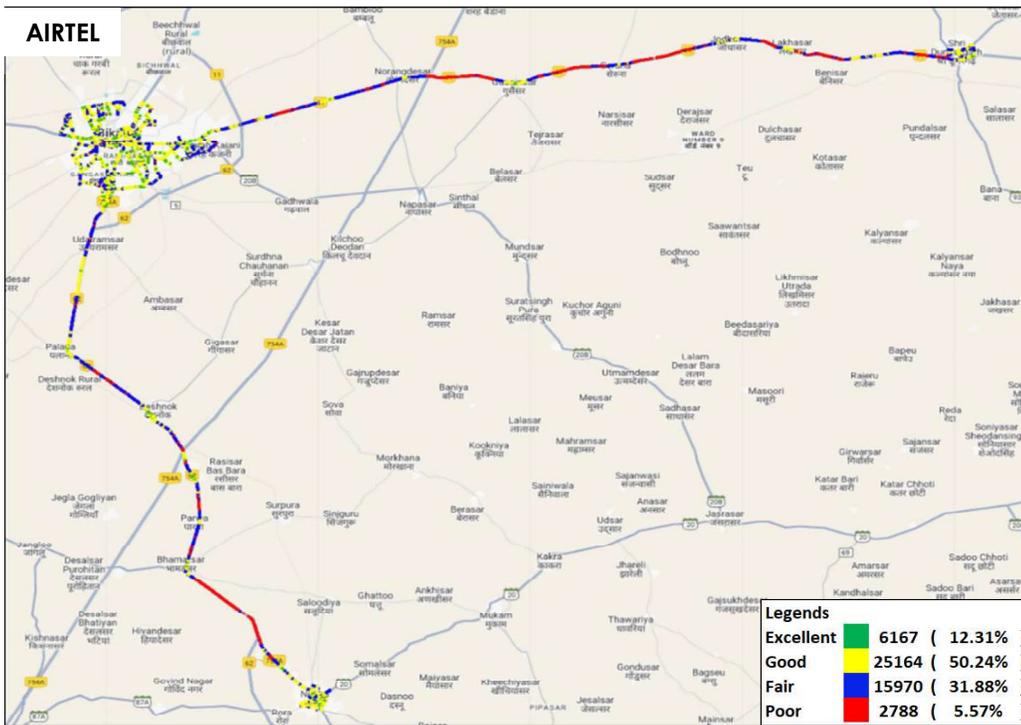


Figure-59: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

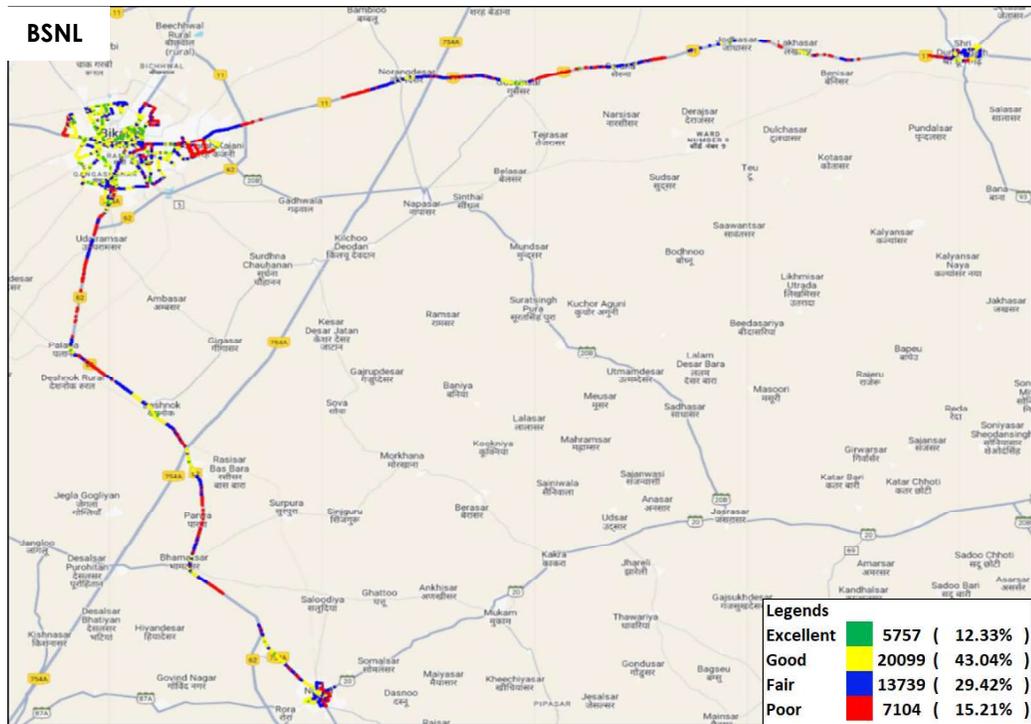


Figure-60: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

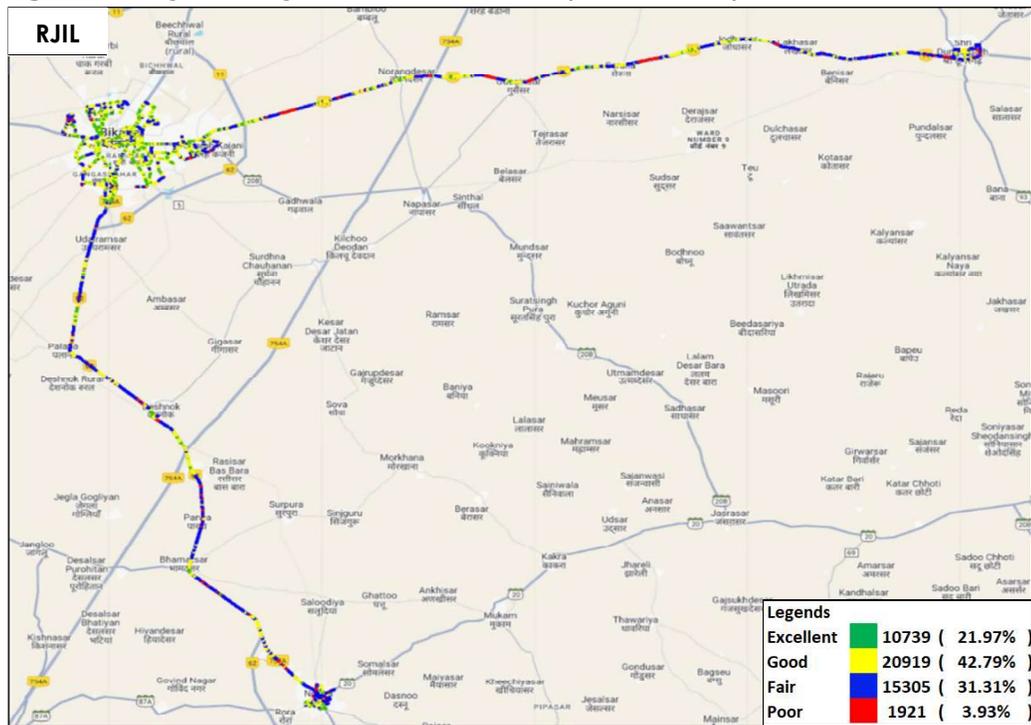


Figure-61: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

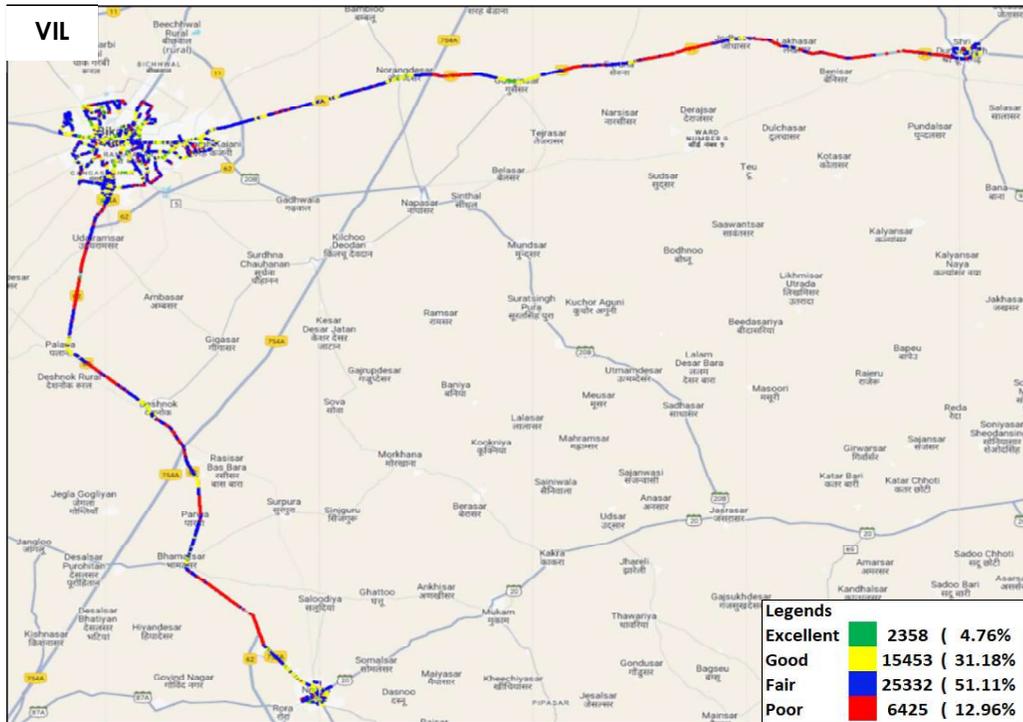


Figure-62: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

6.1.2 Highway

i) Deshnok to Norangdesar

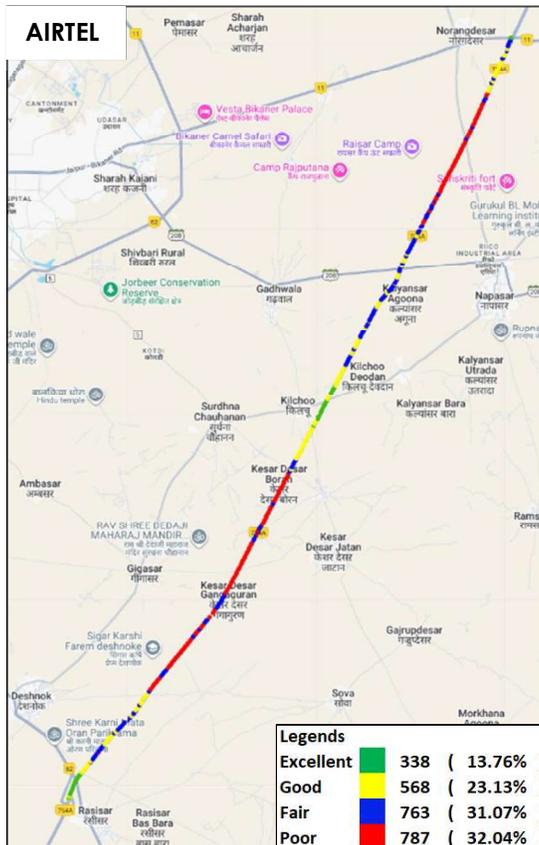


Figure-63: Signal strength 3G/2G network mode voice - AIRTEL.



Figure-64: Signal strength 3G/2G network mode voice - BSNL.



Figure-65: Signal strength 3G/2G network mode voice - VIL.



Figure-66: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

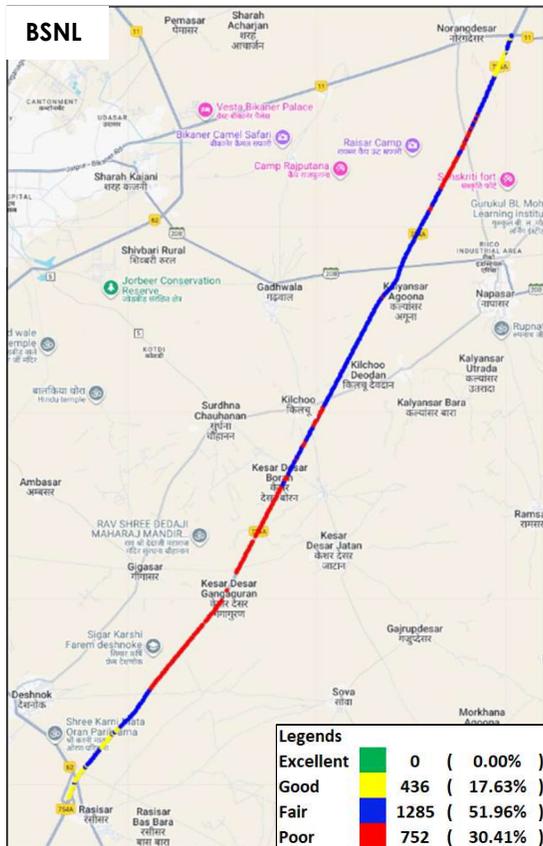


Figure-67: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.



Figure-68: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

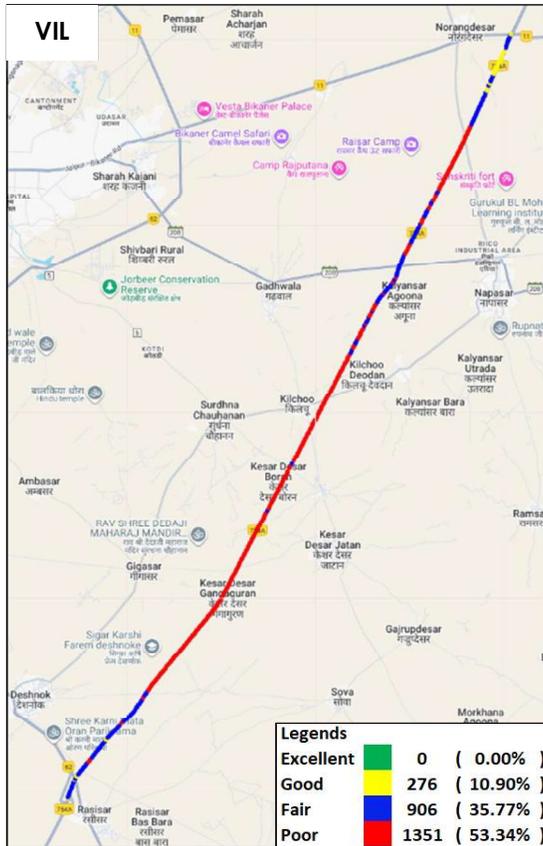


Figure-69: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.



Figure-70: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

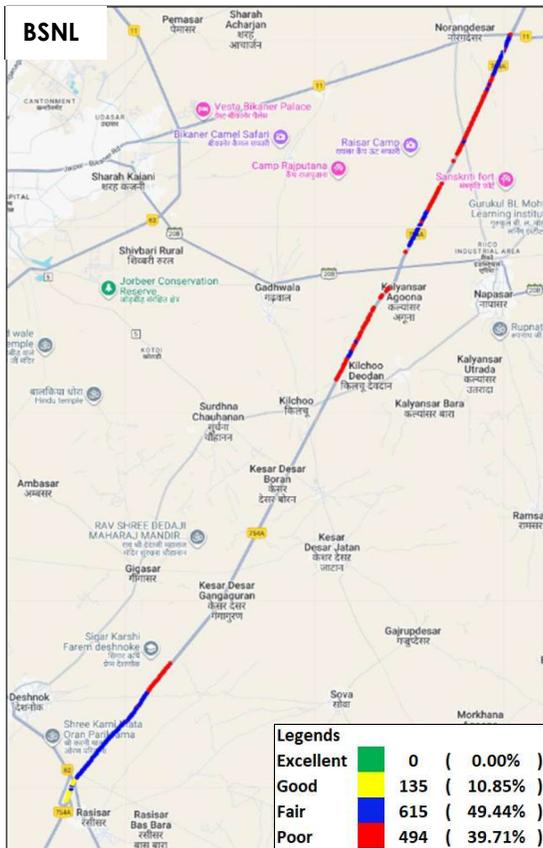


Figure-71: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

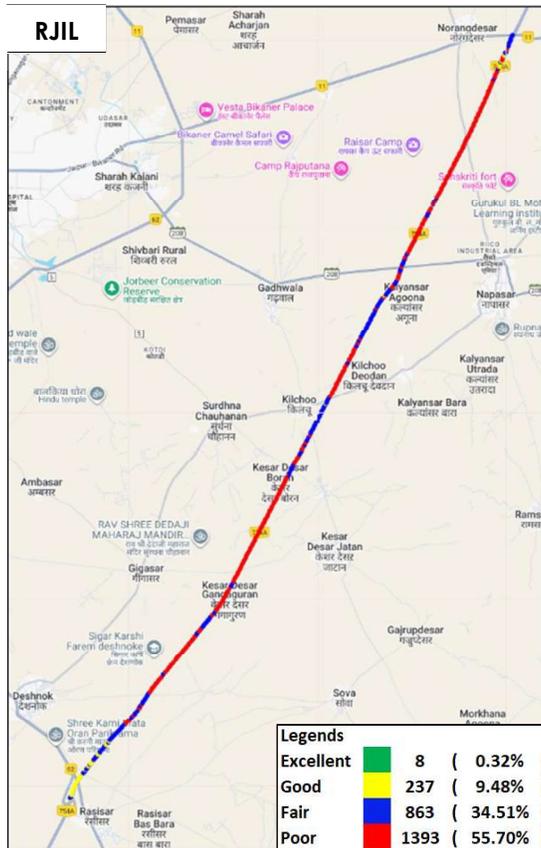


Figure-72: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

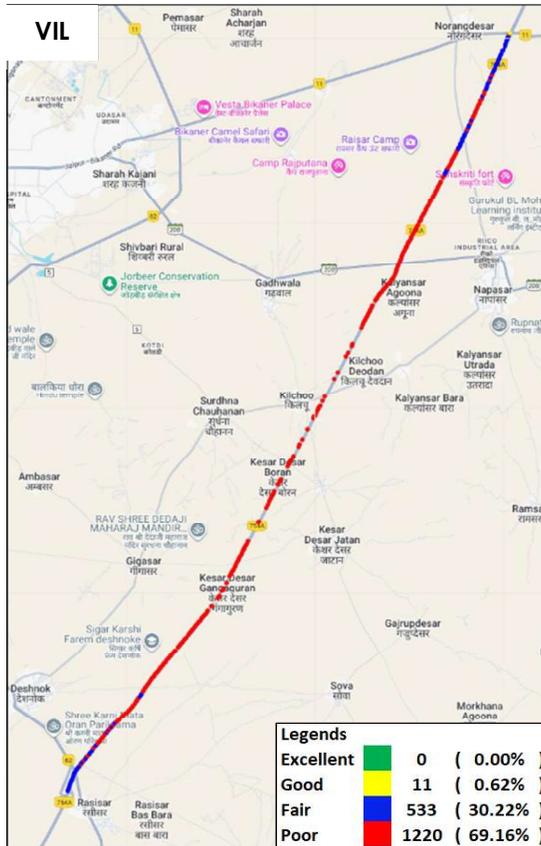


Figure-73: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	<ul style="list-style-type: none"> • 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call 	30 Sec
Call Duration		90 seconds
Wait/ Guard Time		15 Sec

Table-67: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.
- 90 Sec calls were made in highway route drive.

Data Test		
Test Type	Technology	Detail
FTP/HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
FTP/HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.irctc.co.in , sbi.bank.in) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)		25 count- Dynamic 500 count- Hotspot Payload- 42 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)		500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 42 bytes in all drive

Table-68: Data test detail

Note-

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- TWAMP-UDP & TCP test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Delhi-based TRAI server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing for Airtel and BSNL.
- RJIL server was used for FTP Download, FTP Upload, TCP and TWAMP testing, for RJIL.
- VIL server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing, for VIL.

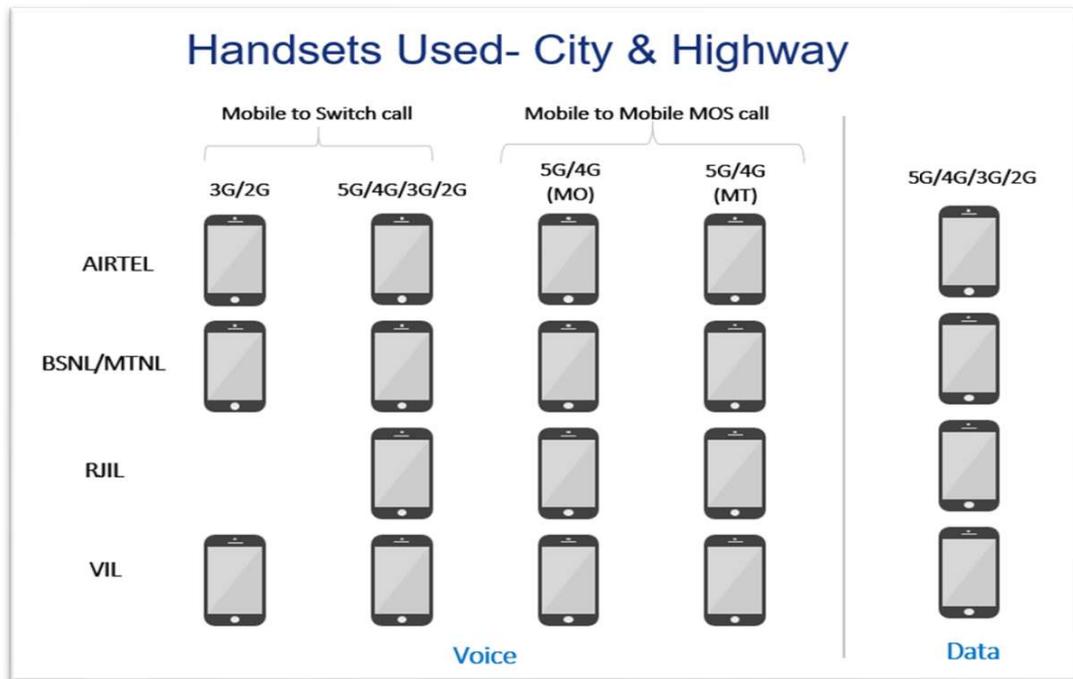


Figure-74: Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

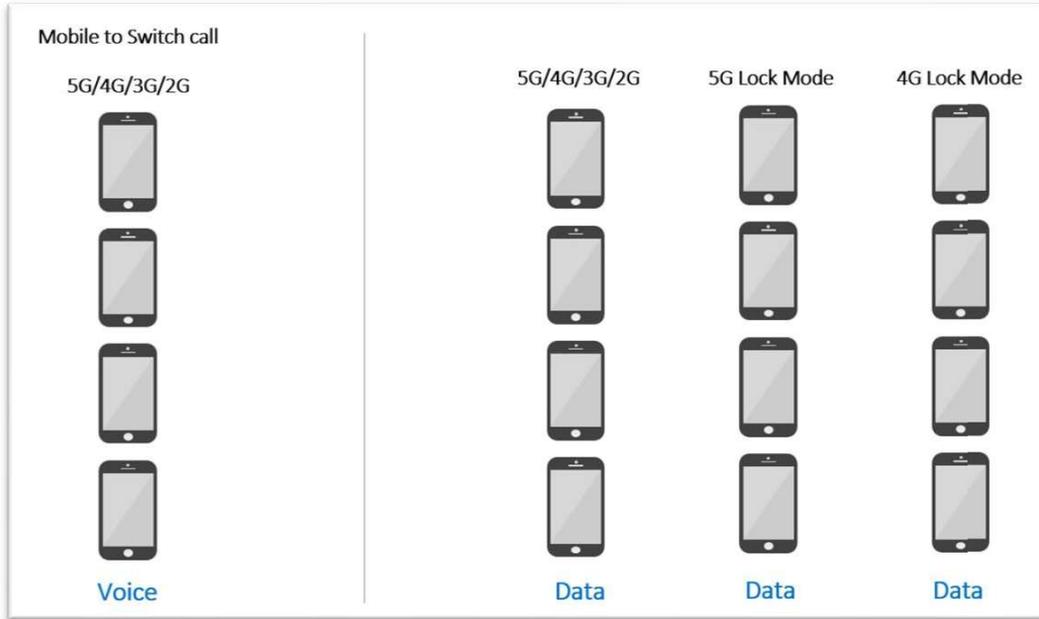


Figure-75: Number of handsets used in railway/metro/walktest/hotspot/coastal area.

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

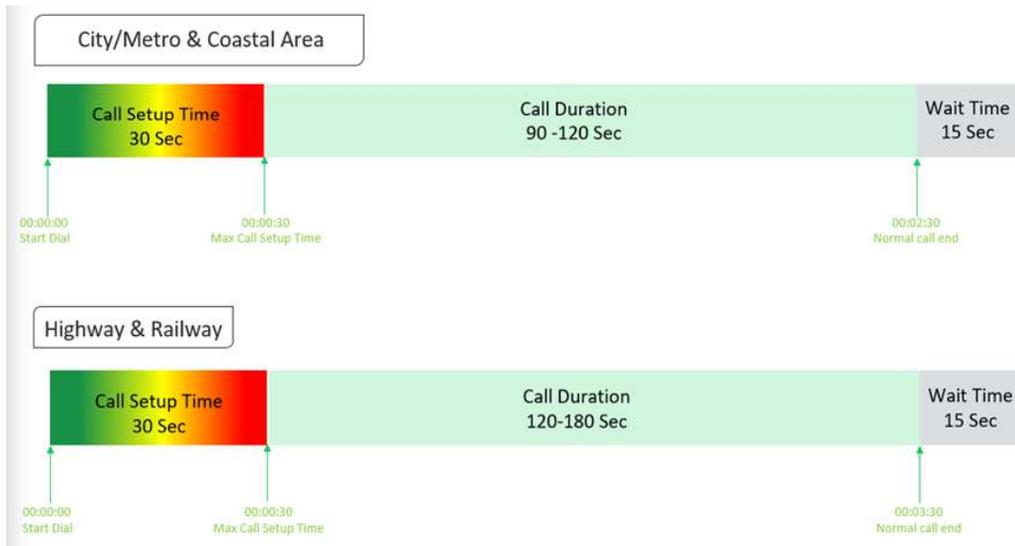


Figure-76: Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.

(b) Hotspot voice testing



Figure-77: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

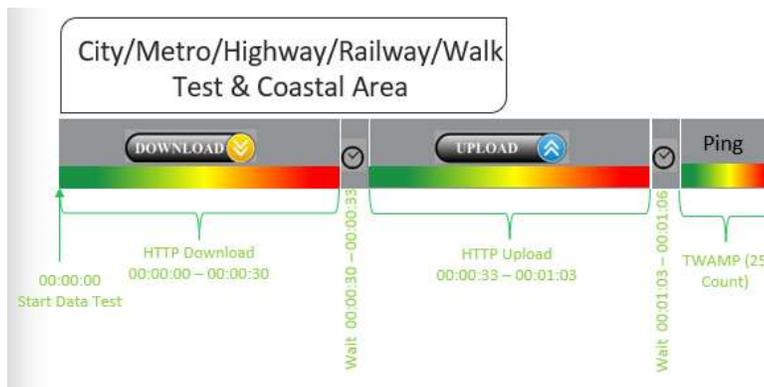


Figure-78: Data test script used in city/metro/railway/highway/walk test & coastal area

(d) Static Data(internet) testing

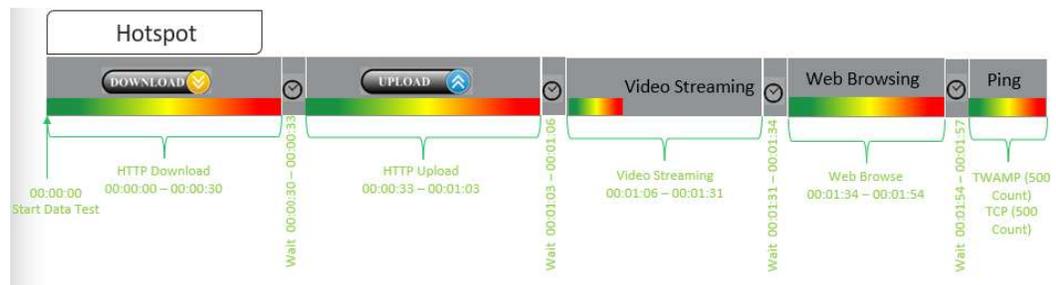


Figure-79: Data test script used at hotspot

- 5 Data iteration done at each hotspot location
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	<p>(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup:</p> <ul style="list-style-type: none"> (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. <p>CSSR = (Total Call Established/ Total Call Attempt) *100</p> <p>As per QoS Regulation 2024 benchmark value is >=98%</p>
Drop Call Rate	<p>Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network</p> <p>Drop Call Rate = (Total Call Drop/Total Call Established) *100</p> <p>As per QoS Regulation 2024 benchmark value is <=2%</p>
Call Setup Time	<p>Time taken from call initiate to call alerting/ringing.</p> <p>Call Setup Time = T2- T1</p> <p>T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)</p>
Voice Quality (MOS)	<p>Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as:</p> <p>Excellent: MOS ≥ 4 and < 5 Good : MOS ≥ 3 and < 4 Fair : MOS ≥ 2 and < 3 Poor : MOS ≥ 1 and < 2</p>
Handover Success Rate	<p>Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100</p> <p>Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.</p>
Silence Call	<p>A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call.</p> <p>Silence call rate = (count of silence call / Total calls established) *100</p> <p>If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.</p>

<p>Jitter</p>	<p>The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as: $D(i,j) = (R_j - R_i) - (S_j - S_i)$</p> <p>The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16$ or 8</p>																																		
<p>Downlink Packet Drop Rate</p>	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)</p>																																		
<p>Uplink Packet Drop Rate</p>	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
<p>Signal Strength</p>	<p>Signal strength is the signal power level received by the wireless user.</p> <table border="1" data-bbox="727 852 1393 1100"> <thead> <tr> <th rowspan="2">Parameter Name</th> <th rowspan="2">Technology</th> <th colspan="4">Signal Strength (dBm)</th> </tr> <tr> <th>Excellent</th> <th>Good</th> <th>Fair</th> <th>Poor</th> </tr> </thead> <tbody> <tr> <td>Rx Level</td> <td>GSM</td> <td>0 to ≥ -65</td> <td>< -65 to ≥ -75</td> <td>< -75 to ≥ -85</td> <td>< -85 to min</td> </tr> <tr> <td>RSCP</td> <td>WCDMA</td> <td>0 to ≥ -70</td> <td>< -70 to ≥ -80</td> <td>< -80 to ≥ -90</td> <td>< -90 to min</td> </tr> <tr> <td>RSRP</td> <td>LTE</td> <td>0 to ≥ -80</td> <td>< -80 to ≥ -95</td> <td>< -95 to ≥ -110</td> <td>< -110 to min</td> </tr> <tr> <td>SS_RSRP</td> <td>NR</td> <td>0 to ≥ -80</td> <td>< -80 to ≥ -95</td> <td>< -95 to ≥ -110</td> <td>< -110 to min</td> </tr> </tbody> </table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to ≥ -65	< -65 to ≥ -75	< -75 to ≥ -85	< -85 to min	RSCP	WCDMA	0 to ≥ -70	< -70 to ≥ -80	< -80 to ≥ -90	< -90 to min	RSRP	LTE	0 to ≥ -80	< -80 to ≥ -95	< -95 to ≥ -110	< -110 to min	SS_RSRP	NR	0 to ≥ -80	< -80 to ≥ -95	< -95 to ≥ -110	< -110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to ≥ -65	< -65 to ≥ -75	< -75 to ≥ -85	< -85 to min																														
RSCP	WCDMA	0 to ≥ -70	< -70 to ≥ -80	< -80 to ≥ -90	< -90 to min																														
RSRP	LTE	0 to ≥ -80	< -80 to ≥ -95	< -95 to ≥ -110	< -110 to min																														
SS_RSRP	NR	0 to ≥ -80	< -80 to ≥ -95	< -95 to ≥ -110	< -110 to min																														

Table-69: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
<p>Download Speed (Mbps)</p>	<p>The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.</p> <p>Download Speed = Total bytes transferred during download / Total time for transfer</p> <ul style="list-style-type: none"> 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
<p>Upload Speed (Mbps)</p>	<p>The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server.</p> <p>Upload Speed = Total bytes transferred during upload / Total time for transfer.</p> <ul style="list-style-type: none"> 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
<p>Download Session Setup Success Rate</p>	<p>(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.</p>

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency (TWAMP-UDP)	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency, we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
Jitter (TWAMP-UDP)	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate (TWAMP-UDP & TCP)	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on TWAMP-UDP & TCP. *90 th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-70: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.

Hardik
Rajeshbhai
Patel

Digitally signed by Hardik
Rajeshbhai Patel
Date: 2026.02.10 22:21:32
+05'30'