



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

Bihar LSA

September 2025

Contents

1. Introduction	3
2. Executive Summary (LSA)	3
2.1 Drive test details	3
2.2 Drive test routes	4
2.3 Summary of areas covered	4
2.4 Telecom service providers detected frequency bands	5
2.5 Performance against key QoS parameters	5
3. QoS performance analysis-LSA level	6
3.1 Overview	7
3.2 Voice performance	7
3.3 Data performance	10
4. Detailed QoS performance analysis	12
4.1 Overview	12
4.2 City	12
4.2.1 Drive test route	12
4.2.2 Area Covered	12
4.2.3 Voice performance	13
4.2.4 Data performance	20
4.3 Hotspots	22
4.3.1 Locations	22
4.3.2 Hotspot covered	22
4.3.3 Voice performance	23
4.3.4 Data performance (auto-selection mode 5G/4G/3G/2G)	25
4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)	29
4.4 Walk Test	32
4.4.1 Walk test locations	32
4.4.2 Walk test covered	32
4.4.3 Voice performance	32
4.4.4 Data performance	36
5. Voice & Data Key findings	39
5.1 Overall Voice	39
5.2 Overall Data	39
5.3 Operator wise Key Findings	40
6. Annexure	44

6.1 Route wise coverage map	44
6.1.1 City	44
7. Appendix	48
7.1 Appendix-I	48
7.1.1 Drive test setup	48
7.1.2 Drive test Methodology	50
7.2 Appendix-II	52
7.2.1 Network Performance Parameters for Voice calls	52
7.2.2 Network Performance Parameters Data tests	53

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interest of the consumers of telecommunications service.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in Bihar License Service Area (LSA) during the month of September-2025 under the supervision of TRAI Regional Office (RO) Kolkata. Details of route / area covered during the IDT is as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Saran district including Chhapra city and Siwan district	City	309.1	9-Sept-2025	12-Sept-2025
2	Siwan District	Inter Operator Calling	1 Locations	11-Sept-2025	11-Sept-2025
3	Saran district including Chhapra city and Siwan district	Hotspot	10 Locations	9-Sept-2025	11-Sept-2025
4	Saran district including Chhapra city and Siwan district	Walk Test	2.7	9-Sept-2025	11-Sept-2025

Table-1: Drive test summary.

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, inter-operator call test, hotspots and walk tests as per the legends shown on the map.

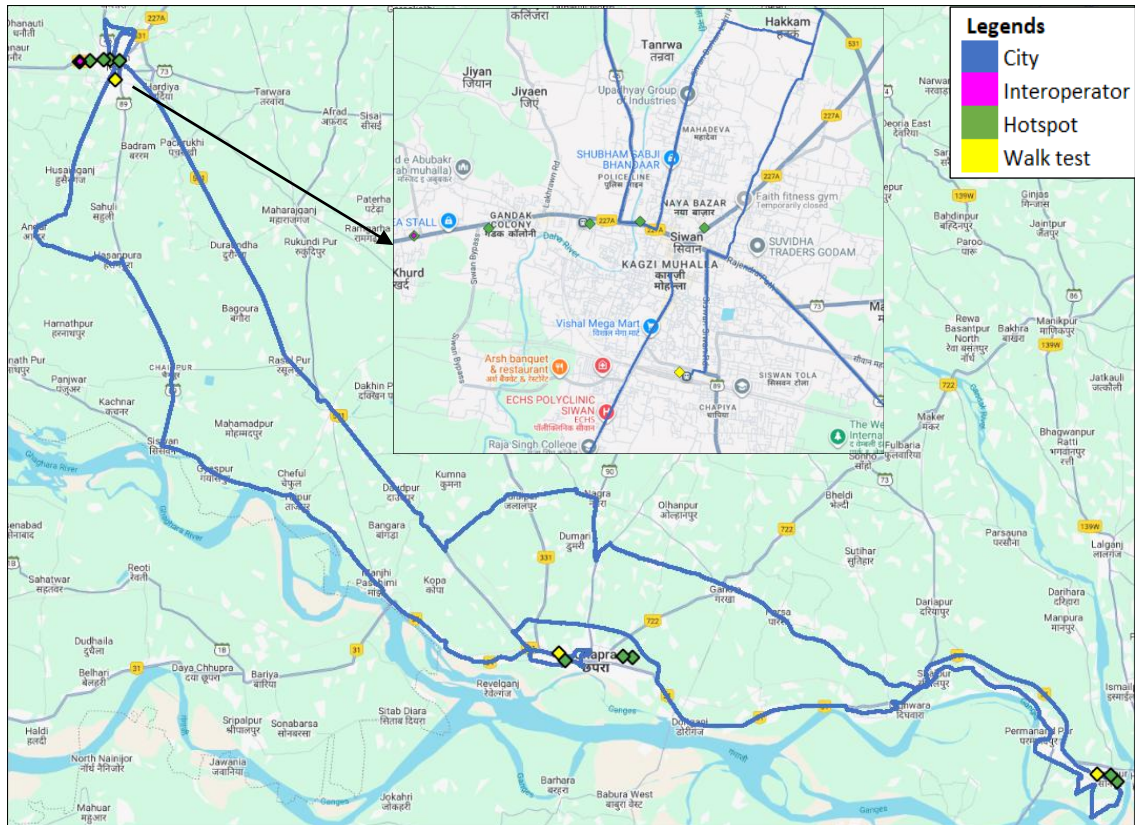


Figure-1: Drive test routes.

2.3 Summary of areas covered

City- Hasanpur, Gaighat, Andar, Habib Nagar, Mahadeva, Chanp, Jasauli, Parauli, Harsar, Duraundha, Korari Kala, Madari Chak, Rasulpur, Daudpur, Jaitpur, Deuria, Madhopur, Nagra, Khaira, Makim Pur, Parsa, Sonapur, Sabalpur, Barbatta, Makhdumpur, Gopalpur, Chaturpur, Jatia Bajidpur, Chirand, Doriganj, Saran, Inai, Revelganj Ghat, Gorhat, Tajpur, Sainpur, Siswan, Gurghat, Jalalpur, Andar, Faridpur, Hathaura etc.

a) Hotspot

1. Civil Court Siwan
2. Daroga Ray College Ayodhyapuri Siwan
3. Government Engineering College Siwan
4. Government Medical College and Hospital Chhapra
5. Jai Prakash University Chhapra
6. Sadar Hospital Chhapra
7. Sadar Hospital Siwan
8. Siwan Bus Stand
9. Sonapur Mela Sonapur
10. Sub Divisional Hospital Sonapur

b) Walk Test

1. Chhapra Railway Station
2. Siwan Railway Station

3. Sonepur Railway Station

2.4 Telecom service providers detected frequency bands


Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	900
2	Bharti Airtel Ltd.	4G	900,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,2100,2500
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	1800
10	Vodafone Idea Ltd.	4G	900,1800,2100,2500

Table-2: Telecom service provider (TSP) covered in IDT

2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), CST: Call Setup Time (in seconds), DCR: Drop Call Rate (in %) & MOS: Mean Opinion Score.

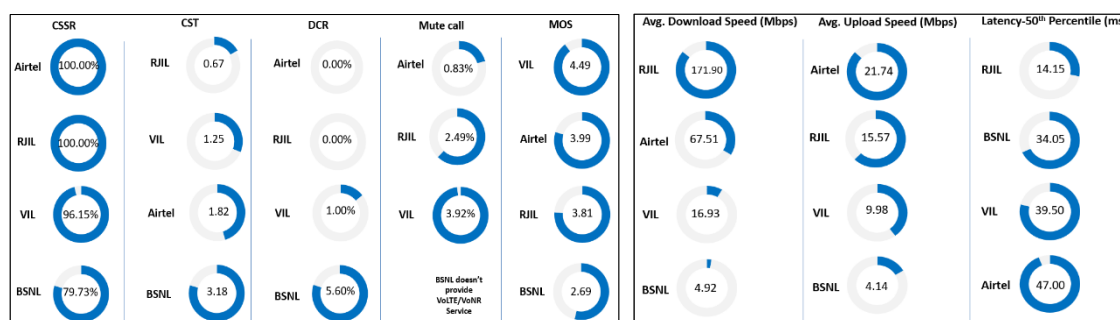

Summary-Voice services

Call Setup Success Rate: Airtel, BSNL, RJIL and VIL have call setup success rate of 100.00%, 79.73%, 100.00% and 96.15% respectively in Auto-selection mode (5G/4G/3G/2G).

Call Setup Time: Airtel, BSNL, RJIL and VIL have call setup time of 1.82, 3.18, 0.67 and 1.25 seconds respectively in Auto-selection mode (5G/4G/3G/2G).

Drop Call Rate: Airtel, BSNL, RJIL and VIL have drop call rate of 0.00%, 5.60%, 0.00% and 1.00% respectively in Auto-selection mode (5G/4G/3G/2G).

Call Silence/Mute Rate: Airtel, RJIL and VIL have silence call rate of 0.83%, 2.49% and 3.92% respectively in packet switched network (5G/4G).

Mean Opinion Score (MOS): Airtel, BSNL, RJIL and VIL have Average MOS of 3.99, 2.69, 3.81 & 4.49 respectively.

Summary-Data services

Data Download performance (Overall):

Average download speed of Airtel (5G/4G) is 67.51 Mbps, BSNL (4G/3G/2G) is 4.92 Mbps, RJIL (5G/4G) is 171.90 Mbps and VIL (4G/2G) is 16.93 Mbps.

Data Upload performance (Overall):

Average upload speed of Airtel (5G/4G) is 21.74 Mbps, BSNL (4G/3G/2G) is 4.14 Mbps, RJIL (5G/4G) is 15.57 Mbps and VIL (4G/2G) is 9.98 Mbps.

Latency (Overall): Airtel, BSNL, RJIL & VIL 50th percentile latency is 47.00 ms, 34.05 ms, 14.15 ms & 39.50 ms respectively.

Data performance - Hotspots (in Mbps):

Airtel- 4G D/L: 28.88 4G U/L: 6.73
 5G D/L: 64.62 5G U/L: 38.99
 BSNL- 4G D/L: 7.67 4G U/L: 5.99
 RJIL- 4G D/L: 29.03 4G U/L: 7.04
 5G D/L: 274.79 5G U/L: 32.05
 VIL- 4G D/L: 17.95 4G U/L: 8.61

Note- "D/L" Download speed, "U/L" Upload speed

QoS Performance Analysis- Bihar LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the LSA during the month of September-2025 covering city drive, hotspots and walk test. (Refer Table-1)

3.2 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	353	436	358
Call Setup Success Rate %	99.72	80.50	100.00
Drop Call Rate %	0.28	11.11	0.84
Call Setup Time-Average (Second)	5.34	3.08	2.87
Handover Success Rate %	99.14	92.96	97.18

Table-3: Summary of voice call performance in 3G/2G network mode only.

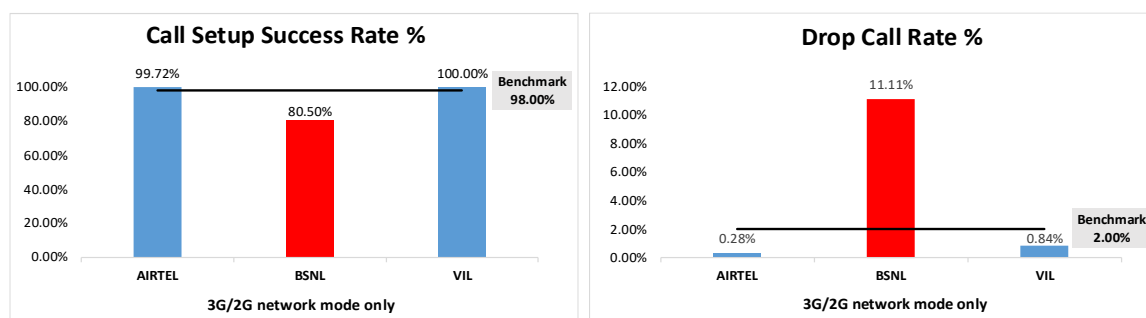


Figure-2: Call setup success rate and drop call rate performance.

Number of unique cell Id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	51	NA
2G	470	91	342

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	502	582	506	519
Call Setup Success Rate %	100.00	79.73	100.00	96.15
Drop Call Rate %	0.00	5.60	0.00	1.00
Call Setup Time-Average (Second)	1.82	3.18	0.67	1.25
Handover Success Rate %	99.93	85.63	99.87	99.57

Table-5: Summary of voice call performance in network auto-selection mode.

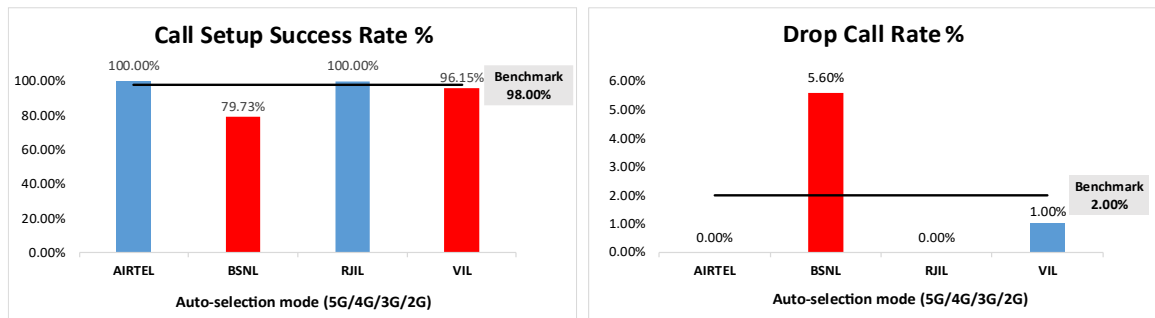


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	361	343	361	357
Number of silence call for >4 Sec	3	NA	9	14
Silence Call Rate %	0.83	NA	2.49	3.92
Number of silence instances for >4 Sec	6	NA	14	18
Number of silence instances for >3 Sec	11	NA	21	39
Number of silence instances for >2 sec	34	NA	48	128
RTP Jitter (4G & 5G) in ms	5.62	NA	13.39	13.23
Packet loss Rate Downlink %	0.72	NA	1.41	1.02
Packet loss Rate Uplink %	0.65	NA	1.62	1.53

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Note-

- NA- Due to unavailability of packet switched (VoLTE & VoNR) network in BSNL silence instances are not captured.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	442	NA
4G	1099	146	877	479
3G	NA	35	NA	NA
2G	0	104	NA	43

Table-7: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	3216	2329	3150	3161
Speech Quality (Average MOS)	3.99	2.69	3.81	4.49
Number of samples with MOS ≥ 4 to < 5 (Excellent)	2652	0	2026	2818
Number of samples with MOS ≥ 3 to < 4 (Good)	462	921	875	195
Number of samples with MOS ≥ 2 to < 3 (Fair)	40	1046	123	62
Number of samples with MOS ≥ 1 to < 2 (Poor)	62	362	126	86
%age of samples with MOS ≥ 4 to < 5 (Excellent)	82.46%	0.00%	64.32%	89.15%
%age of samples with MOS ≥ 3 to < 4 (Good)	14.37%	39.54%	27.78%	6.17%
%age of samples with MOS ≥ 2 to < 3 (Fair)	1.24%	44.91%	3.90%	1.96%
%age of samples with MOS ≥ 1 to < 2 (Poor)	1.93%	15.54%	4.00%	2.72%

Table-8: Summary of speech quality (MOS) samples.

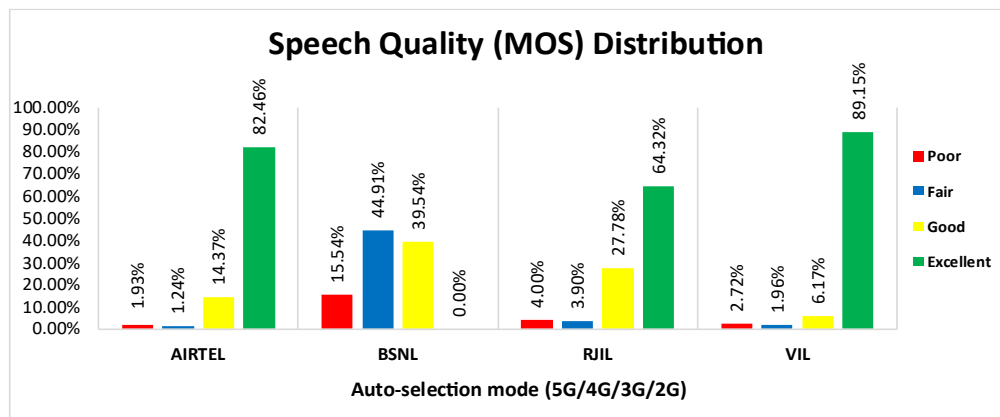


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service provider call setup success rate, total 28 to 34 inter operator calls was attempted at one location which is Government Engineering College, Siwan. The call setup success rate and call setup time observation is as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	100.00
BSNL	87.10	NA	100.00	100.00
RJIL	100.00	100.00	NA	100.00
VIL	100.00	96.43	96.88	NA

Table-9: Call setup success rate across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	5.14	0.96	1.39
BSNL	6.19	NA	5.58	4.58
RJIL	1.62	4.40	NA	1.80
VIL	1.64	3.33	1.71	NA

Table-10: Call setup time across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	67.51	4.92	171.90	16.93
	80th Percentile	120.50	8.68	300.92	24.47
	20th Percentile	10.08	0.03	25.59	5.08
Upload Throughput (Mbits/s)	Average	21.74	4.14	15.57	9.98
	80th Percentile	38.36	8.33	28.98	16.45
	20th Percentile	5.21	1.21	2.37	2.79
Latency (ms)	50th Percentile	47.00	34.05	14.15	39.50

Table-11: Summary of data performance in network auto-selection mode.

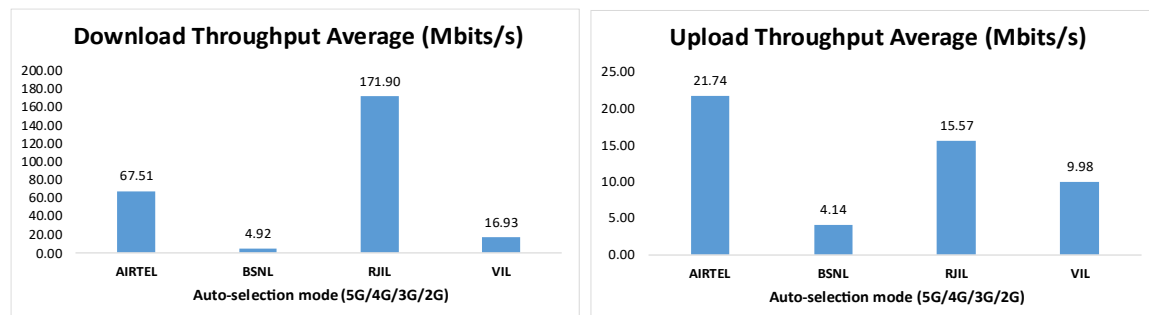


Figure- 5: Download and Upload throughput.

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	624	NA
4G	1130	247	309	533
3G	NA	21	NA	NA
2G	0	56	NA	104

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city drive, hotspots and walk test for all telecom service providers, the results of drive tests conducted is shown individually for respective areas/locations.

4.2 City

Drive test has been conducted on 9th September 2025 to 12th September 2025 in Saran district including Chhapra city and Siwan district. (Refer Table-1)

4.2.1 Drive test route



Figure- 6: Drive test routes

4.2.2 Area Covered

Hasanpur, Gaighat, Andar, Habib Nagar, Mahadeva, Chanp, Jasauli, Parauli, Harsar, Duraundha, Korari Kala, Madari Chak, Rasulpur, Daudpur, Jaitpur, Deuria, Madhopur, Nagra, Khaira, Makim Pur, Parsa, Sonapur, Sabalpur, Barbatta, Makhdumpur, Gopalpur, Chaturpur, Jatia Bajidpur, Chirand, Doriganj, Saran, Inai, Revelganj Ghat, Gorhat, Tajpur, Sainpur, Siswan, Gurghat, Jalalpur, Andar, Faridpur, Hathaura etc.

4.2.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	353	436	358
Call Setup Success Rate %	99.72	80.50	100.00
Drop Call Rate %	0.28	11.11	0.84
Call Setup Time-Average (Second)	5.34	3.08	2.87
Handover Success Rate %	99.14	92.96	97.18

Table-13: Summary of voice call performance in 3G/2G network mode only.

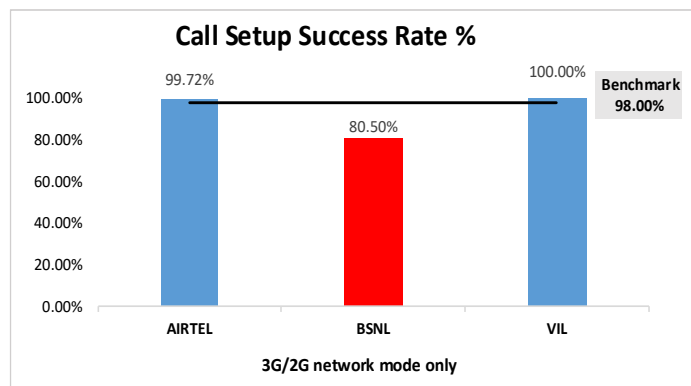


Figure-7: Performance for call setup success rate.

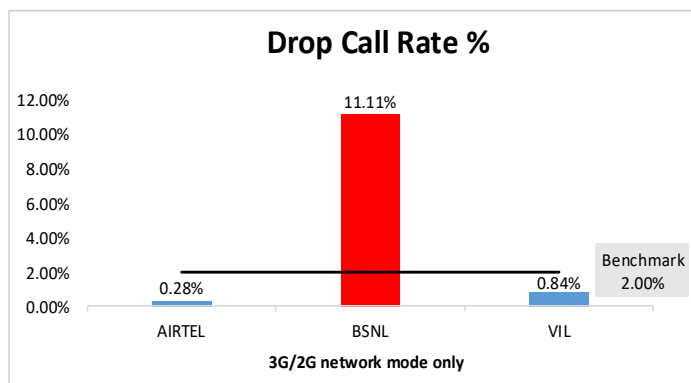


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	26.23%	NA
2G	99.98%	69.88%	99.96%
Limited Service	0.02%	3.89%	0.04%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.



Figure-9: Serving technology plots 3G/2G network mode – AIRTEL

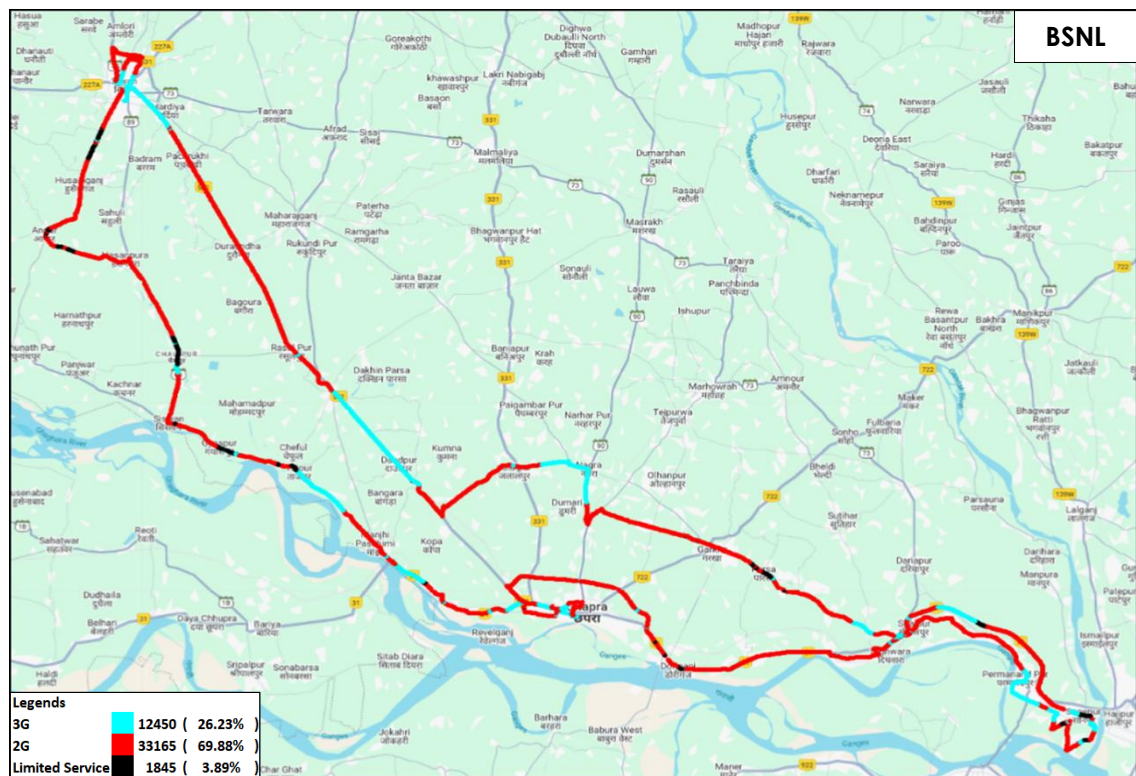


Figure-10: Serving technology plots 3G/2G network mode –BSNL.

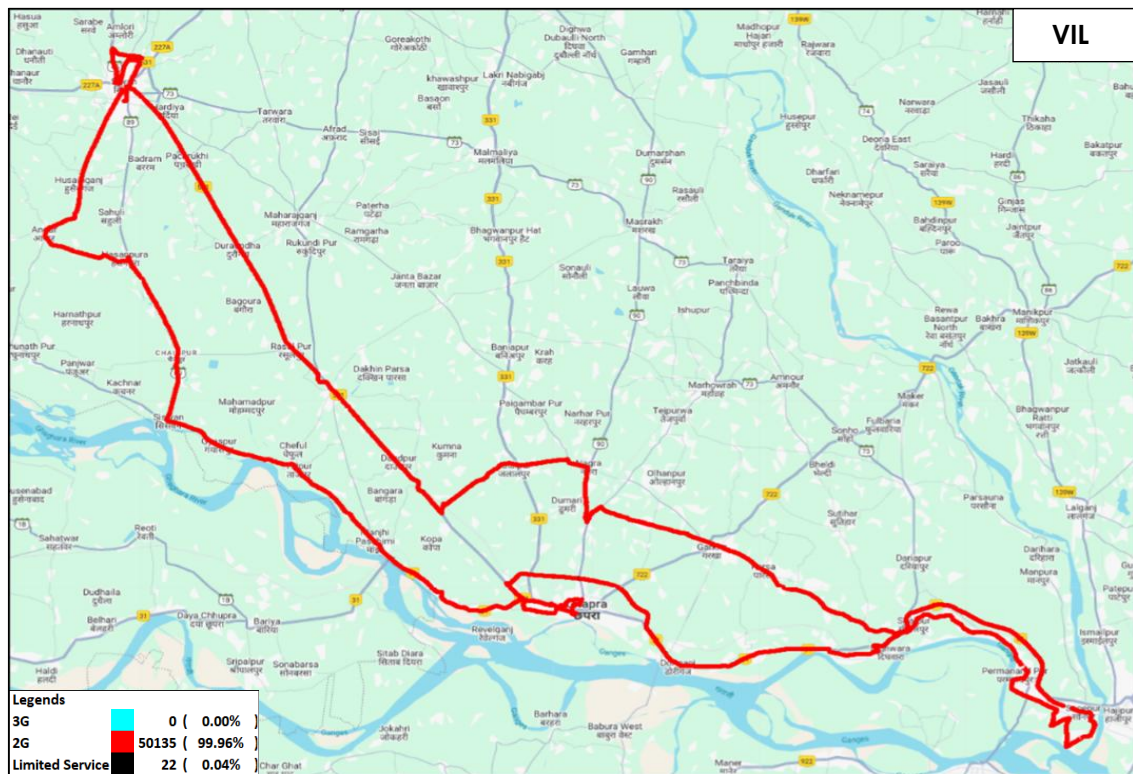


Figure-11: Serving technology plots 3G/2G network mode –VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 34, 35 & 36 for map view)

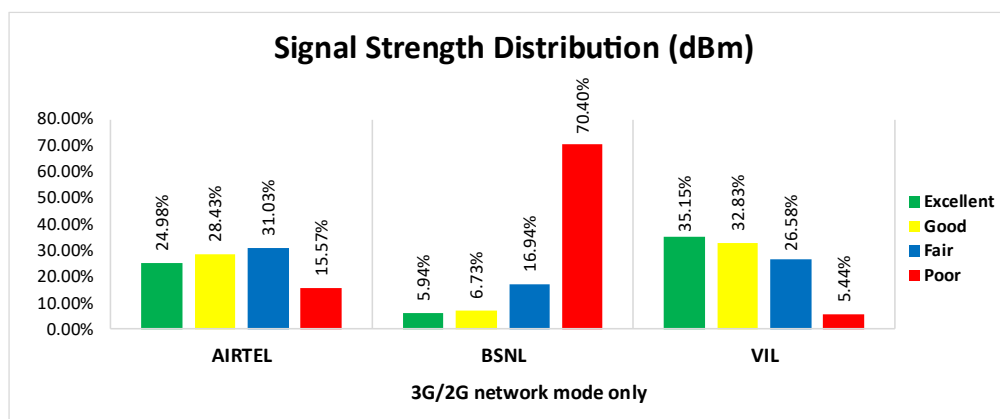


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 25% of samples falling in the excellent signal strength category.
- BSNL has 6% of samples falling in the excellent signal strength category.
- VIL has 35% of samples falling in the excellent signal strength category.

(d)Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	368	443	370	386
Call Setup Success Rate %	100.00	76.98	100.00	95.60
Drop Call Rate %	0.00	7.33	0.00	1.36
Call Setup Time Average (Second)	1.82	3.2	0.72	1.36
Handover Success Rate %	99.93	91.45	99.86	99.54

Table-15: Summary of voice call performance in network auto-selection mode.

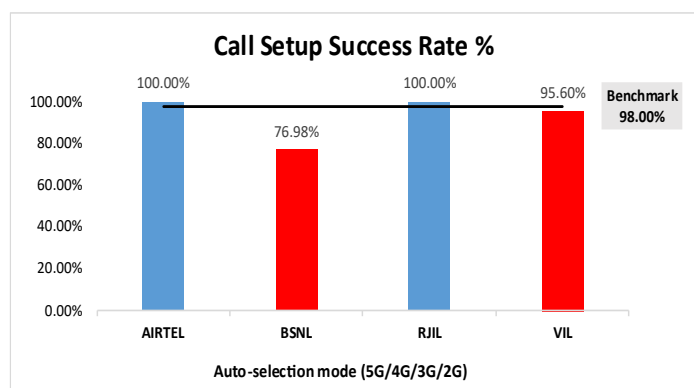


Figure-13: Performance for call setup success rate.

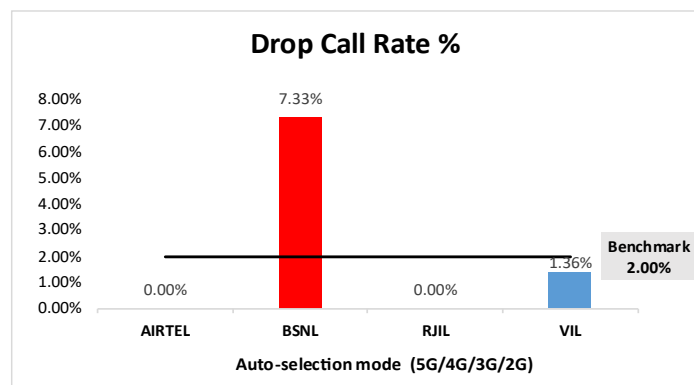


Figure-14: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	361	343	361	357
Number of silence call for >4 Sec	3	0	9	14
Silence Call Rate %	0.83	NA	2.49	3.92
Number of silence instances for >4 Sec	6	NA	14	18
Number of silence instances for >3 Sec	11	NA	21	39
Number of silence instances for >2 sec	34	NA	48	128
RTP Jitter (4G & 5G) in ms	5.62	NA	13.39	13.23
Packet loss Rate Downlink %	0.72	NA	1.41	1.02
Packet loss Rate Uplink %	0.65	NA	1.62	1.53

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

Note-

- NA- Due to unavailability of packet switched (VoLTE & VoNR) network in BSNL silence instances are not captured.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	3216	2329	3150	3161
Speech Quality (Average MOS)	3.99	2.69	3.81	4.49
Number of samples with MOS ≥ 4 to < 5 (Excellent)	2652	0	2026	2818
Number of samples with MOS ≥ 3 to < 4 (Good)	462	921	875	195
Number of samples with MOS ≥ 2 to < 3 (Fair)	40	1046	123	62
Number of samples with MOS ≥ 1 to < 2 (Poor)	62	362	126	86
%age of samples with MOS ≥ 4 to < 5 (Excellent)	82.46%	0.00%	64.32%	89.15%
%age of samples with MOS ≥ 3 to < 4 (Good)	14.37%	39.54%	27.78%	6.17%
%age of samples with MOS ≥ 2 to < 3 (Fair)	1.24%	44.91%	3.90%	1.96%
%age of samples with MOS ≥ 1 to < 2 (Poor)	1.93%	15.54%	4.00%	2.72%

Table-17: Summary of speech quality (MOS) samples.

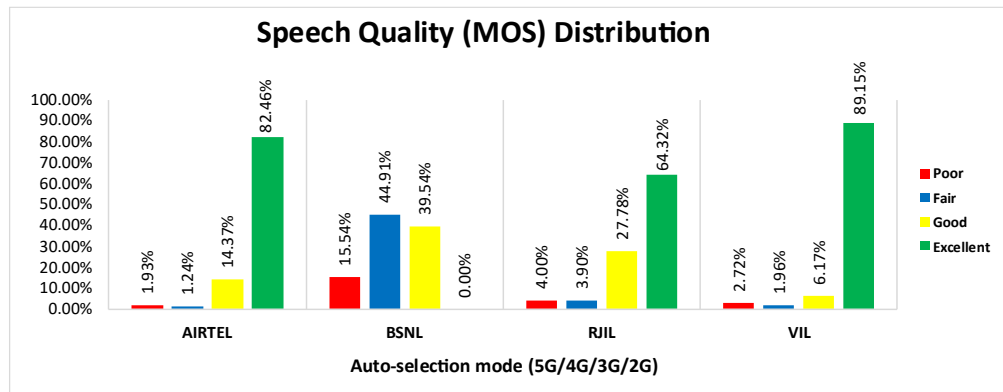


Figure-15: Distribution of samples in MOS range.

(f) Network Technology: This section represent time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	3.98%	NA	52.69%	NA
4G	96.02%	6.92%	47.30%	93.63%
3G	NA	9.31%	NA	NA
2G	0.00%	81.02%	NA	6.29%
Limited Service	0.00%	2.75%	0.02%	0.09%

Table-18: Time spent on technology during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.

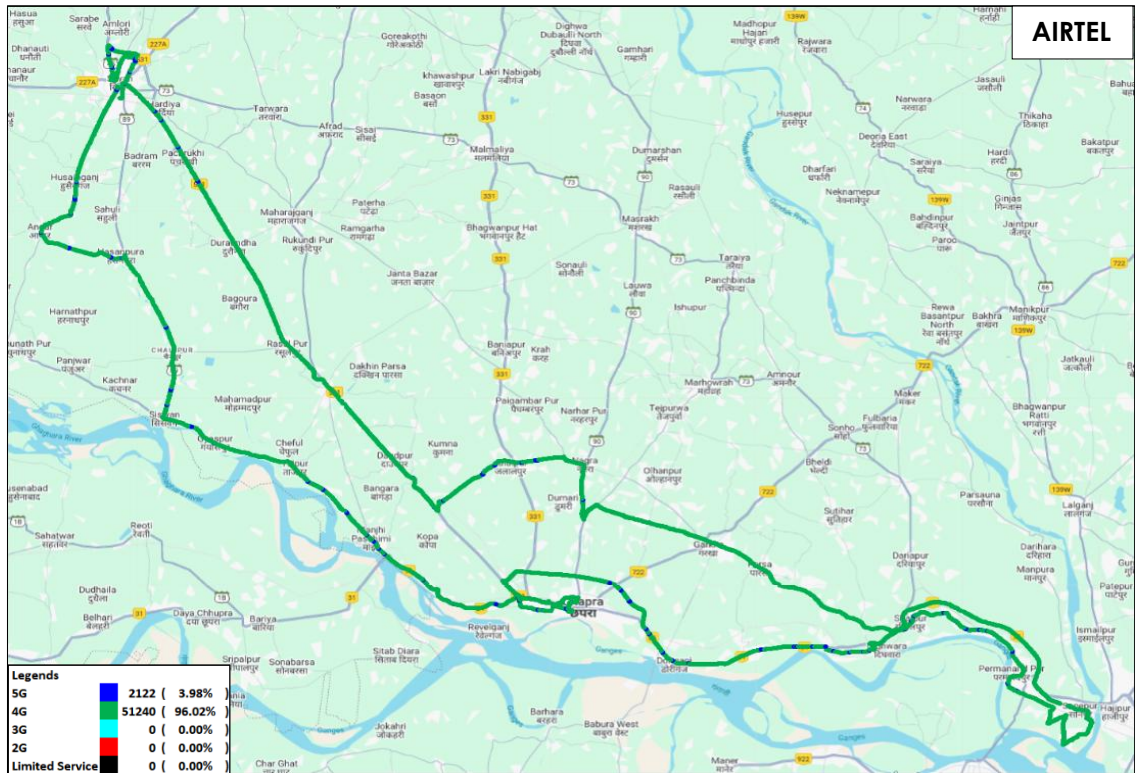


Figure-16: Serving technology plots in auto-selection mode (5G/4G/3G/2G) -AIRTEL.

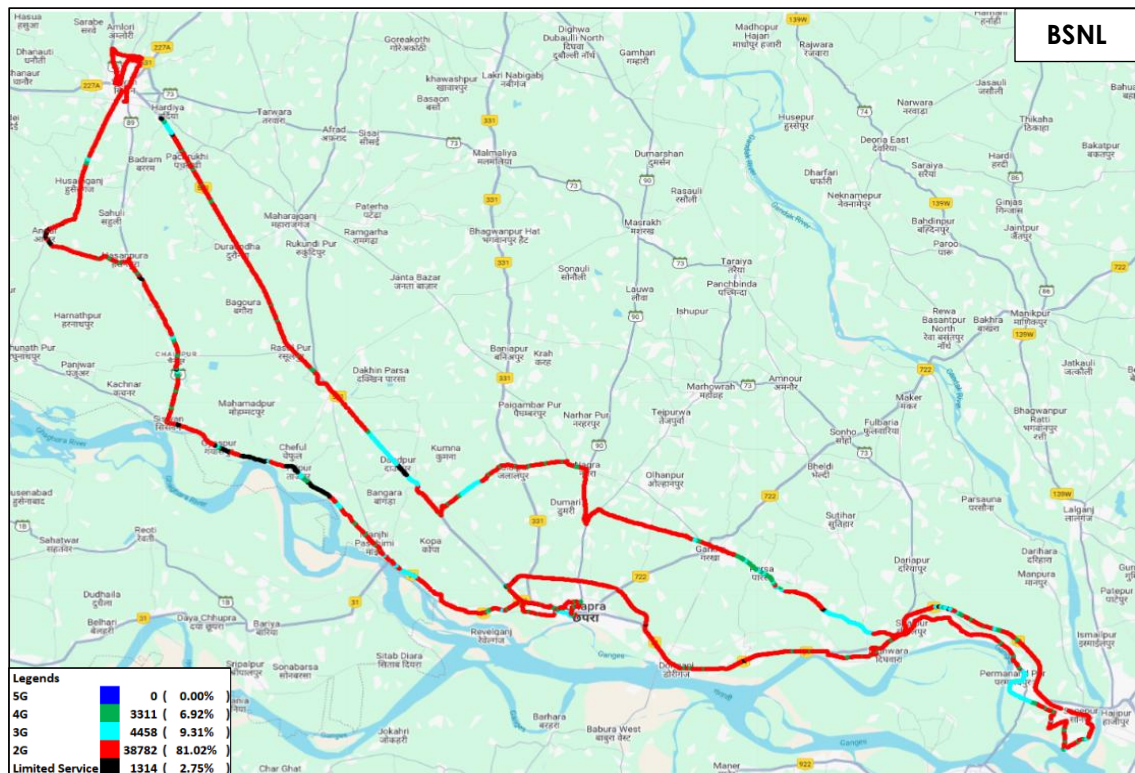


Figure-17: Serving technology plots in auto-selection mode (5G/4G/3G/2G) -BSNL (4G being rolled out).

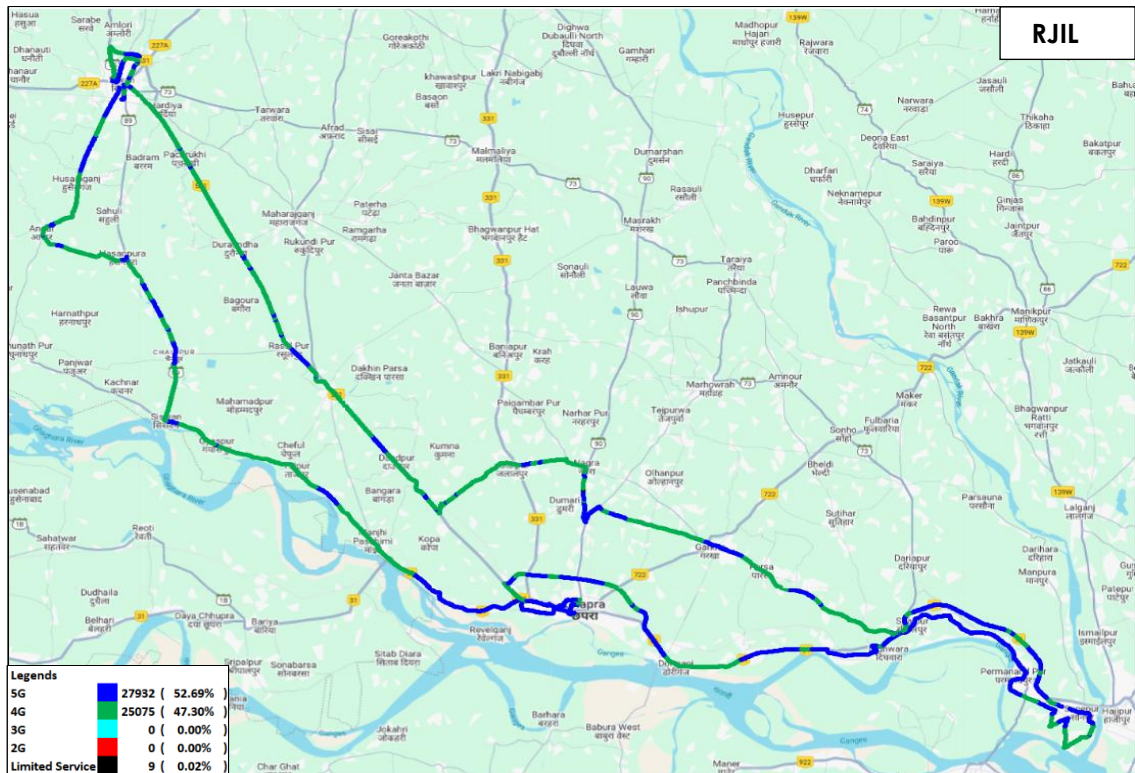


Figure-18: Serving technology plots in auto-selection mode (5G/4G/3G/2G)- RJIL.

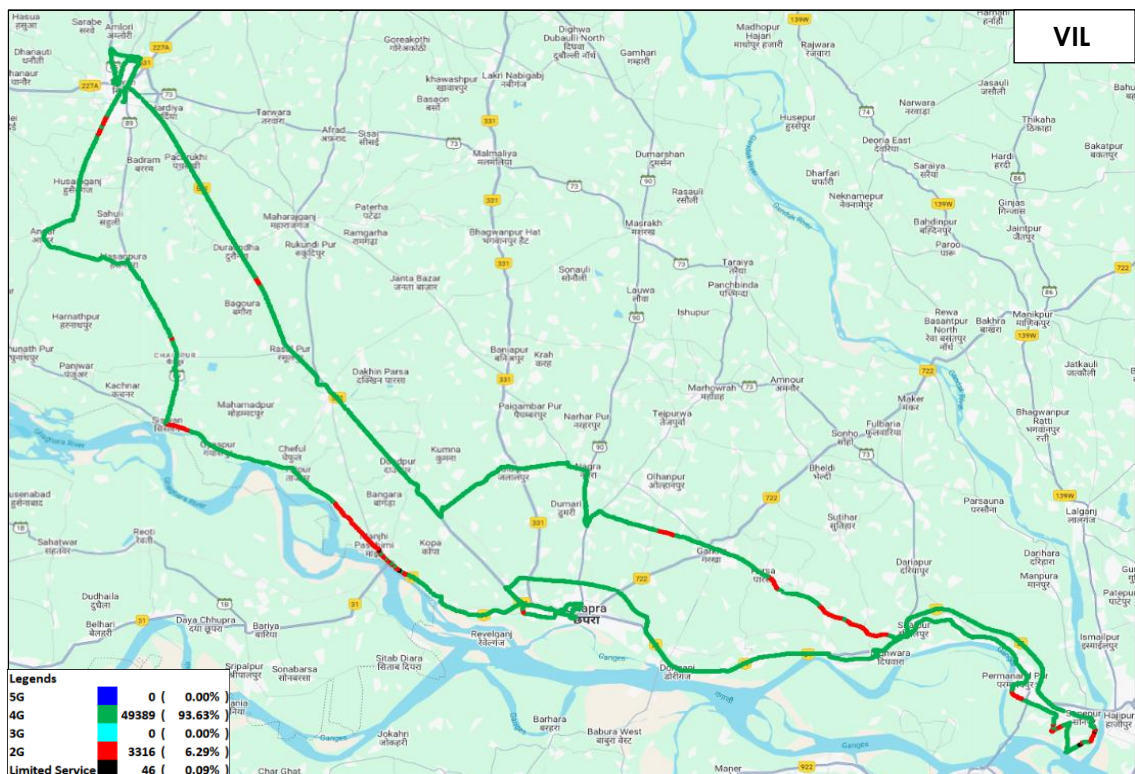


Figure-19: Serving technology plots in auto-selection mode (5G/4G/3G/2G) – VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G). (Refer figure-37, 38, 39 & 40 for map view)

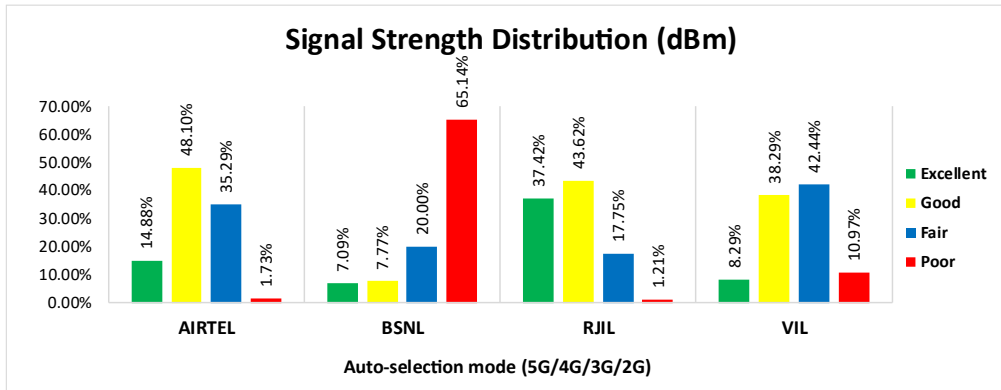


Figure-20: Signal strength distribution auto-selection mode 5G/4G/3G/2G.

Observations:

- Airtel has 15% of samples falling in the excellent signal strength category.
- BSNL has 7% of samples falling in the excellent signal strength category.
- RJIL has 37% of samples falling in the excellent signal strength category.
- VIL has 8% of samples falling in the excellent signal strength category.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	70.21	5.63	165.22	15.17
	80th Percentile	128.11	9.67	300.57	21.78
	20th Percentile	11.63	0.37	17.54	4.84
Upload Throughput (Mbits/s)	Average	20.27	4.65	13.89	9.75
	80th Percentile	35.09	8.92	25.03	16.05
	20th Percentile	5.20	1.21	2.15	2.61
Latency (ms)	50th Percentile	47.38	32.50	15.50	42.55

Table-19: Summary of Data performance in network auto-selection mode.

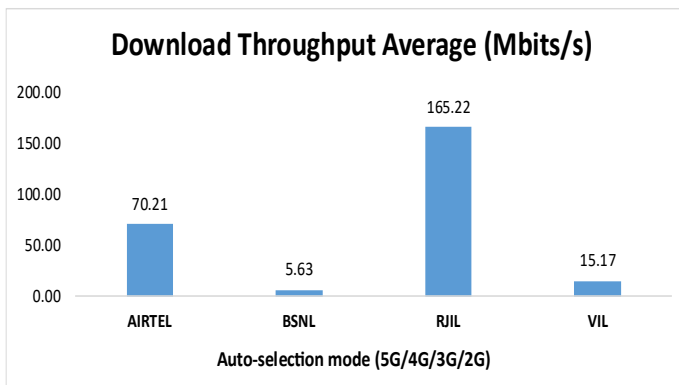


Figure- 21: Download throughput

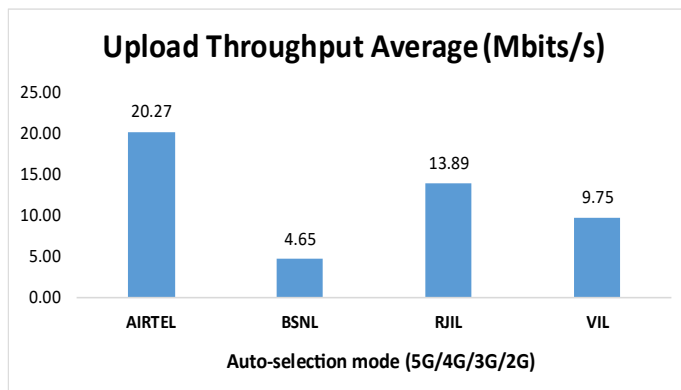


Figure- 22: Upload throughput

4.3 Hotspots

Hotspot testing has been done on 9th, 10th and 11th September 2025. Ten locations have been tested in Saran district including Chhapra city and Siwan district. (refer table-1)

4.3.1 Locations

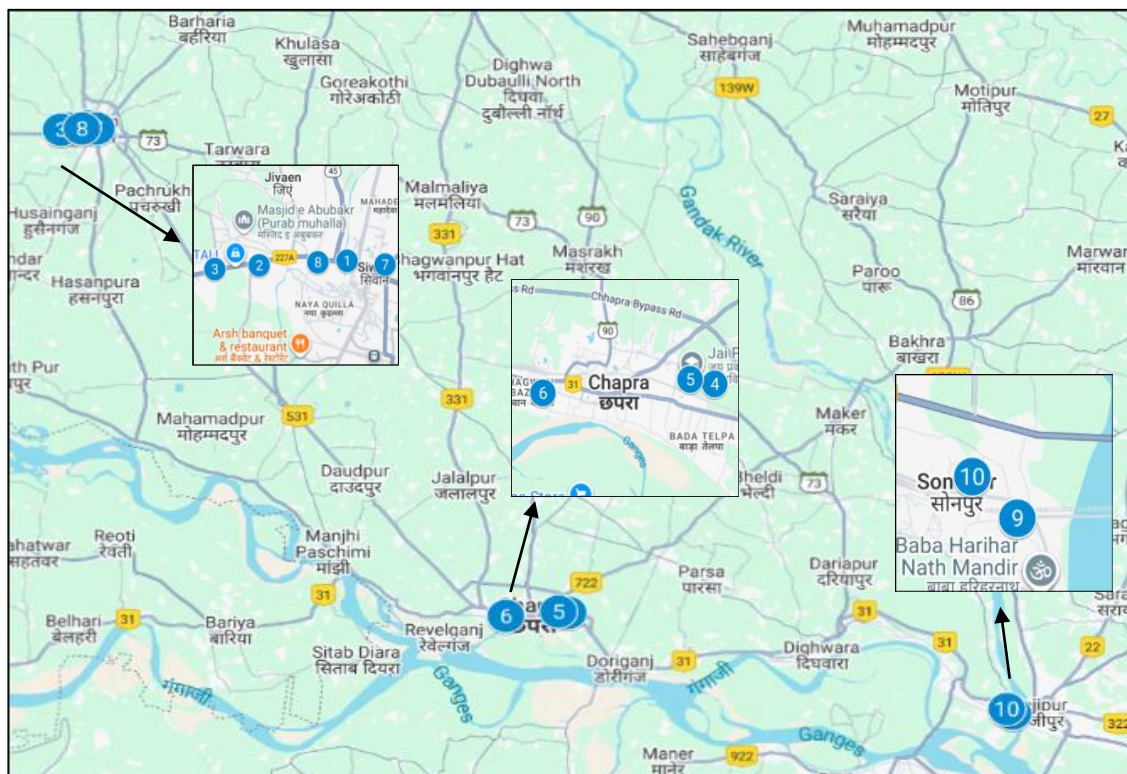


Figure- 23: Hotspot locations

4.3.2 Hotspot covered

1. Civil Court Siwan
2. Daroga Ray College Ayodhyapuri Siwan
3. Government Engineering College Siwan
4. Government Medical College and Hospital Chhapra
5. Jai Prakash University Chhapra
6. Sadar Hospital Chhapra
7. Sadar Hospital Siwan
8. Siwan Bus Stand
9. Sonpur Mela Sonpur
10. Sub Divisional Hospital Sonpur

4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	100	100	100	100
Call Setup Success Rate %	100.00	90.00	100.00	97.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.79	3.38	0.54	0.96

Table-20: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Civil Court Siwan				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	60.00	100.00	90.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.39	1.89	0.56	0.88

Table-21: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Daroga Ray College Ayodhyapuri Siwan				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.71	2.40	0.64	1.13

Table-22: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Government Engineering College Siwan				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.69	2.77	0.51	1.17

Table-23: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Government Medical College and Hospital Chhapra				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	90.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.69	2.84	0.50	0.82

Table-24: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Jai Prakash University Chhapra				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.73	2.68	0.56	0.95

Table-25: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Sadar Hospital Chhapra				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.64	3.32	0.48	0.90

Table-26: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Sadar Hospital Siwan				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.68	9.60	0.47	0.91

Table-27: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Siwan Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	90.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.59	2.26	0.52	0.93

Table-28: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Sonepur Mela Sonepur				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.15	2.55	0.57	0.93

Table-29: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Sub Divisional Hospital Sonepur				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	60.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.58	2.43	0.54	0.94

Table-30: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.3.4 Data performance (auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	66.85	0.45	236.79	34.73
Download Throughput 80th Percentile (Mbit/s)	103.95	0.77	299.98	49.71
Download Throughput 20th Percentile (Mbit/s)	2.92	0.00	178.40	12.01
Download Session Setup Success Rate %	84.00	78.00	100.00	100.00
Upload Throughput Average (Mbits/s)	29.57	1.16	23.00	13.35
Upload Throughput 80th Percentile (Mbit/s)	46.18	1.26	32.76	18.63
Upload Throughput 20th Percentile (Mbit/s)	6.02	1.21	10.93	4.66
Upload Session Setup Success Rate %	84.00	82.00	100.00	100.00
Web Browsing Delay (Second)	2.55	6.43	2.14	4.04
Youtube Initial Buffer Delay (Second)	0.94	6.48	0.68	1.45
Latency (ms) - 50th Percentile	46.70	36.55	13.25	37.70
Jitter (ms)	12.03	161.71	9.78	6.15
Packet Loss Rate%	8.39	45.59	0.72	20.27
Packet Loss Rate- 90th percentile	21.05	76.17	0.79	100.00

Table-31: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Civil Court Siwan				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	70.10	0.00	201.05	10.94
Download Session Setup Success Rate %	100.00	80.00	100.00	100.00
Upload Throughput Average (Mbits/s)	16.55	1.23	21.33	6.11
Upload Session Setup Success Rate %	100.00	80.00	100.00	100.00
Web Browsing Delay (Second)	2.13	19.51	2.12	4.73
Youtube Initial Buffer Delay (Second)	0.59	-	0.61	2.36
Latency (ms) - 50th Percentile	49.05	40.68	12.35	39.95
Jitter (ms)	8.44	25.22	2.38	3.52
Packet Loss Rate%	0.00	44.60	0.00	0.30

Table-32: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

Daroga Ray College Ayodhyapuri Siwan				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	70.11	0.03	189.11	36.33
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	20.64	1.21	3.91	16.65
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.59	4.83	3.28	5.23
Youtube Initial Buffer Delay (Second)	0.88	-	0.94	0.70
Latency (ms) - 50th Percentile	23.13	24.55	14.88	37.40
Jitter (ms)	14.12	3.29	69.07	1.78
Packet Loss Rate%	2.60	0.80	7.00	0.00

Table-33: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

Government Engineering College Siwan				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	45.49	0.02	215.02	9.39
Download Session Setup Success Rate %	80.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	4.07	1.22	13.98	2.41
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.38	5.79	1.87	2.48
Youtube Initial Buffer Delay (Second)	1.05	-	0.59	1.43
Latency (ms) - 50th Percentile	58.50	74.75	12.60	40.43
Jitter (ms)	20.84	393.41	3.04	11.63
Packet Loss Rate%	19.90	65.50	0.00	0.40

Table-34: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

Government Medical College and Hospital Chhapra				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	129.60	1.16	209.58	17.09
Download Session Setup Success Rate %	100.00	40.00	100.00	100.00
Upload Throughput Average (Mbits/s)	24.87	1.06	45.99	4.17
Upload Session Setup Success Rate %	100.00	60.00	100.00	100.00
Web Browsing Delay (Second)	1.53	9.90	1.42	3.82
Youtube Initial Buffer Delay (Second)	1.17	-	0.55	1.00
Latency (ms) - 50th Percentile	47.55	68.00	12.60	35.05
Jitter (ms)	2.99	207.68	5.71	2.26
Packet Loss Rate%	0.00	31.70	0.10	0.70

Table-35: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note--" Youtube tests were failed.

Jai Prakash University Chhapra				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	2.88	1.33	218.29	11.56
Download Session Setup Success Rate%	60.00	80.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.54	0.85	22.27	7.02
Upload Session Setup Success Rate %	60.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.94	11.85	1.73	4.18
Youtube Initial Buffer Delay (Second)	1.21	-	0.64	2.02
Latency (ms)- 50th Percentile	71.50	65.50	11.63	35.05
Jitter (ms)	23.31	153.38	2.87	21.63
Packet Loss Rate%	31.40	73.80	0.00	0.90

Table-36: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note--" Youtube tests were failed.

Sadar Hospital Chhapra				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	0.86	0.00	344.79	95.14
Download Session Setup Success Rate %	100.00	20.00	100.00	100.00
Upload Throughput Average (Mbits/s)	17.91	0.00	32.45	20.02
Upload Session Setup Success Rate %	80.00	20.00	100.00	100.00
Web Browsing Delay (Second)	3.39	0.00	2.72	5.69
Youtube Initial Buffer Delay (Second)	0.66	-	0.66	0.75
Latency (ms) - 50th Percentile	48.20	2871.00	13.35	36.05
Jitter (ms)	25.14	1121.74	3.05	3.93
Packet Loss Rate%	14.00	97.50	0.00	0.20

Table-37: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note--" Youtube tests were failed.

Sadar Hospital Siwan				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	18.07	0.00	243.50	26.01
Download Session Setup Success Rate %	80.00	80.00	100.00	100.00
Upload Throughput Average (Mbits/s)	35.55	1.21	30.63	6.86
Upload Session Setup Success Rate %	80.00	80.00	100.00	100.00
Web Browsing Delay (Second)	2.38	-	1.95	5.18
Youtube Initial Buffer Delay (Second)	2.19	-	0.76	2.16
Latency (ms) - 50th Percentile	58.50	30.35	14.10	40.20
Jitter (ms)	10.65	130.95	2.15	2.72
Packet Loss Rate%	2.40	62.70	0.00	0.10

Table-38: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- Web Browsing & Youtube tests were failed.

Siwan Bus Stand				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	71.90	0.03	254.26	24.20
Download Session Setup Success Rate %	80.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	43.74	1.21	36.51	14.33
Upload Session Setup Success Rate %	80.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.34	4.93	1.96	4.51
Youtube Initial Buffer Delay (Second)	0.61	-	0.73	2.06
Latency (ms) - 50th Percentile	42.53	26.60	15.53	36.03
Jitter (ms)	8.08	3.23	3.25	1.71
Packet Loss Rate%	0.20	0.70	0.10	0.10

Table-39: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- Youtube tests were failed.

Sonepur Mela Sonepur				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	203.79	2.25	295.90	51.67
Download Session Setup Success Rate %	40.00	80.00	100.00	100.00
Upload Throughput Average (Mbits/s)	101.09	1.39	14.24	18.43
Upload Session Setup Success Rate %	40.00	80.00	100.00	100.00
Web Browsing Delay (Second)	2.37	3.18	2.29	2.00
Youtube Initial Buffer Delay (Second)	0.66	6.48	0.61	0.85
Latency (ms) - 50th Percentile	39.83	33.05	14.10	-
Jitter (ms)	3.85	628.31	2.60	-
Packet Loss Rate%	0.00	48.10	0.00	100.00

Table-40: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- Ping tests were failed.

Sub Divisional Hospital Sonapur				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	99.28	0.09	196.40	64.95
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	62.53	1.29	8.71	37.48
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.64	6.38	2.01	2.61
Youtube Initial Buffer Delay (Second)	0.80	-	0.70	0.92
Latency (ms) - 50th Percentile	39.03	37.85	12.60	-
Jitter (ms)	3.51	20.67	3.85	-
Packet Loss Rate%	13.40	30.50	0.00	100.00

Table-41: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube & ping tests were failed.

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	64.62	-	274.79	-
	Upload Throughput Average (Mbits/s)	38.99	-	32.05	-
4G	Download Throughput Average (Mbits/s)	28.88	7.67	29.03	17.95
	Upload Throughput Average (Mbits/s)	6.73	5.99	7.04	8.61

Table-42: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Civil Court Siwan					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	66.09	-	197.34	-
	Upload Throughput Average (Mbits/s)	16.13	-	24.52	-
4G	Download Throughput Average (Mbits/s)	46.97	8.87	20.04	8.93
	Upload Throughput Average (Mbits/s)	3.65	5.54	7.88	8.76

Table-43: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Daroga Ray College Ayodhyapuri Siwan					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	70.11	-	163.81	-
	Upload Throughput Average (Mbits/s)	36.84	-	3.41	-
4G	Download Throughput Average (Mbits/s)	26.44	18.73	5.26	24.85
	Upload Throughput Average (Mbits/s)	5.70	13.87	1.89	15.28

Table-44: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Government Engineering College Siwan					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	45.49	-	312.53	-
	Upload Throughput Average (Mbits/s)	3.93	-	19.04	-
4G	Download Throughput Average (Mbits/s)	54.22	7.22	56.93	2.62
	Upload Throughput Average (Mbits/s)	4.38	2.38	6.18	4.17

Table-45: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Government Medical College and Hospital Chhapra					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	129.60	-	259.58	-
	Upload Throughput Average (Mbits/s)	53.33	-	47.54	-
4G	Download Throughput Average (Mbits/s)	51.63	1.53	37.19	9.93
	Upload Throughput Average (Mbits/s)	12.92	1.31	6.79	8.94

Table-46: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Jai Prakash University Chhapra					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	2.34	-	198.82	-
	Upload Throughput Average (Mbits/s)	10.77	-	15.00	-
4G	Download Throughput Average (Mbits/s)	29.17	6.61	19.42	16.39
	Upload Throughput Average (Mbits/s)	4.16	3.46	3.50	9.58

Table-47: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Sadar Hospital Chhapra					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	0.87	-	381.17	-
	Upload Throughput Average (Mbits/s)	42.61	-	31.48	-
4G	Download Throughput Average (Mbits/s)	0.72	0.04	22.50	30.30
	Upload Throughput Average (Mbits/s)	4.33	0.00	7.76	1.57

Table-48: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Sadar Hospital Siwan					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	19.36	-	213.43	-
	Upload Throughput Average (Mbits/s)	30.07	-	42.91	-
4G	Download Throughput Average (Mbits/s)	14.43	12.24	27.09	18.07
	Upload Throughput Average (Mbits/s)	11.41	10.52	11.09	6.38

Table-49: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

Siwan Bus Stand					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	62.34	-	379.38	-
	Upload Throughput Average (Mbits/s)	51.67	-	52.77	-
4G	Download Throughput Average (Mbits/s)	60.10	7.10	33.12	20.79
	Upload Throughput Average (Mbits/s)	5.96	13.50	8.27	8.11

Table-50: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

Sonepur Mela Sonepur					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	203.79	-	403.36	-
	Upload Throughput Average (Mbits/s)	93.47	-	71.42	-
4G	Download Throughput Average (Mbits/s)	0.74	5.01	55.18	16.31
	Upload Throughput Average (Mbits/s)	9.51	1.38	14.93	7.21

Table-51: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

Sub Divisional Hospital Sonepur					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	99.28	-	238.50	-
	Upload Throughput Average (Mbits/s)	60.44	-	12.43	-
4G	Download Throughput Average (Mbits/s)	1.03	1.67	13.55	33.83
	Upload Throughput Average (Mbits/s)	5.00	1.25	2.07	16.06

Table-52: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

4.4 Walk Test

Walk test has been conducted on 9th, 10th and 11th September 2025. Three locations have been tested in Saran district including Chhapra city and Siwan district. (refer table-1)

4.4.1 Walk test locations

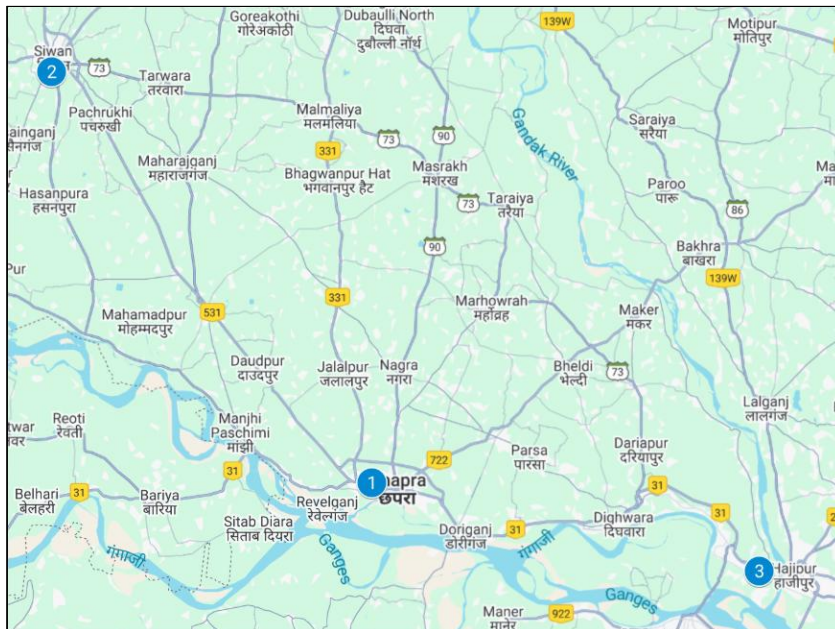


Figure-24: Walk test locations.

4.4.2 Walk test covered

1. Chhapra Railway Station
2. Siwan Railway Station
3. Sonapur Railway Station

4.4.3 Voice performance

i) Chhapra Railway Station

(a) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Chhapra Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	11	11	11	11
Call Setup Success Rate %	100.00	90.91	100.00	100.00
Drop Call Rate %	0.00	10.00	0.00	0.00
Call Setup Time-Average (Sec)	1.70	2.26	0.63	0.89
Handover Success Rate %	100.00	100.00	100.00	100.00

Table-53: Summary of Voice performance in network auto-selection mode (5G/4G/3G/2G).

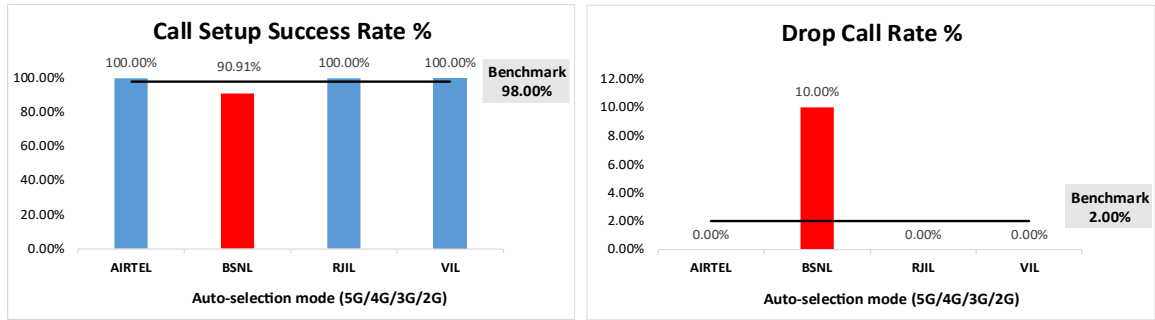


Figure-25: Performance for call setup success rate and drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

Chhapra Railway Station				
Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	0.00%	NA	92.27%	NA
4G	100.00%	15.36%	7.73%	100.00%
3G	NA	10.90%	NA	NA
2G	0.00%	73.67%	NA	0.00%
Limited service	0.00%	0.07%	0.00%	0.00%

Table-54: Time spent on technology during walk test.

Note-

- NA- Service provider doesn't provide services in respective technology.

(c) Network Signal Strength distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G).

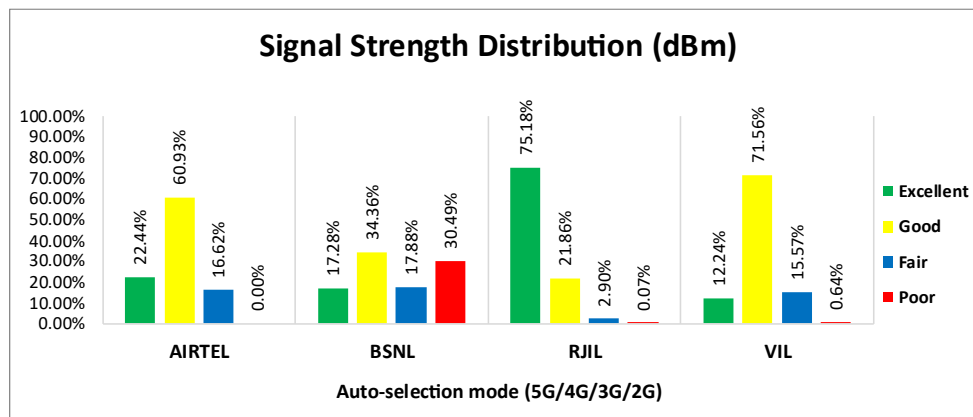


Figure-26: Signal strength distribution auto-selection mode 5G/4G/3G/2G.

ii) Siwan Railway Station

(a) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Siwan Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	12	12	11	11
Call Setup Success Rate %	100.00	91.67	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	1.70	2.73	0.49	0.89
Handover Success Rate %	100.00	-	100.00	100.00

Table-55: Summary of Voice performance in network auto-selection mode (5G/4G/3G/2G).

Note "- "Handover did not attempt.

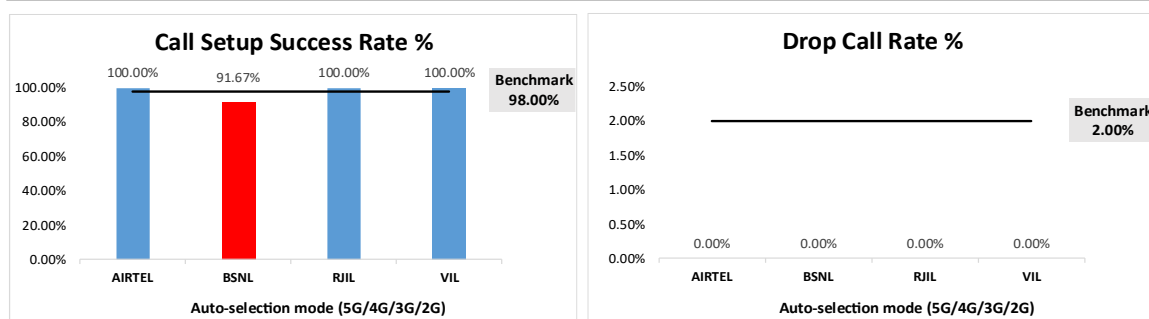


Figure- 27: Performance for call setup success rate and drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Siwan Railway Station				
Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	3.68%	NA	100.00%	NA
4G	96.32%	0.27%	0.00%	100.00%
3G	NA	0.00%	NA	NA
2G	0.00%	99.73%	NA	0.00%
Limited service	0.00%	0.00%	0.00%	0.00%

Table-56: Time spent on technology during walk test.

Note-

- NA- Service provider doesn't provide services in respective technology.

(c) Network Signal Strength distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G).

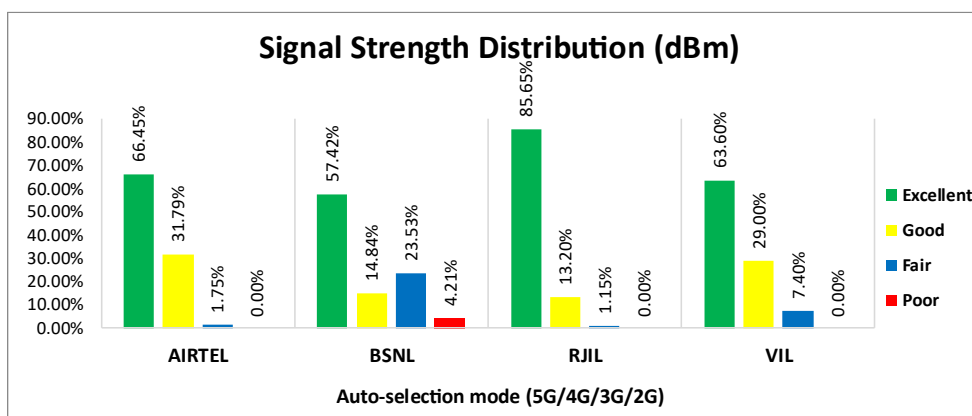


Figure-28: Signal strength distribution auto-selection mode 5G/4G/3G/2G.

iii) Sonapur Railway Station

(a) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Sonapur Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	11	16	14	11
Call Setup Success Rate %	100.00	75.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	2.23	2.39	0.50	0.93
Handover Success Rate %	100.00	0.00	100.00	100.00

Table-57: Summary of Voice performance in network auto-selection mode (5G/4G/3G/2G).

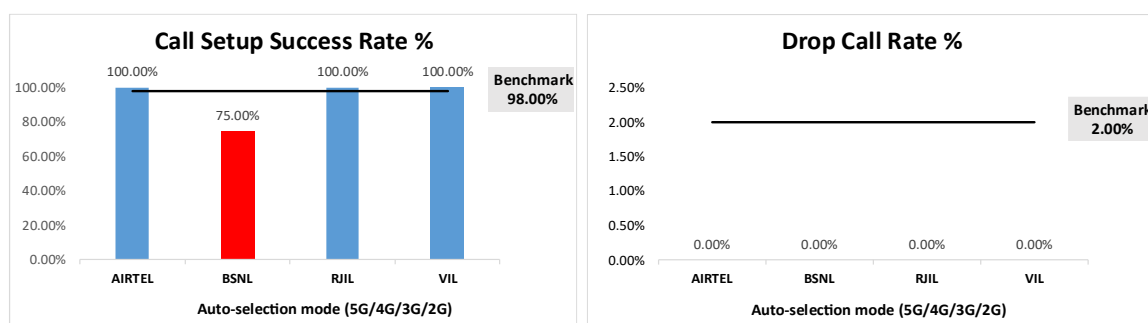


Figure- 29: Performance for call setup success rate and drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Sonepur Railway Station				
Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	9.45%	NA	95.84%	NA
4G	90.55%	0.00%	4.16%	100.00%
3G	NA	0.39%	NA	NA
2G	0.00%	87.10%	NA	0.00%
Limited service	0.00%	12.51%	0.00%	0.00%

Table-58: Time spent on technology during walk test.

Note-

- NA- Service provider doesn't provide services in respective technology.

(c) Network Signal Strength distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G).

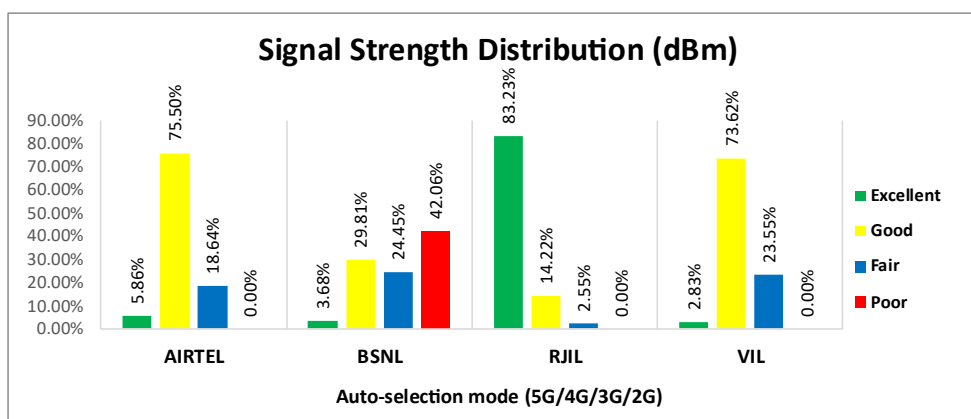


Figure-30: Signal strength distribution auto-selection mode 5G/4G/3G/2G.

4.4.4 Data performance

i) Chhapra Railway Station

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Chhapra Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbps/s)	0.53	2.47	42.72	6.32
Download Throughput 80th Percentile	0.76	3.42	56.67	10.36
Download Throughput 20th Percentile	0.38	1.11	16.89	1.16
Download Session Setup Success Rate %	100.00	58.82	100.00	100.00
Upload Throughput Average (Mbps/s)	12.00	2.19	7.69	5.35
Upload Throughput 80th Percentile	19.62	3.20	11.03	7.27
Upload Throughput 20th Percentile	2.68	1.21	2.04	2.86
Upload Session Setup Success Rate %	100.00	62.50	100.00	100.00
Latency (ms)-50th Percentile	61.50	33.08	17.60	45.55

Table-59: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

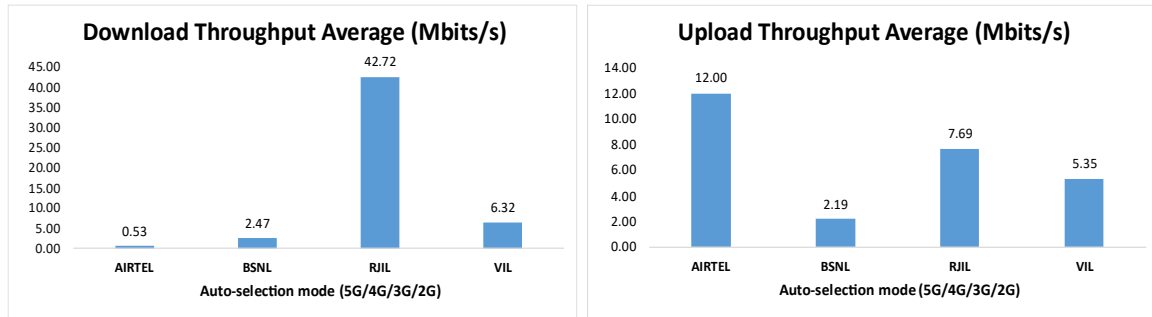


Figure- 31: Download and Upload throughput.

ii) Siwan Railway Station

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Siwan Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	75.53	0.02	335.82	6.24
Download Throughput 80th Percentile	102.37	0.03	422.71	7.93
Download Throughput 20th Percentile	41.73	0.02	211.77	3.64
Download Session Setup Success Rate %	100.00	25.00	100.00	100.00
Upload Throughput Average (Mbits/s)	56.15	1.22	45.16	11.47
Upload Throughput 80th Percentile	78.01	1.23	68.14	15.57
Upload Throughput 20th Percentile	43.34	1.21	14.86	7.41
Upload Session Setup Success Rate %	100.00	26.67	100.00	100.00
Latency (ms)-50th Percentile	20.30	5601.00	14.50	44.85

Table-60: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

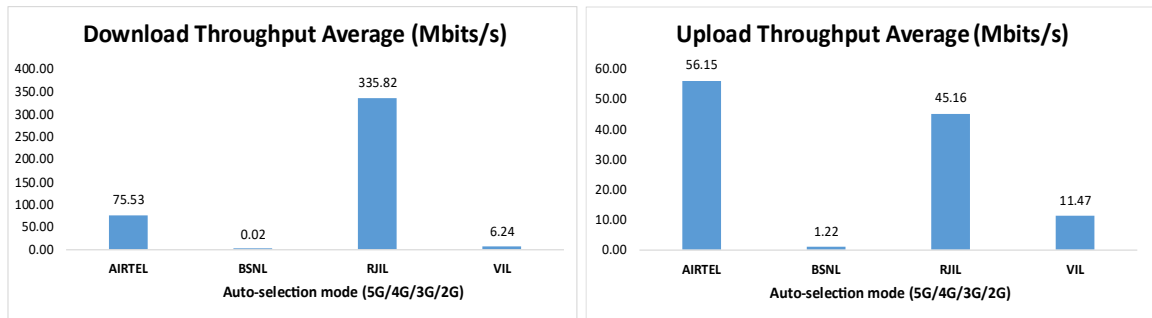


Figure- 32: Download and Upload throughput

iii) Sonapur Railway Station

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Sonapur Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	40.20	-	128.97	28.98
Download Throughput 80th Percentile	57.59	-	172.53	47.85
Download Throughput 20th Percentile	14.68	-	65.53	14.47
Download Session Setup Success Rate %	100.00	0.00	100.00	100.00
Upload Throughput Average (Mbits/s)	21.87	-	23.21	8.26
Upload Throughput 80th Percentile	43.13	-	35.02	14.64
Upload Throughput 20th Percentile	5.82	-	11.84	3.34
Upload Session Setup Success Rate %	100.00	0.00	100.00	100.00
Latency (ms)-50th Percentile	52.25	-	12.80	-

Table-61: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note-“-” Respective tests were failed.

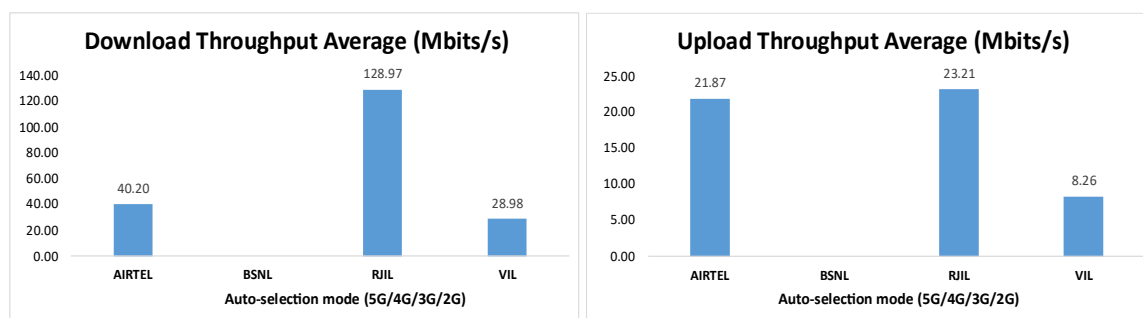


Figure- 33: Download and Upload throughput.

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 99.72%, 80.50% and 100.00% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 100.00%, 79.73%, 100.00% and 96.15% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) Airtel had a 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)
- d) BSNL had a 100.00% call setup success when calling RJIL and VIL whereas call blocking was observed when calling Airtel. (refer table-9)
- e) RJIL had a 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)
- f) VIL had a 100.00% call setup success when calling Airtel whereas call blocking was observed when calling BSNL & RJIL. (refer table-9)

2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 5.34, 3.08 and 2.87 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 1.82, 3.18, 0.67 and 1.25 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate:

In packet switched network (4G/5G) Airtel, RJIL & VIL have 0.83%, 2.49% and 3.92% silence call rate respectively. Further Airtel, RJIL & VIL downlink RTP packet loss is 0.72%, 1.41% and 1.02% respectively. In uplink Airtel, RJIL & VIL RTP packet loss is 0.65%, 1.62% and 1.53% respectively. (refer table-6)

4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 0.28%, 11.11% and 0.84% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 0.00%, 5.60%, 0.00% and 1.00% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 67.51 Mbps, 4.92 Mbps, 171.90 Mbps and 16.93 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 21.74 Mbps, 4.14 Mbps, 15.57 Mbps and 9.98 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 66.85 Mbps, 0.45 Mbps, 236.79 Mbps and 34.73 Mbps respectively. (refer table-31)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 29.57 Mbps, 1.16 Mbps, 23.00 Mbps and 13.35 Mbps respectively. (refer table-31)

3. Data session setup success rate (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL have 84.00%, 78.00%, 100.00% and 100.00% download session setup success rate respectively. (refer table-31)
- b) Airtel, BSNL, RJIL and VIL have 84.00%, 82.00%, 100.00% and 100.00% upload session setup success rate respectively. (refer table-31)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 99.72% call setup success rate and 0.28% drop call rate have been observed in 3G/2G network mode for LSA/city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3 & 13)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-53, 55 & 57.)

Data

- Airtel has 67.51 Mbps average download speed & 21.74 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 70.21 Mbps average download speed & 20.27 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speeds (less than 100 Mbps) except Government Medical College and Hospital Chhapra and Sonapur Mela- Sonapur for auto-selection mode (5G/4G/3G/2G). (refer table-32, 33, 34, 36, 37, 38, 39 & 41)
- Civil Court Siwan, Government Engineering College Siwan, Jai Prakash University Chhapra & Sadar Hospital Chhapra have less upload speed (less than 20 Mbps) out of total 10 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-32, 34, 36 & 37)
- All walk test locations have less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-59, 60 & 61)
- Chhapra Railway Station walk test locations has less upload speed (less than 20 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 59)

2. BSNL:

Voice

- 80.50% call setup success rate and 11.11% drop call rate have been observed in 3G/2G network mode for LSA/city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-3 & 13)
- 79.73% call setup success rate and 5.60% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 76.98% call setup success rate and 7.33% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 90.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-20)
- 90.91%, 91.67% & 75.00% call setup success rate & 10.00%, 0.00% & 0.00% drop call rate have been observed at Chhapra Railway Station, Siwan Railway Station, Sonapur Railway Station Walk test locations respectively for auto-selection mode (5G/4G/3G/2G). Performance is not meeting the benchmark of 98.00% at all walk test locations for call setup success rate & 2.00% at Chhapra Railway Station for drop call rate. (refer table- 53, 55 & 57)

Data

- BSNL has 4.92 Mbps average download speed & 4.14 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 5.63 Mbps average download speed & 4.65 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 10 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-32 to 41)
- All hotspot locations have less upload speed (less than 2 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-32 to 41)
- All walk test locations have less download speed (less than 10 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-59, 60 & 61)
- Siwan Railway Station and Sonapur Railway Station have less upload speed (less than 2 Mbps) out of total 3 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table- 60 & 61)

3. RJIL:

Voice

- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)

- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-53, 55 & 57.)

Data

- RJIL has 171.90 Mbps average download speed & 15.57 Mbps average upload speed for LSA. (refer table-11)
- RJIL has 165.22 Mbps average download speed & 13.89 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Daroga Ray College Ayodhyapuri Siwan, Government Engineering College Siwan, Sonapur Mela Sonapur & Sub Divisional Hospital Sonapur hotspot locations have less upload speed (less than 20 Mbps) out of total 10 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-33, 34, 40 & 41)
- Chhapra Railway Station walk test location has less download speed (less than 100 Mbps) out of total 3 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-59)
- Chhapra Railway Station walk test location has less upload speed (less than 20 Mbps) out of total 3 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-59)

4. VIL:

Voice

- 100.00% call setup success rate and 0.84% drop call rate have been observed in 3G/2G network mode for LSA/city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3 & 13)
- 96.15% call setup success rate and 1.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 95.60% call setup success rate and 1.36% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-15)
- 97.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-20)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-53, 55 & 57.)

Data

- VIL has 16.93 Mbps average download speed & 9.98 Mbps average upload speed for LSA. (refer table-11)

- VIL has 15.17 Mbps average download speed & 9.75 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Government Engineering College Siwan has less download speed (less than 10 Mbps) out of total 10 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-34)
- Chhapra Railway Station and Siwan Railway Station walk test locations have less download speed (less than 10 Mbps) out of total 3 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-59 & 60)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

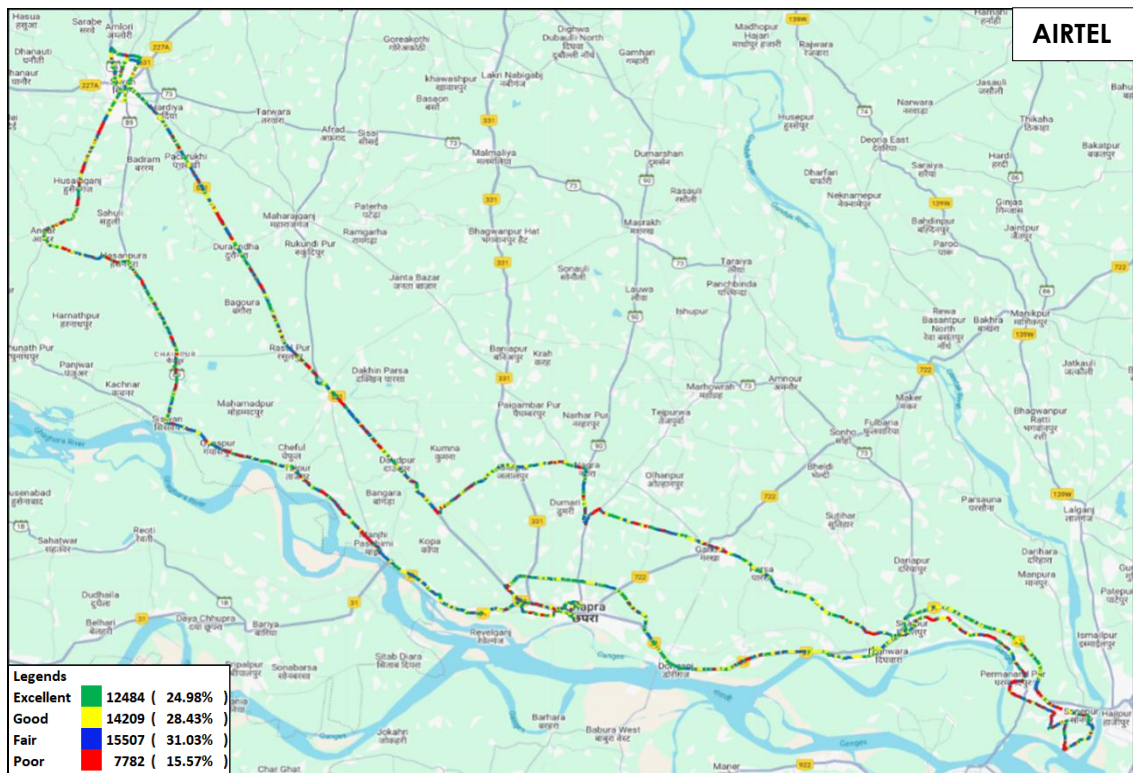


Figure-34: Signal strength 3G/2G network mode – AIRTEL.



Figure-35: Signal strength 3G/2G network mode – BSNL.



Figure-36: Signal strength 3G/2G network mode – VIL.

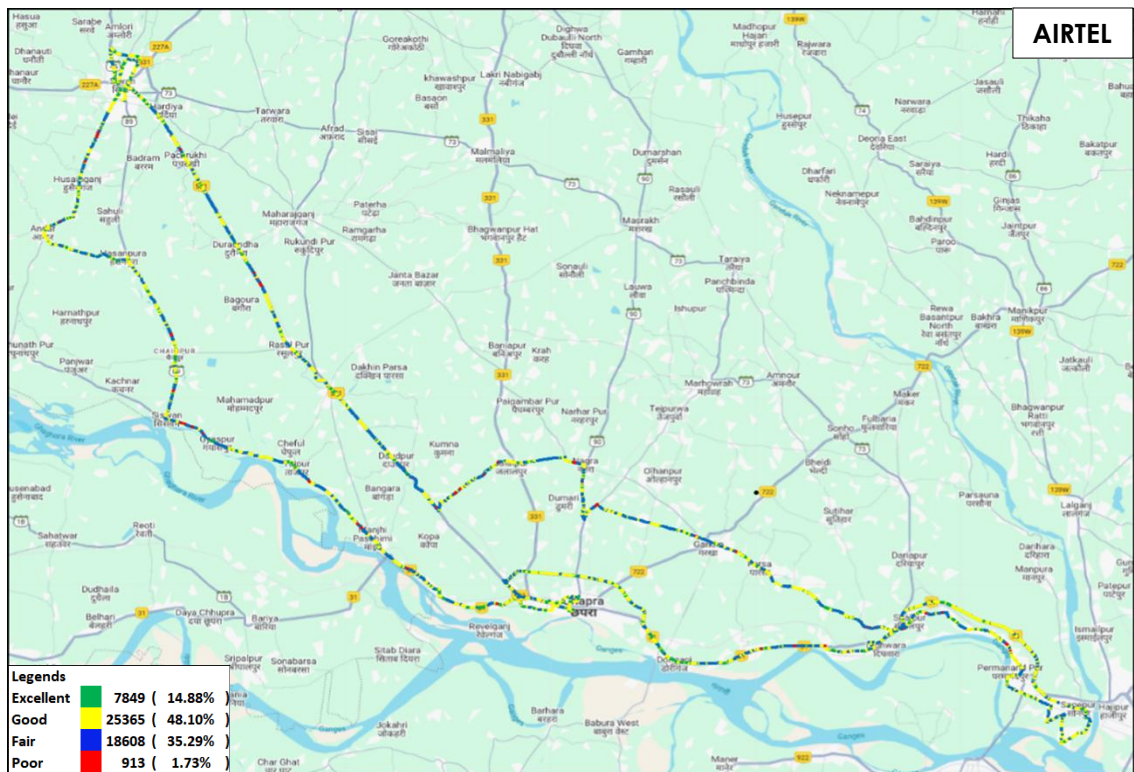


Figure-37: Signal strength auto-selection mode 5G/4G/3G/2G – AIRTEL.



Figure-38: Signal strength auto-selection mode 5G/4G/3G/2G – BSNL. (4G being rolled out).

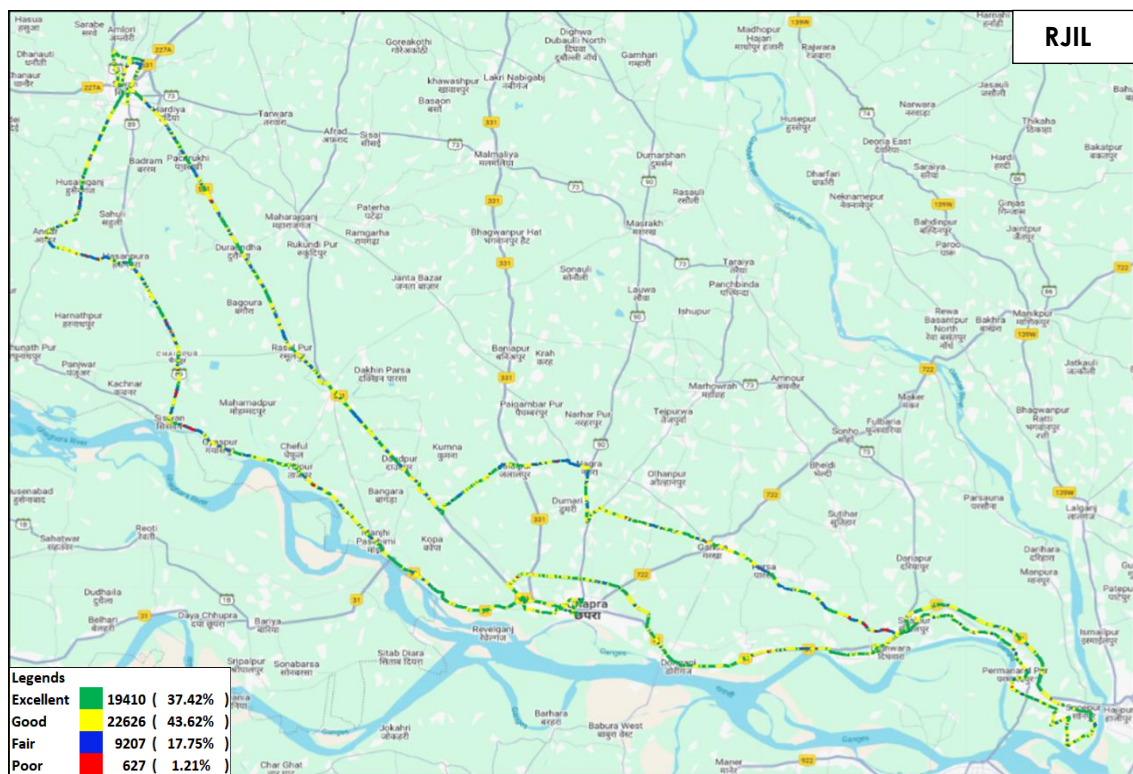


Figure-39: Signal strength auto-selection mode 5G/4G/3G/2G – RJIL.



Figure-40: Signal strength auto-selection mode 5G/4G/3G/2G – VIL.

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	• 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call	30 Sec
Call Duration		120 Sec
Wait/ Guard Time		15 Sec

Table-62: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.
- 180 Sec calls were made only in highway & railway route drive.

Data Test		
Test Type	Technology	Detail
HTTP/FTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
HTTP/FTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.irctc.co.in , www.sbi.co.in) 20 sec timeout (only at Hotspot)

Latency		25 count- Dynamic 1000 count- Hotspot Payload- 512 bytes in all drive
---------	--	---

Table-63: Data test detail

Note-

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- Ping test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Download and upload testing has been done on FTP server for Airtel, BSNL & RJIL. (Airtel, BSNL & RJIL not provided HTTP server)
- VIL download and upload testing is done on HTTP Server.

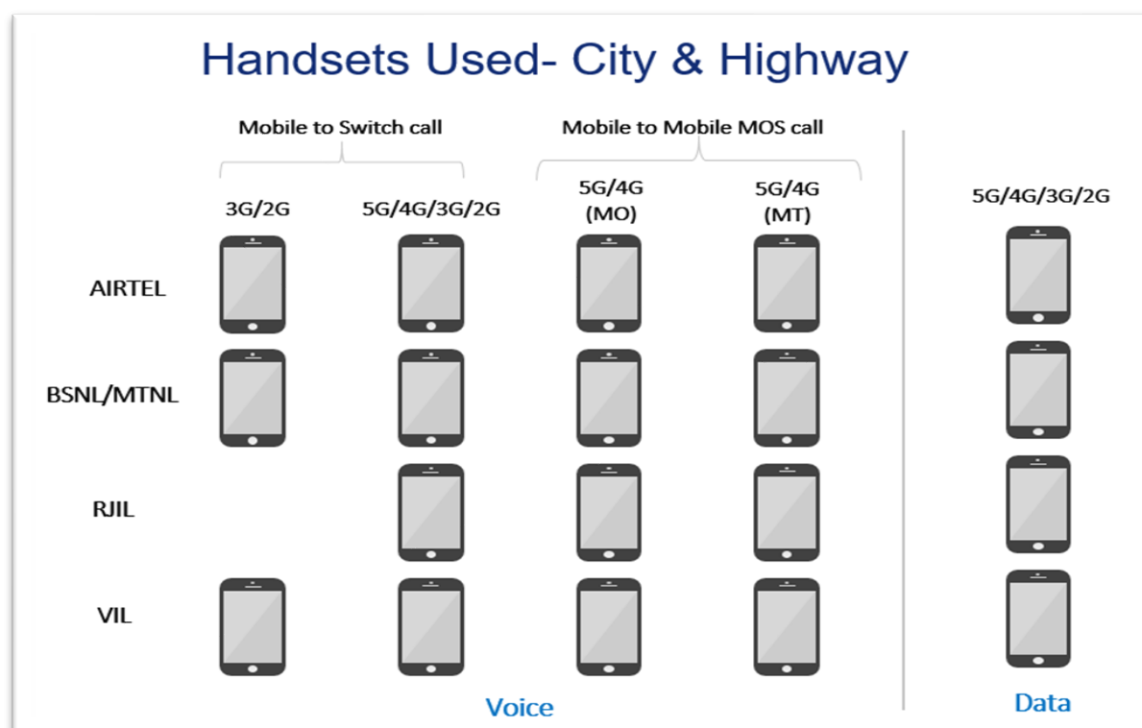


Figure-41: Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

Handsets Used- Railway/Metro/Walk Test/ Hotspot & Coastal Area

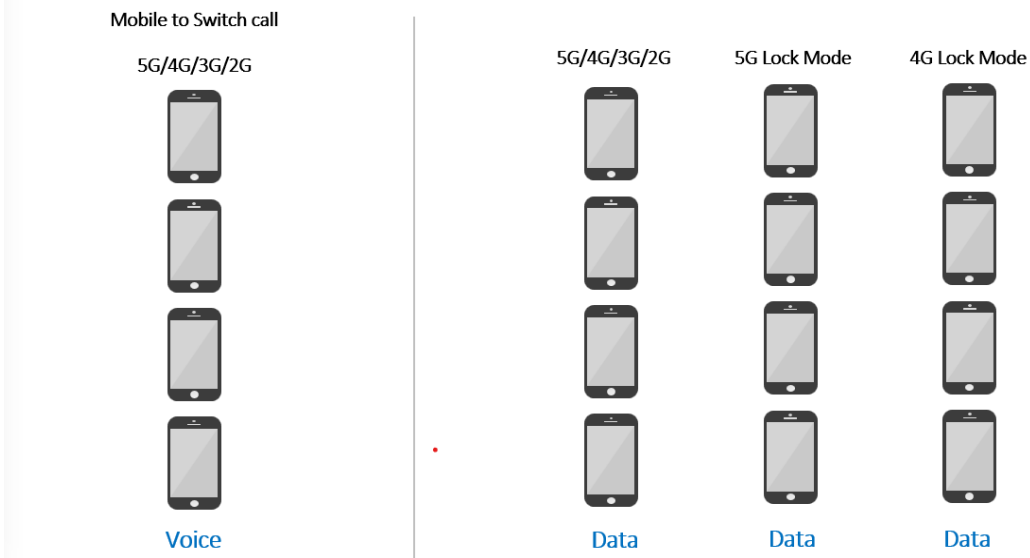


Figure-42: Number of handsets used in railway/metro/walktest/hotspot & coastal area

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

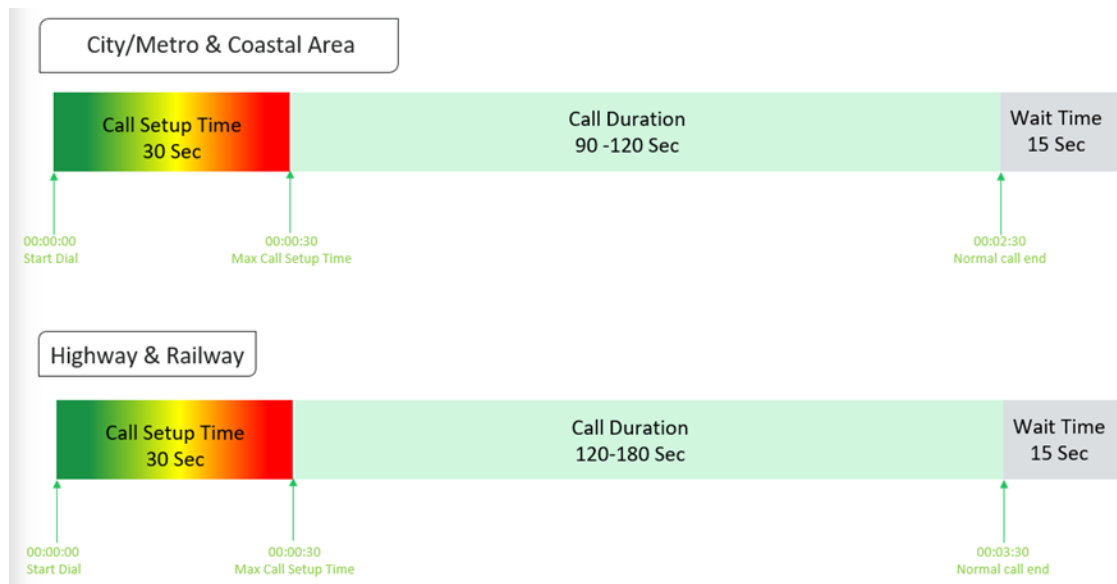


Figure-43: Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.

(b) Hotspot voice testing



Figure-44: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

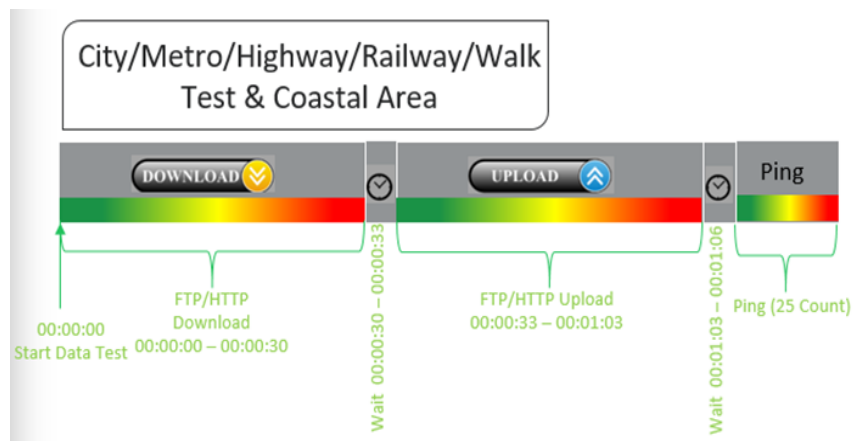


Figure-45: Data test script used in city/metro/railway/highway/walk test & coastal area

(d) Static Data(internet) testing

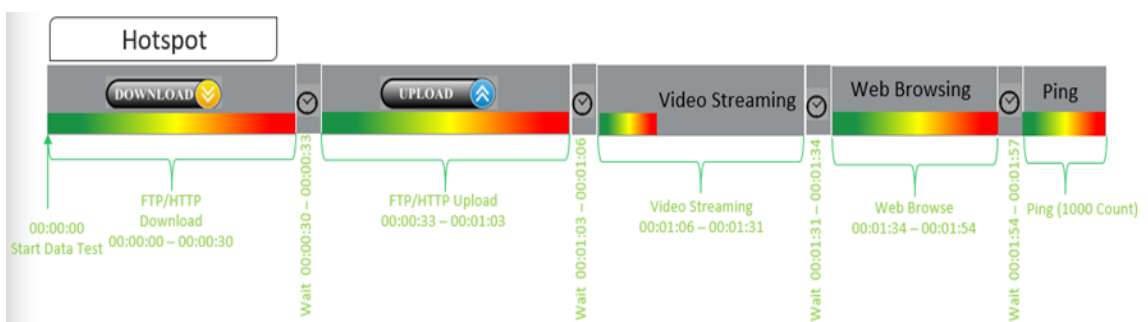


Figure-46: Data test script used at hotspot

- 5 Data iteration done at each hotspot location.
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- Only 1 ping iteration (with 1000 Count) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup: (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. CSSR = (Total Call Established/ Total Call Attempt) *100 As per QoS Regulation 2024 benchmark value is >=98%
Drop Call Rate	Drop call represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network Drop Call Rate = (Total Drop Call/Total Call Established) *100 As per QoS Regulation 2024 benchmark value is <=2%
Call Setup Time	Time taken from call initiate to call alerting/ringing. Call Setup Time = T2- T1 T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)
Voice Quality (MOS)	Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as: Excellent: MOS ≥ 4 and < 5 Good : MOS ≥ 3 and < 4 Fair : MOS ≥ 2 and < 3 Poor : MOS ≥ 1 and < 2
Handover Success Rate	Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100 Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.
Silence Call	A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call. Silence call rate = (count of silence call / Total calls established) *100 If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.

Jitter	The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as: $D(i,j) = (R_j - R_i) - (S_j - S_i)$ The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16 \text{ or } 8$																																		
Downlink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)																																		
Uplink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).																																		
Signal Strength	Signal strength is the signal power level received by the wireless user. <table><thead><tr><th rowspan="2">Parameter Name</th><th rowspan="2">Technology</th><th colspan="4">Signal Strength (dBm)</th></tr><tr><th>Excellent</th><th>Good</th><th>Fair</th><th>Poor</th></tr></thead><tbody><tr><td>Rx Level</td><td>GSM</td><td>0 to ≥ -65</td><td>< -65 to ≥ -75</td><td>< -75 to ≥ -85</td><td>< -85 to min</td></tr><tr><td>RSCP</td><td>WCDMA</td><td>0 to ≥ -70</td><td>< -70 to ≥ -80</td><td>< -80 to ≥ -90</td><td>< -90 to min</td></tr><tr><td>RSRP</td><td>LTE</td><td>0 to ≥ -80</td><td>< -80 to ≥ -95</td><td>< -95 to ≥ -110</td><td>< -110 to min</td></tr><tr><td>SS_RSRP</td><td>NR</td><td>0 to ≥ -80</td><td>< -80 to ≥ -95</td><td>< -95 to ≥ -110</td><td>< -110 to min</td></tr></tbody></table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to ≥ -65	< -65 to ≥ -75	< -75 to ≥ -85	< -85 to min	RSCP	WCDMA	0 to ≥ -70	< -70 to ≥ -80	< -80 to ≥ -90	< -90 to min	RSRP	LTE	0 to ≥ -80	< -80 to ≥ -95	< -95 to ≥ -110	< -110 to min	SS_RSRP	NR	0 to ≥ -80	< -80 to ≥ -95	< -95 to ≥ -110	< -110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to ≥ -65	< -65 to ≥ -75	< -75 to ≥ -85	< -85 to min																														
RSCP	WCDMA	0 to ≥ -70	< -70 to ≥ -80	< -80 to ≥ -90	< -90 to min																														
RSRP	LTE	0 to ≥ -80	< -80 to ≥ -95	< -95 to ≥ -110	< -110 to min																														
SS_RSRP	NR	0 to ≥ -80	< -80 to ≥ -95	< -95 to ≥ -110	< -110 to min																														

Table-64: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
Download Speed (Mbps)	The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device. Download Speed = Total bytes transferred during download / Total time for transfer 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
Upload Speed (Mbps)	The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server. Upload Speed = Total bytes transferred during upload / Total time for transfer. 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
Download Session Setup Success Rate	(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency we just do half of the round-trip time. 50th percentile of one way latency has been reported.
Jitter	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using ping) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on ICMP * 90th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-65: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.