



**TELECOM REGULATORY AUTHORITY OF INDIA**

*Independent Drive Test Report*

*Madhya Pradesh LSA*

*January 2026*

Contents

- 1. Introduction ..... 3
- 2. Executive Summary (LSA) ..... 3
  - 2.1 Drive test details ..... 3
  - 2.2 Drive test routes ..... 4
  - 2.3 Summary of areas covered ..... 5
  - 2.4 Telecom service providers detected frequency bands ..... 5
  - 2.5 Performance against key QoS parameters ..... 6
- 3. QoS performance analysis-LSA level ..... 7
  - 3.1 Overview ..... 8
  - 3.2 Voice performance ..... 8
  - 3.3 Data performance ..... 11
- 4. Detailed QoS performance analysis ..... 13
  - 4.1 Overview ..... 13
  - 4.2 City ..... 13
    - 4.2.1 Drive test route ..... 13
    - 4.2.2 Areas covered ..... 13
    - 4.2.3 Voice performance ..... 13
    - 4.2.4 Data performance ..... 20
  - 4.3 Hotspots ..... 24
    - 4.3.1 Locations ..... 24
    - 4.3.2 Hotspot covered ..... 24
    - 4.3.3 Voice performance ..... 24
    - 4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G) ..... 26
    - 4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed) ..... 29
  - 4.4 Walk Test ..... 31
    - 4.4.1 Walk test locations ..... 31
    - 4.4.2 Walk Test Covered ..... 31
    - 4.4.3 Voice Performance ..... 31
    - 4.4.4 Data Performance ..... 31
  - 4.5 Highway ..... 32
    - 4.5.1 Drive test route ..... 32
    - 4.5.2 Routes Covered ..... 32
    - 4.5.3 Voice performance ..... 32
    - 4.5.4 Data performance ..... 41

5. Voice & Data Key findings .....	45
5.1 Overall Voice.....	45
5.2 Overall Data .....	45
5.3 Operator wise Key Findings .....	46
6. Annexure .....	50
6.1 Route wise coverage map .....	50
6.1.1 City .....	50
6.1.2 Highway .....	54
7. Appendix .....	60
7.1 Appendix-I .....	60
7.1.1 Drive test setup .....	60
7.1.2 Drive test Methodology .....	62
7.2 Appendix-II .....	64
7.2.1 Network Performance Parameters for Voice calls .....	64
7.2.2 Network Performance Parameters Data tests .....	65

## 1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

## 2. Executive Summary (LSA)

### 2.1 Drive test details

This report covers the findings of the IDT undertaken in Madhya Pradesh License Service Area (LSA) during the month of January & February-2026 under the supervision of TRAI Regional Office (RO) Bhopal. Details of route/area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Guna & Ashoknagar	City	187.0	30-Jan-2026	01-Feb-2026
2	Guna	Inter-Operator	9.7	31-Jan-2026	31-Jan-2026
3	Guna & Ashoknagar	Hotspot	7 Locations	30-Jan-2026	01-Feb-2026
4	Guna	Walk test	1.5	01-Feb-2026	01-Feb-2026
5	Guna to Bhopal	Highway	201.2	02-Feb-2026	02-Feb-2026

**Table-1:** Drive test summary.

## 2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator calls test, hotspots, walk test and highway as per the legends shown on the map.

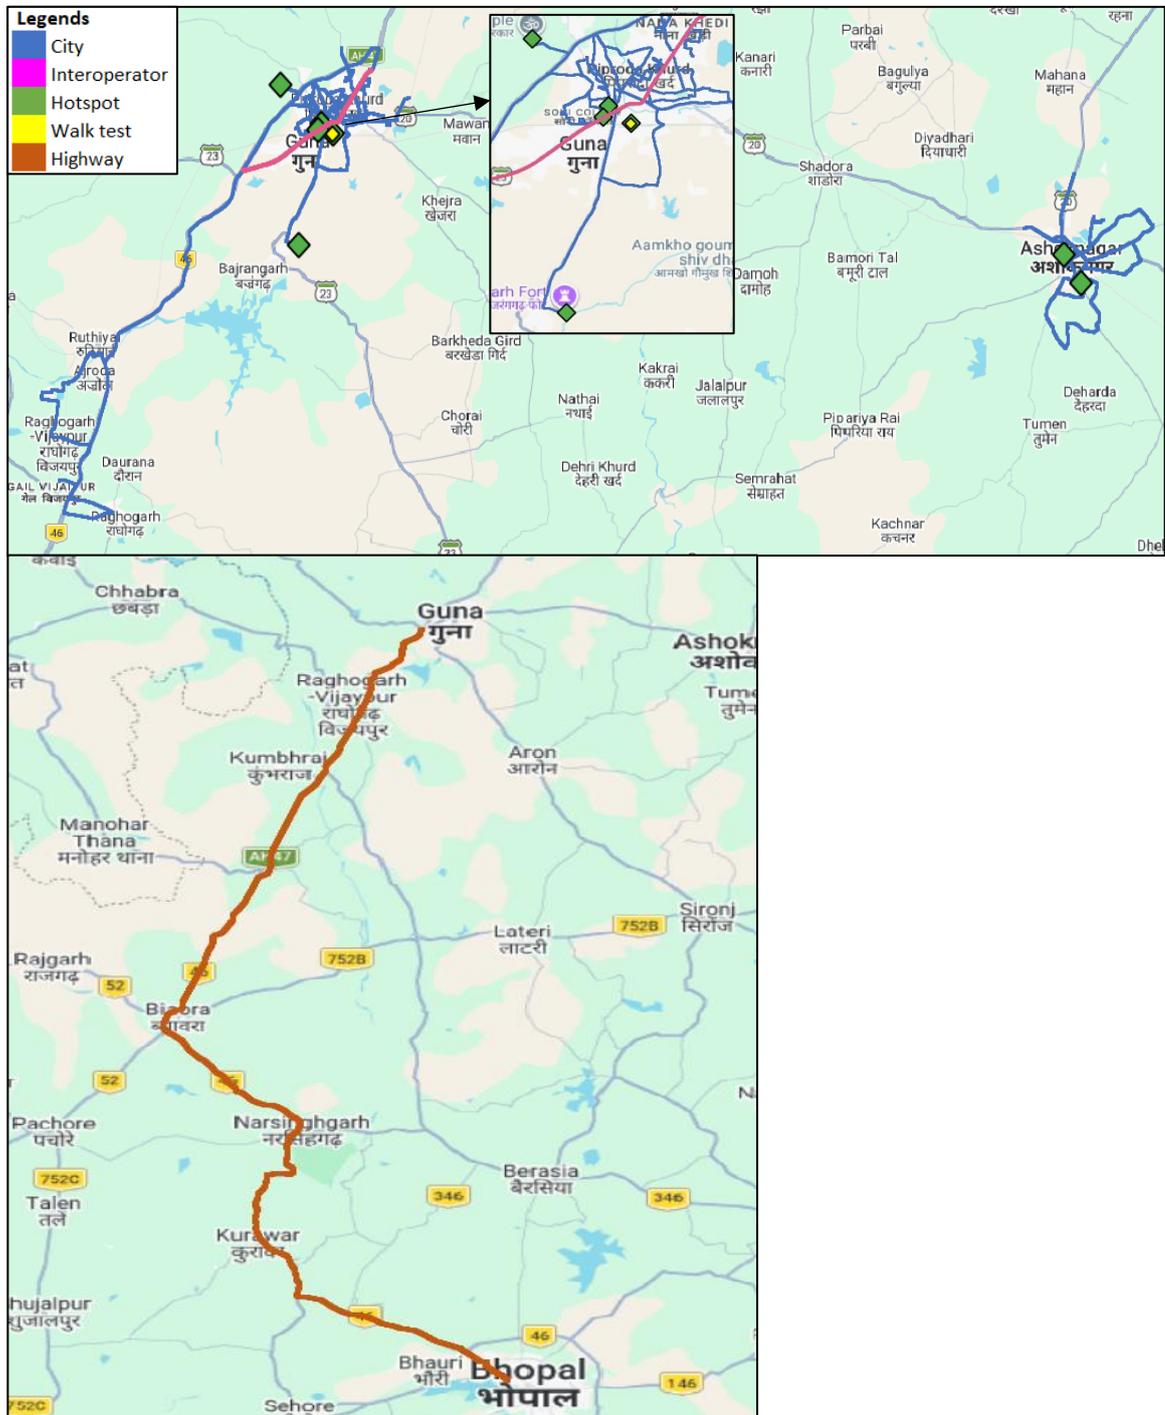


Figure-1: Drive test routes

## 2.3 Summary of areas covered

**a) City- Guna-** Gadarwara, Raghogarh-Vijaypur, NFL Township, Mahoogarha, Soni Colony, Budhewalaji, Tekri Sarkar Temple, New City Colony, Piproda Khurd, Naina Khedi, Bhagat Singh Colony, Gopal Pura Cantt, Poline line, Krisnani Nagar and Bajrangarh Fort etc.

**Ashoknagar-** Ashoknagar Railway Station, Om Colony, Mahaveer Colony, Ashoknagar-Esagarh Road, Manakpur Road, Kolua road, Purana Bazar, Mohari Road and Ashoknagar-Bahadurpur Road etc.

### b) Hotspot

1. Ashoknagar Railway Station
2. Bajrangarh Fort Guna
3. District Hospital Guna
4. Guna Railway Station
5. Jajji Bus Stand Guna
6. Polytechnic College Ashoknagar
7. Tekri Sarkar Temple Guna

### c) Walk Test

1. Guna Railway Station

### d) Highway

Guna to Bhopal passing through Ruthiyai, Ajroda, Gail Vijapur, Janjali, Barkhedi Khurd, Ramdi, Bamori, Bankpura, Khanpur, Kachnaria, Baiheda, Narsinghgarh, Kurawar, Bairagarh Khuman and Shyampur etc.

## 2.4 Telecom service providers detected frequency bands


Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	1800
2	Bharti Airtel Ltd.	4G	850,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,2100
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900,1800
10	Vodafone Idea Ltd.	4G	900,1800,2300,2500

**Table-2:** Telecom service provider (TSP) covered in IDT.

## 2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), CST: Call Setup Time (in seconds), DCR: Drop Call Rate (in %) & MOS: Mean Opinion Score.

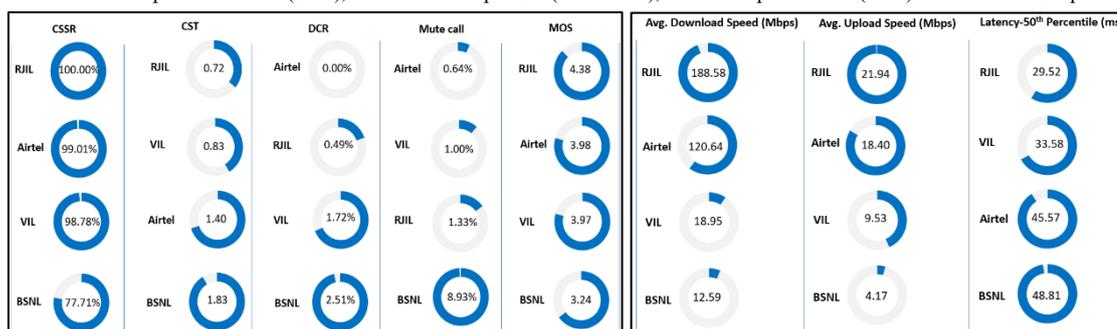

### Summary-Voice services

**Call Setup Success Rate:** Airtel, BSNL, RJIL and VIL have 99.01%, 77.71%, 100.00% and 98.78%, call setup success rate respectively in Auto-selection mode (5G/4G/3G/2G).

**Call Setup Time:** Airtel, BSNL, RJIL & VIL have call setup time of 1.40, 1.83, 0.72 and 0.83 seconds respectively in Auto-selection mode (5G/4G/3G/2G).

**Drop Call Rate:** Airtel, BSNL, RJIL and VIL have drop call rate of 0.00%, 2.51%, 0.49% and 1.72% respectively in Auto-selection mode (5G/4G/3G/2G).

**Call Silence/Mute Rate:** Airtel, BSNL, RJIL and VIL have silence call rate of 0.64%, 8.93%, 1.33% and 1.00% respectively in packet switched network (4G/5G).

**Mean Opinion Score (MOS):** Airtel, BSNL, RJIL and VIL have average MOS of 3.98, 3.24, 4.38 and 3.97 respectively.

### Summary-Data services

**Data Download performance (Overall):** Average download speed of Airtel (5G/4G/2G) is 120.64 Mbps, BSNL (4G/3G/2G) is 12.59 Mbps, RJIL (5G/4G) is 188.58 Mbps and VIL (4G/2G) is 18.95 Mbps.

**Data Upload performance (Overall):** Average upload speed of Airtel (5G/4G/2G) is 18.40 Mbps, BSNL (4G/3G/2G) is 4.17 Mbps, RJIL (5G/4G) is 21.94Mbps and VIL (4G/2G) is 9.53 Mbps.

**Latency (Overall):** Airtel, BSNL, RJIL and VIL 50<sup>th</sup> percentile latency is 45.57 ms, 48.81 ms, 29.52 ms & 33.58 ms respectively.

#### Data performance - Hotspots (in Mbps):

Airtel- 4G D/L: 21.92	4G U/L: 8.53
5G D/L: 133.69	5G U/L: 26.46
BSNL- 4G D/L: 8.73	4G U/L: 3.42
RJIL- 4G D/L: 25.55	4G U/L: 6.31
5G D/L: 120.70	5G U/L: 11.42
VIL- 4G D/L: 15.71	4G U/L: 6.84

Note- "D/L" Download speed, "U/L" Upload speed

- The poor Signal Strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 1.02%, 4.51%, 1.35% & 3.38% of the **City IDT route** in case of Airtel, BSNL, RJIL & VIL respectively. {refer **figure- 55 to 58** as per the **Section 6.1** under Para-6(Annexure)}
- The poor Signal Strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 8.23%, 7.75%, 10.41% & 7.55% of the **City IDT route** in case of Airtel, BSNL, RJIL & VIL respectively. {refer **figure- 59 to 62** as per the **Section 6.1** under Para-6(Annexure)}
- The poor Signal Strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 3.57%, 31.57%, 1.36% & 8.14% of the **Highway IDT route** in case of Airtel, BSNL, RJIL & VIL respectively. {refer **figure- 66 to 69** as per the **Section 6.1** under Para-6(Annexure)}
- The poor Signal Strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 16.90%, 42.13%, 11.44% & 12.16% of the **Highway IDT route** in case of Airtel, BSNL, RJIL & VIL respectively. {refer **figure- 70 to 73** as per the **Section 6.1** under Para-6(Annexure)}

# QoS Performance Analysis- Madhya Pradesh LSA

### 3. QoS performance analysis-LSA level

#### 3.1 Overview


This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the Madhya Pradesh LSA during the month of January & February-2026 covering city drive, hotspots, walk test and highway. (Refer Table 1)

#### 3.2 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	302	349	316
Call Setup Success Rate %	99.34	91.69	98.73
Drop Call Rate %	1.00	3.44	0.00
Call Setup Time-Average (Second)	4.66	4.09	3.36
Handover Success Rate %	96.81	99.65	98.59

**Table-3:** Summary of voice call performance in 3G/2G network mode only.

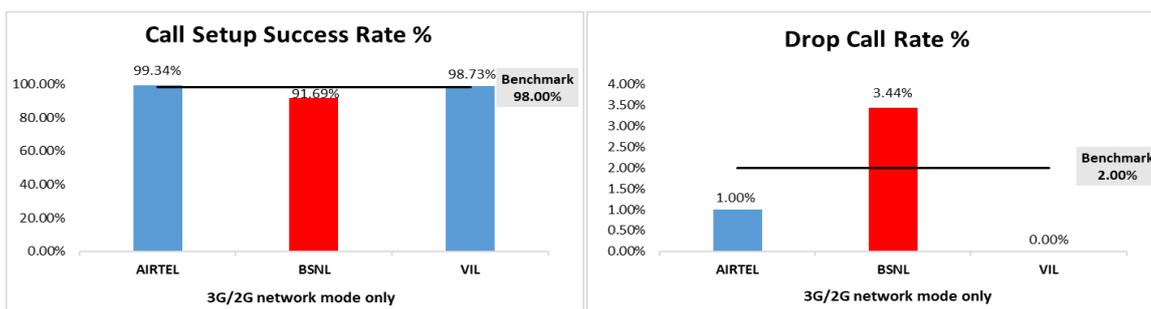

**Figure-2:** Call setup success rate and drop call rate performance.

Number of unique cell Id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	90	NA
2G	329	44	293

**Table-4:** Technology wise number of network cell Id's latched during drive test.


**Note-**

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

**(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)**

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	405	462	409	411
Call Setup Success Rate %	99.01	77.71	100.00	98.78
Drop Call Rate %	0.00	2.51	0.49	1.72
Call Setup Time-Average (Second)	1.40	1.83	0.72	0.83
Handover Success Rate %	99.90	99.69	99.85	99.90

**Table-5:** Summary of voice call performance in network auto-selection mode.

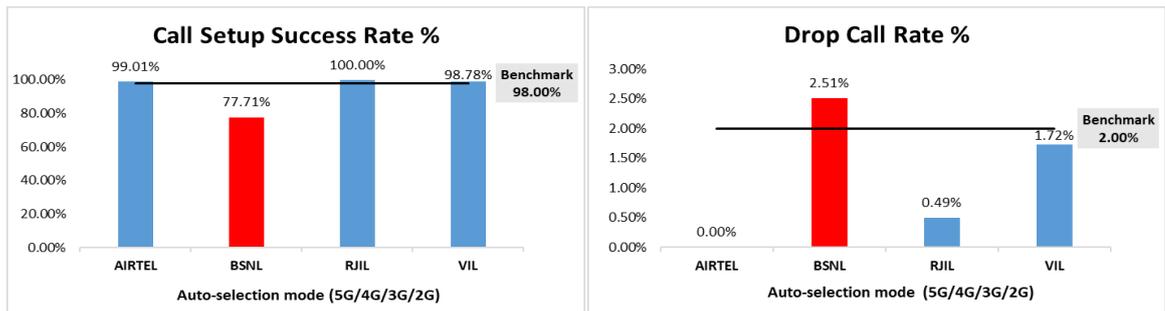

**Figure-3:** Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	311	291	301	299
Number of silences call for >4 Sec	2	26	4	3
Silence Call Rate %	0.64	8.93	1.33	1.00
Number of silence instances for >4 Sec	2	34	6	5
Number of silence instances for >3 Sec	4	65	8	12
Number of silence instances for >2 sec	13	118	22	30
RTP Jitter (4G & 5G) in ms	4.38	8.73	16.83	10.37
Packet loss Rate Downlink %	0.56	7.11	1.80	1.07
Packet loss Rate Uplink %	0.30	5.58	1.58	0.89

**Table-6:** Summary of silence instances & packet loss rate for mobile to mobile calls.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	389	NA
4G	675	304	482	699
3G	NA	8	NA	NA
2G	0	22	NA	13

**Table-7:** Technology wise number of network cell Id's latched during drive test.


<b>Note-</b>
<ul style="list-style-type: none"> <li>• NA- Service provider doesn't provide services in respective technology.</li> <li>• 0- No cell Id's were found in respective technology.</li> </ul>

**(c) Mean Opinion Score (MOS) performance for speech quality:**

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values mean: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
<b>Total Number of MOS Samples for calls table-6</b>	2010	1794	2021	2004
<b>Speech Quality (Average MOS)</b>	3.98	3.24	4.38	3.97
<b>Number of samples with MOS &gt;=4 to &lt;5 (Excellent)</b>	1655	707	1707	1454
<b>Number of samples with MOS &gt;=3 to &lt;4 (Good)</b>	272	506	160	423
<b>Number of samples with MOS &gt;=2 to &lt;3 (Fair)</b>	52	255	64	65
<b>Number of samples with MOS &gt;=1 to &lt;2 (Poor)</b>	31	326	90	62
<b>%age of samples with MOS &gt;=4 to &lt;5 (Excellent)</b>	82.34%	39.41%	84.46%	72.55%
<b>%age of samples with MOS &gt;=3 to &lt;4 (Good)</b>	13.53%	28.21%	7.92%	21.11%
<b>%age of samples with MOS &gt;=2 to &lt;3 (Fair)</b>	2.59%	14.21%	3.17%	3.24%
<b>%age of samples with MOS &gt;=1 to &lt;2 (Poor)</b>	1.54%	18.17%	4.45%	3.09%

**Table-8:** Summary of speech quality (MOS) samples.

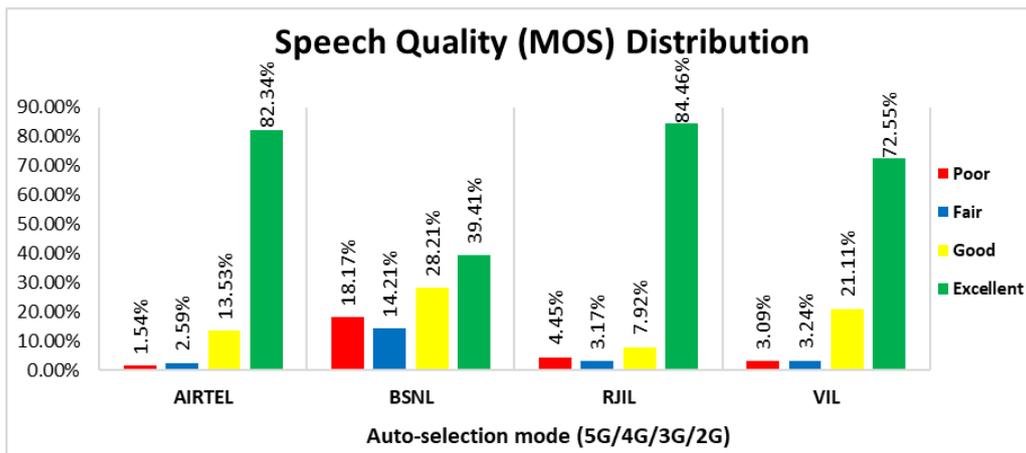

**Figure- 4:** Distribution of samples in MOS range.

**(d) Inter-service provider voice call performance:** To check the performance of inter-service providers call setup success rate, total 18 to 20 inter operator calls were attempted. The call setup success rate and call setup time observation is as below.

From Service Provider	Call Setup Success Rate %			
	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
<b>AIRTEL</b>	NA	100.00	100.00	100.00
<b>BSNL</b>	89.47	NA	100.00	100.00
<b>RJIL</b>	100.00	100.00	NA	100.00
<b>VIL</b>	100.00	94.74	100.00	NA

**Table-9:** Call setup success rate across service providers.

**Note-**

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	2.68	1.17	2.47
BSNL	3.71	NA	2.73	2.77
RJIL	1.57	2.21	NA	1.84
VIL	1.82	3.07	1.91	NA

**Table-10:** Call setup time across service providers

**Note-**


- NA- Only inter-operator calls were measured during test.

### 3.3 Data performance

#### (a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	120.64	12.59	188.58	18.95
	80th Percentile	211.12	18.57	310.90	28.77
	20th Percentile	23.58	3.52	52.94	7.61
Upload Throughput (Mbits/s)	Average	18.40	4.17	21.94	9.53
	80th Percentile	32.33	6.64	38.92	17.18
	20th Percentile	3.32	1.27	4.10	1.88
Latency (ms)	50th Percentile	45.57	48.81	29.52	33.58

**Table-11:** Summary of data performance in network auto-selection mode.

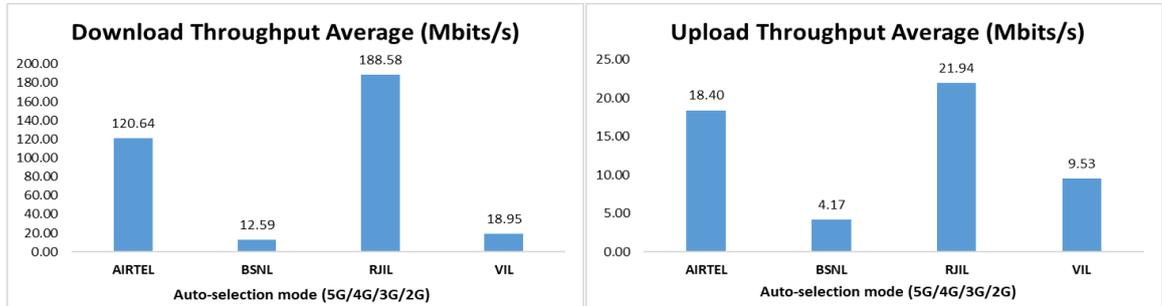

**Figure- 5:** Download and Upload throughput

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	506	NA
4G	731	328	254	593
3G	NA	9	NA	NA
2G	1	17	NA	7

**Table-12:** Technology wise number of network cell Id's latched during drive test.

**Note-**

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

# Detailed QoS Performance Analysis

## 4. Detailed QoS performance analysis

### 4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots, walk test and highway for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

### 4.2 City

Drive test has been conducted from 30<sup>th</sup> January 2026 to 1<sup>st</sup> February 2026 in Guna and Ashoknagar city. (Refer Table-1)

#### 4.2.1 Drive test route

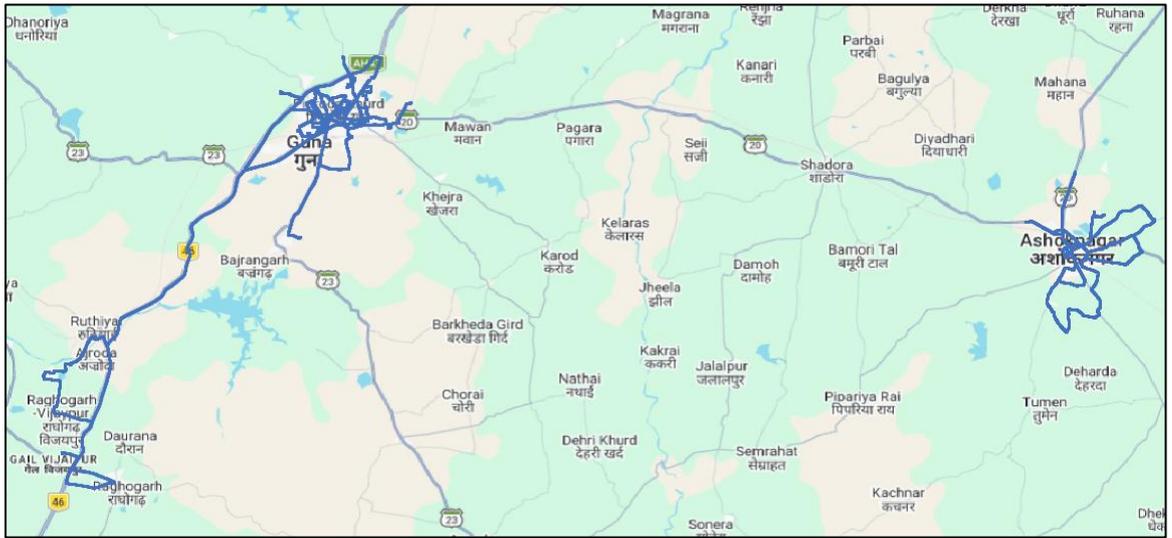


Figure- 6: Drive test routes.

#### 4.2.2 Areas covered

**Guna-** Gadarwara, Raghogarh-Vijaypur, NFL Township, Mahoogarha, Soni Colony, Budhewalaji, Tekri Sarkar Temple, New City Colony, Piproda Khurd, Naina Khedi, Bhagat Singh Colony, Gopal Pura Cantt, Poline line, Krisnani Nagar and Bajrangarh Fort etc.


**Ashoknagar-** Ashoknagar Railway Station, Om Colony, Mahaveer Colony, Ashoknagar-Esagarh Road, Manakpur Road, Kolua road, Purana Bazar, Mohari Road and Ashoknagar-Bahadurpur Road etc.

#### 4.2.3 Voice performance


**(a) Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	250	277	256
Call Setup Success Rate %	99.20	98.19	99.22
Drop Call Rate %	0.40	1.10	0.00
Call Setup Time-Average (Second)	4.60	4.10	3.37
Handover Success Rate %	97.93	99.77	98.78

Table-13: Summary of voice call performance in 3G/2G network mode only.

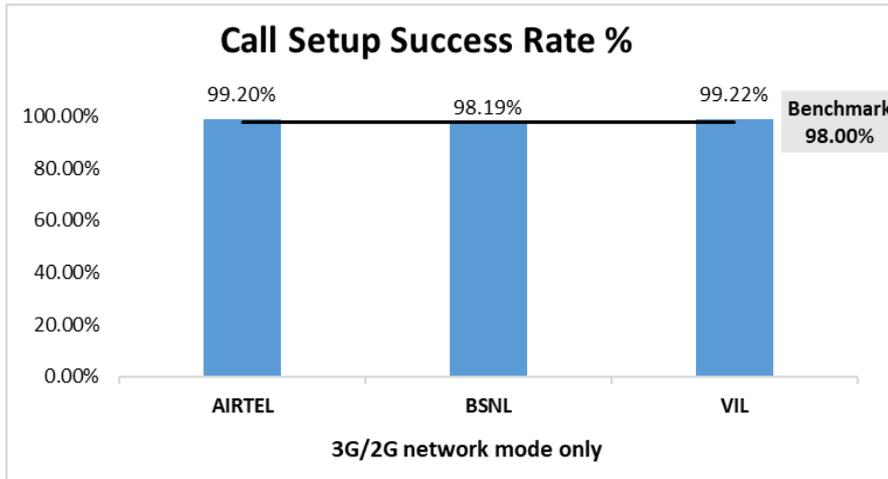

**Figure-7:** Performance for call setup success rate.

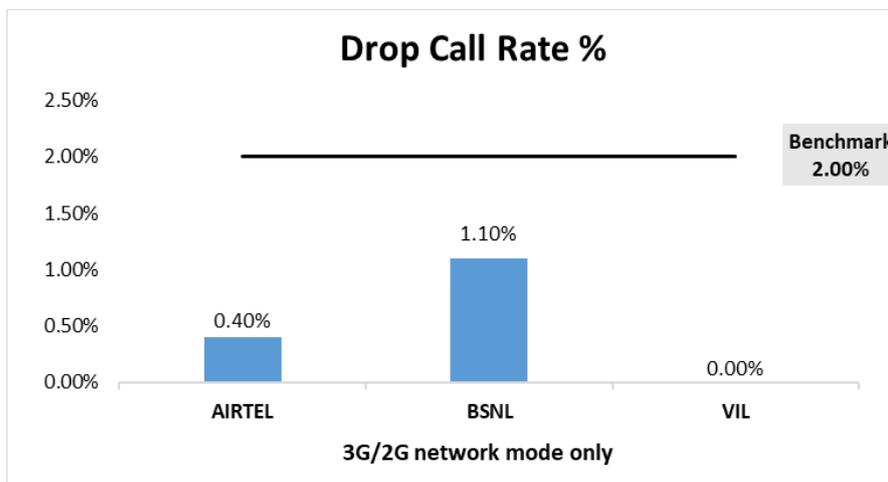

**Figure-8:** Performance for drop call rate.

**(b) Network Technology:** This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	95.76%	NA
2G	99.91%	4.13%	99.93%
Limited Service	0.09%	0.11%	0.07%

**Table-14:** Time spent on technology during drive test 3G/2G network mode.

**Note-**

- NA- Service provider doesn't provide services in respective technology.

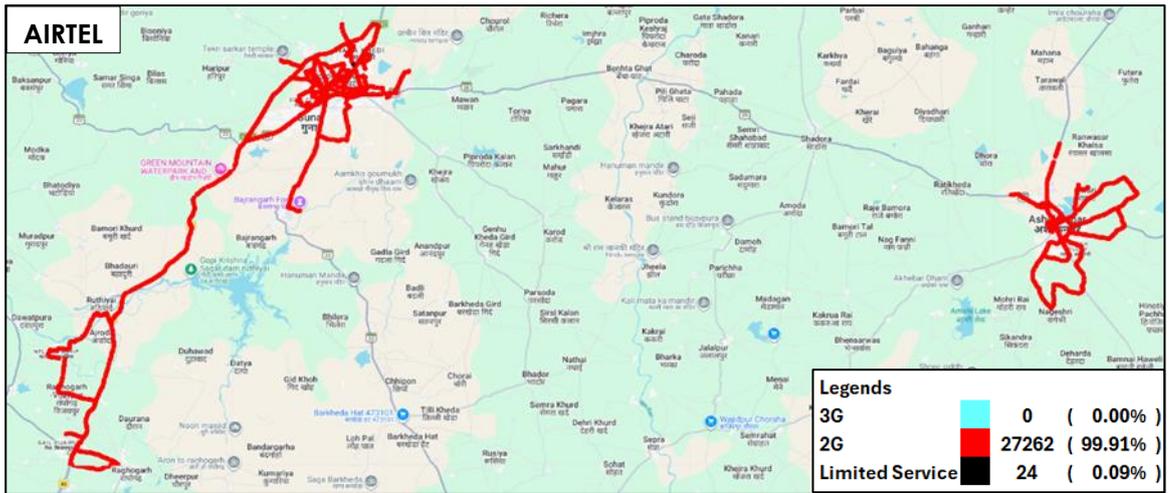


Figure-9: Serving technology plot 3G/2G network mode – AIRTEL.

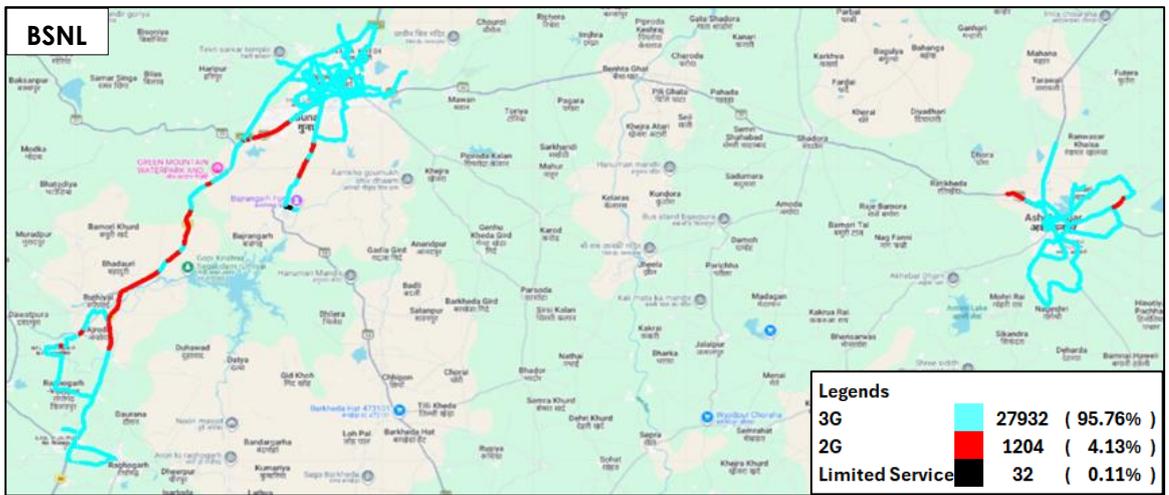


Figure-10: Serving technology plot 3G/2G network mode - BSNL.


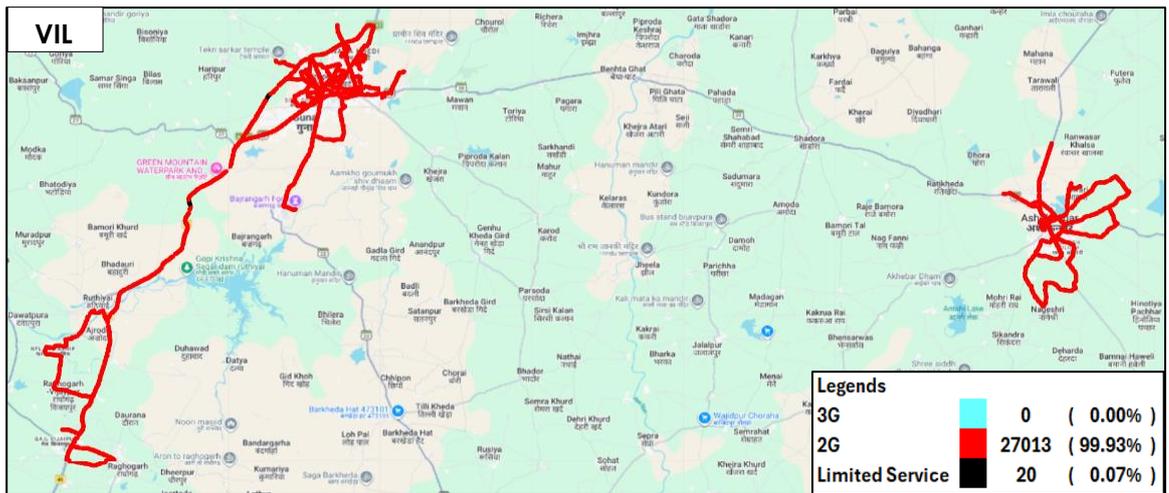


Figure-11: Serving technology plot 3G/2G network mode - VIL.

**(c) Network Signal Strength Distribution:** The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 52, 53 & 54 for map view)

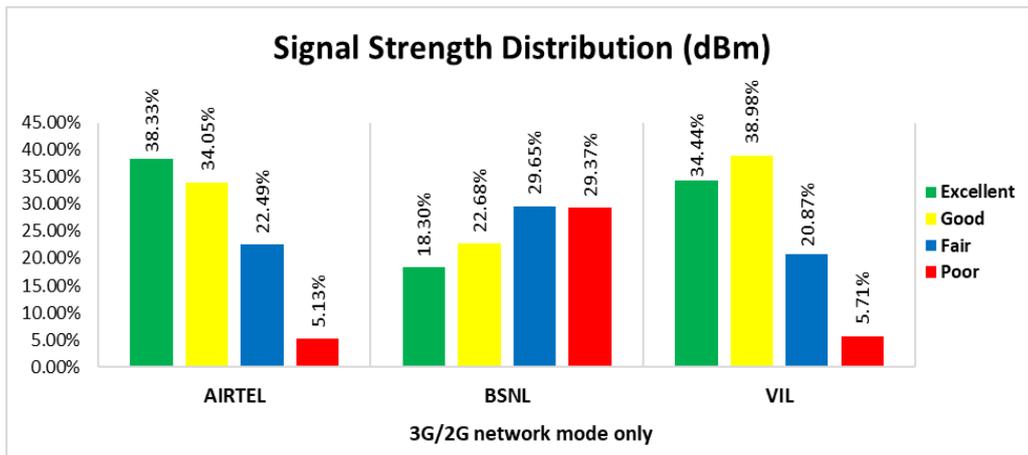

**Figure-12:** Signal strength distribution 3G/2G network mode only.


**Observations:**

- Airtel has 38% of samples falling in the excellent signal strength category.
- BSNL has 18% of samples falling in the excellent signal strength category.
- VIL has 34% of samples falling in the excellent signal strength category.


**(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)**

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
<b>Call Attempts</b>	267	298	270	271
<b>Call Setup Success Rate %</b>	98.50	80.54	100.00	99.63
<b>Drop Call Rate %</b>	0.00	0.00	0.74	1.85
<b>Call Setup Time Average (Second)</b>	1.46	1.79	0.70	0.83
<b>Handover Success Rate %</b>	99.84	99.87	99.87	99.95

**Table-15:** Summary of voice call performance in network auto-selection mode.

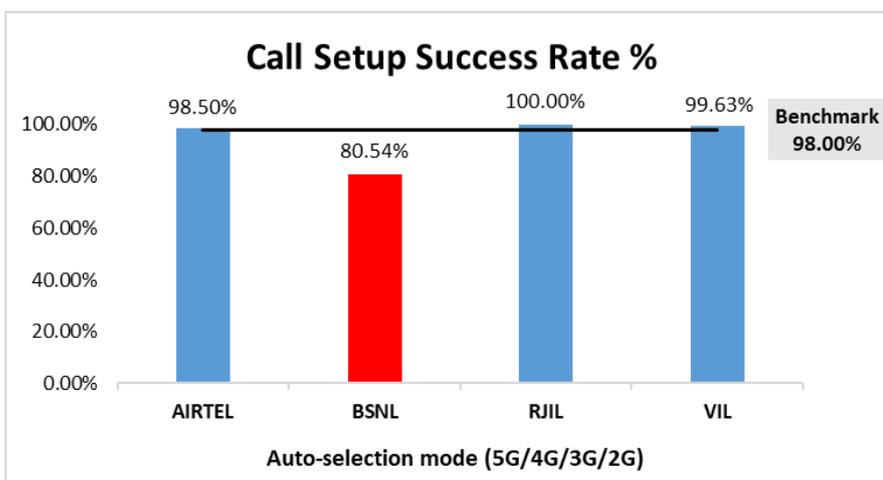

**Figure-13:** Performance for call setup success rate.

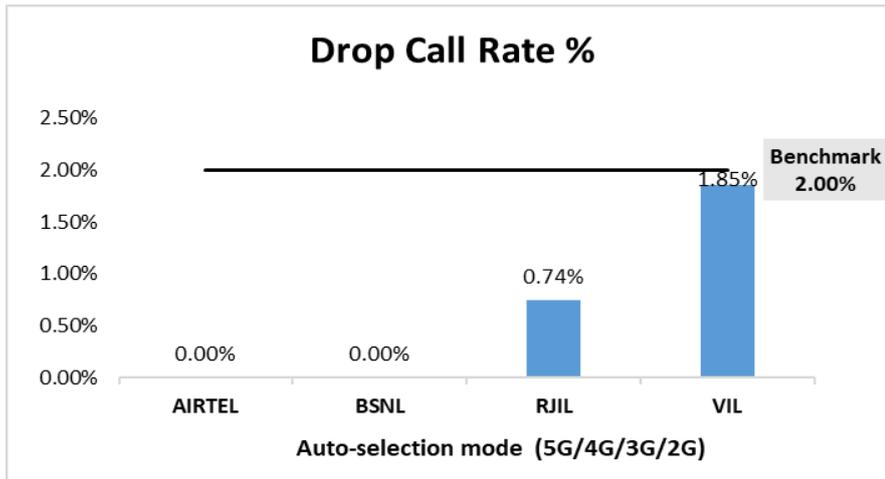

**Figure-14:** Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
<b>Call Established (within service provider Network)</b>	265	244	255	256
<b>Number of silences call for &gt;4 Sec</b>	2	21	3	1
<b>Silence Call Rate %</b>	0.75	8.61	1.18	0.39
<b>Number of silence instances for &gt;4 Sec</b>	2	27	5	3
<b>Number of silence instances for &gt;3 Sec</b>	4	54	7	5
<b>Number of silence instances for &gt;2 sec</b>	8	100	16	14
<b>RTP Jitter (4G &amp; 5G) in ms</b>	4.27	9.01	17.31	9.31
<b>Packet loss Rate Downlink %</b>	0.46	7.03	1.89	0.86
<b>Packet loss Rate Uplink %</b>	0.19	5.42	1.67	0.65


**Table-16:** Summary of silence instances & packet loss rate for mobile to mobile call.

**(e) Mean Opinion Score (MOS) performance for speech quality:**

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
<b>Total Number of MOS Samples for calls in table-16</b>	1455	1337	1462	1468
<b>Speech Quality (Average MOS)</b>	4.01	3.28	4.36	4.04
<b>Number of samples with MOS &gt;=4 to &lt;5 (Excellent)</b>	1231	543	1229	1107
<b>Number of samples with MOS &gt;=3 to &lt;4 (Good)</b>	181	399	122	299
<b>Number of samples with MOS &gt;=2 to &lt;3 (Fair)</b>	29	148	44	39
<b>Number of samples with MOS &gt;=1 to &lt;2 (Poor)</b>	14	247	67	23
<b>%age of samples with MOS &gt;=4 to &lt;5 (Excellent)</b>	84.60%	40.61%	84.06%	75.41%
<b>%age of samples with MOS &gt;=3 to &lt;4 (Good)</b>	12.44%	29.84%	8.34%	20.37%
<b>%age of samples with MOS &gt;=2 to &lt;3 (Fair)</b>	1.99%	11.07%	3.01%	2.66%
<b>%age of samples with MOS &gt;=1 to &lt;2 (Poor)</b>	0.96%	18.47%	4.58%	1.57%

**Table-17:** Summary of speech quality (MOS) samples.

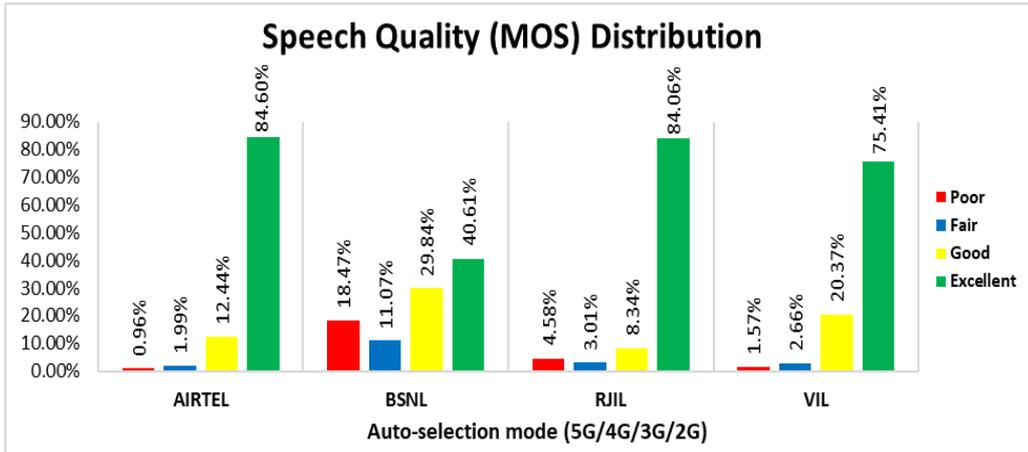

**Figure-15:** Distribution of samples in MOS range.


**(f) Network Technology:** This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
<b>5G</b>	11.05%	NA	78.67%	NA
<b>4G</b>	88.95%	97.87%	21.33%	99.56%
<b>3G</b>	NA	0.79%	NA	NA
<b>2G</b>	0.00%	1.14%	NA	0.44%
<b>Limited Service</b>	0.00%	0.20%	0.00%	0.00%

**Table-18:** Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

**Note-**

- NA- Service provider doesn't provide services in respective technology.

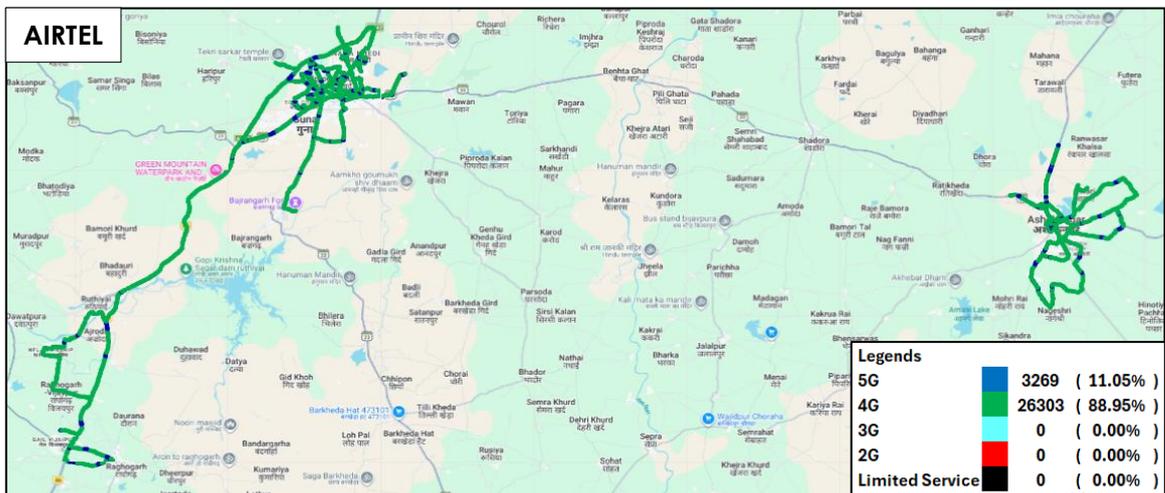

**Figure-16:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

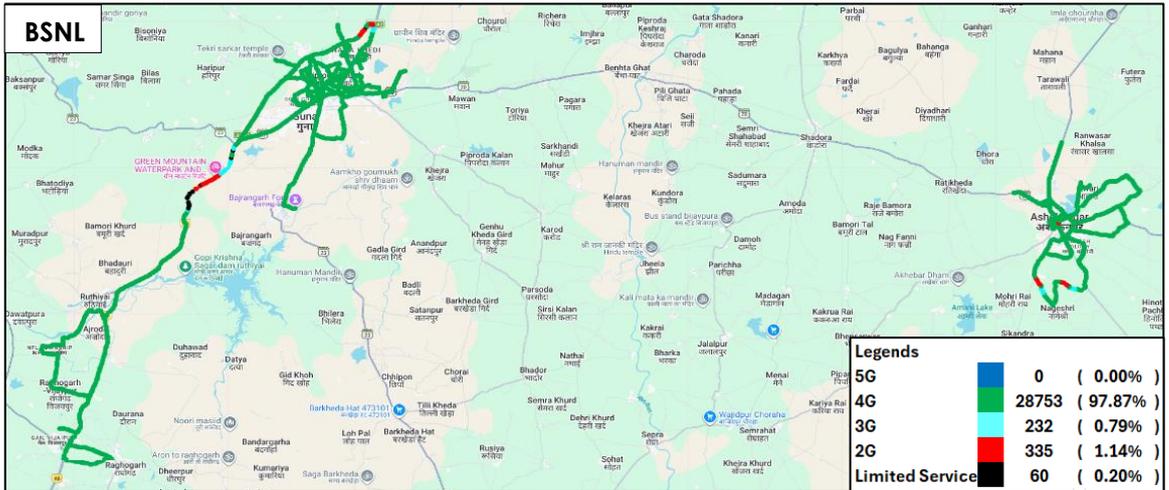


Figure-17: Serving technology plot in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

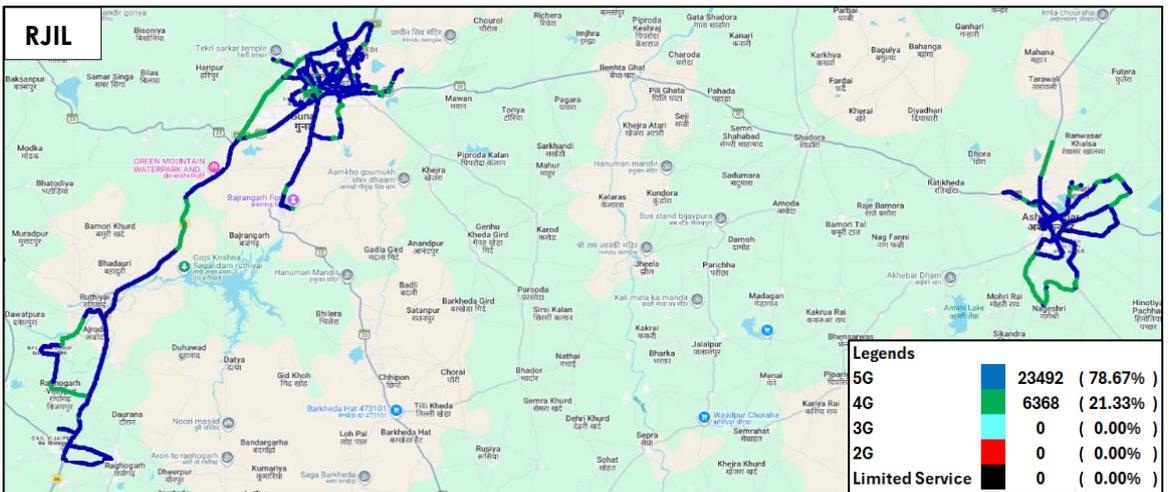


Figure-18: Serving technology plot in auto-selection mode (5G/4G/3G/2G) voice - RJIL.


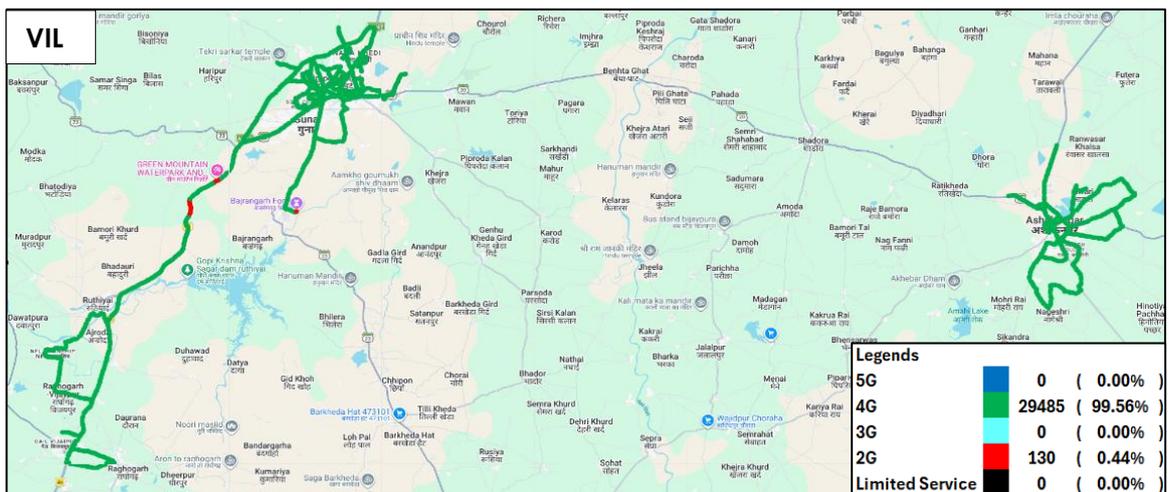


Figure-19: Serving technology plot in auto-selection mode (5G/4G/3G/2G) voice - VIL.

**(g) Network Signal Strength Distribution:** The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-55, 56, 57 & 58 for map view)

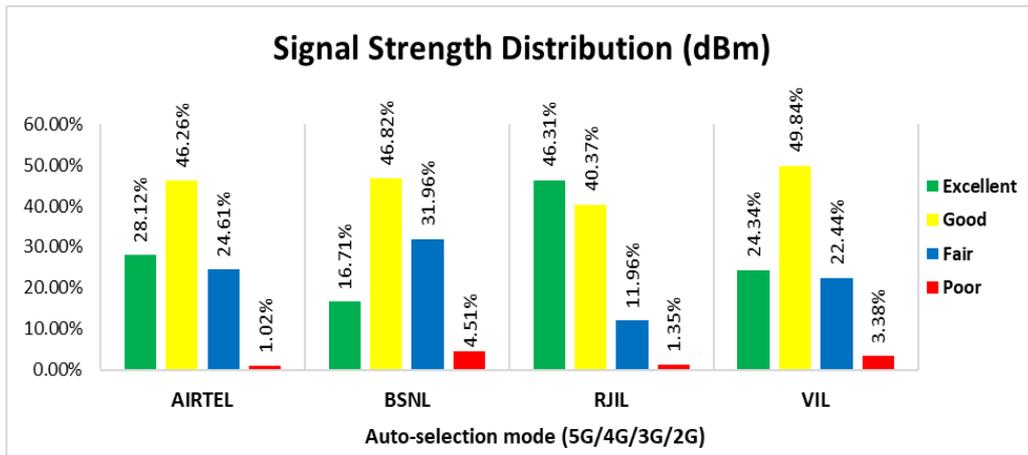

**Figure-20:** Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

**Observations:**


- Airtel has 28% of samples falling in the excellent signal strength category.
- BSNL has 17% of samples falling in the excellent signal strength category.
- RJIL has 46% of samples falling in the excellent signal strength category.
- VIL has 24% of samples falling in the excellent signal strength category.

**4.2.4 Data performance**


**(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)**

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	130.08	12.27	165.86	17.13
	80th Percentile	224.93	17.72	267.76	26.79
	20th Percentile	37.83	3.45	41.58	6.61
Upload Throughput (Mbits/s)	Average	19.43	4.59	20.96	8.76
	80th Percentile	34.52	7.28	35.98	15.35
	20th Percentile	3.32	1.37	3.12	1.82
Latency (ms)	50th Percentile	40.42	47.90	27.90	33.65

**Table-19:** Summary of Data performance in network auto-selection mode.

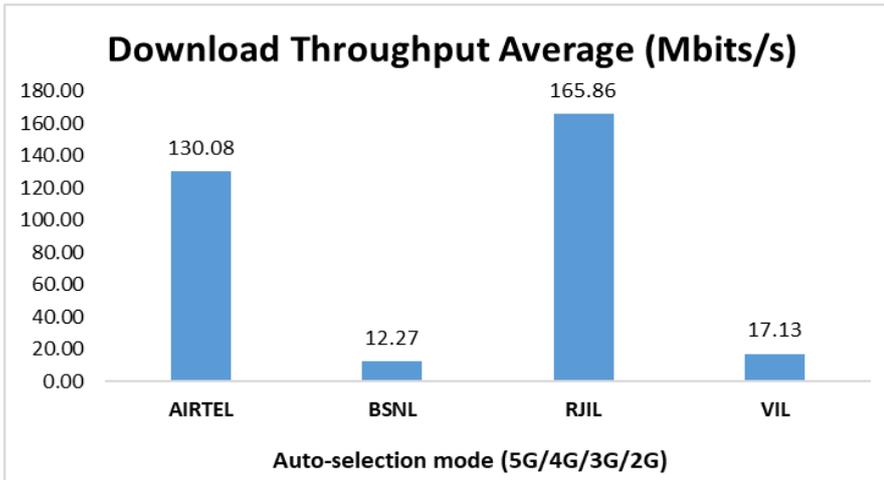

**Figure- 21:** Download throughput.

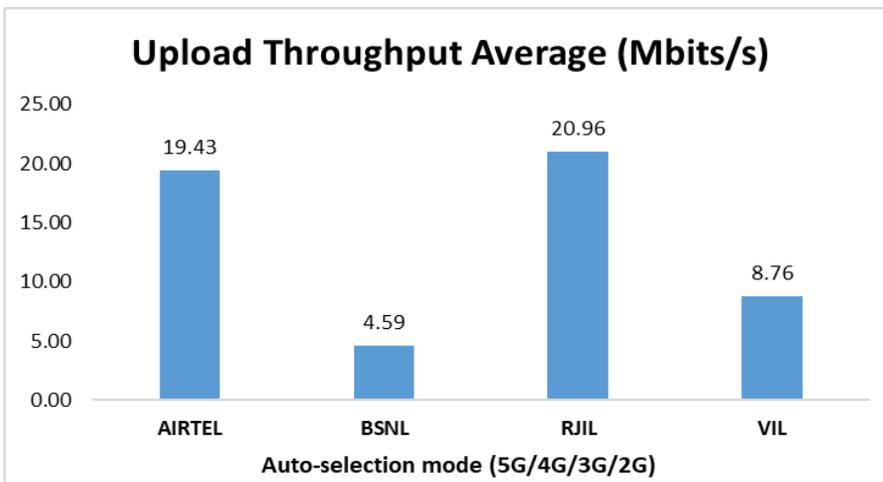

**Figure- 22:** Upload throughput.

**(b) Network Technology:** This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
<b>5G</b>	76.38%	NA	91.76%	NA
<b>4G</b>	23.62%	99.14%	8.21%	99.84%
<b>3G</b>	NA	0.35%	NA	NA
<b>2G</b>	0.00%	0.08%	NA	0.06%
<b>Limited Service</b>	0.00%	0.43%	0.03%	0.09%

**Table-20:** Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

**Note-**

- NA- Service provider doesn't provide services in respective technology.

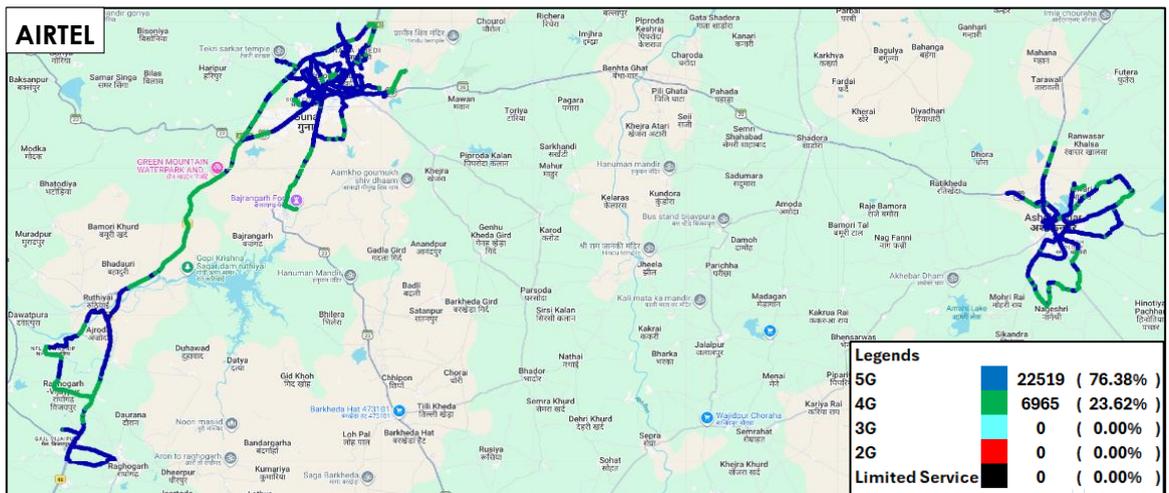


Figure-23: Serving technology plot in auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

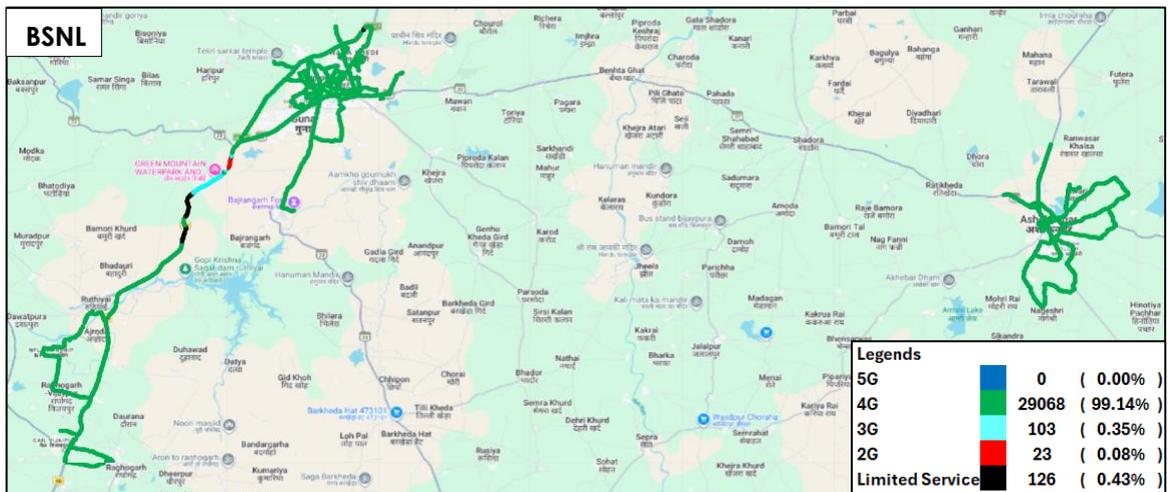


Figure-24: Serving technology plot in auto-selection mode (5G/4G/3G/2G) data - BSNL.



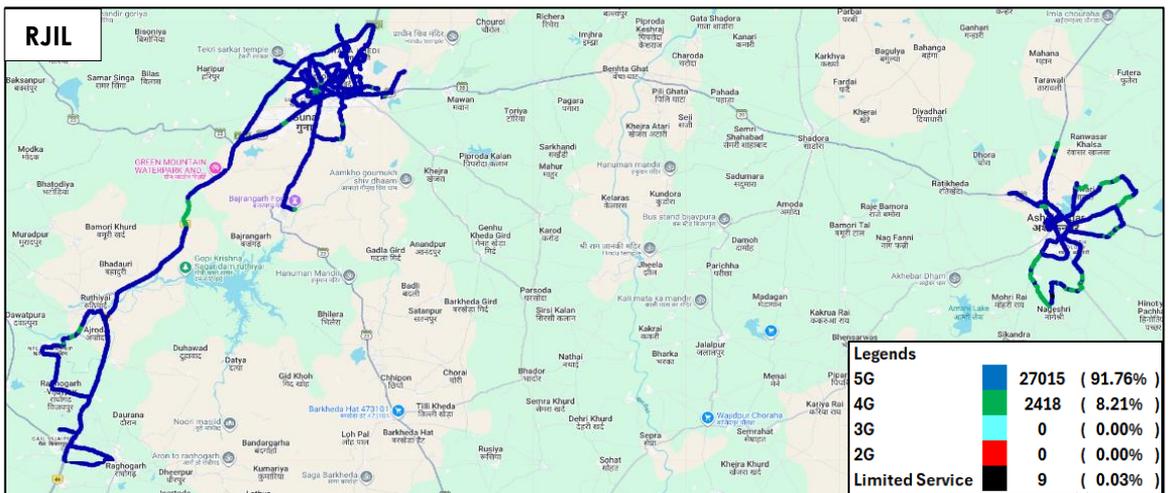


Figure-25: Serving technology plot in auto-selection mode (5G/4G/3G/2G) data - RJIL.

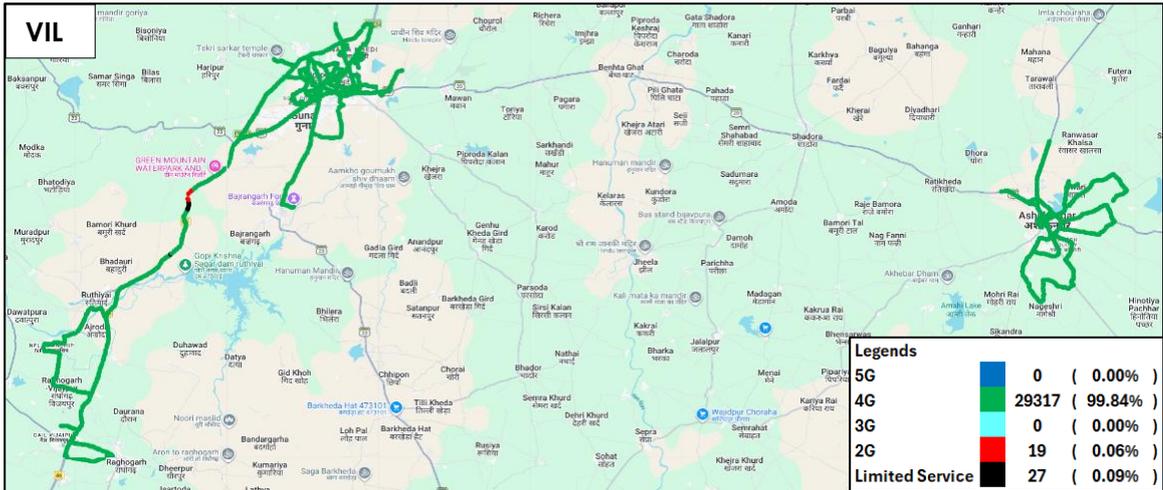

**Figure-26:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) data – VIL

**(c) Network Signal Strength Distribution:** The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-59, 60, 61 & 62 for map view)

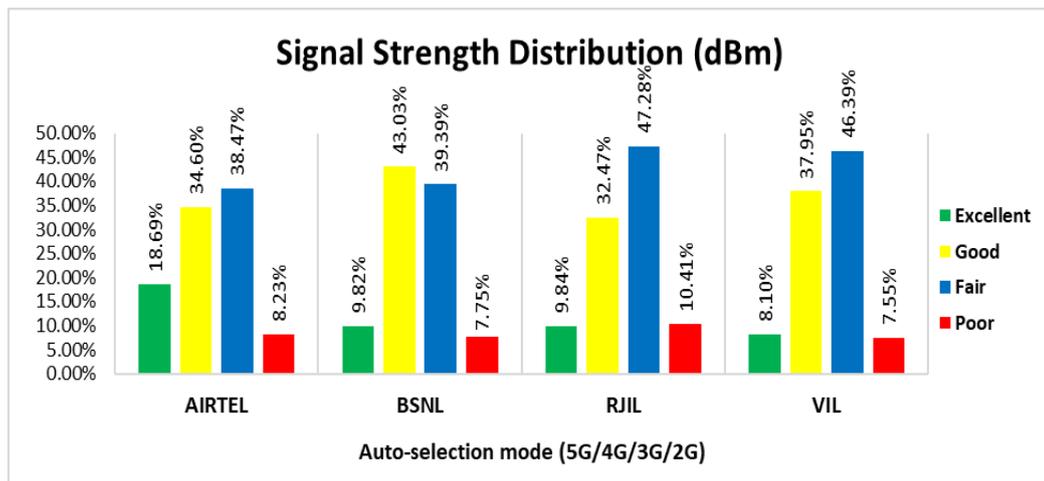

**Figure-27:** Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

**Observations:**

- Airtel has 19% of samples falling in the excellent signal strength category.
- BSNL has 10% of samples falling in the excellent signal strength category.
- RJIL has 10% of samples falling in the excellent signal strength category.
- VIL has 8% of samples falling in the excellent signal strength category.

### 4.3 Hotspots

Hotspot testing has been done from 30<sup>th</sup> January 2026 to 1<sup>st</sup> February 2026. Seven locations have been tested in the city. (Refer Table-1)

#### 4.3.1 Locations

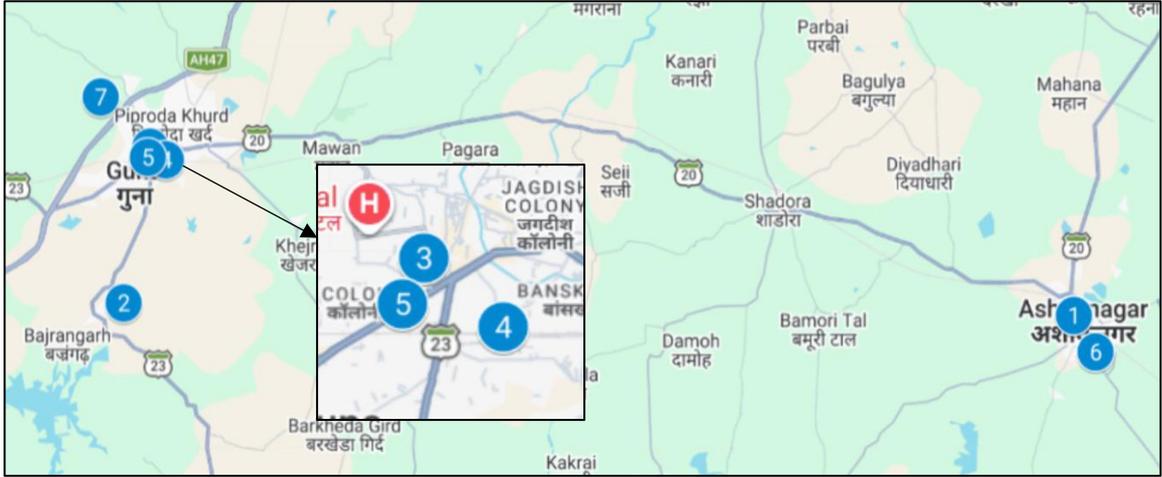


Figure- 28: Hotspot locations

#### 4.3.2 Hotspot covered

1. Ashoknagar Railway Station
2. Bajrangarh Fort Guna
3. District Hospital Guna
4. Guna Railway Station
5. Jajji Bus Stand Guna
6. Polytechnic College Ashoknagar
7. Tekri Sarkar Temple Guna

#### 4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	70	70	70	70
Call Setup Success Rate %	100.00	82.86	100.00	98.57
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.26	1.27	0.62	0.80

Table-21: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Ashoknagar Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	80.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.21	1.17	0.64	0.74

Table-22: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

<b>Bajrangarh Fort Guna</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-selection mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Call Attempt</b>	10	10	10	10
<b>Call Setup Success Rate %</b>	100.00	90.00	100.00	100.00
<b>Drop Call Rate %</b>	0.00	0.00	0.00	0.00
<b>Call Setup Time-Average (Second)</b>	1.36	1.42	0.56	0.85

**Table-23:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

<b>District Hospital Guna</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-selection mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Call Attempt</b>	10	10	10	10
<b>Call Setup Success Rate %</b>	100.00	90.00	100.00	100.00
<b>Drop Call Rate %</b>	0.00	0.00	0.00	0.00
<b>Call Setup Time-Average (Second)</b>	1.25	1.27	0.61	0.68

**Table-24:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

<b>Guna Railway Station</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-selection mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Call Attempt</b>	10	10	10	10
<b>Call Setup Success Rate %</b>	100.00	80.00	100.00	100.00
<b>Drop Call Rate %</b>	0.00	0.00	0.00	0.00
<b>Call Setup Time-Average (Second)</b>	1.24	1.18	0.60	0.80

**Table-25:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

<b>Jajji Bus Stand Guna</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-selection mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Call Attempt</b>	10	10	10	10
<b>Call Setup Success Rate %</b>	100.00	80.00	100.00	90.00
<b>Drop Call Rate %</b>	0.00	0.00	0.00	0.00
<b>Call Setup Time-Average (Second)</b>	1.24	1.09	0.57	0.97

**Table-26:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

<b>Polytechnic College Ashoknagar</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-selection mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Call Attempt</b>	10	10	10	10
<b>Call Setup Success Rate %</b>	100.00	90.00	100.00	100.00
<b>Drop Call Rate %</b>	0.00	0.00	0.00	0.00
<b>Call Setup Time-Average (Second)</b>	1.23	1.24	0.54	0.79

**Table-27:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Tekri Sarkar Temple Guna				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	70.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.32	1.52	0.81	0.79

**Table-28:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

#### 4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	97.63	8.98	109.47	19.42
Download Throughput 80th Percentile (Mbit/s)	154.23	11.77	157.24	25.73
Download Throughput 20th Percentile (Mbit/s)	13.09	3.74	53.60	12.10
Download Session Setup Success Rate %	100.00	85.71	100.00	97.14
Upload Throughput Average (Mbits/s)	19.35	2.20	11.25	7.02
Upload Throughput 80th Percentile (Mbit/s)	23.23	3.04	17.54	13.26
Upload Throughput 20th Percentile (Mbit/s)	6.39	1.22	4.69	1.58
Upload Session Setup Success Rate %	100.00	91.43	100.00	94.29
Web Browsing Delay (Second)	6.61	5.58	4.31	5.43
Youtube Initial Buffer Delay (Second)	1.04	3.07	1.37	1.61
Latency (ms) - 50th Percentile	52.13	49.27	30.85	33.84
Jitter (ms)	72.02	3.67	3.62	19.27
Packet Loss Rate%	7.91	16.33	10.27	7.90
Packet Loss Rate- 90th percentile	21.00	75.46	30.30	5.40

**Table-29:** Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G)

Ashoknagar Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	230.79	4.69	53.45	21.62
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	64.33	1.34	7.13	1.87
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.74	6.18	4.50	5.82
Youtube Initial Buffer Delay (Second)	0.76	-	3.06	2.49
Latency (ms) - 50th Percentile	50.89	51.64	31.71	33.82
Jitter (ms)	9.47	3.08	5.16	5.05
Packet Loss Rate%	0.80	0.60	0.00	0.20

**Table-30:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G)

**Note-** "- "Youtube tests were failed.

<b>Bajrangarh Fort Guna</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-Selection Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	13.47	9.76	137.65	36.63
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	7.14	1.58	4.92	18.14
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	9.50	10.07	4.25	6.48
<b>Youtube Initial Buffer Delay (Second)</b>	1.11	2.64	1.16	1.06
<b>Latency (ms) - 50th Percentile</b>	57.83	48.38	31.68	28.83
<b>Jitter (ms)</b>	8.28	3.49	3.34	3.79
<b>Packet Loss Rate%</b>	0.30	1.50	0.20	0.10

**Table-31:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

<b>District Hospital Guna</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-Selection Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	129.32	4.74	86.21	15.42
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	23.65	2.08	6.14	2.54
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	6.56	5.23	4.00	4.61
<b>Youtube Initial Buffer Delay (Second)</b>	0.60	3.10	0.83	1.84
<b>Latency (ms) – 50<sup>th</sup> Percentile</b>	57.58	46.95	26.20	34.82
<b>Jitter (ms)</b>	4.73	3.22	3.43	54.37
<b>Packet Loss Rate%</b>	0.40	1.00	0.10	4.20

**Table-32:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

<b>Guna Railway Station</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-Selection Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	149.44	3.38	218.08	13.83
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	8.87	1.88	23.98	5.03
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	8.36	4.11	4.12	4.25
<b>Youtube Initial Buffer Delay (Second)</b>	0.82	6.50	0.82	1.06
<b>Latency (ms) - 50th Percentile</b>	49.72	53.11	32.82	35.28
<b>Jitter (ms)</b>	21.46	5.01	3.32	4.13
<b>Packet Loss Rate%</b>	35.70	10.00	0.00	0.10

**Table-33:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

<b>Jajji Bus Stand Guna</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-Selection Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	103.08	23.39	133.17	19.44
<b>Download Session Setup Success Rate%</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	15.86	4.62	20.24	1.47
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	3.73	6.36	2.98	7.12
<b>Youtube Initial Buffer Delay (Second)</b>	0.84	1.06	0.87	6.16
<b>Latency (ms)- 50th Percentile</b>	52.04	42.24	30.65	32.61
<b>Jitter (ms)</b>	4.35	3.28	3.11	17.05
<b>Packet Loss Rate%</b>	0.00	1.00	0.00	0.50

**Table-34:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

<b>Polytechnic College Ashoknagar</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-Selection Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	54.42	7.92	106.48	12.04
<b>Download Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Upload Throughput Average (Mbits/s)</b>	14.00	2.25	13.78	9.61
<b>Upload Session Setup Success Rate %</b>	100.00	100.00	100.00	100.00
<b>Web Browsing Delay (Second)</b>	8.53	2.54	3.82	4.47
<b>Youtube Initial Buffer Delay (Second)</b>	2.12	2.27	1.80	1.14
<b>Latency (ms) - 50th Percentile</b>	40.93	49.91	30.28	34.50
<b>Jitter (ms)</b>	12.04	3.94	3.35	13.61
<b>Packet Loss Rate%</b>	1.10	0.20	0.00	0.40

**Table-35:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

<b>Tekri Sarkar Temple Guna</b>				
<b>Parameters</b>	<b>Service Provider</b>			
	<b>Auto-Selection Mode (5G/4G/3G/2G)</b>			
	<b>AIRTEL</b>	<b>BSNL</b>	<b>RJIL</b>	<b>VIL</b>
<b>Download Throughput Average (Mbits/s)</b>	2.88	-	31.26	16.38
<b>Download Session Setup Success Rate %</b>	100.00	0.00	100.00	80.00
<b>Upload Throughput Average (Mbits/s)</b>	1.61	0.87	2.56	12.83
<b>Upload Session Setup Success Rate %</b>	100.00	40.00	100.00	60.00
<b>Web Browsing Delay (Second)</b>	-	-	7.56	4.97
<b>Youtube Initial Buffer Delay (Second)</b>	-	-	0.87	0.88
<b>Latency (ms) - 50th Percentile</b>	55.83	-	-	500.06
<b>Jitter (ms)</b>	449.29	-	-	38.14
<b>Packet Loss Rate%</b>	17.10	100.00	71.60	49.80

**Table-36:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G)

**Note-** "-" respective tests were failed.

### 4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	133.69	-	120.70	-
	Upload Throughput Average (Mbits/s)	26.46	-	11.42	-
4G	Download Throughput Average (Mbits/s)	21.92	8.73	25.55	15.71
	Upload Throughput Average (Mbits/s)	8.53	3.42	6.31	6.84

**Table-37:** Overall Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "-"Respective technology was not observed during the test.					
Ashoknagar Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	255.19	-	54.16	-
	Upload Throughput Average (Mbits/s)	67.44	-	7.38	-
4G	Download Throughput Average (Mbits/s)	34.83	5.38	23.59	17.01
	Upload Throughput Average (Mbits/s)	19.19	2.79	8.28	1.13

**Table-38:** Overall Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "-"Respective technology was not observed during the test.					
Bajrangarh Fort Guna					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	85.05	-
	Upload Throughput Average (Mbits/s)	-	-	4.23	-
4G	Download Throughput Average (Mbits/s)	34.62	13.89	7.76	24.71
	Upload Throughput Average (Mbits/s)	18.70	4.41	3.80	14.15

**Table-39:** Overall Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "-"Respective technology was not observed during the test.					
District Hospital Guna					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	132.68	-	88.87	-
	Upload Throughput Average (Mbits/s)	33.31	-	6.92	-
4G	Download Throughput Average (Mbits/s)	28.33	5.13	40.66	10.70
	Upload Throughput Average (Mbits/s)	3.65	1.66	4.22	2.36

**Table-40:** Overall Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "-"Respective technology was not observed during the test.					
Guna Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	206.53	-	234.97	-
	Upload Throughput Average (Mbits/s)	9.71	-	21.91	-
4G	Download Throughput Average (Mbits/s)	24.34	4.50	69.10	9.17
	Upload Throughput Average (Mbits/s)	6.81	3.97	16.49	1.87

**Table-41:** Overall Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "-"Respective technology was not observed during the test.					
---	--	--	--	--	--

Jajji Bus Stand Guna					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	128.78	-	145.04	-
	Upload Throughput Average (Mbits/s)	29.27	-	16.25	-
4G	Download Throughput Average (Mbits/s)	16.18	24.20	5.68	28.68
	Upload Throughput Average (Mbits/s)	4.14	5.50	1.69	11.66

**Table-42:** Overall Summary of 5G only & 4G only data download & upload speed.

**Note-** "--Respective technology was not observed during the test.

Polytechnic College Ashoknagar					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	67.27	-	134.54	-
	Upload Throughput Average (Mbits/s)	9.77	-	17.58	-
4G	Download Throughput Average (Mbits/s)	11.39	7.32	20.53	9.85
	Upload Throughput Average (Mbits/s)	5.90	3.77	6.72	1.98

**Table-43:** Overall Summary of 5G only & 4G only data download & upload speed.

**Note-** "--Respective technology was not observed during the test.

Tekri Sarkar Temple Guna					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	12.99	-	102.27	-
	Upload Throughput Average (Mbits/s)	2.61	-	5.67	-
4G	Download Throughput Average (Mbits/s)	3.77	0.66	4.38	9.82
	Upload Throughput Average (Mbits/s)	1.30	1.81	2.00	14.70

**Table-44:** Overall Summary of 5G only & 4G only data download & upload speed.

**Note-** "--Respective technology was not observed during the test.

## 4.4 Walk Test

Walk Test has been conducted on 1<sup>st</sup> February 2026. One location has been tested in the city. (Refer Table-1)

### 4.4.1 Walk test locations



**Figure-29:** Walk Test locations.

### 4.4.2 Walk Test Covered

1. Guna Railway Station

### 4.4.3 Voice Performance

Guna Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	13	15	14	13
Call Setup Success Rate %	100.00	80.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.21	1.37	0.58	0.80

**Table-45:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).


### 4.4.4 Data Performance

#### (a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)


Guna Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	192.27	8.44	333.54	12.61
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	43.29	4.62	59.50	3.10
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	44.32	48.92	27.60	40.92

**Table-46:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).



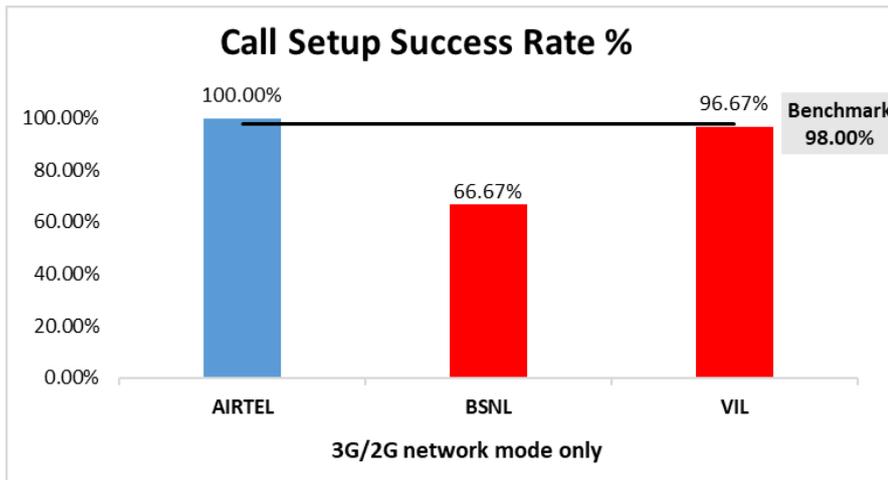

**Figure-31:** Performance for call setup success rate.

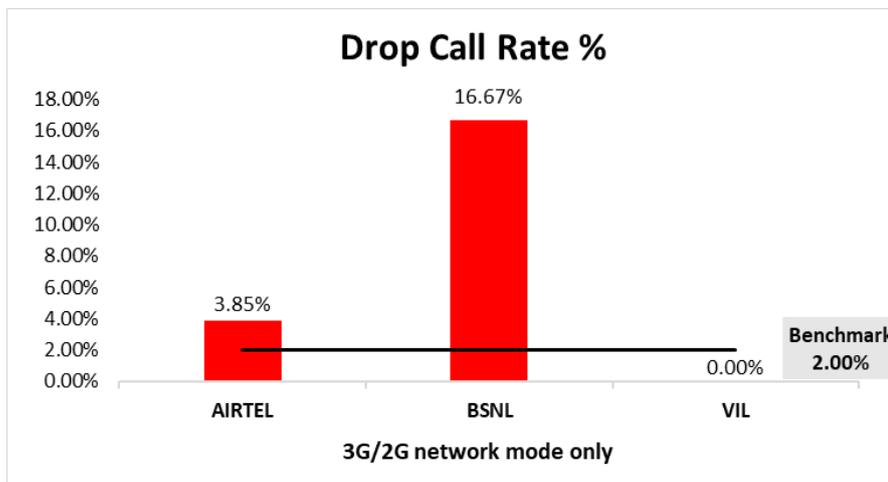

**Figure-32:** Performance for drop call rate.


**(c) Network Technology:** This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
<b>3G</b>	NA	43.24%	NA
<b>2G</b>	100.00%	51.26%	99.65%
<b>Limited Service</b>	0.00%	5.50%	0.35%

**Table-48:** Time spent on technology during drive test 3G/2G network mode.

**Note-**

- NA- Service provider doesn't provide services in respective technology.

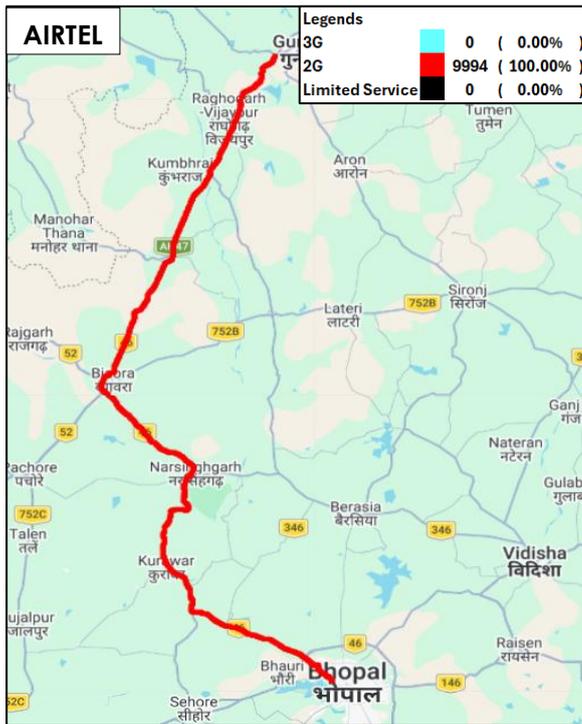

**Figure-33:** Serving technology plot 3G/2G network mode - AIRTEL




**Figure-34:** Serving technology plot 3G/2G network mode - BSNL.



**Figure-35:** Serving technology plot 3G/2G network mode - VIL.

**(c) Network Signal Strength Distribution:** The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 63, 64 & 65 for map view)

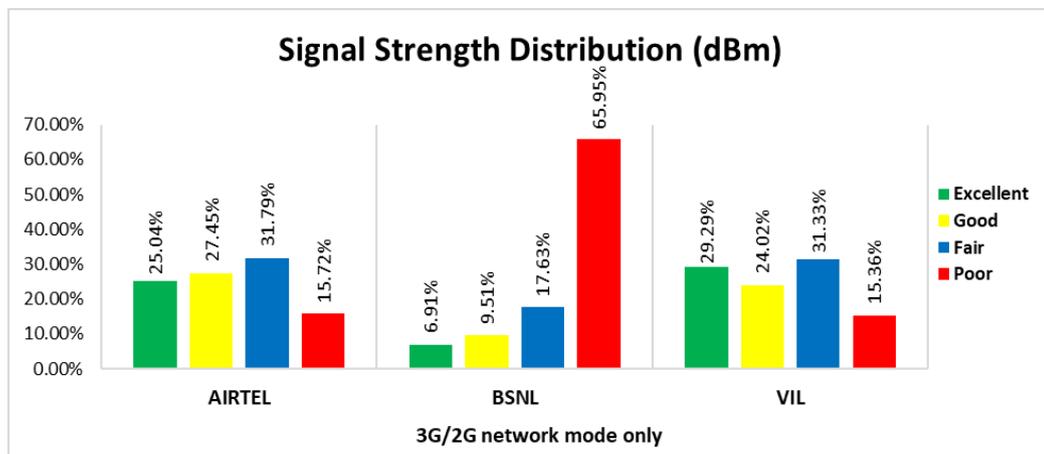

**Figure-36:** Signal strength distribution 3G/2G network mode only.


**Observations:**

- Airtel has 25% of samples falling in the excellent signal strength category.
- BSNL has 7% of samples falling in the excellent signal strength category.
- VIL has 29% of samples falling in the excellent signal strength category.


**(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)**

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	55	79	55	57
Call Setup Success Rate %	100.00	62.03	100.00	94.74
Drop Call Rate %	0.00	18.37	0.00	3.70
Call Setup Time Average (Second)	1.31	2.82	0.96	0.87
Handover Success Rate %	100.00	99.03	99.77	99.87

**Table-49:** Summary of voice call performance in network auto-selection mode.

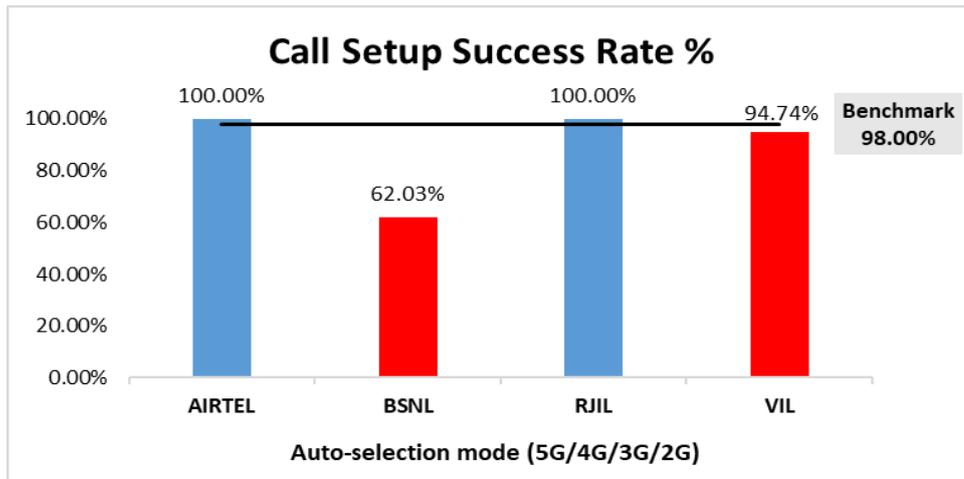

**Figure-37:** Performance for call setup success rate.

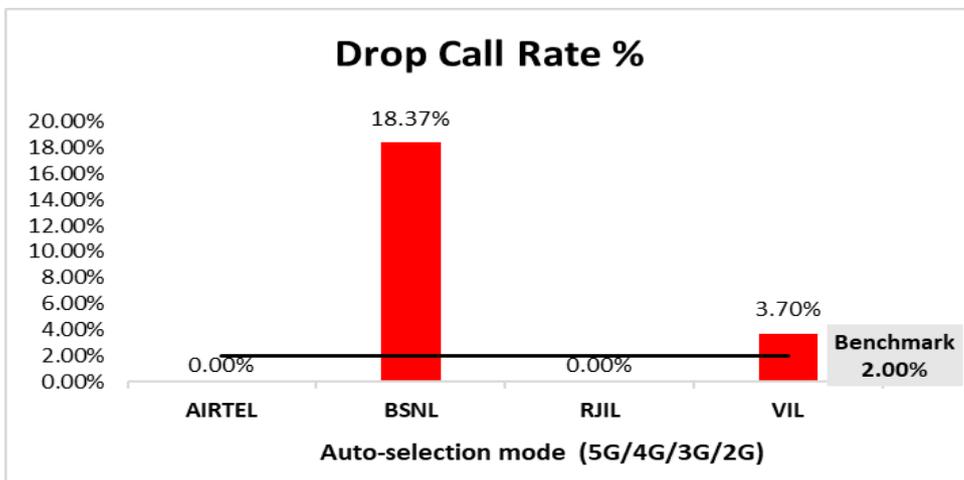

**Figure-38:** Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
<b>Call Established (within service provider Network)</b>	46	47	46	43
<b>Number of silences call for &gt;4 Sec</b>	0	5	1	2
<b>Silence Call Rate %</b>	0.00	10.64	2.17	4.65
<b>Number of silence instances for &gt;4 Sec</b>	0	7	1	2
<b>Number of silence instances for &gt;3 Sec</b>	0	11	1	7
<b>Number of silence instances for &gt;2 sec</b>	5	18	6	16
<b>RTP Jitter (4G &amp; 5G) in ms</b>	4.69	7.79	15.48	13.52
<b>Packet loss Rate Downlink %</b>	1.13	7.58	1.26	2.30
<b>Packet loss Rate Uplink %</b>	0.96	6.6	1.04	2.31


**Table-50:** Summary of silence instances & packet loss rate for mobile to mobile call.

**(e) Mean Opinion Score (MOS) performance for speech quality:**

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
<b>Total Number of MOS Samples for calls in table-50</b>	555	457	559	536
<b>Speech Quality (Average MOS)</b>	3.88	3.13	4.40	3.80
<b>Number of samples with MOS &gt;=4 to &lt;5 (Excellent)</b>	424	164	478	347
<b>Number of samples with MOS &gt;=3 to &lt;4 (Good)</b>	91	107	38	124
<b>Number of samples with MOS &gt;=2 to &lt;3 (Fair)</b>	23	107	20	26
<b>Number of samples with MOS &gt;=1 to &lt;2 (Poor)</b>	17	79	23	39
<b>%age of samples with MOS &gt;=4 to &lt;5 (Excellent)</b>	76.40%	35.89%	85.51%	64.74%
<b>%age of samples with MOS &gt;=3 to &lt;4 (Good)</b>	16.40%	23.41%	6.80%	23.13%
<b>%age of samples with MOS &gt;=2 to &lt;3 (Fair)</b>	4.14%	23.41%	3.58%	4.85%
<b>%age of samples with MOS &gt;=1 to &lt;2 (Poor)</b>	3.06%	17.29%	4.11%	7.28%

**Table-51:** Summary of speech quality (MOS) samples.

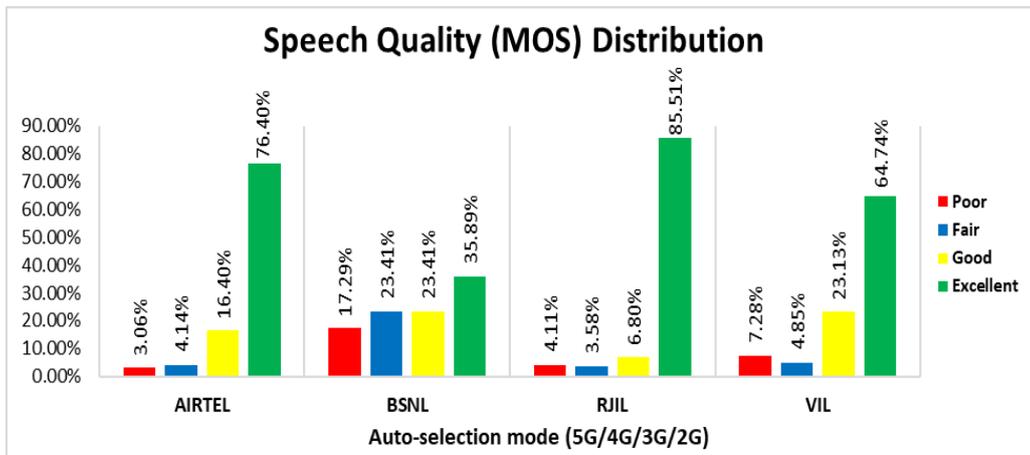

**Figure-39:** Distribution of samples in MOS range.


**(f) Network Technology:** This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	4.43%	NA	51.13%	NA
4G	95.57%	76.75%	48.87%	89.89%
3G	NA	10.32%	NA	NA
2G	0.00%	8.19%	NA	9.33%
Limited Service	0.00%	4.75%	0.00%	0.78%


**Table-52:** Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

**Note-**


- NA- Service provider doesn't provide services in respective technology.

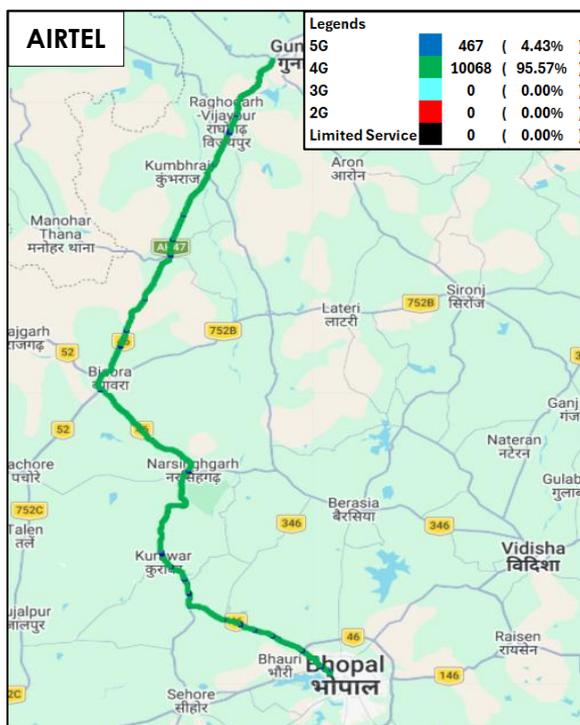


**Figure-40:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

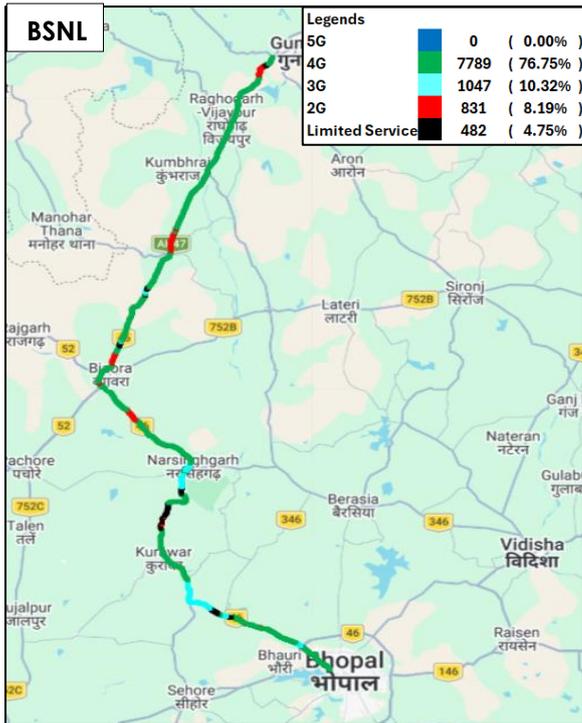

**Figure-41:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

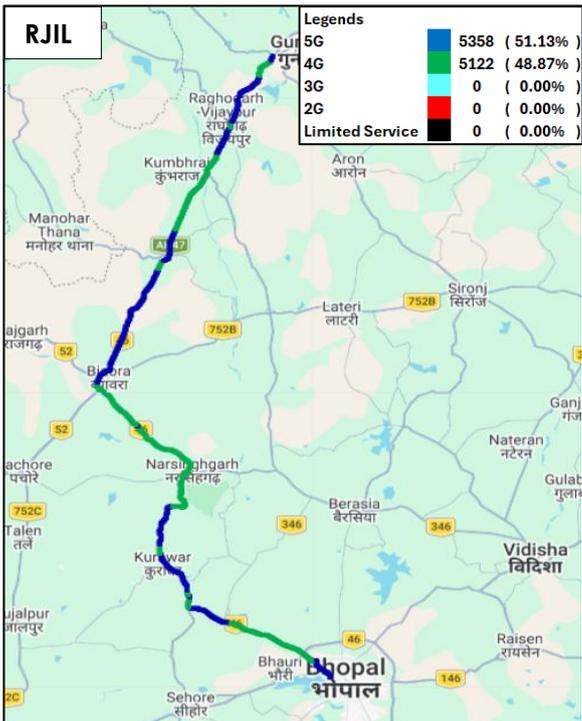


**Figure-42:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

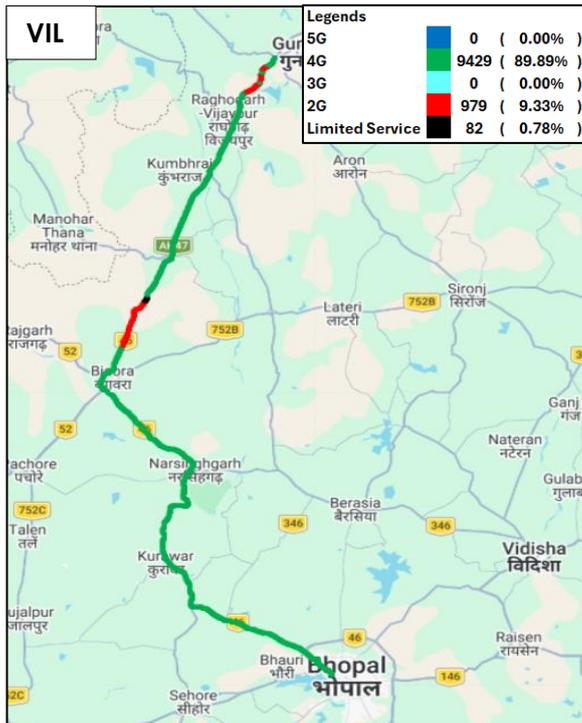

**Figure-43:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) voice - VIL

**(g) Network Signal Strength Distribution:** The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-66, 67, 68 & 69 for map view)

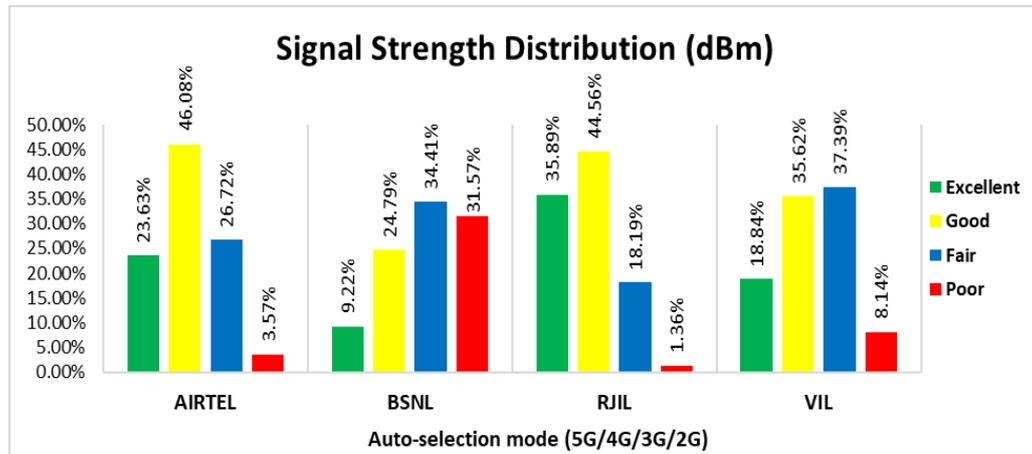

**Figure-44:** Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

**Observations:**


- Airtel has 24% of samples falling in the excellent signal strength category.
- BSNL has 9% of samples falling in the excellent signal strength category.
- RJIL has 36% of samples falling in the excellent signal strength category.
- VIL has 19% of samples falling in the excellent signal strength category.

## 4.5.4 Data performance


### (b) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	94.14	16.73	256.25	24.23
	80th Percentile	173.40	28.43	416.51	35.44
	20th Percentile	12.54	3.32	84.47	7.79
Upload Throughput (Mbits/s)	Average	11.69	3.64	23.63	13.25
	80th Percentile	16.77	6.61	44.93	22.46
	20th Percentile	2.88	1.20	6.65	2.50
Latency (ms)	50th Percentile	45.32	44.40	33.51	32.37

**Table-53:** Summary of Data performance in network auto-selection mode.

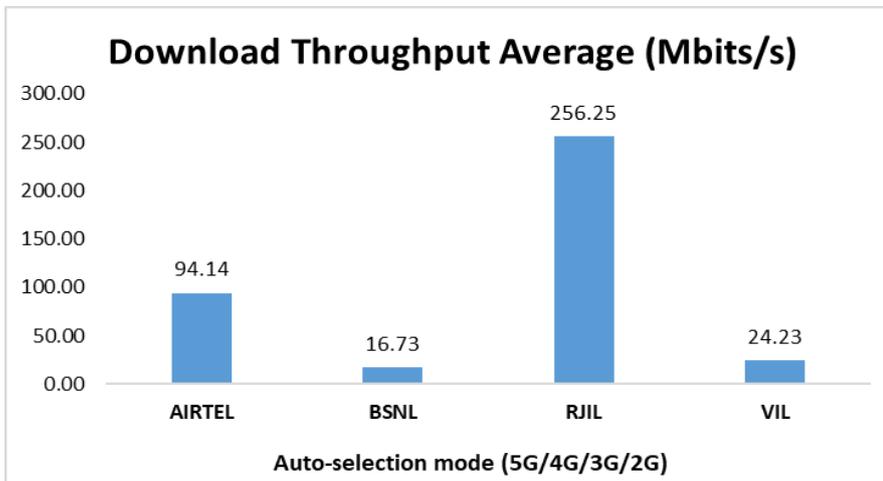

**Figure- 45:** Download throughput.

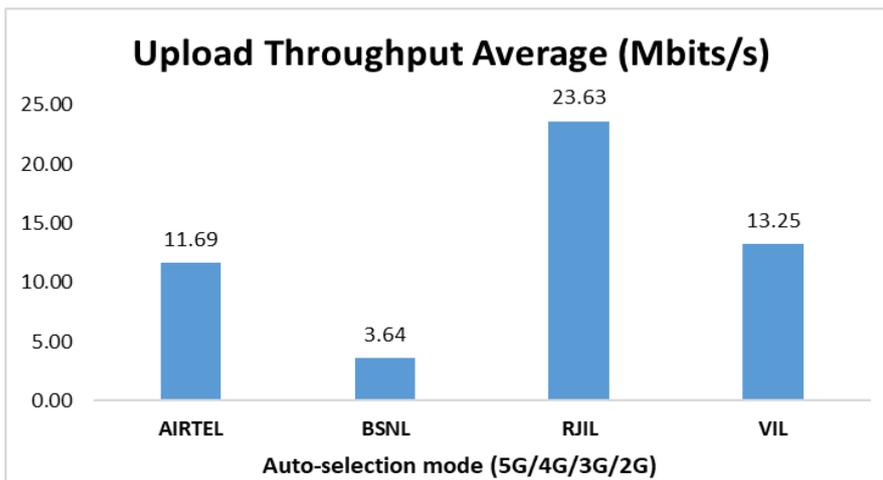

**Figure- 46:** Upload throughput.


**(b) Network Technology:** This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	41.22%	NA	92.66%	NA
4G	57.86%	77.21%	7.34%	93.46%
3G	NA	8.97%	NA	NA
2G	0.05%	4.45%	NA	4.32%
Limited Service	0.87%	9.37%	0.00%	2.21%


**Table-54:** Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

**Note-**


- NA- Service provider doesn't provide services in respective technology.

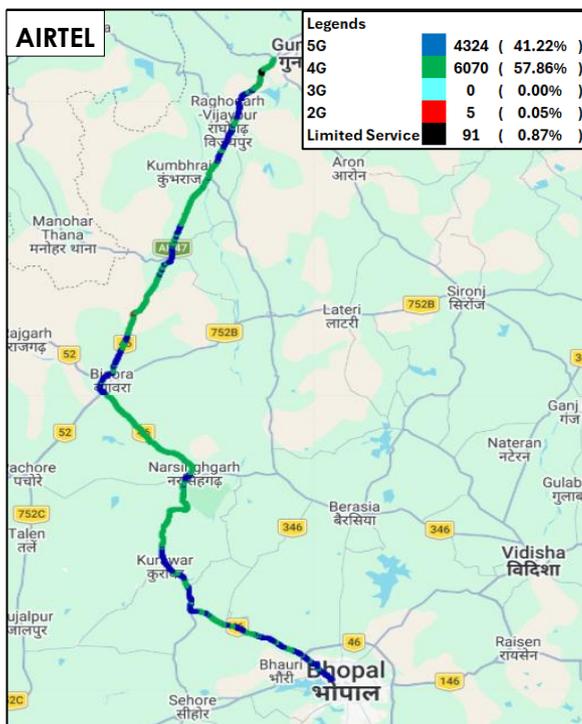


**Figure-47:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

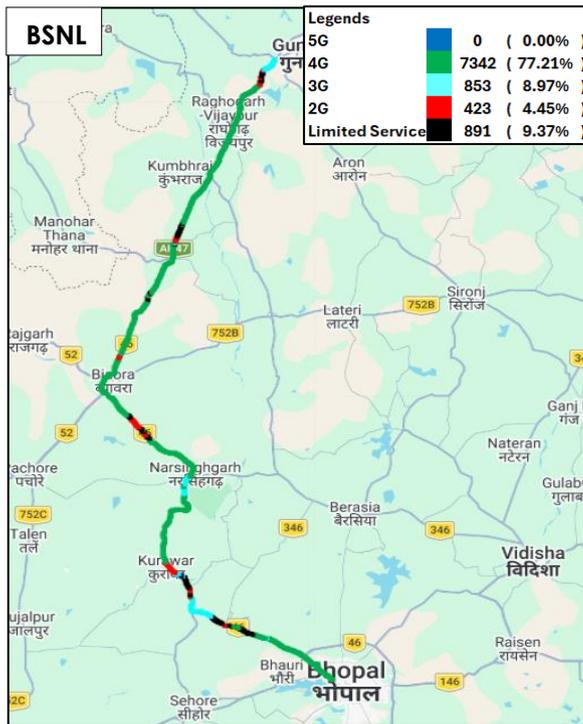

**Figure-48:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) data - BSNL

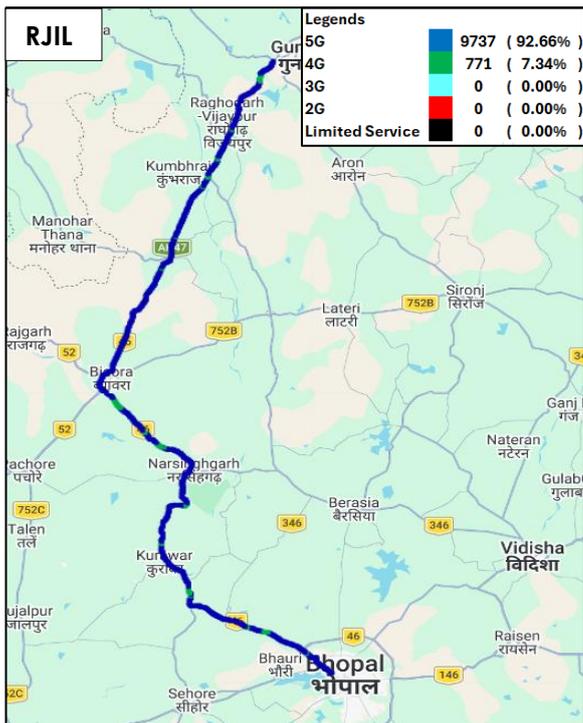


**Figure-49:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) data - RJIL.

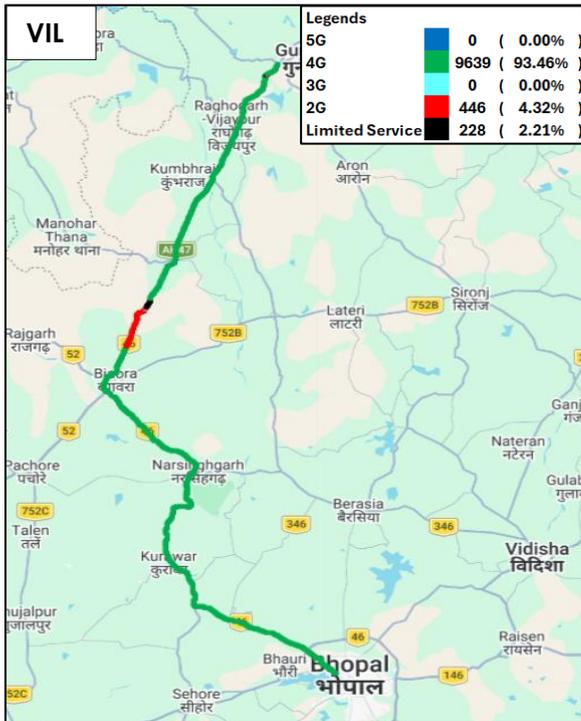

**Figure-50:** Serving technology plot in auto-selection mode (5G/4G/3G/2G) data - VIL

**(c) Network Signal Strength Distribution:** The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-70, 71, 72 & 73 for map view)

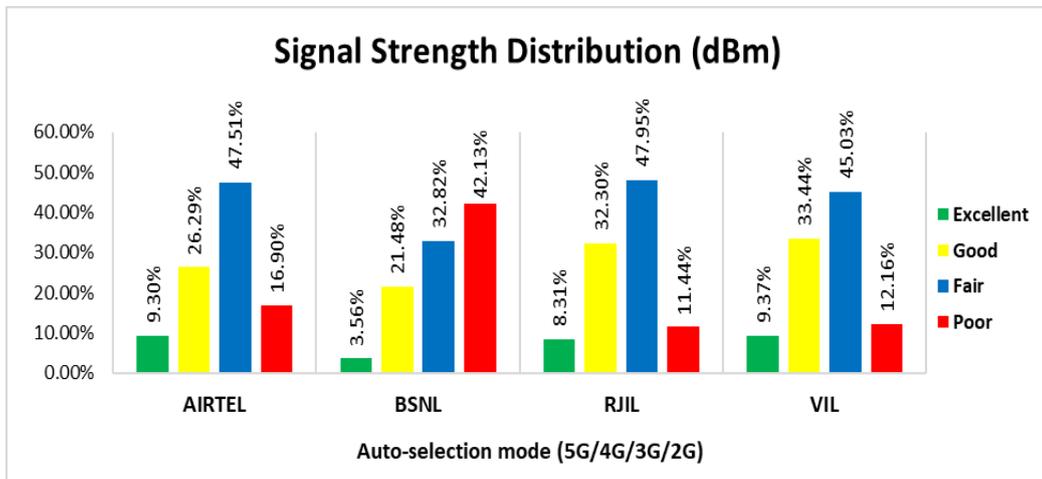

**Figure-51:** Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

**Observations:**

- Airtel has 9% of samples falling in the excellent signal strength category.
- BSNL has 4% of samples falling in the excellent signal strength category.
- RJIL has 8% of samples falling in the excellent signal strength category.
- VIL has 9% of samples falling in the excellent signal strength category.

## 5. Voice & Data Key findings

### 5.1 Overall Voice

#### 1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 99.34%, 91.69% and 98.73% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 99.01%, 77.71%, 100.00% and 98.78% Call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) Airtel & RJIL have 100.00% call setup success while calling on peer service provider's network for inter-operator calls. (refer table-9)
- d) BSNL had a 100.00% call setup success rate while calling RJIL and VIL whereas call blocking was observed when calling Airtel. (refer table-9)
- e) VIL had a 100.00% call setup success rate while calling Airtel and RJIL whereas call blocking was observed when calling BSNL. (refer table-9)

#### 2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 4.66, 4.09 & 3.36 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 1.40, 1.83, 0.72 & 0.83 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

#### 3. Call Silence/Mute Rate: In packet switched network (4G/5G) BSNL, RJIL, VIL & Airtel have 8.93%, 1.33%, 1.00% & 0.64% silence call rate respectively. Further BSNL has higher RTP packet loss rate in downlink (7.11%) compared to RJIL (1.80%), VIL (1.07%) & Airtel (0.56%). In uplink the RTP packet loss rate is higher for BSNL (5.58%) compared to RJIL (1.58%), VIL (0.89%) & Airtel (0.30%). (refer table-6)

#### 4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 1.00%, 3.44% and 0.00% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 0.00%, 2.51%, 0.49% and 1.72% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

### 5.2 Overall Data

#### 1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 120.64 Mbps, 12.59 Mbps, 188.58 Mbps and 18.95 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 18.40 Mbps, 4.17 Mbps, 21.94 Mbps and 9.53 Mbps respectively. (refer table-11)

#### 2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 97.63 Mbps, 8.98 Mbps, 109.47 Mbps and 19.42 Mbps respectively. (refer table-29)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 19.35 Mbps, 2.20 Mbps, 11.25 Mbps and 7.02 Mbps respectively. (refer table-29)

### **3. Data session setup success rate (static i.e. while stationary):**

a) Airtel, BSNL, RJIL and VIL have 100.00%, 85.71%, 100.00% and 97.14% download session setup success rate respectively. (refer table-29)

b) Airtel, BSNL, RJIL and VIL have 100.00%, 91.43%, 100.00% and 94.29% upload session setup success rate respectively. (refer table-29)

## **5.3 Operator wise Key Findings**

### **1. Airtel:**

#### **Voice**

- 99.34% call setup success rate and 1.00% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 99.01% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.20% call setup success rate and 0.40% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 98.50% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 45)
- 100.00% call setup success rate and 3.85% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 2.00% for drop call rate. (refer table-47)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-49)

#### **Data**

- Airtel has 120.64 Mbps average download speed & 18.40 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 130.08 Mbps average download speed & 19.43 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Bajrangarh Fort Guna, Polytechnic College Ashoknagar and Tekri Sarkar Temple Guna have less download speed (less than 100 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 31, 35 & 36)
- Bajrangarh Fort Guna, Guna Railway Station, Jajji Bus Stand Guna, Polytechnic College Ashoknagar and Tekri Sarkar Temple Guna have less upload speed (less than 20 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 31, 33, 34, 35 & 36)

- Airtel has 94.14 Mbps average download speed & 11.69 Mbps average upload speed across the measured routes for highway drive. (refer table-53)

## **2. BSNL:**

### **Voice**

- 91.69% call setup success rate and 3.44% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% and 2.00% respectively. (refer table-3)
- 77.71% call setup success rate and 2.51% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% and 2.00% respectively. (refer table-5)
- 98.19% call setup success rate and 1.10% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 80.54% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting benchmark of 98.00% for call setup success rate. (refer table-15)
- 82.86% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is not meeting benchmark of 98.00% for call setup success rate. (refer table-21)
- 80.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is not meeting benchmark of 98.00% for call setup success rate. (refer table- 45)
- 66.67% call setup success rate and 16.67% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% and 2.00% respectively. (refer table-47)
- 62.03% call setup success rate and 18.37% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-49)

### **Data**

- BSNL has 12.59 Mbps average download speed & 4.17 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 12.27 Mbps average download speed & 4.59 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 10 Mbps) except Jajji Bus Stand Guna for auto-selection mode (5G/4G/3G/2G). (refer table- 30, 31, 32, 33, 35 & 36)
- Ashoknagar Railway Station, Bajrangarh Fort Guna, Guna Railway Station and Tekri Sarkar Temple Guna have less upload speed (less than 2 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30, 31, 33 & 36)
- Guna Railway Station walktest location has less download speed (less than 10 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 46)
- BSNL has 16.73 Mbps average download speed & 3.64 Mbps average upload speed across the measured routes for highway drive. (refer table-53)

### **3. RJIL: Voice**

- 100.00% call setup success rate and 0.49% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 100.00% call setup success rate and 0.74% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-45)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-49)

### **Data**

- RJIL has 188.58 Mbps average download speed & 21.94 Mbps average upload speed for LSA. (refer table-11)
- RJIL has 165.86 Mbps average download speed & 20.96 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Ashoknagar Railway Station, District Hospital Guna and Tekri Sarkar Temple Guna have less download speed (less than 100 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 30, 32 & 36)
- Ashoknagar Railway Station, Bajrangarh Fort Guna, District Hospital Guna, Polytechnic College Ashoknagar and Tekri Sarkar Temple Guna have less upload speed (less than 20 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 30, 31, 32, 35 & 36)
- RJIL has 256.25 Mbps average download speed & 23.63 Mbps average upload speed across the measured routes for highway drive. (refer table-53)

### **4. VIL: Voice**

- 98.73% call setup success rate and 0.00% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 98.78% call setup success rate and 1.72% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.22% call setup success rate and 0.00% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 99.63% call setup success rate and 1.85% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)

- 98.57% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-45)
- 96.67% call setup success rate and 0.00% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-47)
- 94.74% call setup success rate and 3.70% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-49)

#### **Data**

- VIL has 18.95 Mbps average download speed & 9.53 Mbps average upload speed for LSA. (refer table-11)
- VIL has 17.13 Mbps average download speed & 8.76 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Ashoknagar Railway Station and Jajji Bus Stand Guna have less upload speed (less than 2 Mbps) out of total 7 hotspot locations for auto- selection mode (5G/4G/3G/2G). (refer table-30 & 34)
- VIL has 24.23 Mbps average download speed & 13.25 Mbps average upload speed across the measured routes for highway drive. (refer table-53)

## 6. Annexure

### 6.1 Route wise coverage map

#### 6.1.1 City

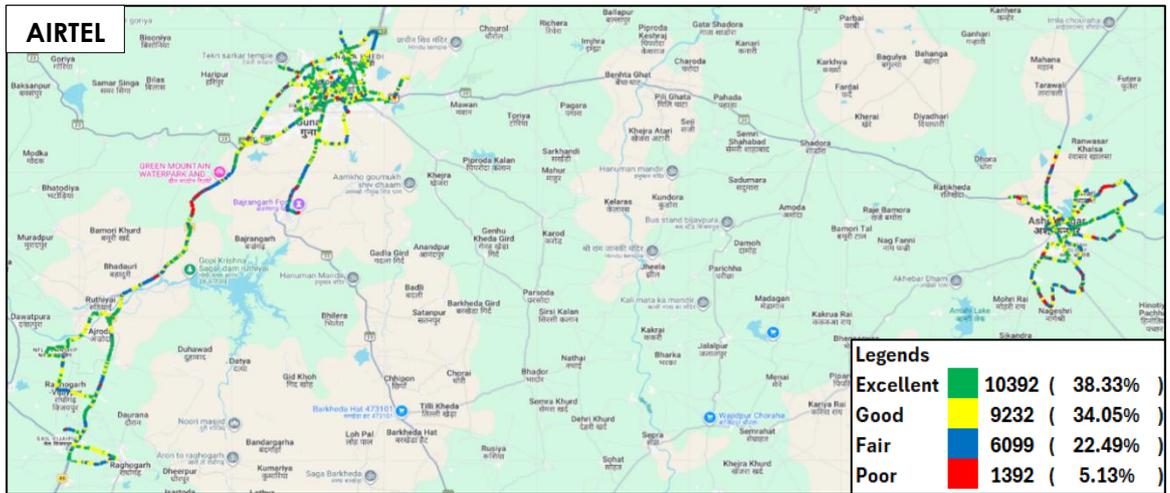


Figure-52: Signal strength 3G/2G network mode - AIRTEL.

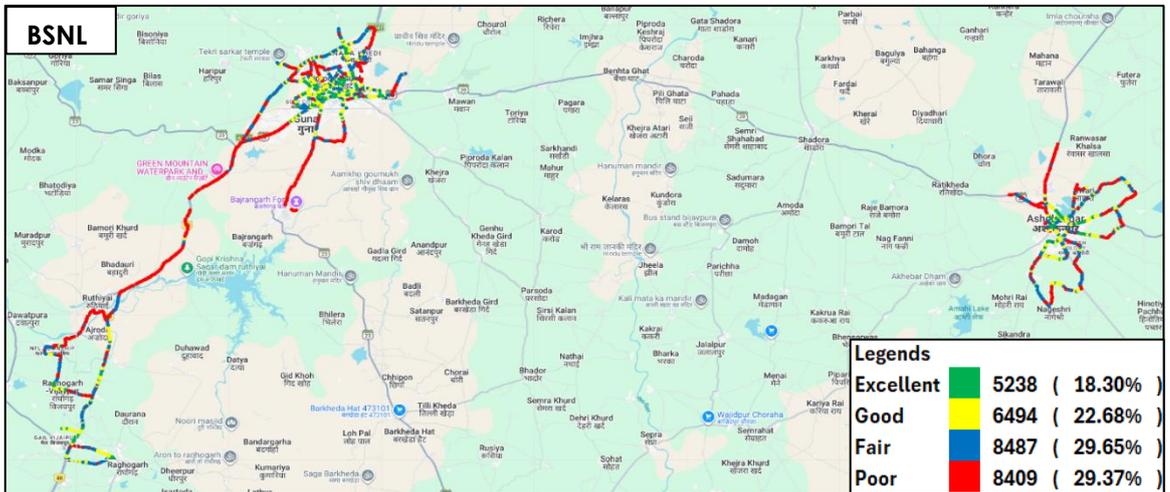


Figure-53: Signal strength 3G/2G network mode - BSNL.



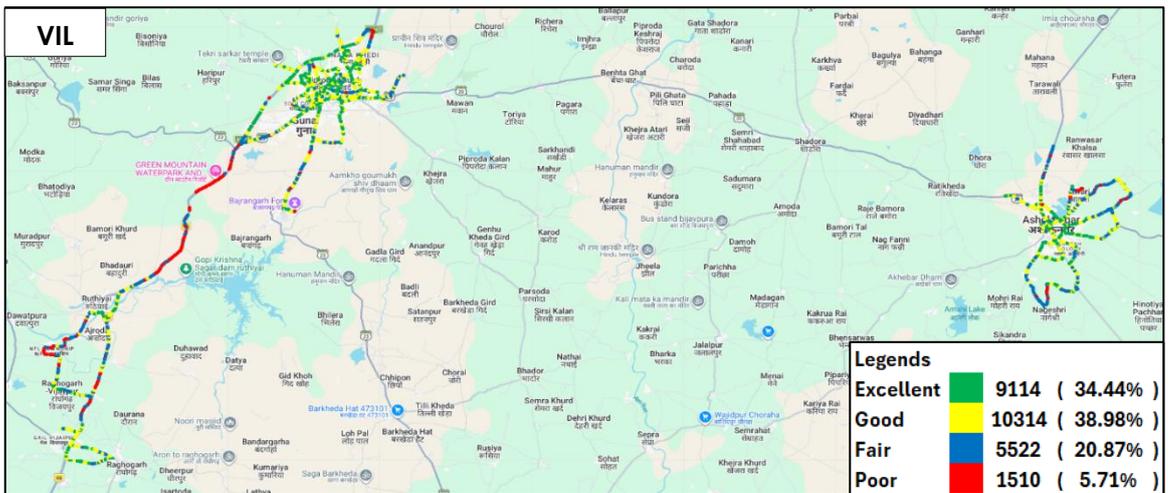



Figure-54: Signal strength 3G/2G network mode - VIL.

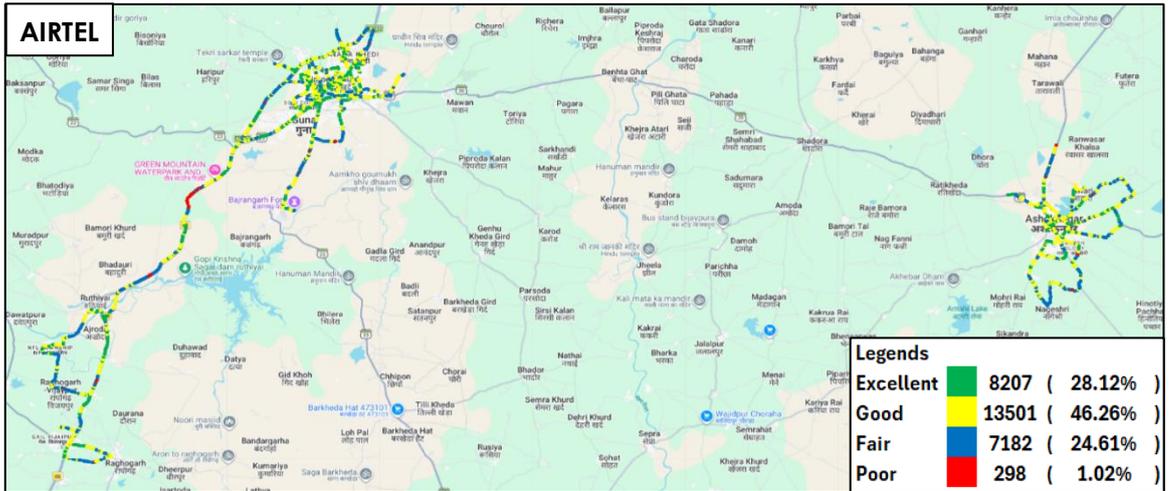


**Figure-55:** Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

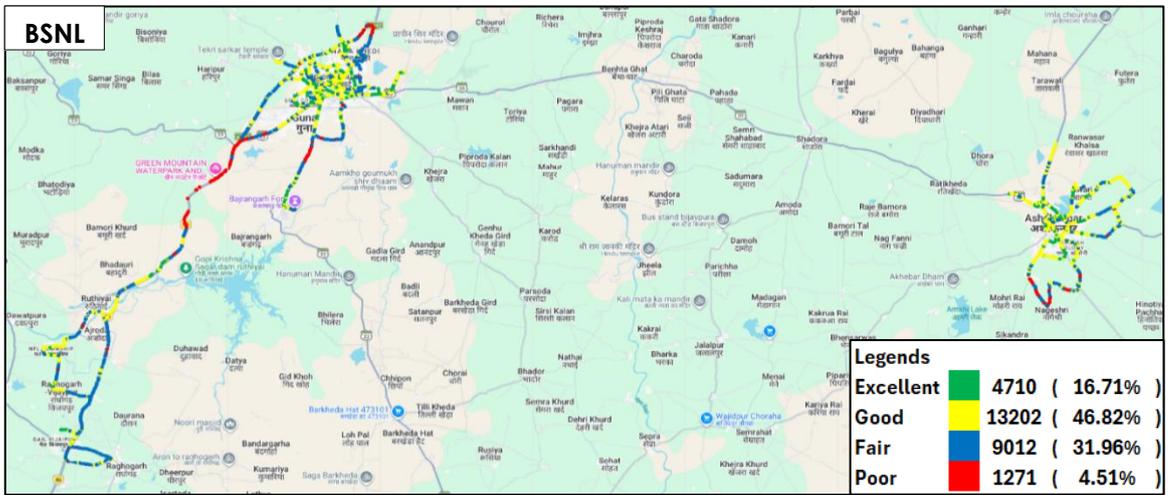


**Figure-56:** Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

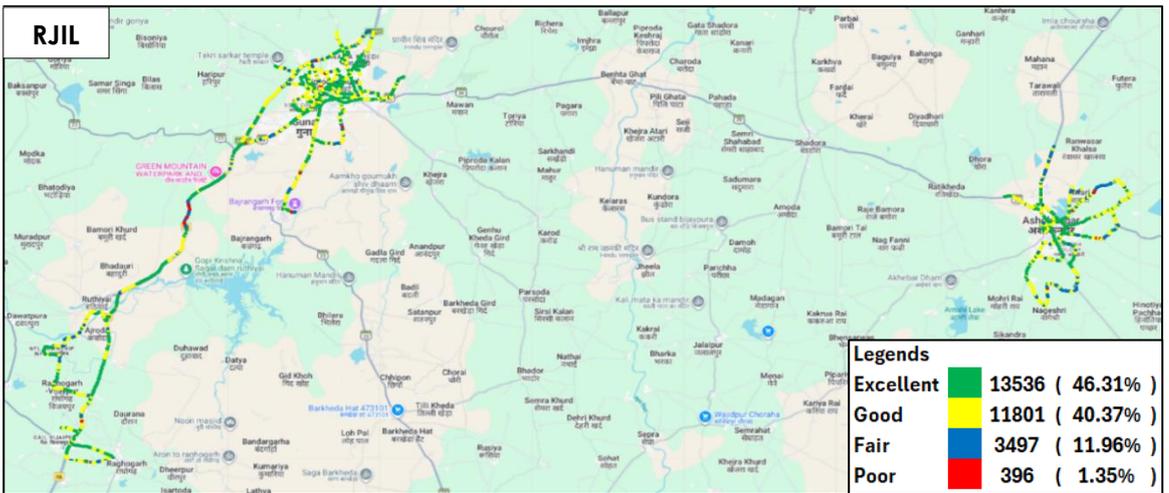


**Figure-57:** Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

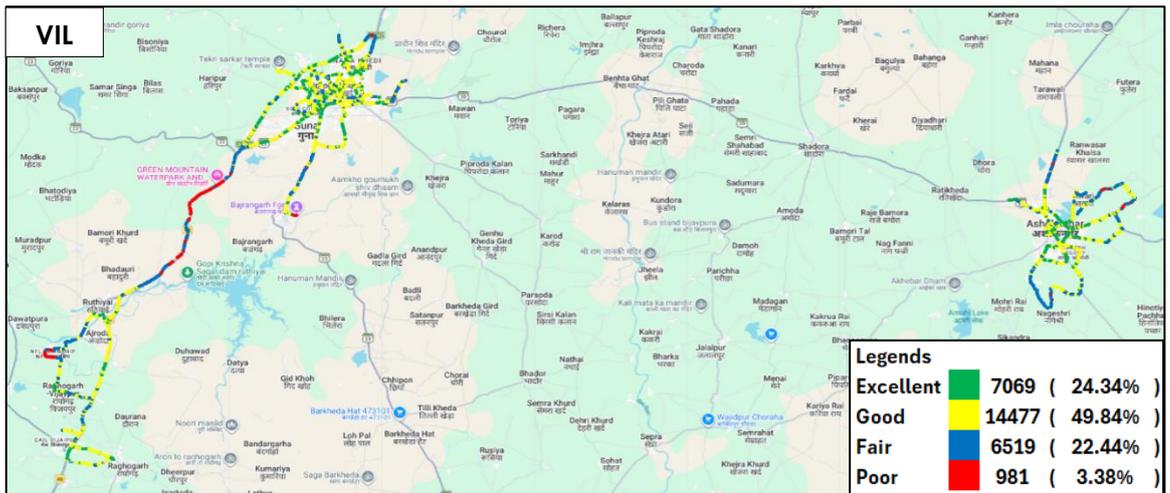


**Figure-58:** Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

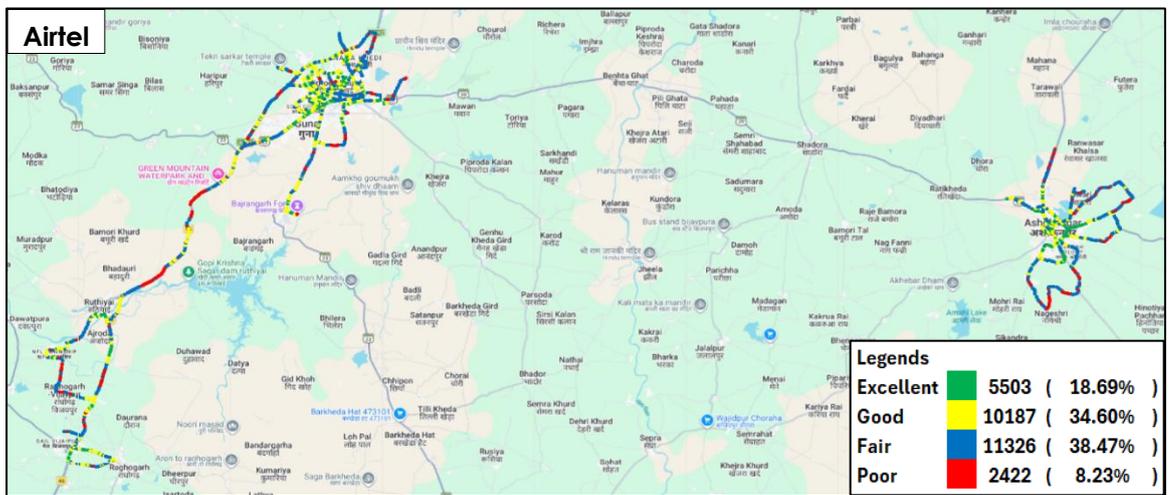


**Figure-59:** Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

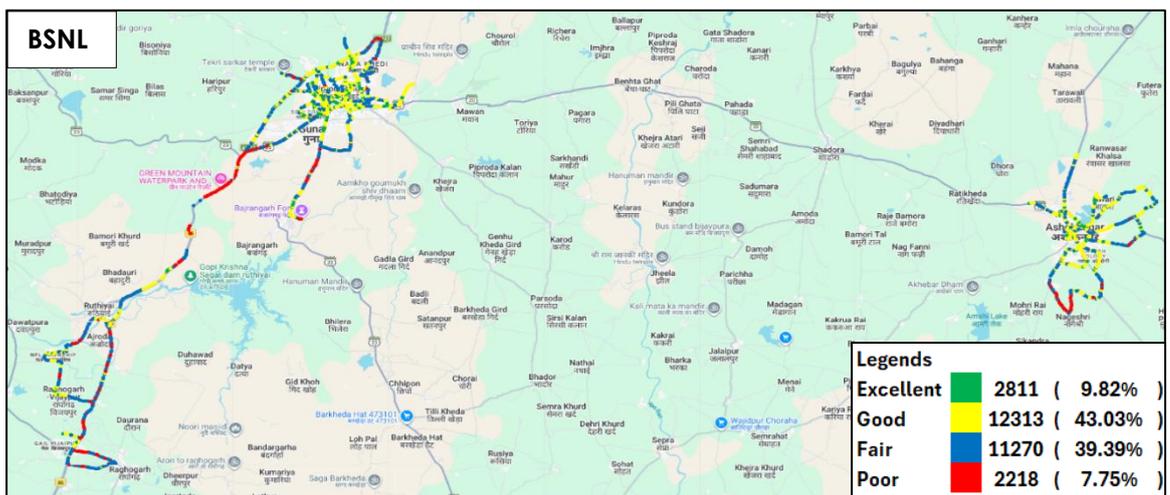

**Figure-60:** Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

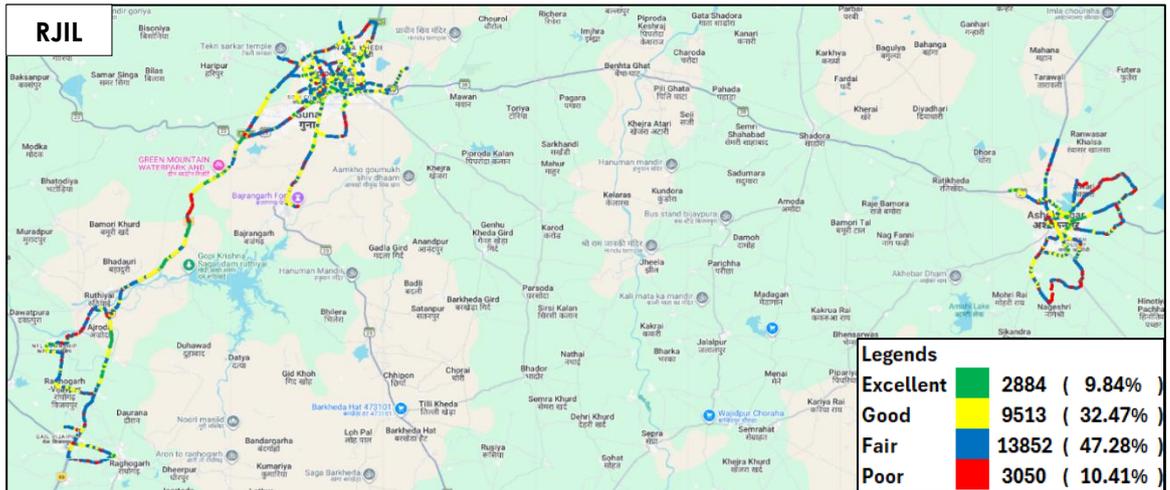

**Figure-61:** Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

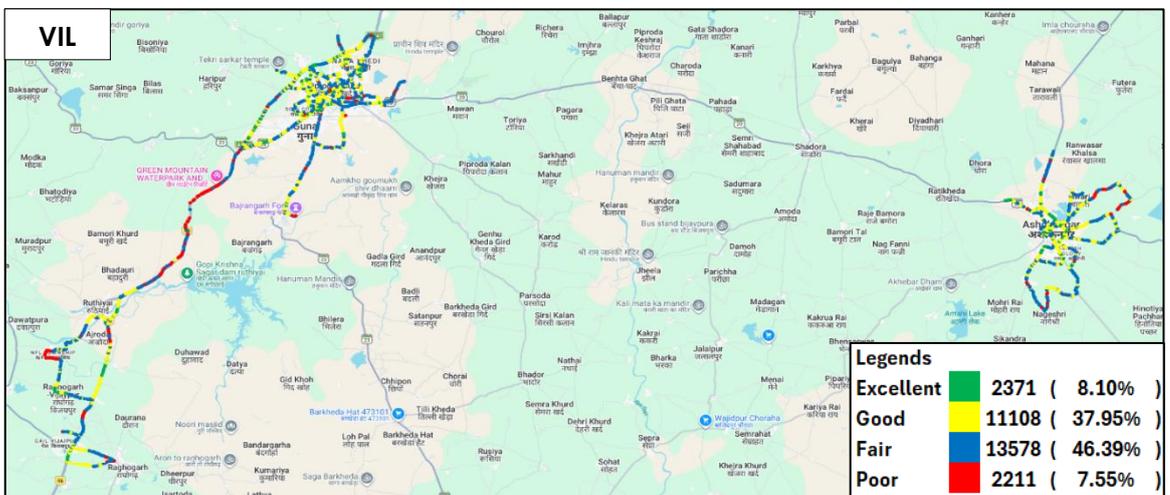

**Figure-62:** Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

## 6.1.2 Highway

### i) Guna to Bhopal

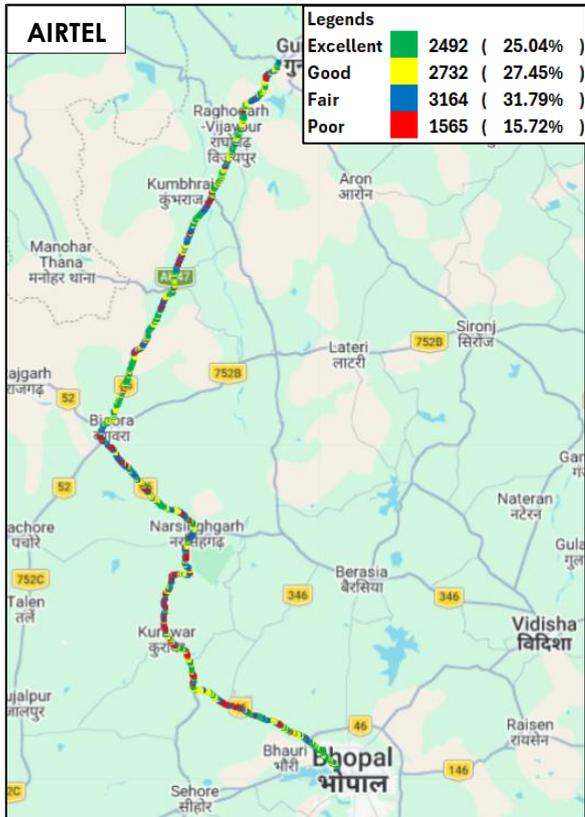


Figure-63: Signal strength 3G/2G network mode - AIRTEL.

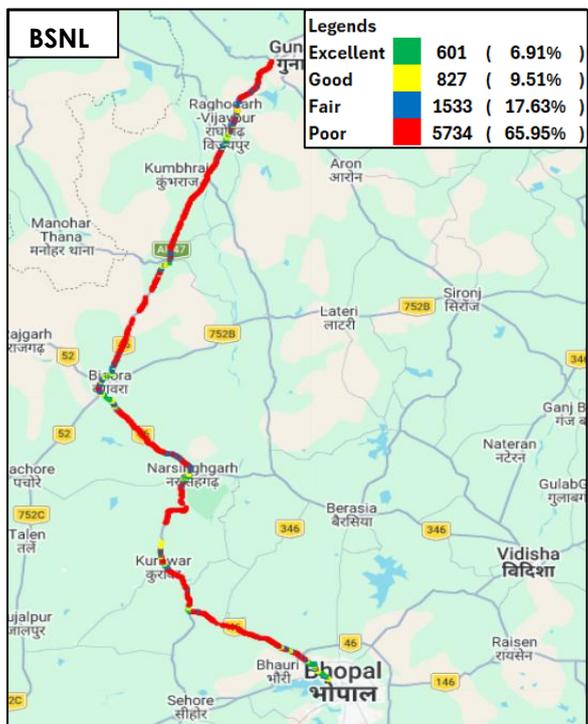


Figure-64: Signal strength 3G/2G network mode - BSNL.

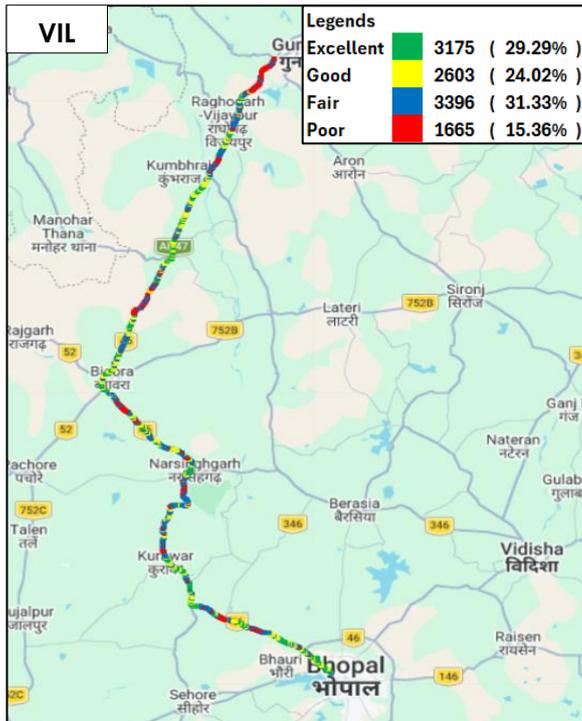


Figure-65: Signal strength 3G/2G network mode - VIL.



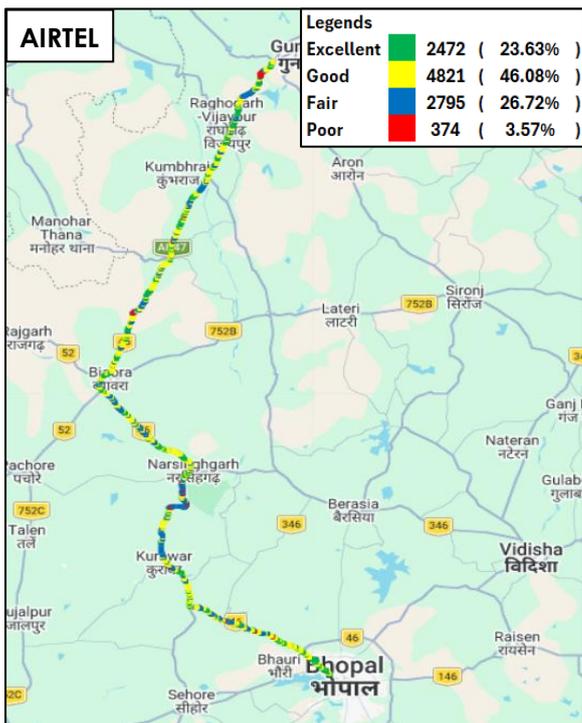



Figure-66: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

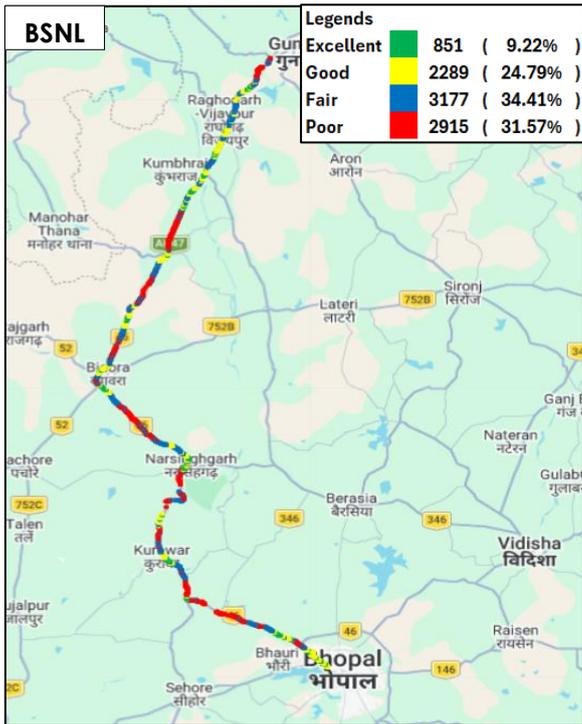


**Figure-67:** Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

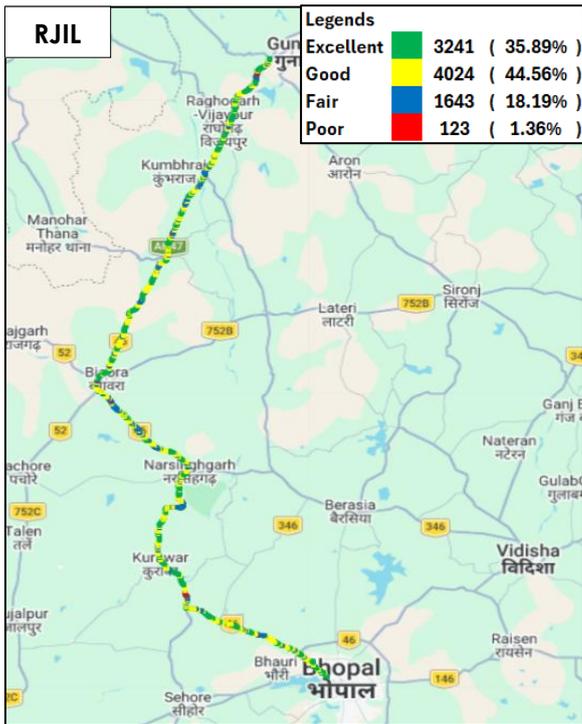


**Figure-68:** Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

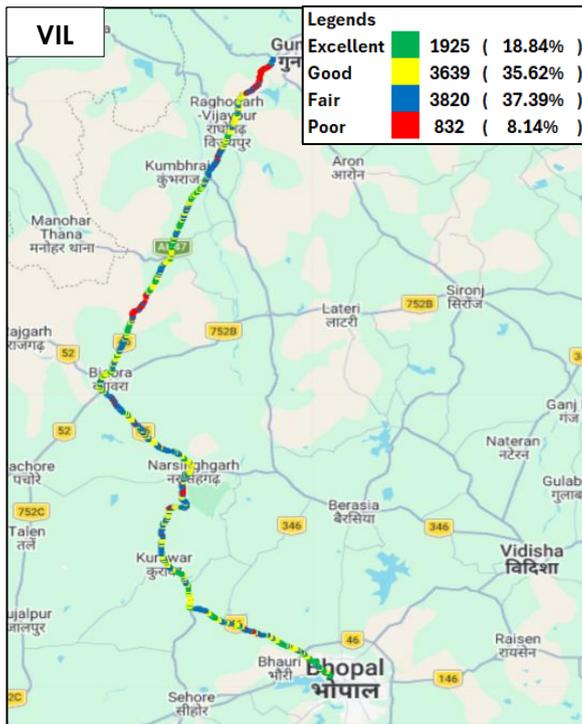


**Figure-69:** Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

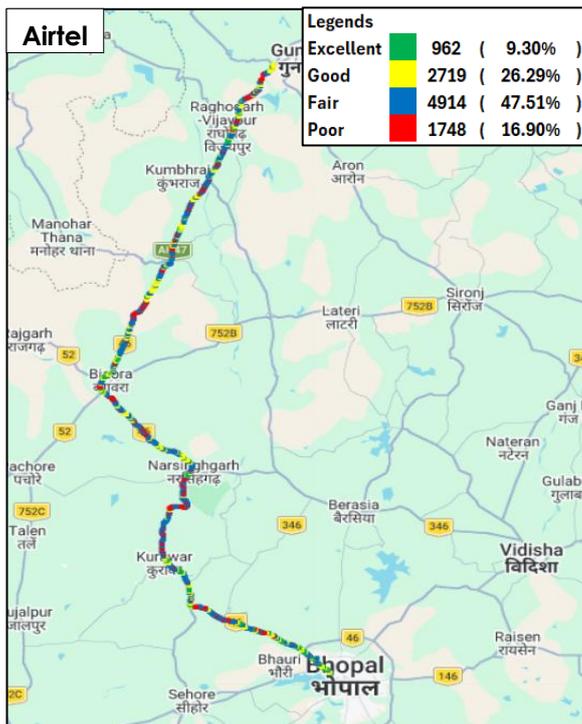


**Figure-70:** Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

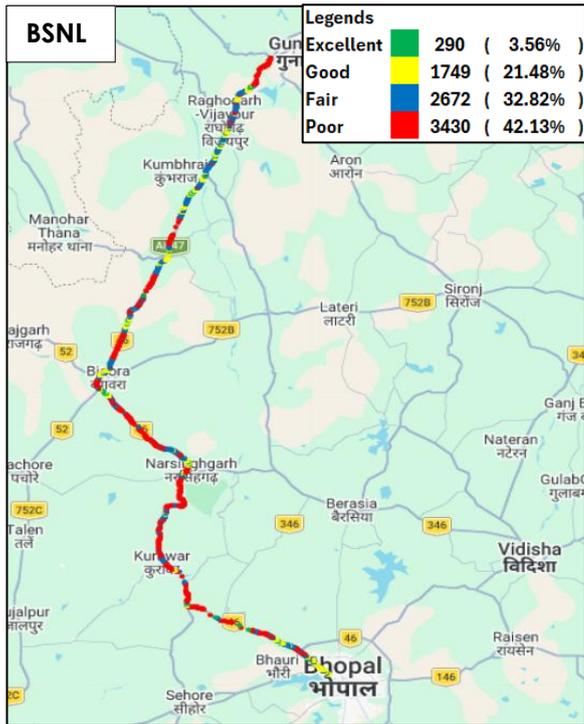

**Figure-71:** Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

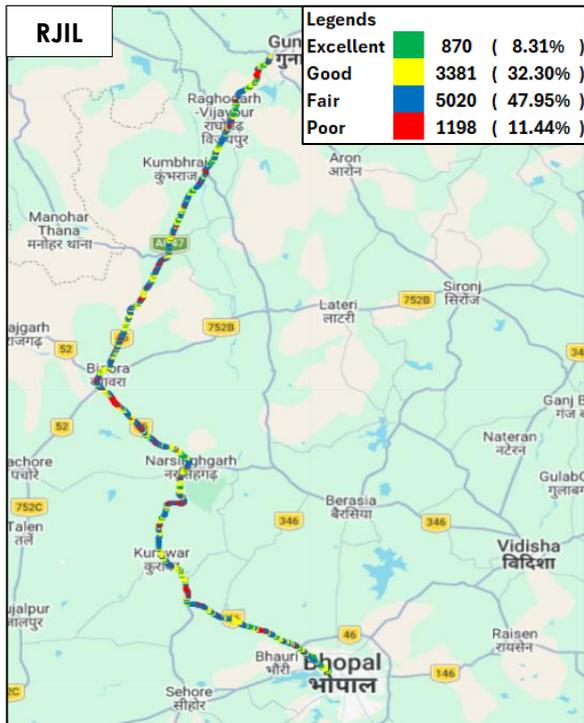

**Figure-72:** Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

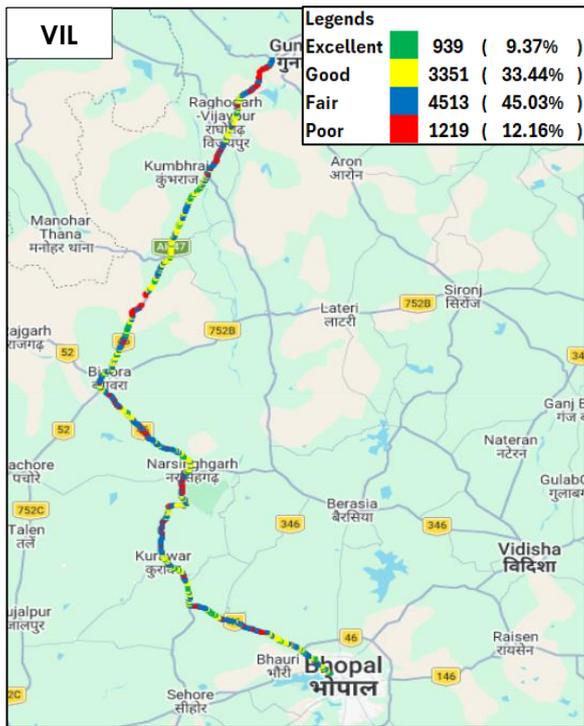

**Figure-73:** Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

## 7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

### 7.1 Appendix-I

#### 7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	<ul style="list-style-type: none"> <li>• 3G/2G auto mode- switch Call</li> <li>• 5G/4G/3G/2G auto mode- switch Call</li> <li>• 5G/4G MOS Call</li> </ul>	30 Sec
Call Duration		90/180 Sec
Wait/ Guard Time		15 Sec

**Table-55:** Voice test detail

#### Note-


- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.
- 180 Sec calls were made only in highway & railway route drive.

Data Test		
Test Type	Technology	Detail
FTP/HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
FTP/HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites ( <a href="http://www.google.co.in">www.google.co.in</a> , <a href="http://www.irctc.co.in">www.irctc.co.in</a> , <a href="http://sbi.bank.in">sbi.bank.in</a> ) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)		25 count- Dynamic 500 count- Hotspot Payload- 42 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)		500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 42 bytes in all drive

**Table-56:** Data test detail


<p><b>Note-</b></p> <ul style="list-style-type: none"> <li>• 5 Data iteration to be done at each hotspot location.</li> <li>• Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.</li> <li>• TWAMP-UDP &amp; TCP test to be performed only once at hotspot location.</li> <li>• Youtube &amp; Web browsing test to be performed at static location only.</li> <li>• All values are taken up to two decimal places with round off.</li> <li>• Delhi-based TRAI server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing for Airtel and BSNL.</li> <li>• RJIL server was used for FTP Download, FTP Upload, TCP and TWAMP testing, for RJIL.</li> <li>• VIL server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing, for VIL.</li> </ul>
---

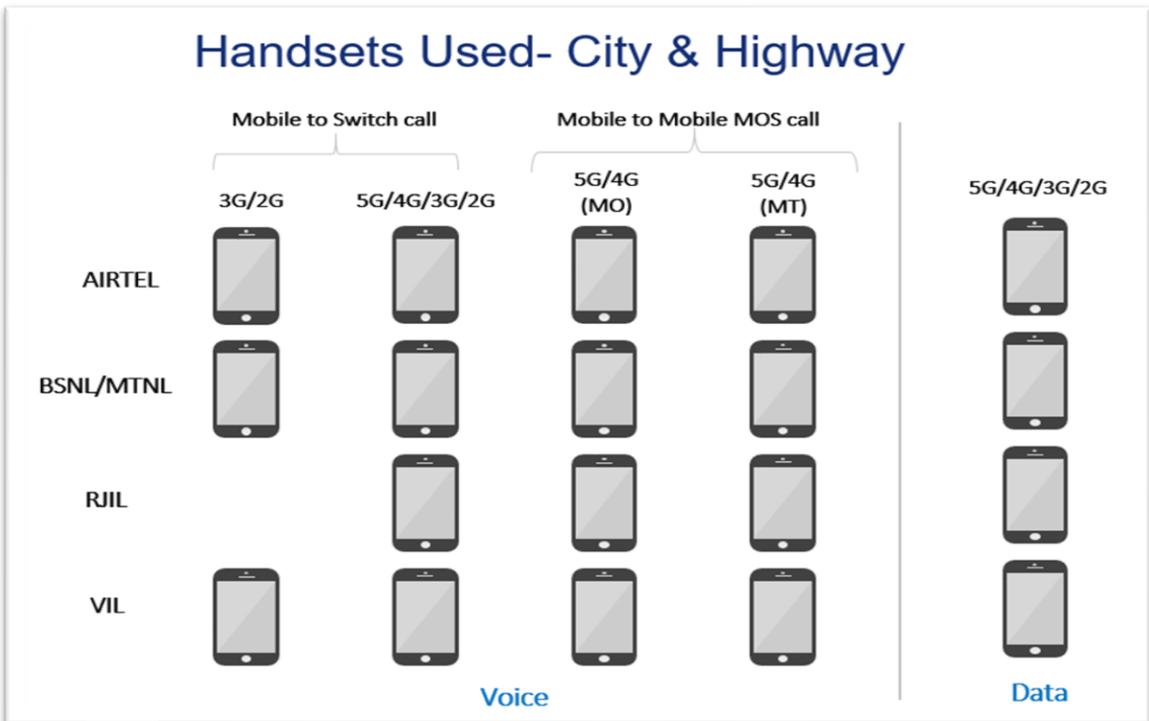

**Figure-74:** Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

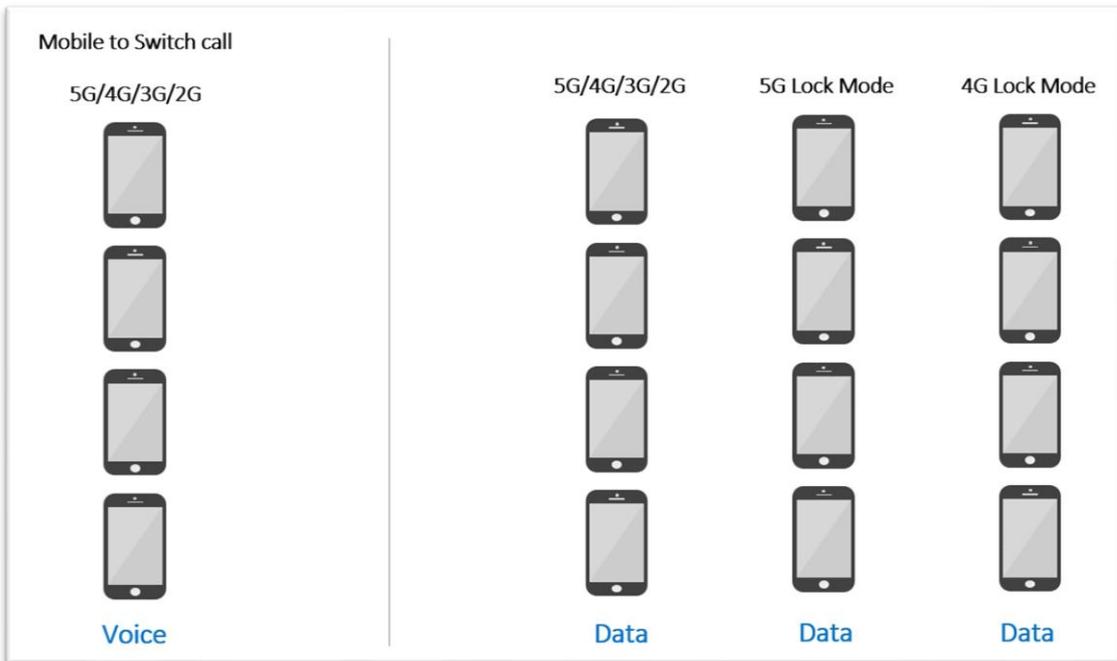


**Figure-75:** Number of handsets used in railway/metro/walktest/hotspot/ coastal area

**Note-** 5G & 4G Lock mode testing has been performed at hotspot locations only.

## 7.1.2 Drive test Methodology

### (a) Dynamic voice testing (on the move)

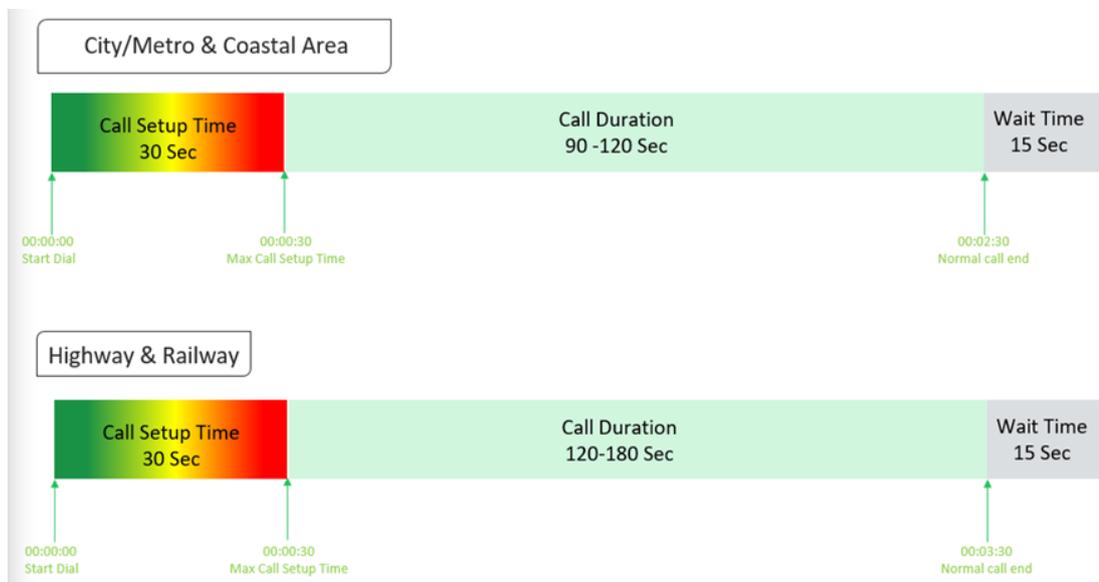

**Figure-76:** Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.


## (b) Hotspot voice testing



**Figure-77:** Voice test script for walktest/hotspot


- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

## (c) Dynamic Data (internet) test

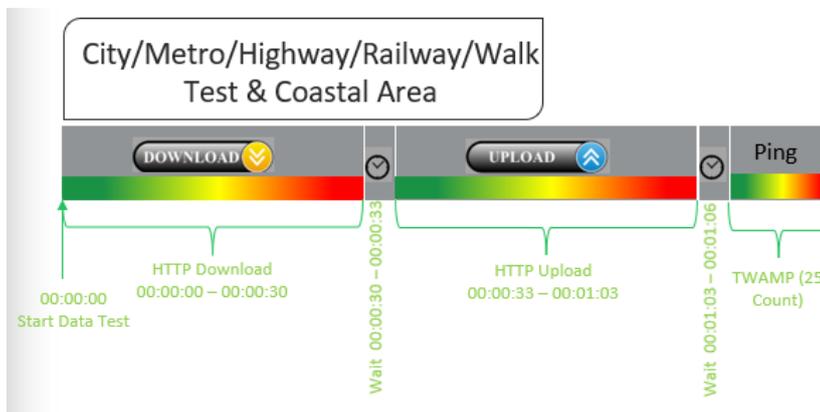

**Figure-78:** Data test script used in city/metro/railway/highway/walk test & coastal area

## (d) Static Data(internet) testing

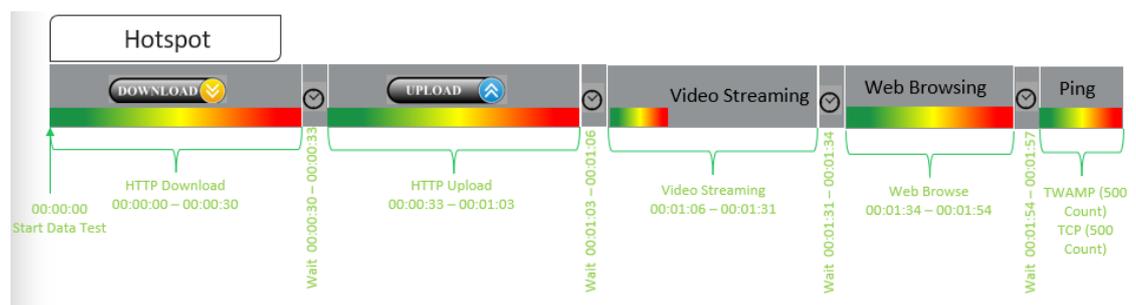

**Figure-79:** Data test script used at hotspot

- 5 Data iteration done at each hotspot location
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One Ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

## 7.2 Appendix-II

### 7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	<p>(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup:</p> <ul style="list-style-type: none"> <li>(a) Call attempt is made</li> <li>(b) The signaling channel is allocated</li> <li>(c) The call is routed to the outwards path of the terminating network</li> <li>(d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement.</li> </ul> <p>CSSR = (Total Call Established/ Total Call Attempt) *100</p> <p>As per QoS Regulation 2024 benchmark value is <b>&gt;=98%</b></p>
Drop Call Rate	<p>Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network</p> <p>Drop Call Rate = (Total Call Drop/Total Call Established) *100</p> <p>As per QoS Regulation 2024 benchmark value is <b>&lt;=2%</b></p>
Call Setup Time	<p>Time taken from call initiate to call alerting/ringing.</p> <p>Call Setup Time = T2- T1</p> <p>T2- Ringing (VoLTE/VoNR) &amp; Alerting (for WCDMA &amp; GSM), T1- Invite (VoLTE/VoNR) &amp; CM Service Request (for WCDMA &amp; GSM)</p>
Voice Quality (MOS)	<p>Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as:</p> <p>Excellent: MOS <math>\geq 4</math> and <math>&lt; 5</math>            Good : MOS <math>\geq 3</math> and <math>&lt; 4</math>            Fair : MOS <math>\geq 2</math> and <math>&lt; 3</math>            Poor : MOS <math>\geq 1</math> and <math>&lt; 2</math></p>
Handover Success Rate	<p>Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100</p> <p>Handover type which are considered- 2G Inter &amp; Intra cell, 3G Soft &amp; IRAT, 4G Inter &amp; Intra frequency &amp; SRVCC, 5G Inter &amp; Intra frequency &amp; 5G to 4G handovers.</p>
Silence Call	<p>A call which has <math>\geq 4</math> sec continuous RTP gap is considered as a Silence Call.</p> <p>Silence call rate = (count of silence call / Total calls established) *100</p> <p>If a call observes multiple silence count <math>\geq 4</math> sec in a particular established call it has been taken as one silent event.</p>

<p><b>Jitter</b></p>	<p>The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If <math>S_i</math> is the RTP timestamp from packet <math>i</math>, and <math>R_i</math> is the time of arrival in RTP timestamps units for packet <math>i</math>, then for two packets <math>i</math> and <math>j</math> the inter-arrival jitter <math>D</math> can be expressed as:  <b><math>D(i,j) = (R_j - R_i) - (S_j - S_i)</math></b></p> <p>The interarrival jitter is calculated continuously as each data packet <math>i</math> is received from source <math>SSRC_n</math>, using this difference <math>D</math> for that packet and the previous packet <math>i-1</math> in order of arrival (not necessarily in sequence), according to the formula  <b><math>J(i) = J(i-1) + ( D(i-1,i)  - J(i-1))/16</math> or <b>8</b></b></p>																																		
<p><b>Downlink Packet Drop Rate</b></p>	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset.  This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)</p>																																		
<p><b>Uplink Packet Drop Rate</b></p>	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
<p><b>Signal Strength</b></p>	<p>Signal strength is the signal power level received by the wireless user.</p> <table border="1" data-bbox="708 907 1423 1171"> <thead> <tr> <th rowspan="2">Parameter Name</th> <th rowspan="2">Technology</th> <th colspan="4">Signal Strength (dBm)</th> </tr> <tr> <th>Excellent</th> <th>Good</th> <th>Fair</th> <th>Poor</th> </tr> </thead> <tbody> <tr> <td>Rx Level</td> <td>GSM</td> <td>0 to <math>\geq -65</math></td> <td><math>&lt; -65</math> to <math>\geq -75</math></td> <td><math>&lt; -75</math> to <math>\geq -85</math></td> <td><math>&lt; -85</math> to min</td> </tr> <tr> <td>RSCP</td> <td>WCDMA</td> <td>0 to <math>\geq -70</math></td> <td><math>&lt; -70</math> to <math>\geq -80</math></td> <td><math>&lt; -80</math> to <math>\geq -90</math></td> <td><math>&lt; -90</math> to min</td> </tr> <tr> <td>RSRP</td> <td>LTE</td> <td>0 to <math>\geq -80</math></td> <td><math>&lt; -80</math> to <math>\geq -95</math></td> <td><math>&lt; -95</math> to <math>\geq -110</math></td> <td><math>&lt; -110</math> to min</td> </tr> <tr> <td>SS_RSRP</td> <td>NR</td> <td>0 to <math>\geq -80</math></td> <td><math>&lt; -80</math> to <math>&gt; -95</math></td> <td><math>&lt; -95</math> to <math>\geq -110</math></td> <td><math>&lt; -110</math> to min</td> </tr> </tbody> </table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to $\geq -65$	$< -65$ to $\geq -75$	$< -75$ to $\geq -85$	$< -85$ to min	RSCP	WCDMA	0 to $\geq -70$	$< -70$ to $\geq -80$	$< -80$ to $\geq -90$	$< -90$ to min	RSRP	LTE	0 to $\geq -80$	$< -80$ to $\geq -95$	$< -95$ to $\geq -110$	$< -110$ to min	SS_RSRP	NR	0 to $\geq -80$	$< -80$ to $> -95$	$< -95$ to $\geq -110$	$< -110$ to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to $\geq -65$	$< -65$ to $\geq -75$	$< -75$ to $\geq -85$	$< -85$ to min																														
RSCP	WCDMA	0 to $\geq -70$	$< -70$ to $\geq -80$	$< -80$ to $\geq -90$	$< -90$ to min																														
RSRP	LTE	0 to $\geq -80$	$< -80$ to $\geq -95$	$< -95$ to $\geq -110$	$< -110$ to min																														
SS_RSRP	NR	0 to $\geq -80$	$< -80$ to $> -95$	$< -95$ to $\geq -110$	$< -110$ to min																														

**Table-57:** Network performance parameter and definition voice

## 7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
<p><b>Download Speed (Mbps)</b></p>	<p>The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.</p> <p>Download Speed = Total bytes transferred during download / Total time for transfer</p> <ul style="list-style-type: none"> <li>80th percentile (upper range) &amp; 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data</li> </ul>
<p><b>Upload Speed (Mbps)</b></p>	<p>The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server.</p> <p>Upload Speed = Total bytes transferred during upload / Total time for transfer.</p> <ul style="list-style-type: none"> <li>80th percentile (upper range) &amp; 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.</li> </ul>
<p><b>Download Session Setup Success Rate</b></p>	<p>(total download session established (successfully connected to server)/ total download session attempt) *100.  This KPI has been calculated for Hotspot only.</p>

<b>Upload Session Setup Success Rate</b>	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
<b>Web Page Download Time</b>	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
<b>Video Streaming Delay</b>	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
<b>Latency (TWAMP-UDP)</b>	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
<b>Jitter (TWAMP-UDP)</b>	Measure of variation in time in arrival of packets from a source to destination  The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL  $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
<b>Packet Loss Rate (TWAMP-UDP &amp; TCP)</b>	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100  * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate.  * Packet loss rate is calculated based on TWAMP-UDP & TCP.  *90 <sup>th</sup> percentile for Packet loss rate has been reported in overall Hotspot performance summary.

**Table-58:** Network performance parameter and definition Data

**Disclaimer:** The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.

Hardik  
Rajeshbhai  
Patel



Digitally signed by  
Hardik Rajeshbhai Patel  
Date: 2026.02.13  
18:35:51 +05'30'